

COLOR MONITOR

**USER GUIDE
GUIA DEL USUARIO
MANUEL D'UTILISATION**

MODEL : StudioWorks 44m

P/NO : 3828TUL001M (S-9604)

Printed in Korea

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception (Which can be determined by turning the equipment off and on), the user is encouraged to try to correct the interference by using one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Changes or modifications not expressly approved by LG Electronics Inc. for compliance could void the user's (or your) authority to operate the equipment. Only peripherals (digital input/output devices, terminals, printers, etc.) certified to comply with the Class B limits may be attached to this monitor. Operation with non-certified peripherals is likely to result in interference to radio and TV reception.

Only shielded Signal Cables may be used with this System.

Canadian D. O. C Notice

Suggested text for the notice indication compliance with this Standard:

This Class B digital apparatus meets all requirements of the Canadian Interference-Causing Equipment Regulations.

Cet appareil numérique de la classe B respecte toutes les exigences du Règlement sur le matériel brouilleur du Canada.



Table of Contents

Monitor Registration	1
Important Precautions	2
Tilt/Swivel Base	4
Installation	5
Control Layout and Descriptions	6
Power Management System	7
General Operation	8
Service	9
Specifications	10
GoldStar Monitor Limited Warranty	11

Monitor Registration

The model and serial number are found on the rear of this unit. These numbers are unique to this unit and not available to others. You should record requested information here and retain this guide as a permanent record of your purchase.

Date of Purchase : _____
Dealer Purchased From : _____
Dealer Address : _____
Dealer Phone No. : _____
Model No. : _____
Serial No. : _____

Notice

All rights reserved. Reproduction in any manner, in whole or in part, is strictly prohibited without the written permission of LG Electronics Inc.

Trademark Acknowledgments

Goldstar is a trademark of **LG Electronics Inc.**

IBM is a registered trademark and **VGA** is a trademark of International Business Machines Corporation.

WARNING : To reduce the risk of fire or electric shock, do not expose this appliance to rain or moisture.

AVERTISSEMENT : Ne pas placer cet appareil dans un endroit humide. Cela peut entraîner un incendie ou une décharge électrique.

Important Precautions

This unit has been engineered and manufactured to assure your personal safety, but improper use can result in potential electrical shock or fire hazard. In order not to defeat the safeguards incorporated in this monitor, observe the following basic rules for its installation, use and servicing. Also follow all warnings and instructions marked directly on your monitor.

On safety

1. Use only the power cord supplied with the unit. In case you use another power cord, make sure that it is certified by the applicable standards(UL/CSA or VDE) if not being provided by the supplier.
2. Operate the monitor only from a power source indicated in the specifications of this manual or listed on the monitor. If you are not sure what type of power supply you have in your home,consult your dealer.
3. Overloaded AC outlets and extension cords are dangerous. So are frayed power cords and broken plugs. They may result in a shock or fire hazard. Call your service technician for replacement.
4. **DO NOT OPEN THE MONITOR.** There are no user serviceable components inside. There are Dangerous High Voltages inside, even when the power is Off. Contact your dealer If the monitor is not operating properly.
5. To avoid personal injury :
 - Do not place the monitor on a sloping shelf unless properly secured.
 - Use only a stand recommended by the manufacturer.
 - Do not try to roll a stand with small casters across thresholds or deep pile carpets.
6. To prevent Fire or Hazards:
 - Always turn the monitor Off if you leave the room for more than a short period of time. Never leave the monitor On when leaving the house.

- Keep children from dropping or pushing objects into the monitor's cabinet openings. Some internal parts carry hazardous voltages.
- Do not add accessories that have not been designed for this monitor.
- During a lightning storm or when the monitor is to be left unattended for an extended period of time, unplug it from the wall outlet.
- Do not bring magnetic devices such as magnets or motors near the picture tube.

On installation

1. Do not allow anything to rest upon or roll over the power cord, and do not place the monitor where the power cord is subject to damage.
2. Do not use this monitor near water such as near a bathtub, washbowl, kitchen sink, laundry tub, in a wet basement, or near a swimming pool.
3. Monitors are provided with ventilation openings in the cabinet to allow the release of heat generated during operation. If these openings are blocked, built up heat can cause failures which may result in a fire hazard. Therefore, NEVER:
 - Block the bottom ventilation slots by placing the monitor on a bed, sofa, rug, etc
 - Place the monitor in a built-in enclosure unless proper ventilation is provided.
 - Cover the openings with cloth or other material
 - Place the monitor near or over a radiator or heat source.

On cleaning

- Unplug the monitor before cleaning the face of the picture tube.
- Use a slightly damp (not wet) cloth. Do not use an aerosol directly on the picture tube because overspray may cause electrical shock.

On repacking.


- Do not throw away the carton and packing materials. They make an ideal container in which to transport the unit. When shipping the unit to another location, repack it in its original material.

Tilt/Swivel Base

- Turn Off the equipment and all attached options.
- Carefully set the monitor face-down with the underside facing you.

Installation

1. Align the hooks on the tilt/swivel stand with the matching slots in the base of the monitor.
2. Insert the hooks into slots.
3. Slide the tilt/swivel stand toward the front of the monitor until the latches click into the locked position.

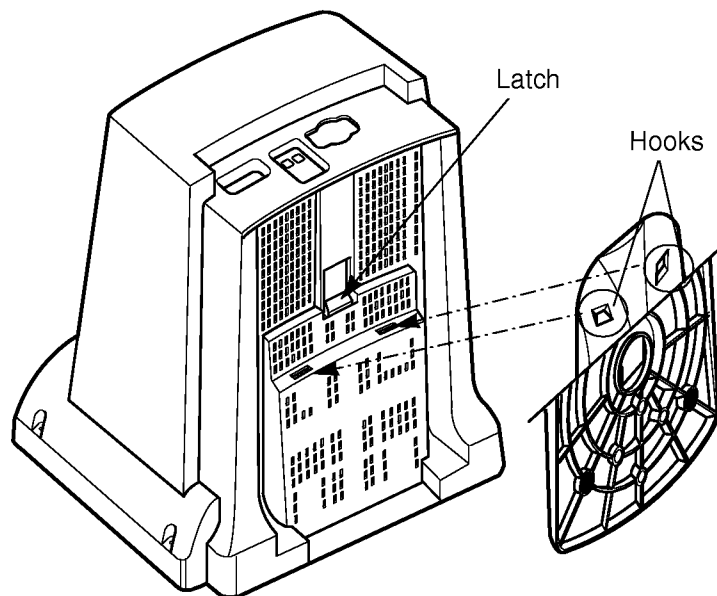

Installation

The supply voltage is marked on the ID label located on the rear panel of the monitor. If your local voltage is different, do not use the monitor and contact your supplier before using the display.


Connections

To connect your monitor after the video adapter is properly installed:


1. Turn OFF the power to your computer and all its attached options.
2. Position the monitor and the computer so that you can easily get to the back panel of each.
3. Connect one end of the supplied signal cable with D-sub connector to the graphics board on your PC as described in your PC Owner's Manual.
4. Tighten the screws on the video cable connector to keep it from coming loose and to prevent radio and TV interference.
5. Connect the power cord to the AC receptacle on the back of the monitor. Plug the other end of the power cord into a properly grounded electrical outlet.
6. The socket-outlet should be installed near the equipment and should be easily accessible.

Control Layout and Descriptions

Front View

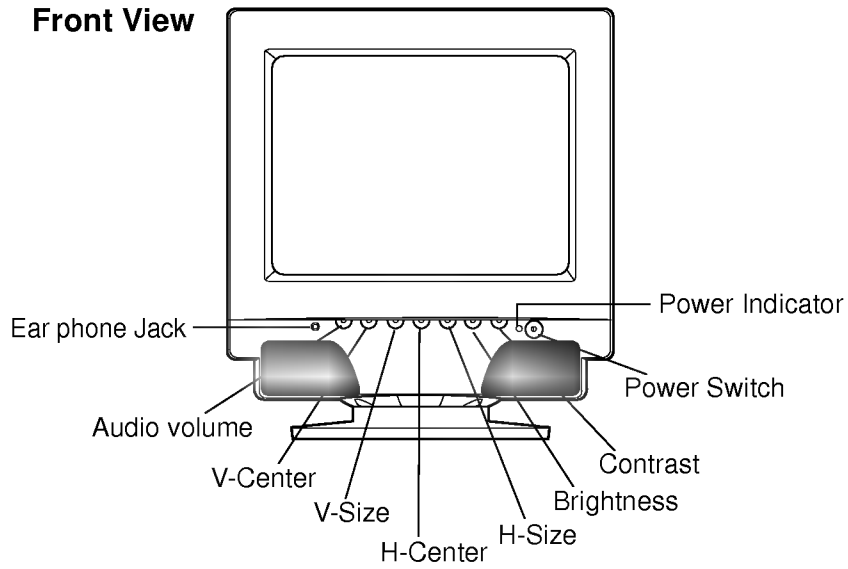

Rear View

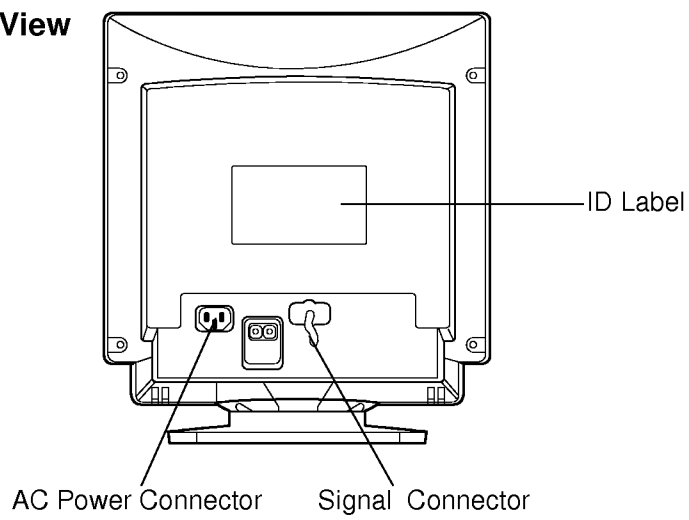

Contrast

.Adjust the display to the contrast desired.

Brightness

.Used to adjust the Brightness of the screen.

Power Switch

.Used to turn the power On or Off.

Power Indicator

.The power indicator lights when the power is On, and indicates the operating status of the display.

V-Center (Vertical Center)

.Adjust this control for the vertical centering of the display desired.

V-Size (Vertical Size)

.Adjust this control for the vertical size of the display desired.

H-Center (Horizontal Center)

.Adjust this control for the horizontal centering of the display desired.

H-Size (Horizontal Size)

.Adjust this control for the horizontal size of the display desired.

Audio Volume

.Adjust this control for Audio volume.

Power Management System

When used in conjunction with a PC having power saving circuitry, this monitor automatically reduces its power consumption when the computer is not in use. The monitor has power-saving states, indicated by the light-emitting diode (LED) on the front panel. These power-saving states exceed the Environmental Protection Agency (EPA) Energy Star requirements using the methodology for Display Power Management Signals(DPMS).
Developed by the Video Electronics Standards Association(VESA).

Low Radiation Compliance (MPR II)

The monitor meets the Swedish Nutek MPR II standard for low radiation emission. The standard also provides for the application of an anti-static coating applies to the picture tube.

General Operation

After following the installation instructions and getting familiar with the controls, you are ready to operate the monitor.

1. Turn on the monitor, PC and other peripherals you plan to use.
2. After the PC has booted (powered up and finished self-testing), enter a software application that uses the full screen display.
3. While looking at the image on the screen, adjust the controls for the image size, centering, brightness and contrast levels you prefer.
4. This monitor is a multiple mode monitor, capable of synchronizing with a variety of video standards automatically. The Scanning Mode Table below indicates the resolution, as well as the horizontal and vertical refresh rates, of some of the modes that this monitor can match to the output of your PC's graphics card.
Other resolutions and standards can also be synchronized and display on this monitor as long as they are within the horizontal and vertical frequency range of this monitor. See the specifications for this information.

Scanning Mode Table

Resolution	H-Freq.	V-Freq.	Remark
640x350	31.5KHz	70Hz	IBM VGA1
640x400	31.5KHz	70Hz	IBM VGA2
640x480	31.5KHz	60Hz	IBM VGA3
800x600	35.2KHz	56Hz	SUPER VGA
1024x768	35.5KHz	87Hz	IBM 8514/A*
640x480	37.5KHz	75Hz	VESA 480
640x480	37.9KHz	72Hz	VESA 480
800x600	37.9KHz	60Hz	SVGA-I
800x600	46.8KHz	75Hz	VESA
800x600	48.1KHz	72Hz	SVGA-II
1024x768	48.4KHz	60Hz	UVGA-I

(* : Interlaced)

DDC (Display Data Channel)

This monitor includes the DDC feature.

DDC (Display Data Channel) is a communication channel over which the monitor automatically informs the host system about its capabilities (e.g. each supported resolution with its corresponding timing). DDC uses a formerly unconnected signal pins in the 15-pin VGA connector. The system will only be "Plug & Play" if both monitor and computer have the DDC feature.

Service

1. Unplug the monitor from the wall outlet and refer servicing to qualified service personnel when :
 - The power cord or plug is damaged or frayed.
 - Liquid has been spilled into the monitor.
 - The monitor has been exposed to rain or water.
 - The monitor does not operate normally following the operating instructions. Adjust only those controls that are covered in the operating instructions. An improper adjustment of other controls may result in damage and often requires extensive work by a qualified technician to restore the monitor to normal operation.
 - The monitor has been dropped or the cabinet has been damaged.
 - The monitor exhibits a distinct change in performance.
 - Snapping or popping from the monitor is continuous or frequent while the monitor is operating. It is normal for some monitors to make occasional sounds when being turned on or off, or switching video modes.
2. Do not attempt to service the monitor yourself, as opening or removing covers may expose you to dangerous voltage or other hazards. Refer all servicing to qualified service personnel.
3. When replacement parts are required, have the service technician verify in writing that the replacements used have the same safety characteristics as the original parts. Use of manufacture specified replacements can prevent fire, shock and other hazards.
4. Upon completion of any service or repairs to the monitor, ask the service technician to perform the safety check described in the manufacturer's service manual.
5. When a video monitor reaches the end of its useful life, improper disposal could result in a picture tube implosion. Ask a qualified service technician to dispose of the monitor.

Specifications

Picture tube	: 14 inch (12.9 inches viewable), Tinted, 90 degree deflection 0.28 mm, Non-Glare screen
Display Size	: 9.8" x 7.3"/250 x 185 mm (HXV)
Audio Signal	
Output	: 3W x 2
Freq. Range	: 20Hz~20KHz
T.H.D	: 1KHz \pm 10%
Horizontal Frequency	: 30 ~ 50 KHz
Vertical Frequency	: 50 ~ 90 Hz
Video Bandwidth	: 65 MHz
Signal connector	: 15 pin D-Sub type
Power input	: 100-240VAC, 50/60Hz, 1.2A

Power Consumption Table

LED Color	States	Power Consumption
Green	On	\leq 80 watts
Orange	Stand-by/ Suspend	\leq 30 watts
Orange	Off	\leq 15 watts

Dimensions : 14.0 X 15.0 X 14.0 inches (Without T/S Base)
(WXDXH) 356 X 381 X 356 mm

14.0 X 15.0 X 15.5 inches (With T/S Stand)
356 X 381 X 393 mm

Weight (net) : 26.0 lbs (11.8kg)

Information in this document is subject to change without notice and does not represent a commitment on the part of LG Electronics Inc.