



LG

Life's Good

液晶電視 使用說明書

LED液晶電視

液晶電視型號

22LU5*** 42LH5***
26LU5*** 47LH5***
32LH2*** 42LH9***
37LH2*** 47LH9***
42LH2*** 42SL8***
32LH4*** 55SL8***
37LH4***
42LH4***
47LH4***
55LH4***

LED液晶電視型號

42SL9***
47SL9***

使用產品前，請細心閱讀本說明書。
並保留說明書，以備日後參考用。
請記錄產品型號及序號。
參考背面的標籤並引用此資訊。
當需要服務時向您的零售商展示此資訊。


型號：
序列號：

HDMI

HDMI，HDMI 標號及高清晰度多媒體介面都是 HDMI 註冊公司的商標或註冊商標。


牆壁支架(另外購買)

RW120




(22LU5***)

RW230




(26LU5***, 32LH2***
32LH4***)

AW-47LG30M



(32/37/42LH2***
32/37/42/47LH4***,
42/47LH5***,
42/47LH9***,
42/47SL8***,
42/47SL9***)

AW-55LH40M



(55LH4***
55SL8***)


附件

請確保電視配備下列附件。 附件如有任何遺漏，請聯絡您購買產品的經銷商。

- 顯示的可能與您的電視有所不同。




使用說明書



電池



電源線

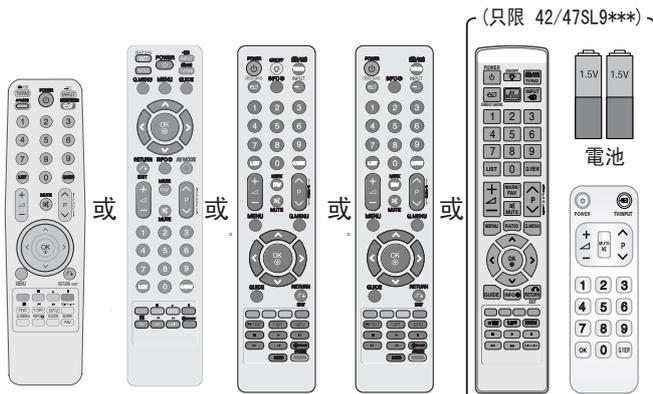

遙控器

(只限 42/47SL9***)



電池

並非所有型號均備有此附件。



抹布
請用抹布清潔屏幕。


- * 使用抹布輕輕擦拭電視表面有污跡或指模。

切勿過份用力。可能會刮損產品或導致產品變色。

只限 22/26LU5***




纜線固定器
(參閱第 15 頁)

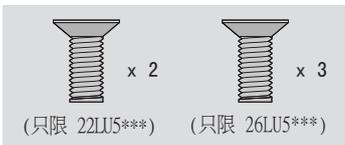


螺絲 (供底座用)
(參閱第 14 頁)

在設定組裝面上使用 12 毫米 (+0.5/-0.5) 長的螺絲。(55SL8*** 除外)



導引間隔器



只限 32/37/42LH2***, 32/37/42/47/55LH4***, 42/47LH5***, 42/47LH9***

(55LH4*** 除外)



螺絲 (供底座用)
(參閱第 13 頁)



保護套
(參閱第 16 頁)

(只限 26LU5***, 32/37/42LH2***, 32/37/42LH4***, 42LH5***, 42LH9***)



1-螺絲釘: 底座固定, 請參閱第 16 頁

只限 42/47/55SL8***, 42/47SL9***

螺絲 (供底座用)



(55SL8*** 除外)
(參閱第 13 頁)

20 毫米 16 毫米
(只限 42/47SL9***)
(參閱第 14 頁)

(42/47SL9*** 除外)



保護套
(參閱第 16 頁)



纜線管理橫門
(參閱第 15 頁)



纜線固定器
(參閱第 15 頁)

目錄

附件 1

準備

前面板控制鈕 4
後面板資訊 8
安裝底座 13
卸除底座 14
背後的電線處理 15
連接電視到桌上型電腦 16
旋轉底座 16
非使用桌上型底座 16
Kensington 保安系統 17
安全安裝建議 17
安裝座枱底座 18
鑲嵌在牆上：水平安裝 18
連接天線 19

連接外置設備

設定 HD 接收器 20
設定 DVD 22
設定錄影機 25
數碼關訊輸出設定 28
設定其他 A/V 來源 29
USB 設定 30
設定電腦 31
- 設定電腦模式的螢幕 35

觀看電視 / 操控頻道

遙控器鍵功能 39
開啓電視 48
初始化設定 48
頻道選項 48
音量調較 48
快速功能表 49
選項及調較螢幕功能表 50
自動較台 51
手動較台 (數碼模式) 52
手動較台 (僅適用於數碼模式) 53
頻道編輯 55

信號加強 (數碼模式) 57
軟件更新 58
診斷表 59
選項頻道清單 60
最愛頻道 61
輸入清單 62
MHEG 手冊 63
輸入類別 63
簡易手冊 64
Simplink 65
AV 模式 68
初始化 (重設至原廠設定) 69

要使用藍牙

使用 USB 裝置時的預防措施 70
設定藍牙 71
定電視 PIN 碼 72
藍牙耳機
- 連接新的藍牙耳機 73
- 連接已註冊的藍牙耳機 73
- 在使用藍牙耳機時中斷連接 74
- 當要求連接藍牙耳機至電視時 74
管理已註冊的藍牙裝置 75
我的藍牙資訊 76
透過外置的藍牙裝置傳送相片 77
從外置的藍牙裝置聽音樂 77

使用 USB 裝置

連接 USB 裝置時 78
相片清單 79
音樂清單 83
電影清單 86
DivX 註冊碼 90
關閉 91

電子頻道指南 (EPG) (數碼模式)

開/關 EPG	92
選擇頻道	92
於目前/下一個 (NOW/NEXT) 指南模式中的按鈕功能	92
於 8 天指南模式中的按鈕功能	93
於日期變更模式中的按鈕功能	93
於延伸描述框中的按鈕功能	94
於提醒設定模式中的按鈕功能	94
於時間表模式中的按鈕功能	94

影像控制

影像大小 (圖像縱橫比) 控制	95
影像精靈	97
節能模式	98
預設影像設定	
- 影像模式 — 預設	99
手動調較影像	
- 影像模式 — 使用者選項	100
影像提升技術	101
專門畫像控制	102
影像重設	105
LED 本機調光控制	105
開關指示燈	106
演示模式	107
模式設定	108

聲音及語言控制

自動音量平衡器	109
清晰人聲 II	110
預設聲音設定 — 聲音模式	111
聲音設定調較 — 使用者模式	112
SRS TruSurround XT	112
平衡	113
電視揚聲器開 / 關設定	114
選擇數碼音頻	115
音頻重設	116
I/II	
- 立體聲 / 雙聲道接收 (僅適用於類比模式)	117

- 麗音廣播接收 (僅適用於類比模式) .	118
- 選擇揚聲器聲音輸出	118
國家或地域選擇	119
語言選擇 (僅適用於數碼模式)	120

時間設定

時鐘設定	121
設定自動開 / 關時間制	122
設定睡眠時間制	123

頻道鎖碼 / 評級

設定密碼及鎖定系統	124
封鎖節目	125
封鎖外置輸入	126
鎖定	127

數碼電視文字廣播

數碼服務以內的電視文字廣播	128
數碼服務內的電視文字廣播	129

附錄

疑難排解	130
維修保養	132
產品規格	133
IR 編碼	136
外置控制設備設定	137
開啓來源軟件通知	144
開啓來源軟件通知	145

準備

前面板控制鈕

! 注意


- ▶ 電視機可調校至備用模式，以減低耗電量。
如在一段時間內不使用電視機，請以機身上的開關掣關掉電視機，以減少電源消耗。
如將畫面亮度調低，電視運作時的耗電量會顯著減少，這可節省整體的運作成本。

! 小心

- ▶ 當電視不能要遙控器開啓，請按主電源按鈕啓動。
(如電視是由主電源按鈕關閉，就不會以遙控器開啓)
- ▶ 請不要踏上玻璃支架或向它施加任何壓力。
它或會破爛，有可能會因玻璃碎片造成損害或令電視掉下。
- ▶ 請勿拖曳電視。地下或產品可能會損壞。


■ 顯示的可能與您的電視有所不同。

32/37/42LH2***

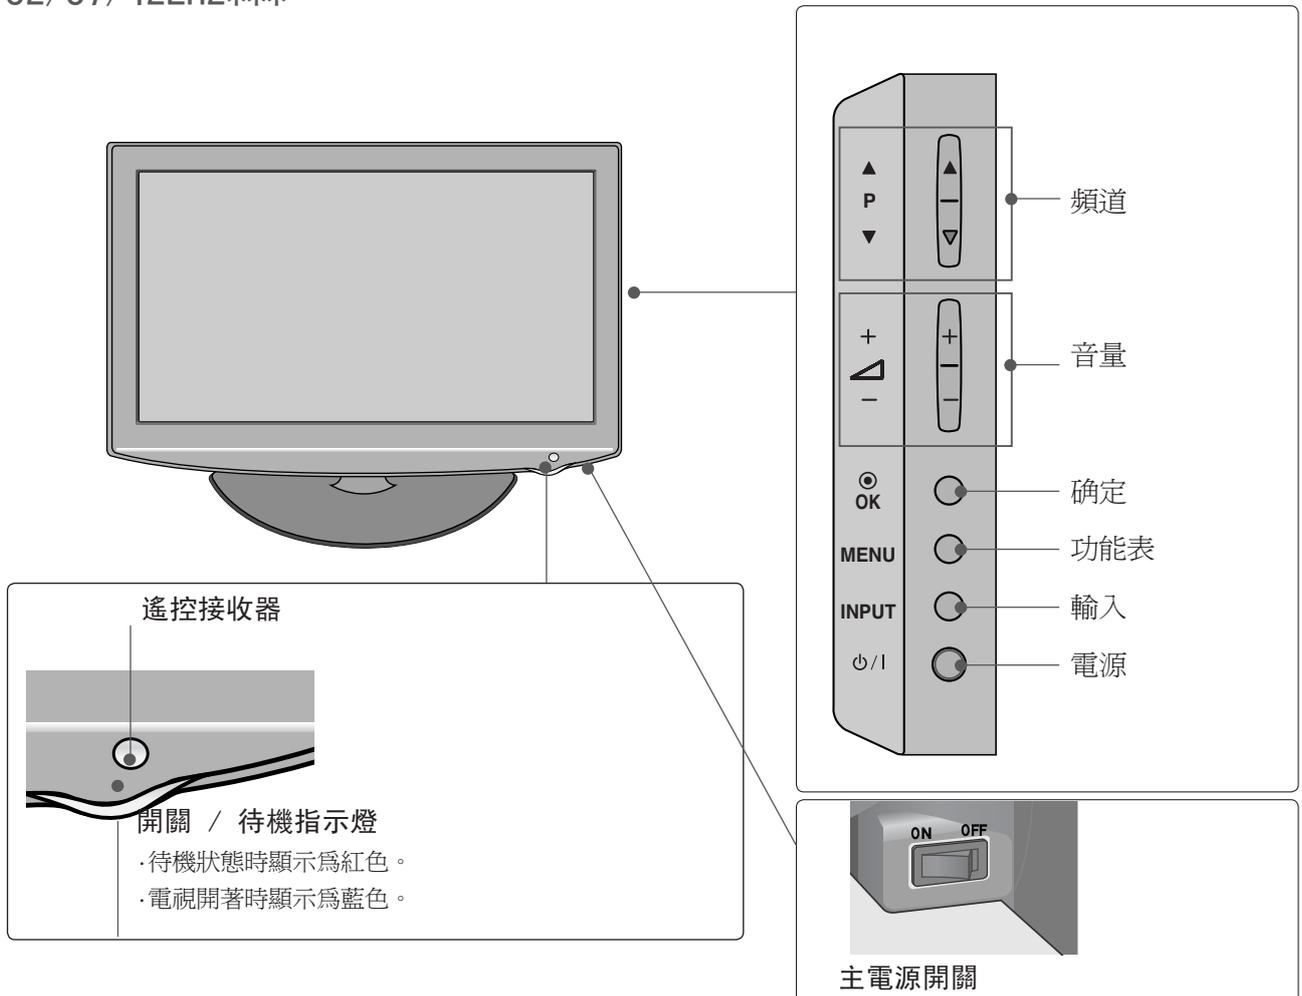


■ 顯示的可能與您的電視有所不同。

32/37/42/47/55LH4***, 42/47LH5***

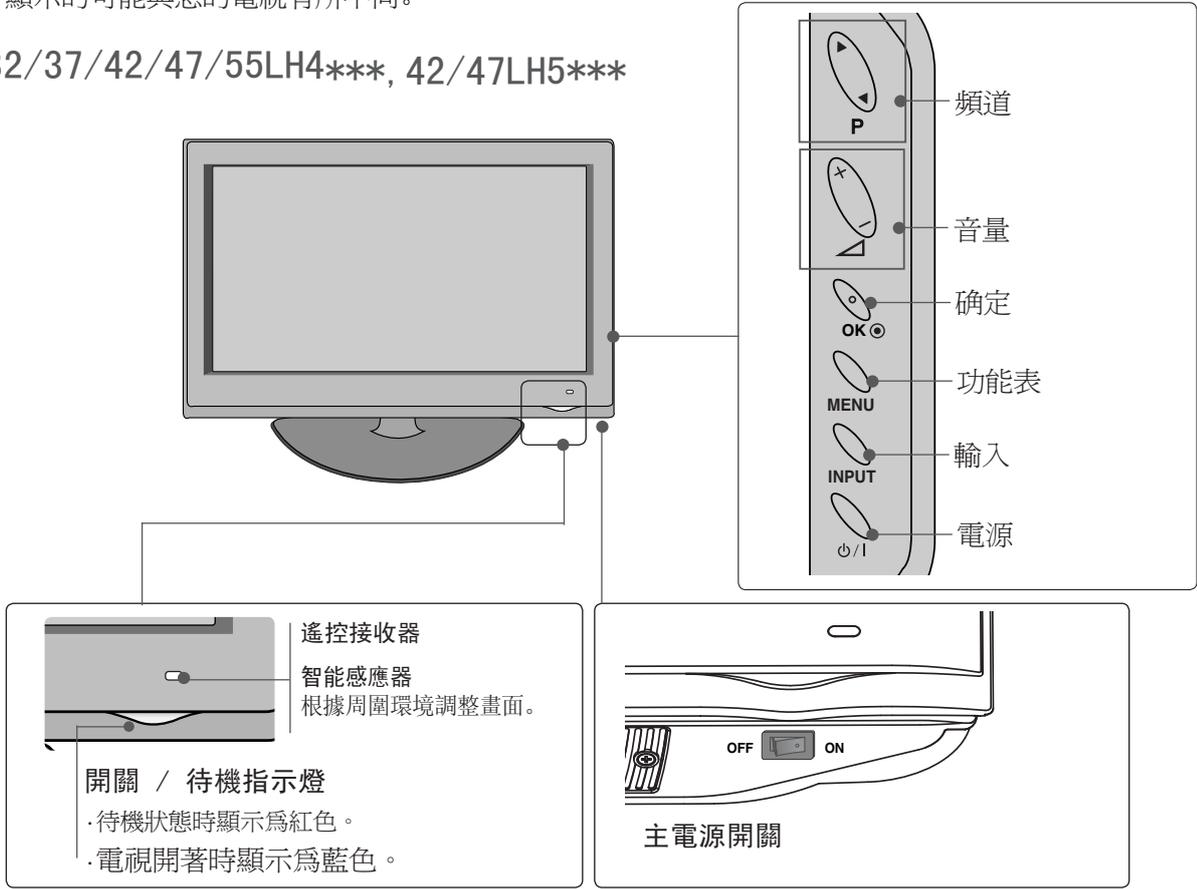

只限 42/47LH9***

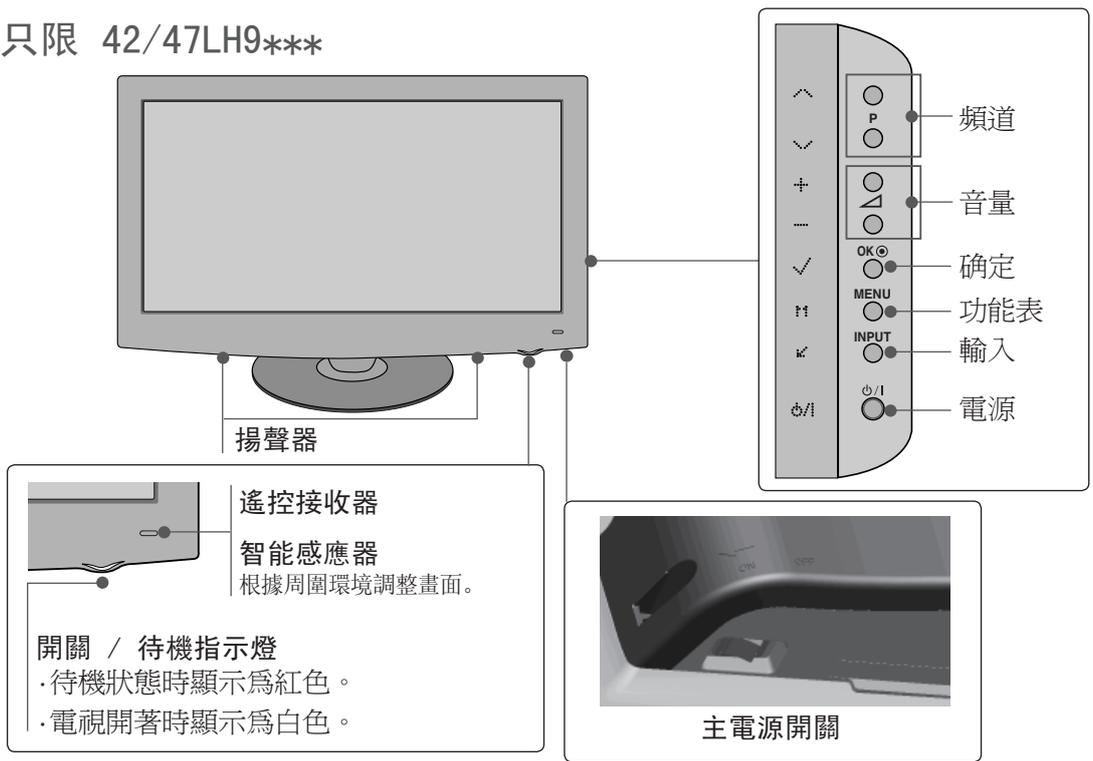


準備





- 顯示的可能與您的電視有所不同。

22/26LU5***

只限 22LU5***

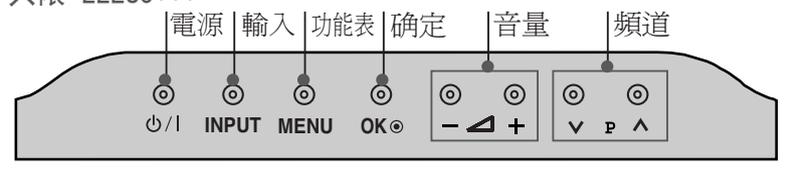


只限 26LU5***

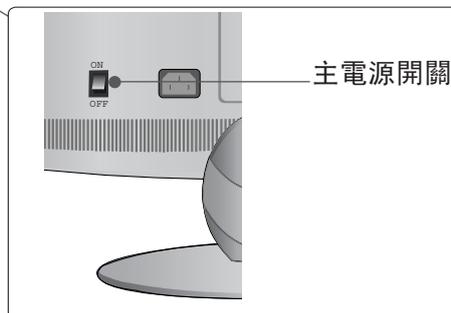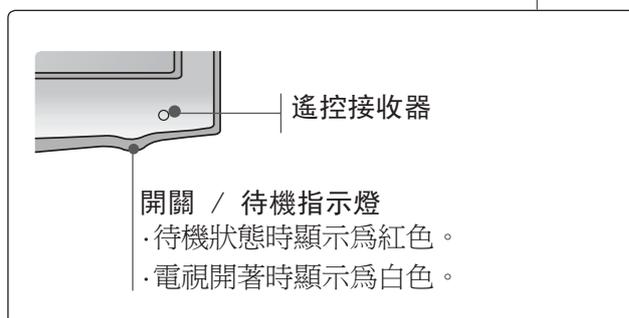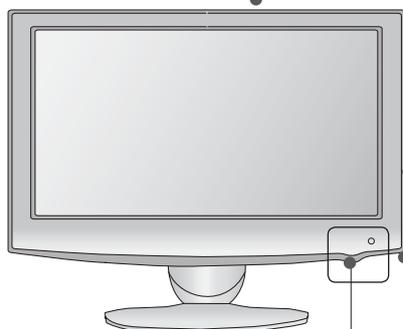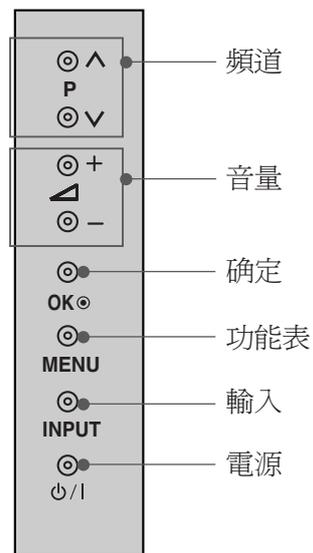


■ 顯示的可能與您的電視有所不同。

42/47/55SL8***

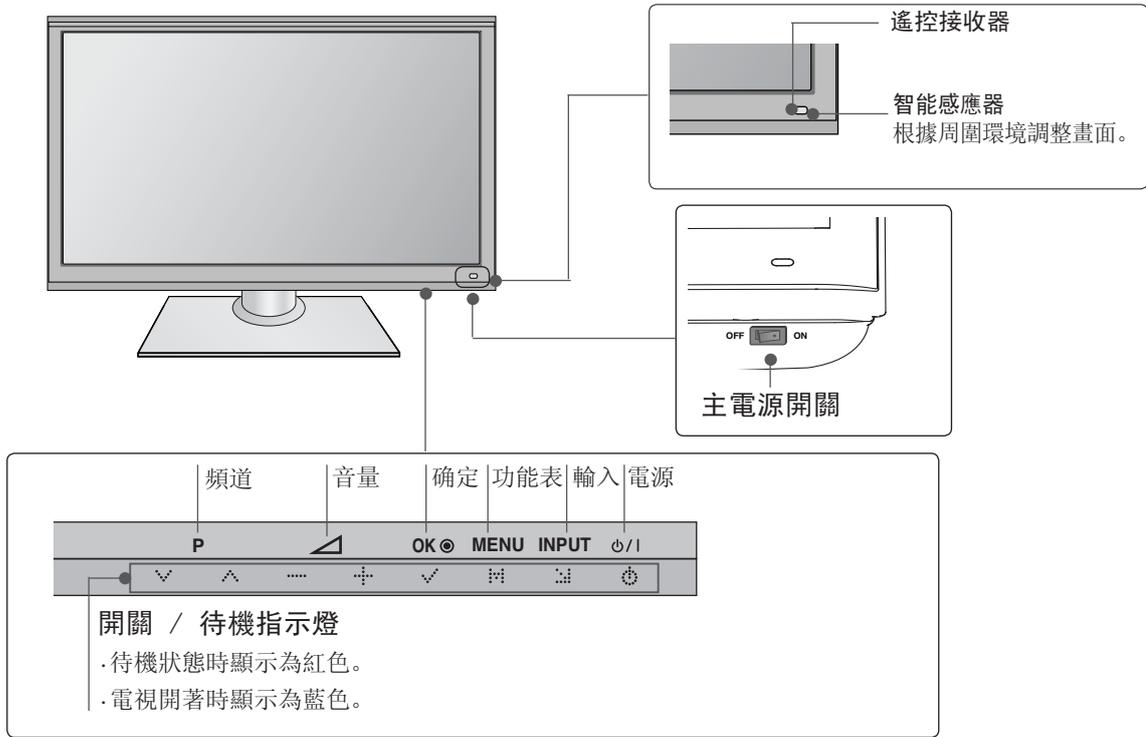

42/47SL9***

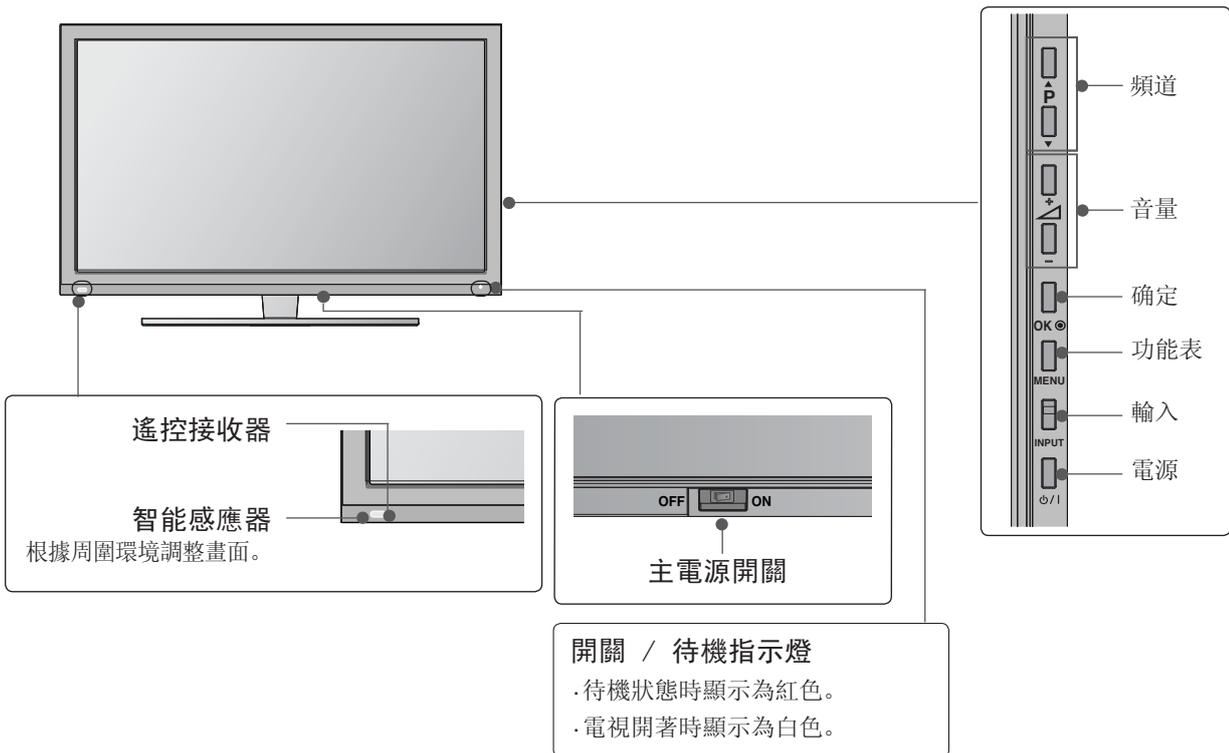


準備

後面板資訊



- 顯示的可能與您的電視有所不同。

只限 22/26LU5***

只限 26LU5***

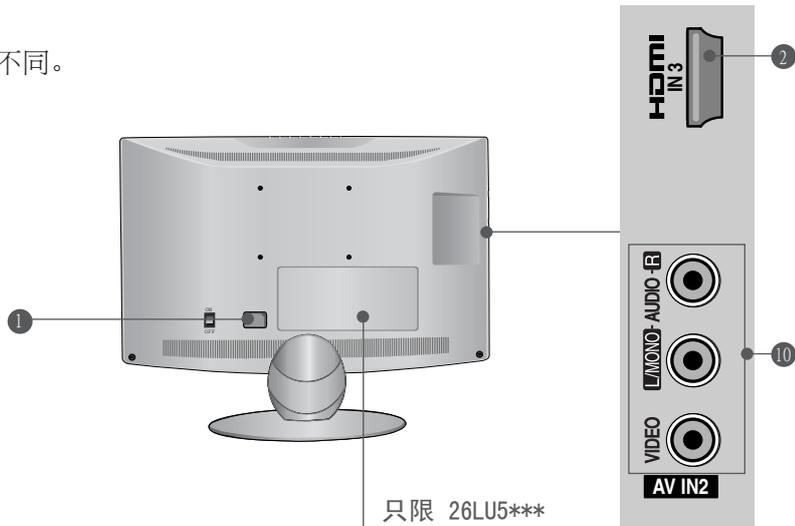


只限 26LU5***

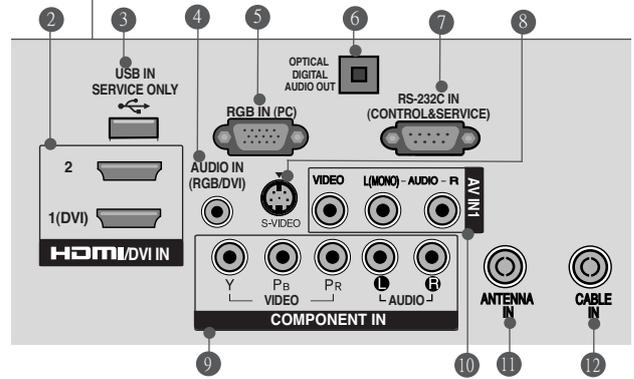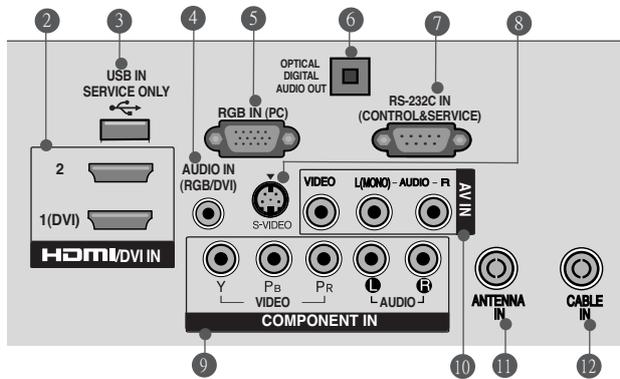

- 1 電源線插口**
此電視由交流電供電運作。規格頁已說明電壓。切勿嘗試以直流電供電予此電視。
- 2 高解像度多媒體介面 (HDMI) 輸入**
連接高解像度多媒體介面 (HDMI) 訊號至 HDMI IN。
或以 DVI 轉 HDMI 纜線連接 DVI (視訊) 訊號至 HDMI/DVI 埠。
- 3 僅限服務埠**
- 4 RGB/DVI 音頻輸入**
從電腦或 DTV 連接音頻。
- 5 三原色 (RGB) 輸入**
從電腦連接輸出。
- 6 光學數碼音訊輸出**
從各種類型的設備中連結數碼音訊。
注意：在備用模式中，這些埠不會工作。
- 7 RS-232C 輸入埠**
連接至電腦的 RS-232C 埠。
此埠用作服務或酒店模式。
- 8 S-視頻 輸入**
從 S-VIDEO 裝置連接 S-Video。
- 9 Component 輸入**
連接視頻 / 音頻裝置等 component 至這些插孔。
- 10 音頻 / 視頻輸入**
把外置裝置插入這些孔內，連接音頻 / 視頻輸出。
- 11 天線輸入**
連接 RF 天線至此插口。
- 12 纜線輸入**
連接纜線訊號至此插孔。

■ 顯示的可能與您的電視有所不同。

只限 32/37/42LH2***, 32/37/42/47/55LH4***, 42/47LH5***

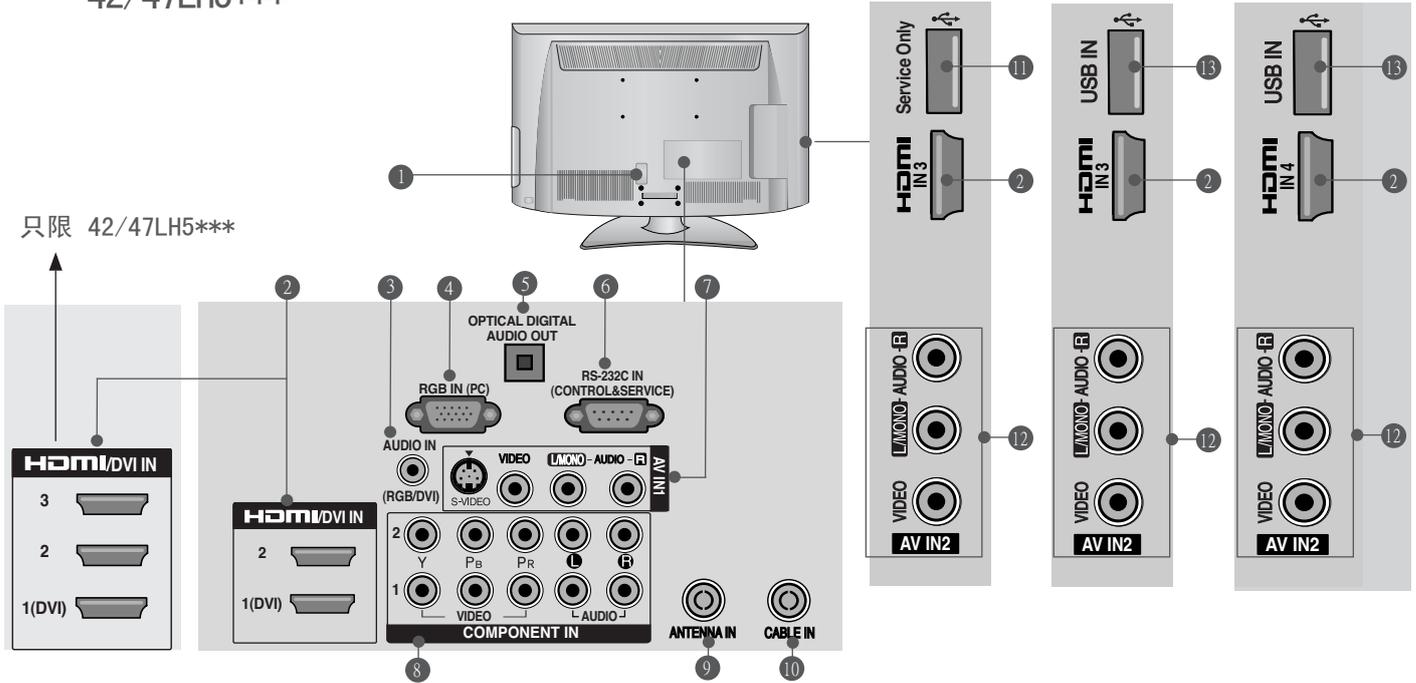


- 1 電源線插口
此電視由交流電供電運作。規格頁已說明電壓。切勿嘗試以直流電供電予此電視。
- 2 高解像度多媒體介面 (HDMI) 輸入
連接高解像度多媒體介面 (HDMI) 訊號至 HDMI IN。
或以 DVI 轉 HDMI 纜線連接 DVI (視訊) 訊號至 HDMI/DVI 埠。
- 3 RGB/DVI 音頻輸入
從電腦或 DTV 連接音頻。
- 4 三原色 (RGB) 輸入
從電腦連接輸出。
- 5 光學數碼音訊輸出
從各種類型的設備中連結數碼音訊。
注意：在備用模式中，這些埠不會工作。
- 6 RS-232C 輸入埠
連接至電腦的 RS-232C 埠。
此埠用作服務或酒店模式。
- 7 S-視頻 輸入
從 S-VIDEO 裝置連接 S-Video。
音頻 / 視頻輸入
把外置裝置插入這些孔內，連接音頻 / 視頻輸出。
- 8 Component 輸入
連接視頻 / 音頻裝置等 component 至這些插孔。
- 9 天線輸入
連接 RF 天線至此插口。
- 10 纜線輸入
連接纜線訊號至此插孔。
- 11 僅限服務埠
- 12 音頻 / 視頻輸入
把外置裝置插入這些孔內，連接音頻 / 視頻輸出。
- 13 USB 輸入
連接 USB 儲存裝置至此插口。

準備

準備

- 顯示的可能與您的電視有所不同。


只限 42/47LH9***

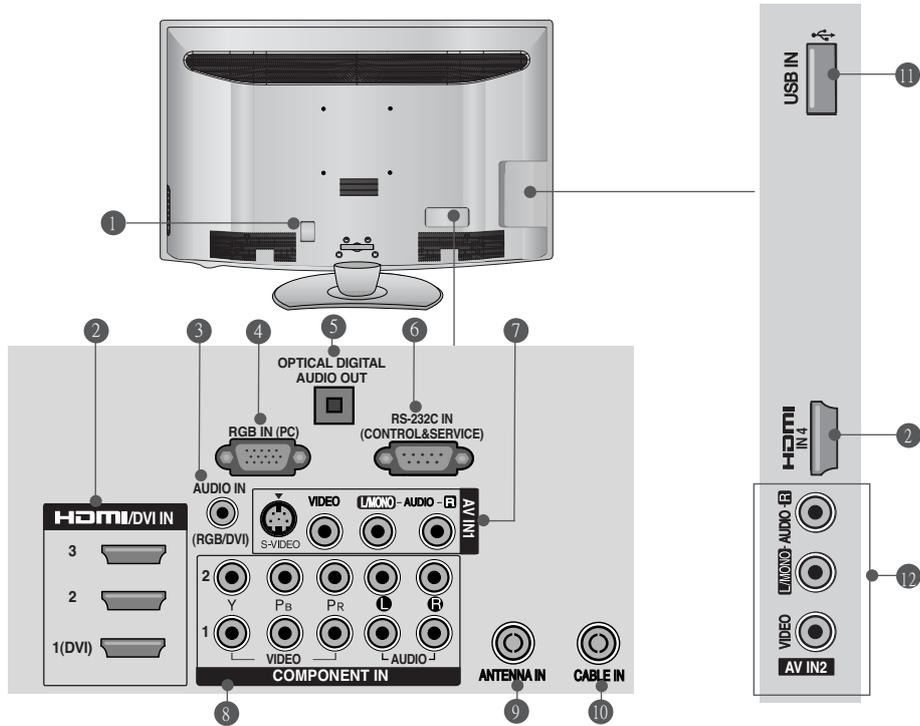

- 1 電源線插口**
此電視由交流電供電運作。規格頁已說明電壓。切勿嘗試以直流電供電予此電視。
- 2 高解像度多媒體介面 (HDMI) 輸入**
連接高解像度多媒體介面 (HDMI) 訊號至 HDMI IN。
或以 DVI 轉 HDMI 纜線連接 DVI (視訊) 訊號至 HDMI/DVI 埠。
- 3 RGB/DVI 音頻輸入**
從電腦或 DTV 連接音頻。
- 4 三原色 (RGB) 輸入**
從電腦連接輸出。
- 5 光學數碼音訊輸出**
從各種類型的設備中連結數碼音訊。
注意：在備用模式中，這些埠不會工作。
- 6 RS-232C 輸入埠**
連接至電腦的 RS-232C 埠。
此埠用作服務或酒店模式。
- 7 S-視頻 輸入**
從 S-VIDEO 裝置連接 S-Video。
音頻 / 視頻輸入
把外置裝置插入這些孔內，連接音頻 / 視頻輸出。
- 8 Component 輸入**
連接視頻 / 音頻裝置等 component 至這些插孔。
- 9 天線輸入**
連接 RF 天線至此插口。
- 10 纜線輸入**
連接纜線訊號至此插孔。
- 11 USB 輸入**
連接 USB 儲存裝置至此插口。
- 12 音頻 / 視頻輸入**
把外置裝置插入這些孔內，連接音頻 / 視頻輸出。

■ 顯示的可能與您的電視有所不同。

只限 42/47/55SL8***

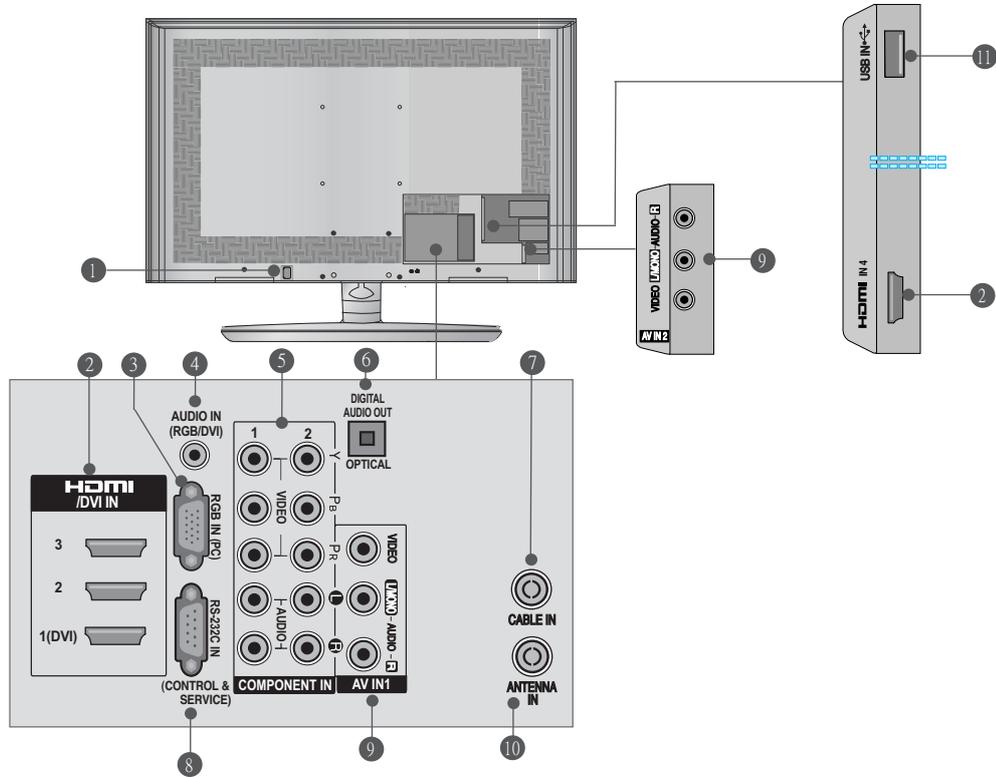


- ① 電源線插口
此電視由交流電供電運作。規格頁已說明電壓。切勿嘗試以直流電供電予此電視。
- ② 高解像度多媒體介面 (HDMI) 輸入
連接高解像度多媒體介面 (HDMI) 訊號至 HDMI IN。
或以 DVI 轉 HDMI 纜線連接 DVI (視訊) 訊號至 HDMI/DVI 埠。
- ③ 三原色 (RGB) 輸入
從電腦連接輸出。
- ④ RGB/DVI 音頻輸入
從電腦或 DTV 連接音頻。
- ⑤ Component 輸入
連接視頻 / 音頻裝置等 component 至這些插孔。
- ⑥ 光學數碼音訊輸出
從各種類型的設備中連結數碼音訊。
注意：在備用模式中，這些埠不會工作。
- ⑦ 纜線輸入
連接纜線訊號至此插孔。
- ⑧ RS-232C 輸入埠
連接至電腦的 RS-232C 埠。
此埠用作服務或酒店模式。
- ⑨ 音頻 / 視頻輸入
把外置裝置插入這些孔內，連接音頻 / 視頻輸出。
- ⑩ 天線輸入
連接 RF 天線至此插口。
- ⑪ USB 輸入
連接 USB 儲存裝置至此插口。

準備

- 顯示的可能與您的電視有所不同。

只限 42/47SL9***

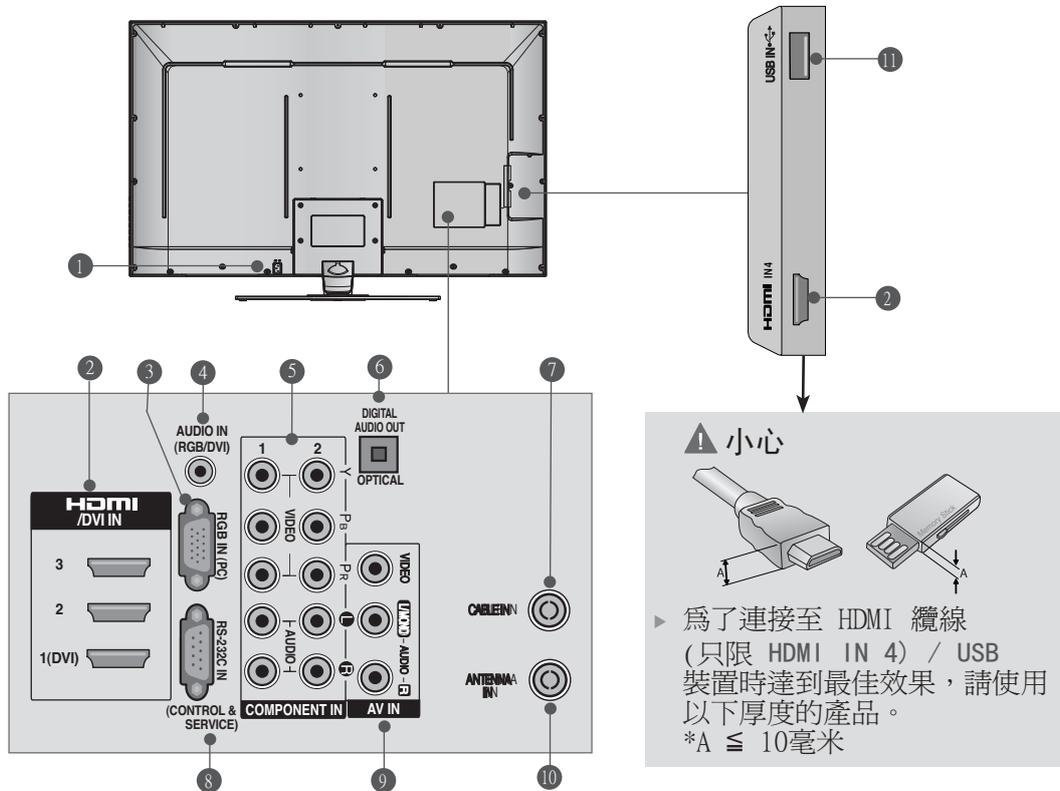

- 電源線插口**
此電視由交流電供電運作。規格頁已說明電壓。切勿嘗試以直流電供電予此電視。
- 高解像度多媒體介面 (HDMI) 輸入**
連接高解像度多媒體介面 (HDMI) 訊號至 HDMI IN。
或以 DVI 轉 HDMI 纜線連接 DVI (視訊) 訊號至 HDMI/DVI 埠。
- 三原色 (RGB) 輸入**
從電腦連接輸出。
- RGB/DVI 音頻輸入**
從電腦或 DTV 連接音頻。
- Component 輸入**
連接視頻 / 音頻裝置等 component 至這些插孔。
- 光學數碼音訊輸出**
從各種類型的設備中連結數碼音訊。
注意：在備用模式中，這些埠不會工作。
- 纜線輸入**
連接纜線訊號至此插孔。
- RS-232C 輸入埠**
連接至電腦的 RS-232C 埠。
此埠用作服務或酒店模式。
- 音頻 / 視頻輸入**
把外置裝置插入這些孔內，連接音頻 / 視頻輸出。
- 天線輸入**
連接 RF 天線至此插口。
- USB 輸入**
連接 USB 儲存裝置至此插口。

安裝底座


■顯示的可能與您的電視有所不同。

當安裝桌上型電腦類型支架時，檢查螺絲是否完全固定。


(如果沒有完全固定，產品會在安裝後向前傾斜。) 如果您以過大的力量固定螺絲，螺絲可能因受力部分磨損而脫落。

只限 22/26LU5***

- 1 小心放置電視，把螢幕一方向下置於軟墊上，以保護電視、避免損壞螢幕。




- 2 如下圖所示安全固定 2 至 3 個螺栓在洞口。

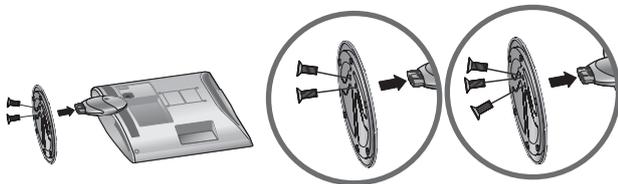


只限 26LU5***

只限 32/37/42LH2***, 32/37/42/47LH4***, 42/47LH5***, 42/47LH9***


- 1 小心放置電視，把螢幕一方向下置於軟墊上，以保護電視、避免損壞螢幕。

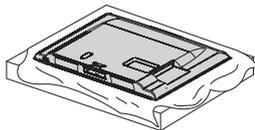

- 2 根據圖示組裝電視機。

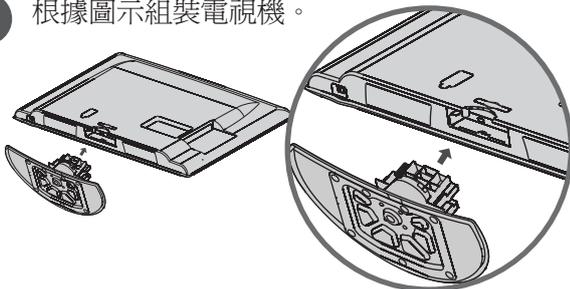


- 3 使用電視背後的孔，牢牢地收緊 4 顆螺絲。

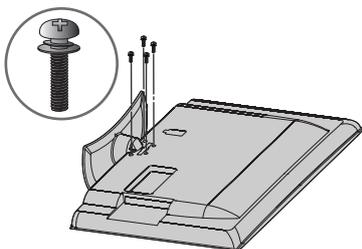


只限 42/47SL8***


- 1 小心放置電視，把螢幕一方向下置於軟墊上，以保護電視、避免損壞螢幕。

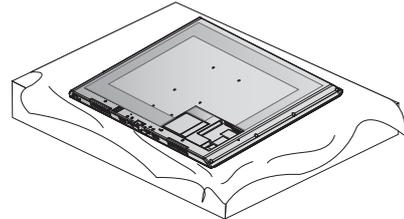


- 2 把電視機的底座及支架鑲嵌在一起。

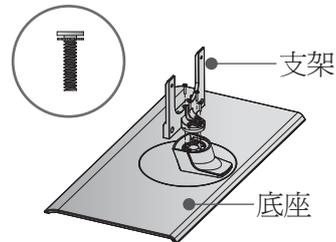

- 3 根據圖示組裝電視機。

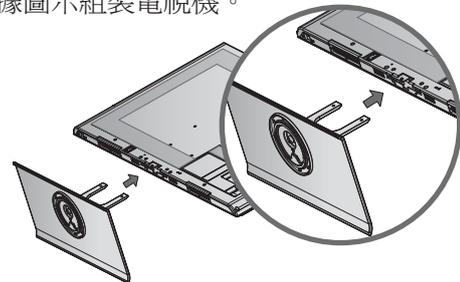


- 4 使用電視背後的孔，牢牢地收緊 4 顆螺絲。

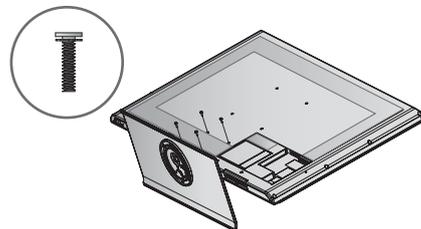


準備

只限 42/47SL9***


- 1 小心放置電視，把螢幕一方向下置於軟墊上，以保護電視、避免損壞螢幕。

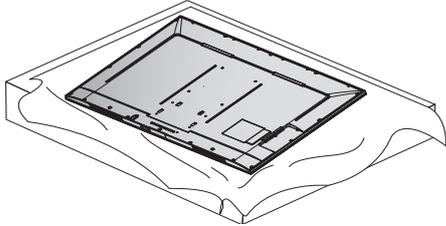


- 2 把電視機的底座及支架鑲嵌在一起。

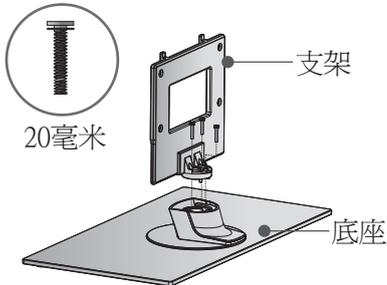

- 3 根據圖示組裝電視機。

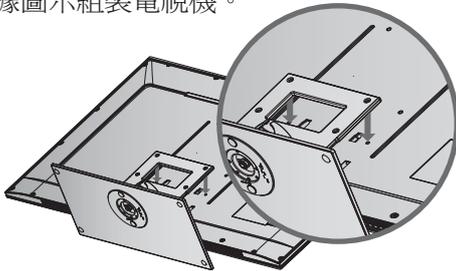

- 4 使用電視背後的孔，牢牢地收緊 4 顆螺絲。

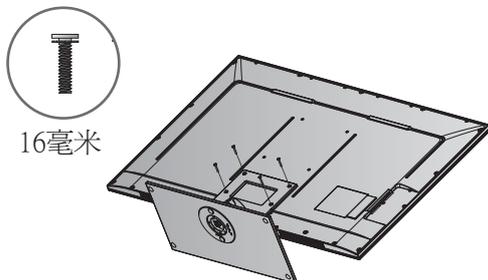


卸除底座


■顯示的可能與您的電視有所不同。

只限 22/26LU5***


- 1 小心放置電視，把螢幕一方向下置於軟墊上，以保護電視、避免損壞螢幕。

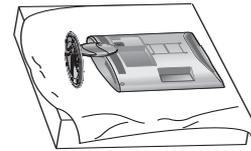

- 2 放鬆電視的螺絲並把支架拆離電視。

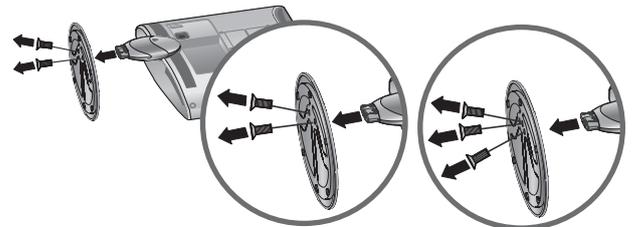

- 3 放鬆電視的螺絲並把底座的底板拆離電視。

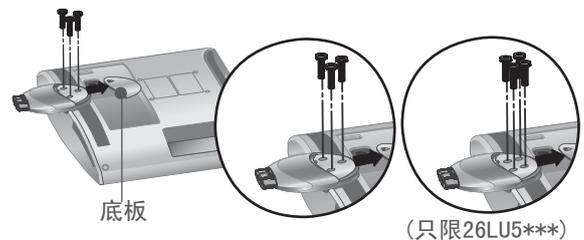

- 4 從電視拆下支架。




背後的電線處理


- 顯示的可能與您的電視有所不同。

只限 32/37/42LH2***,
32/37/42/47/55LH4***,
42/47LH5***, 42/47LH9***

- 1 根據需要連接纜線。
要連接額外設備，請參閱設定外置設備部份。




- 2 如圖所示打開纜線管理橫門並纏繞纜線。

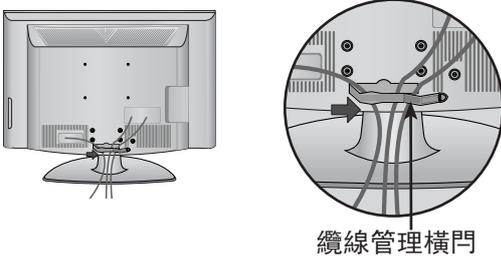

纜線管理橫門

- 3 如圖所示安裝纜線管理橫門。

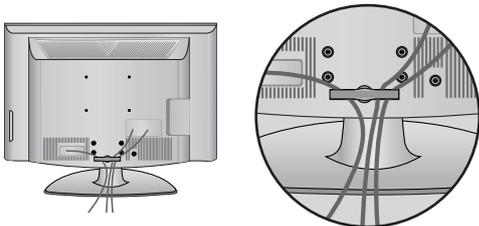


！ 注意

- ▶ 移動電視時，切勿握著 “纜線管理橫門” 部份。
- 如果電視掉落，您或會受傷或摔破電視。

只限 22/26LU5***

在連接纜線後，請如圖所示安裝纜線固定器及整纜線。

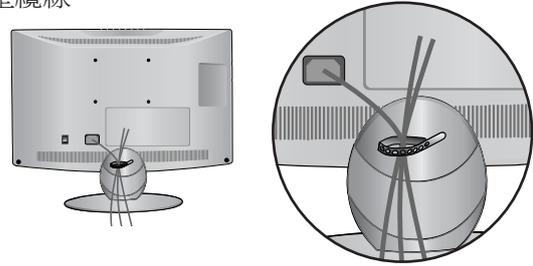


只限 42/47/55SL8***, 42/47SL9***

- 顯示的可能與您的電視有所不同。


桌上型底座裝嵌

- 1 如圖所示安裝纜線管理橫門。

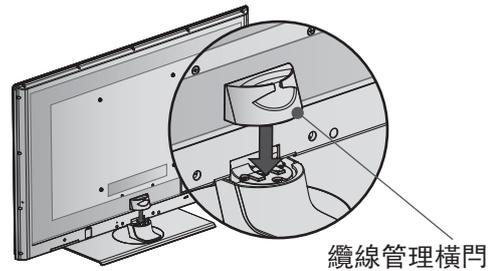


纜線管理橫門

- 2 根據需要連接纜線。
要連接額外設備，請參閱設定外置設備章節。

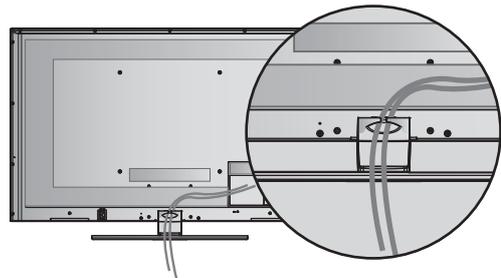

掛牆式裝嵌

- 1 根據需要連接纜線後，如圖所示安裝纜線支架並捆起纜線。要連接附加設備，請參閱設定外置設備章節。

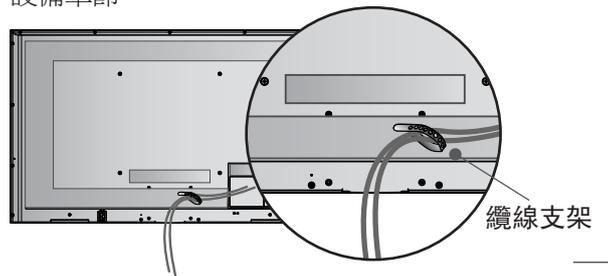

纜線支架


準備

連接電視到桌上型電腦


只限 26LU5***, 32/37/42LH2***,
32/37/42LH4***, 42LH5***,
42LH9***

- 顯示的可能與您的電視有所不同。

連接電視到桌上型電腦電視必須固定在桌上型電腦，不能前後移動，否則有造成產品損毀的可能。只需使用一個附加的螺絲。

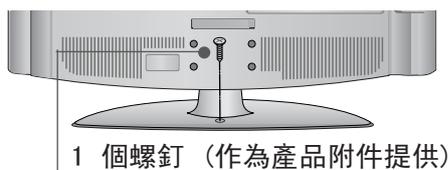

支架

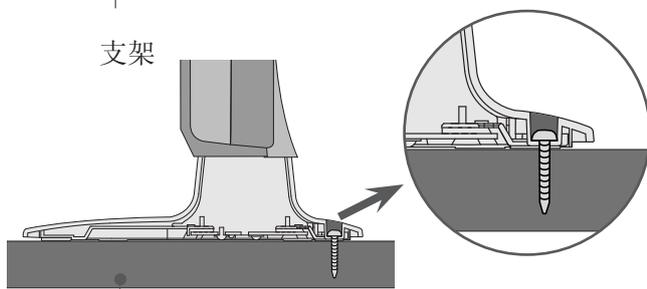

桌面


！警告

- ▶ 為防止電視掉落，每次安裝的時候，設備都要緊靠牆壁或地板。傾斜、搖晃或震動設備可能引起傷害。

旋轉底座

(22/26LU5*** 除外)

- 並非所有型號均備有此功能。
- 安裝電視機後，您可以手動調整電視機向左或向右轉動 20 度來配合您的觀看位置。

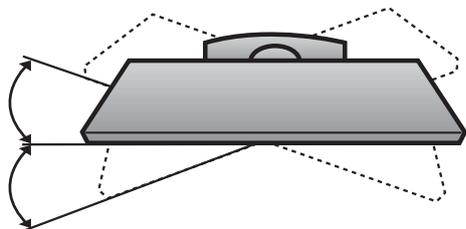

！注意

- ▶ 以下的型號是固定支架種類的型號，並沒有傾斜或旋轉功能，過度受壓會令它損壞。
- 22/26LU5***

非使用桌上型底座


- 顯示的可能與您的電視有所不同。

安裝嵌牆式裝置時，請使用使用保護套以進行桌上型底座的安裝。

只限 32/37/42LH2***, 32/37/42/47/55LH4***


42/47LH5***

把保護套及電視鑲嵌在一起。直至發出聲響，方才鑲嵌妥當。

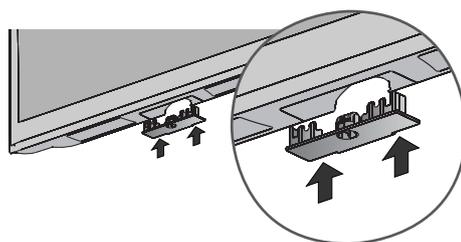


只限 42/47LH9***

從保護套移除保護紙之後，如圖所示黏附保護紙至電視。

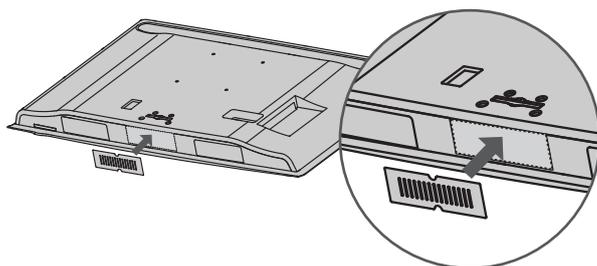

只限 42/47/55SL8***

把保護套及電視鑲嵌在一起。直至發出聲響，方才鑲嵌妥當。

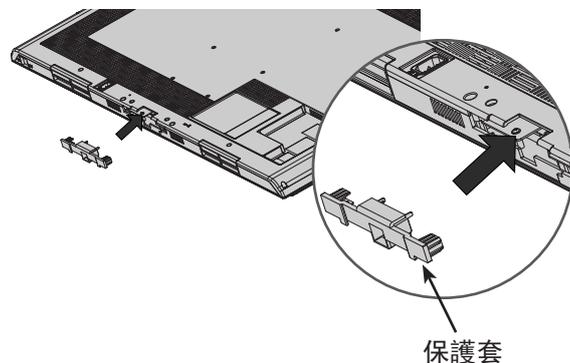

KENSINGTON 保安系統

(42/47SL9*** 除外)

- 並非所有型號均備有此功能。
- 顯示的可能與您的電視有所不同。

電視後面板裝有 Kensington 保安系統連接器。如圖所示，連接 Kensington 保安系統纜線。

Kensington 保安系統的安裝及使用說明，請參閱 Kensington 保安系統提供的使用說明書。


要取得更多詳請，請瀏覽 Kensington 公司的網頁：<http://www.kensington.com>。要取得更多詳請，請瀏覽 Kensington 公司的網頁：<http://www.kensington.com>。Kensington 銷售供手提電腦及液晶投影機等名貴電子設備用的保安系統。

注意

- Kensington 保安系統為需另行購置的配件。


注意

- a. 如果電視表面過份冰冷，開啓時或會產生小“火花”。
此乃正常情況，電視並沒有任何故障。
- b. 一些小點或會出現於螢幕上，如紅、綠或藍色小點。然而，這並不會對顯示器的表現有不良影響。
- c. 避免接觸 LCD 螢幕或長時間用手指按著螢幕。
此舉可能會導致螢幕暫時失真。

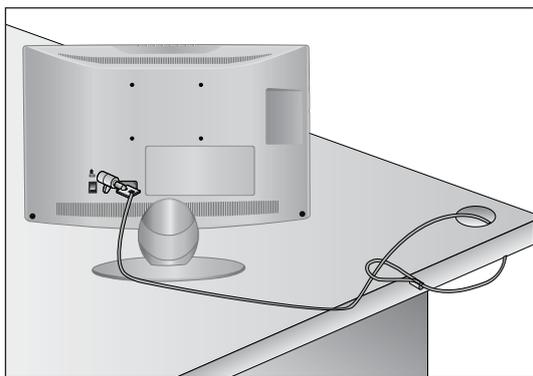


安全安裝建議

- 您應該在市場上購買所需零件將電視機安裝至牆壁上。
- 將電視機安放至靠近牆壁的位置，杜絕推動時掉落的可能性。
- 下圖為較安全的放置電視方法—把電視固定在牆壁上，即使在前面拉電視機時，也不會傾倒。這將防止電視向前傾倒造成傷害。也可防止損壞電視。確保兒童不會攀爬或懸吊在電視上。

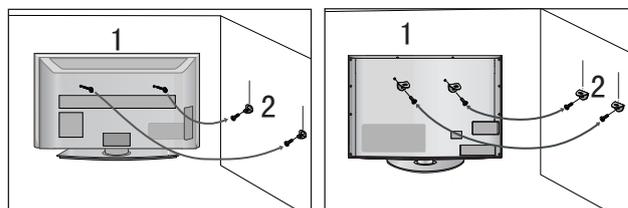

- 1 如圖所示，用環首螺絲或電視支架 / 螺絲固定電視在牆壁。
(如果您的電視的吊懸螺絲中有螺釘，放鬆螺釘。)
* 在上排的孔插入環首螺絲或電視支架 / 螺絲，然後收緊。
- 2 用螺釘把電視固定在牆壁。需與鑲嵌在牆上的支架的高度吻合。

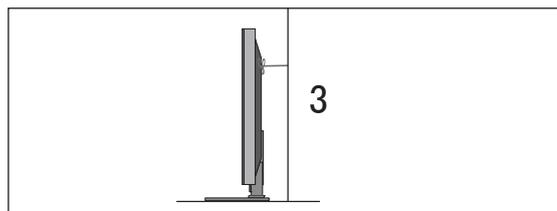

- 3 使用強壯的纜線固定電視。牆壁和電視之間的繩索成水平線時最安全。

! 注意


- ▶ 移動電視的時候，請先解開纜線。
- ▶ 使用足夠大的平台或廚櫃，能夠承擔電視機的大小和重量。
- ▶ 為確保安全使用電視，牆上的電視支架的高度需與電視的高度吻合。

準備

- 電視可以不同形式安裝，如安裝至牆上或桌上等。
- 電視設計為需要水平式鑲嵌。


接地

請確保已連接地線，以防觸電。如果電源未能接地，請要求合資格工程師另外安裝斷路器。切勿嘗試把電視連接至電話線、避雷針或煤氣喉等接地。

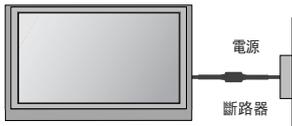

安裝座枱底座

為保持空氣流通，電影與牆壁四週請保留 4 吋 (10 厘米) 空間。


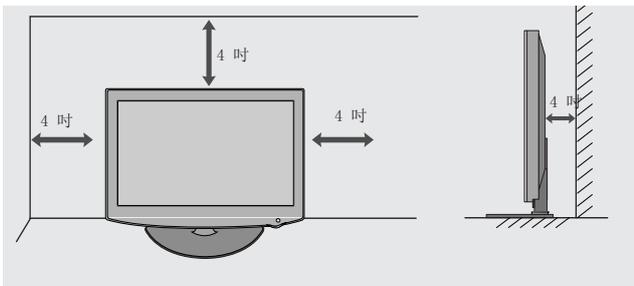


鑲嵌在牆上：水平安裝

- 將電視鑲嵌在牆上時，我們建議您使用 LG 品牌的掛牆支架。
- 我們建議您購買支援 VESA 標準的掛牆支架。
- LG 公司強烈建議由合資格的技工維修此家電。
- 首先您要連接 USB 延長線纜至 USB IN 終端，然後掛於牆上。

注意

- ▶ 必須把掛牆支架安裝在堅固的牆上並與地面成水平。
- ▶ 與您需要把產品安裝至天花板或傾斜的牆，必須使用特定的掛牆支架。
- ▶ 掛牆支架面必須有足夠能力支撐電視裝置；例如混凝土、天然石、磚頭及空心磚。
- ▶ 安裝時的螺絲種類及長度視乎掛牆支架而定。更多資訊，請參考掛牆支架附有的說明書。
- ▶ LG 公司不會負責任何因不正確安裝電視而導致的意外或財物損失。
 - 當使用不合乎標準的 VESA 掛牆支架。
 - 錯誤安裝螺絲會引起電視跌下或個人損傷。
 - 不跟隨建議的安裝方式。


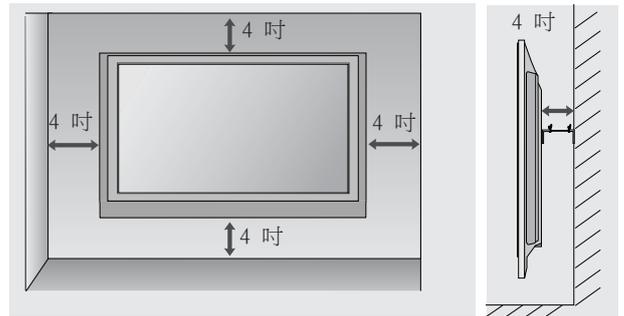


型號	VESA (A * B)	標準螺釘	數量
26LU5***	200 * 100	M4	4
22LU5***	100 * 100	M4	4
42LH2***	200 * 200	M6	4
37LH2***	200 * 200	M6	4
32LH2***	200 * 100	M4	4
55LH4***	400 * 400	M6	4
47LH4***	200 * 200	M6	4
42LH4***	200 * 200	M6	4
37LH4***	200 * 200	M6	4
32LH4***	200 * 100	M4	4
42LH5***	200 * 200	M6	4
47LH5***	200 * 200	M6	4
42LH9***	200 * 200	M6	4
47LH9***	200 * 200	M6	4
42SL8***	200 * 200	M6	4
47SL8***	200 * 200	M6	4
55SL8***	400 * 400	M6	4
42SL9***	200 * 200	M6	4
47SL9***	200 * 200	M6	4

- 為免損壞設備，尚未連接好所有設備前，切勿插入任何電源。

連接天線

- 使畫質達致最佳效果，請調較天線方向。
- 本品沒有提供天線纜線及轉頻器。

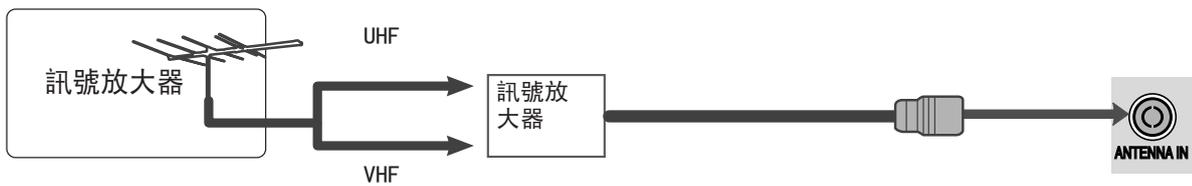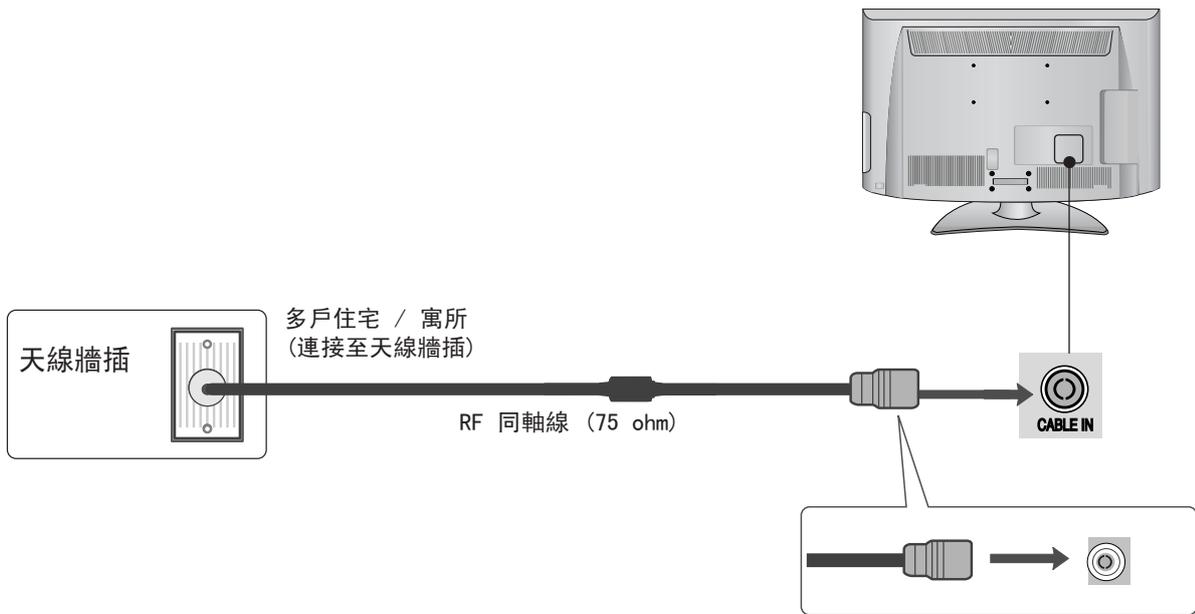

- 想在訊號較弱的地區享受更好畫質，或會有需要如上圖一樣安裝訊號放大器至天線。
- 如果需要把訊號分送至兩台電視，連接時可用天線訊號分相器。

連接外置設備

- 為免損壞設備，尚未連接好所有設備前，切勿插入任何電源。
- 有關連接外置設備的章節主要使用適用於等離子電視 32/37/42/47/55LH4***型號的圖示。
- 顯示的可能與您的電視有所不同。

設定 HD 接收器


- 此電視可以不用外置數位視訊轉換器接收數碼 RF/纜線訊號。但是，如果您確實使用數位視訊轉換器或其他數碼外置設備，請參考以下表格。

連接 component 纜線

- 1 連接數位視訊轉換器 (Digital-STB) 的視頻輸出 (Y, PB, PR) 至電視的 **COMPONENT IN VIDEO** 插口。
- 2 連接數位視訊轉換器 (Digital-STB) 的音頻輸出 (Y, PB, PR) 至電視的 **COMPONENT IN AUDIO** 插口。
- 3 開啓數位視訊轉換器。
(請參閱數位視訊轉換器的使用說明書。)
- 4 在遙控器的輸入 (INPUT) 按鈕選擇 **Component 1** 為輸入來源。
如果已連接至 **COMPONENT IN2**，选项 **Component 2** 為輸入來源。

- ▶ HDMI 音訊支援格式：杜比數碼、PCM
不支援 DTS 音訊格式。

訊號	Component	HDMI
480i/576i	0	X
480p/576p	0	0
720p/1080i	0	0
1080p	0	0
	(只限 50/60Hz)	(24Hz/30Hz/50Hz/60Hz)

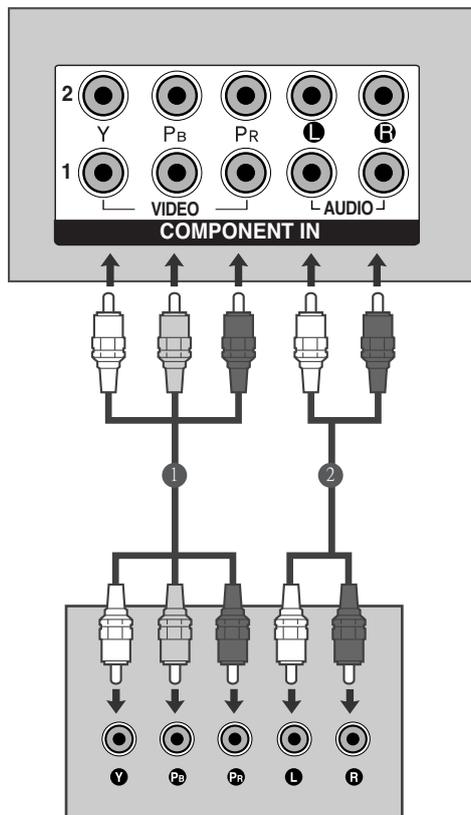


使用 HDMI 纜線連接視訊轉換器

- 1 連接數位視訊轉換器的 HDMI 輸出至電視的 HDMI/DVI IN 1, HDMI IN 2, HDMI IN 3 (22LU5*** 除外) 或 HDMI IN 4 (只限 42/47LH5***, 42/47LH9***, 42/47/55SL8***, 42/47SL9***) 插口。
- 2 開啓數位視訊轉換器。
(請參閱數位視訊轉換器的使用說明書。)
- 3 在遙控器的輸入 (INPUT) 按鈕選擇 HDMI 1, HDMI 2, HDMI 3 (22LU5*** 除外) 或 HDMI IN 4 (只限 42/47LH5***, 42/47LH9***, 42/47/55SL8***, 42/47SL9***) 為輸入來源。


! 注意

- ▶ 檢查 1.3 或更高版本的 HDMI 纜線。
如果 HDMI 纜線不支援 HDMI 1.3 版, 可能會導致閃動或沒有畫面。請使用最新的支援 HDMI 1.3 版的纜線。

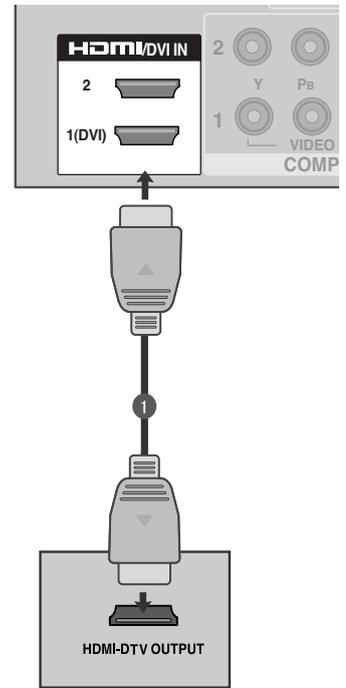

連接 HDMI 轉 DVI 纜線

- 1 連接數位視訊轉換器的音頻輸出至電視的 HDMI/DVI IN 1 插口。
- 2 連接數位視訊轉換器的音頻輸出至電視的 AUDIO IN(RGB/DVI) 插口。
- 3 開啓數位視訊轉換器。
(請參閱數位視訊轉換器的使用說明書。)
- 4 在遙控器的輸入 (INPUT) 按鈕選擇 HDMI 1 為輸入來源。

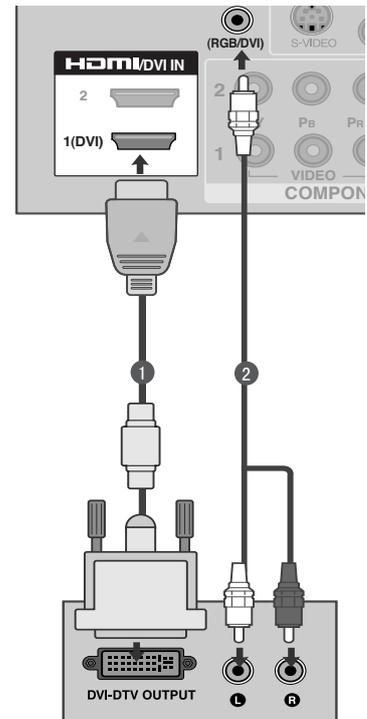


連接外置設備

設定 DVD

連接 component 纜線

- 1 連接 DVD 的視頻輸出 (Y, PB, PR) 至電視的 COMPONENT IN VIDEO 插口。
- 2 連接 DVD 的音頻輸出至電視的 COMPONENT IN AUDIO 插口。
- 3 開啓 DVD 播放器，插入 DVD。
- 4 在遙控器的輸入 (INPUT) 按鈕選擇 Component1 為輸入來源。
如果已連接至 COMPONENT IN 2，選擇 Component 2 為輸入來源。
- 5 請參閱 DVD 播放器之說明書，詳看播放器的操作指示。

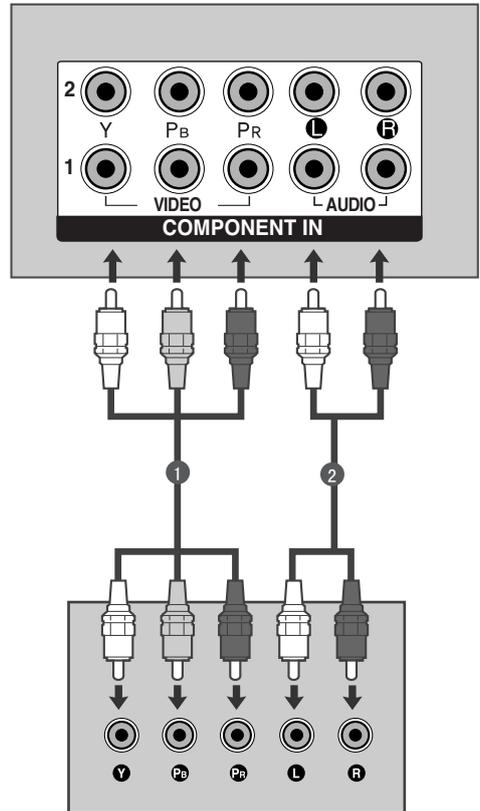


Component 輸入埠

要達致最佳畫質，請如下圖所示連接 DVD 播放器至 component 輸入埠。

電視上的 component 埠	Y	Pb	Pr
DVD 播放器上的 視頻輸出埠	Y	PB	PR
	Y	B-Y	R-Y
	Y	Cb	Cr
	Y	Pb	Pr

連接 S-Video 纜線 (42/47/55SL8***, 42/47SL9*** 除外)

- 1 連接 S-VIDEO 的視頻輸出 至電視的 S-VIDEO 插口。
- 2 連接 DVD 的音頻輸出至電視的 AUDIO 插口。
- 3 開啓 DVD 播放器，插入 DVD。
- 4 在遙控器 AV1 按鈕選擇 INPUT 為輸入來源。
- 5 請參閱 DVD 播放器之說明書，詳看播放器的操作指示。

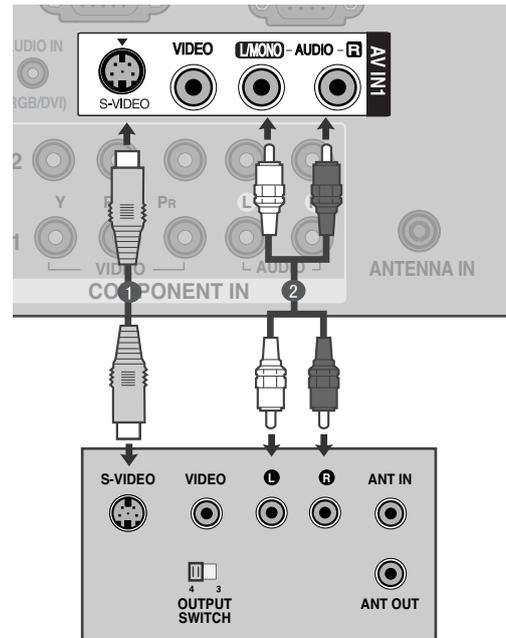


連接外置設備

連接 HDMI 纜線

- 1 連接數位視訊轉換器的 HDMI 輸出至電視的 HDMI/DVI IN 1, HDMI IN 2, HDMI IN 3 (22LU5*** 除外) 或 HDMI IN 4 (只限 42/47LH5***, 42/47LH9***, 42/47/55SL8***, 42/47SL9***) 插口。
- 2 在遙控器的輸入 (INPUT) 按鈕選擇 HDMI1, HDMI2, HDMI3 (22LU5*** 除外) 或 HDMI4 (只限 42/47LH5***, 42/47LH9***, 42/47/55SL8***, 42/47SL9***) 為輸入來源。
- 3 請參閱 DVD 播放器之說明書，詳看播放器的操作指示。

！注意


- ▶ 透過 HDMI 纜線，電視可以同時接收視頻及音頻訊號。
- ▶ 假如 DVD 不支援自動 HDMI，您需要設定相應的 DVD 輸出解像度。
- ▶ 檢查 1.3 或更高版本的 HDMI 纜線。
如果 HDMI 纜線不支援 HDMI 1.3 版，可能會導致閃動或沒有畫面。請使用最新的支援 HDMI 1.3 版的纜線。

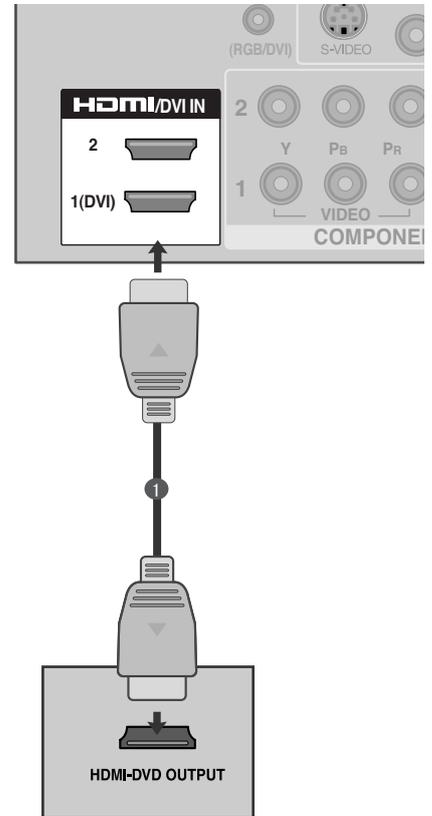

設定錄影機

- 為免雜訊（干擾），請於錄影機及電視之間留有足夠的距離。

連接 RF 纜線

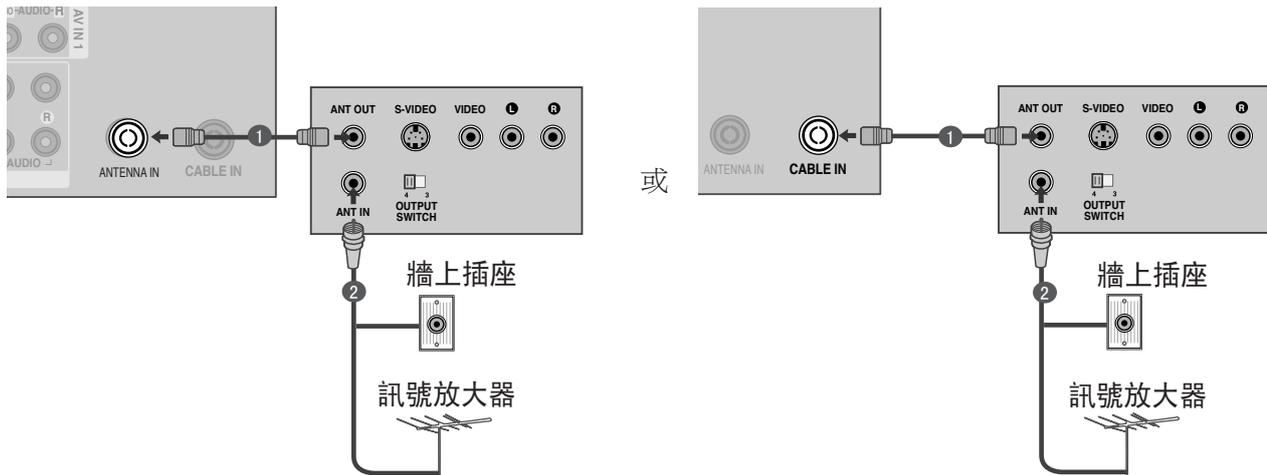

連接外置設備

- 1 連接錄影機的 ANT OUT 插頭至電視的 ANTENNA IN/CABLE IN 插口。
- 2 連接天線纜線至錄影機的 ANT IN 插口。
- 3 按錄影機上的播放（PLAY）按鈕，配對電視及錄影機的相應頻道。


連接外置設備

連接 RCA 纜線

- 1 連接電視及錄影機之間的 AUDIO/VIDEO 插口。請配對插口顏色（視頻 = 黃色、左聲道 = 白色及右聲道 = 紅色）
- 2 把錄影帶插入錄影機，然後按錄影機上的播放鍵 (PLAY)。（請參閱錄影機的使用說明書。）
- 3 在遙控器的輸入 (INPUT) 按鈕選擇 AV1 為輸入來源。
如果已連接至 AV IN 2，選擇 AV2 為輸入來源。

注意

- ▶ 如果您使用單聲道錄影機，請連接錄影機的音頻纜線至電視的 AUDIO L/MONO 插口。

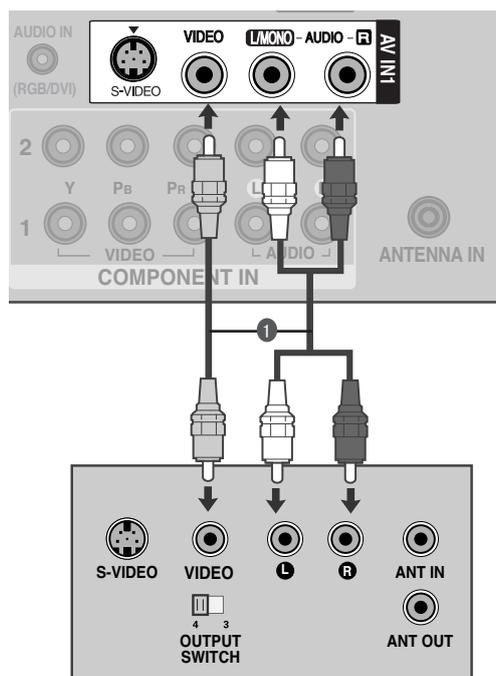


連接 S-Video 纜線

(42/47/55SL8***, 42/47SL9*** 除外)

- 1 連接錄影機的 S-VIDEO 輸出至電視的 S-VIDEO 輸入。和普通的類比影像輸入 (RCA 纜線) 相比，畫質有所改善。
- 2 連接錄影機的音頻輸出至電視的 AUDIO 輸入插口。
- 3 把錄影帶插入錄影機，然後按錄影機上的播放鍵 (PLAY)。(請參閱錄影機的使用說明書。)
- 4 在遙控器的輸入 (INPUT) 按鈕選擇 AV1 為輸入來源。

! 注意

- ▶ 假如兩個 S-VIDEO 及 VIDEO 插口均同時連接 S-VHS 錄影機時，只能接收 S-VIDEO。

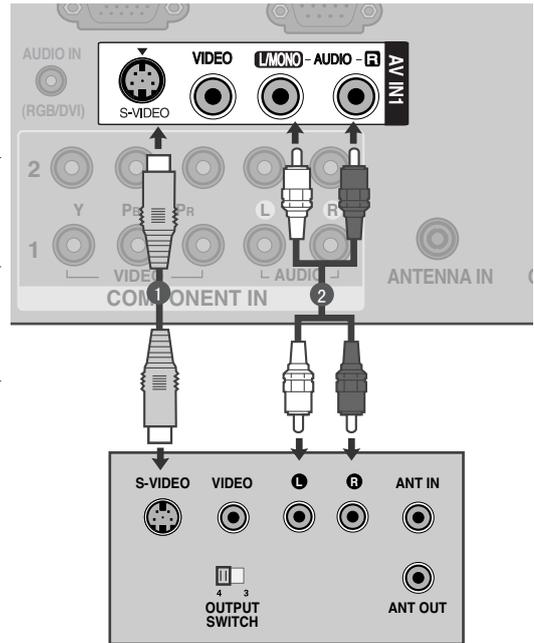

連接外置設備

光學數碼音訊輸出


通過數碼音頻輸出（光學）埠發送電視的音頻訊號至外置音頻設備。

如您想透過 5.1 聲道揚聲器享受數碼廣播，連接電視後的光學數碼音頻輸出終端至家庭影院（或擴音器）。


- 1 將光學纜線的一端連接至電視數碼音訊（光學）輸出插口。
- 2 另一端連接至音頻設備的數碼音頻（光學）輸入。
- 3 於音頻功能表中設定「電視機揚聲器選項 - 關閉」（▶ 第 114 頁）。請參閱外置音頻設備操作說明書，詳看操作指示。

⚠ 小心

- ▶ 不要向光學輸出埠中張望。看向雷射光可能會損害您的視覺。

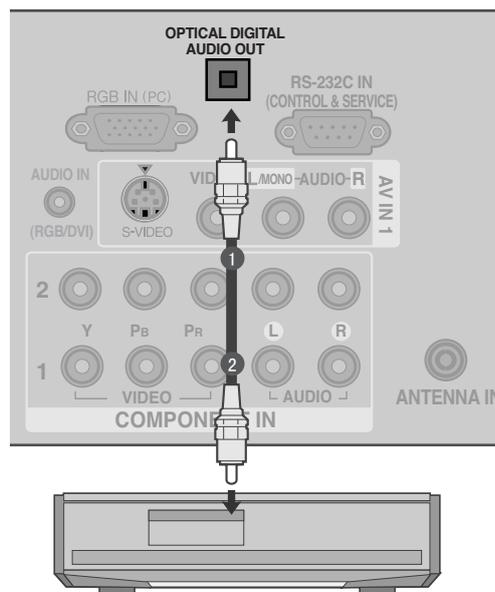

設定其他 A/V 來源

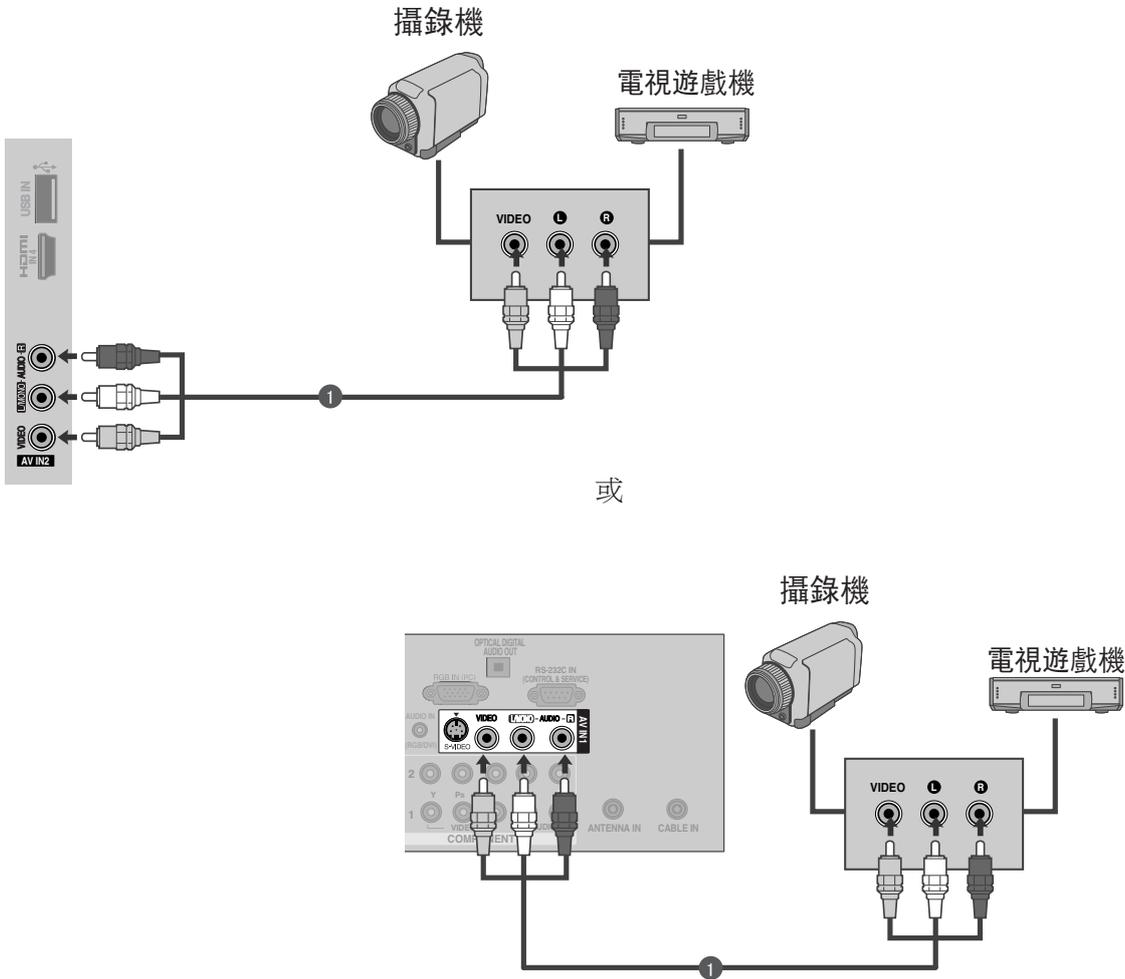

- 1 連接電視及外置設備之間的 AUDIO/VIDEO 插口。請配對插口顏色。
(視頻 = 黃色、左聲道 = 白色及右聲道 = 紅色)


- 2 在遙控器的輸入 (INPUT) 按鈕選擇 AV2 為輸入來源。
如果已連接至 AV IN1，選擇 AV1 為輸入來源。

- 3 操作相應的外置設備。
請參閱外置設備的操作指南。

連接外置設備

USB 輸入設定 (22/26LU5***, 32/37/42LH2*** 除外)

連接外置設備

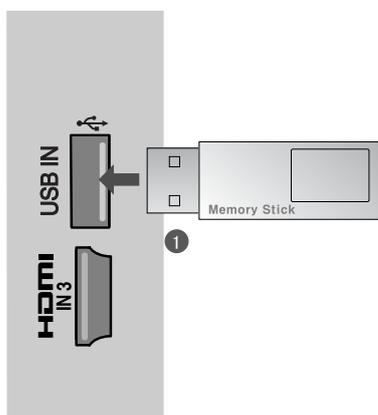


- 1 連接USB裝置至電視機側的USB輸入插口。
- 2 連接USB輸入插口後，您可以使用 USB 功能。(▶ 第 78 頁)

設定電腦

此電視可隨插即用，即電腦會自動調較至電視設定。

連接 D-sub 15 pin 纜線


- 1 連接電腦的 RGB 輸出至電視的 RGB IN (PC) 插口。
- 2 連接電腦的音頻輸出至電視的 AUDIO IN (RGB/DVI) 插口。
- 3 開啓電腦及電視。
- 4 在遙控器的輸入 (INPUT) 按鈕選擇 RGB 為輸入來源

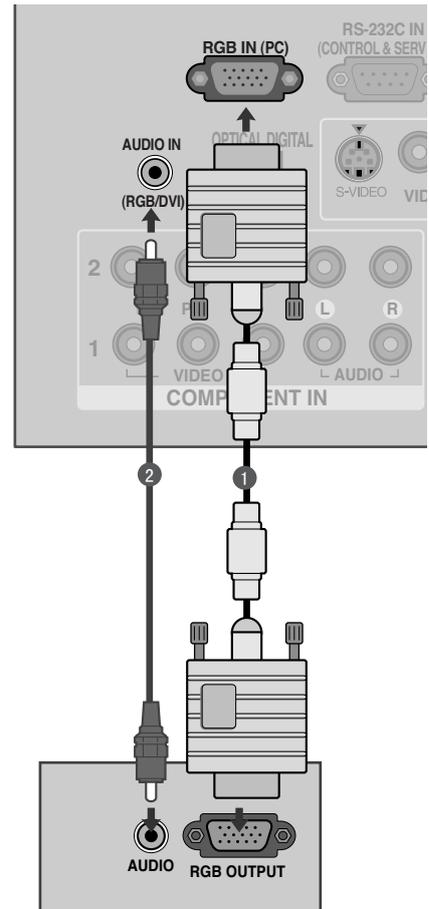

連接外置設備

連接 HDMI 轉 DVI 纜線

- 1 連接電腦的 DVI 輸出至電視的 HDMI/DVI IN 1 插孔。
- 2 連接電腦的音頻輸出至電視的 AUDIO IN (RGB / DVI) 插口。
- 3 開啓電腦及電視。
- 4 在遙控器的輸入 (INPUT) 按鈕選擇 HDMI 1 為輸入來源。

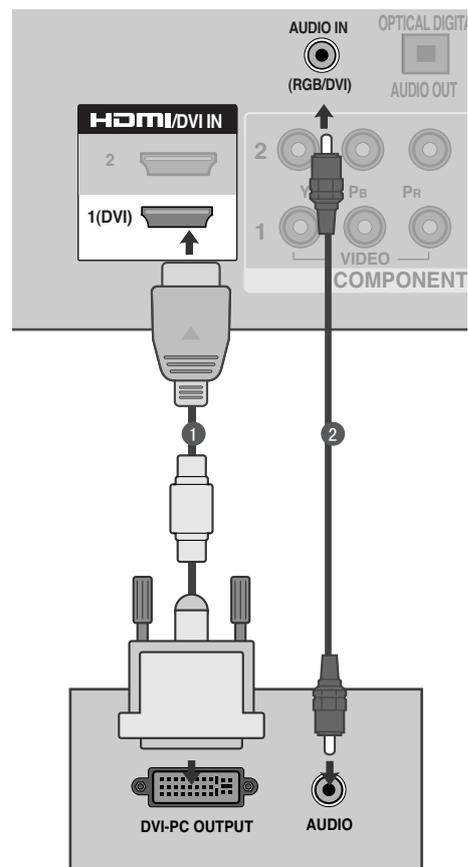

支援的顯示解像度

RGB-PC, HDMI/DVI-PC 模式

解像度	水平頻率 (KHz)	垂直頻率 (Hz)
720x400	31.468	70.08
640x480	31.469	59.94
800x600	37.879	60.31
1024x768	48.363	60.00
1280x768	47.78	59.87
1360x768	47.72	59.80
1280x1024	63.595	60.00
	63.981	60.00
1920x1080 (RGB-PC)	66.587	59.93
1920x1080 (HDMI-PC)	67.5	60.00

→ (42/47/55SL8***除外)
→ (只限42/47/55SL8***)

HDMI/DVI-DTV 模式

解像度	水平頻率 (KHz)	垂直頻率 (Hz)
720x480	31.469/31.5	59.94/60
720x576	31.25	50
1280x720	37.5	50
	44.96/45	59.94/60
1920x1080	33.72/33.75	59.94/60
	28.125	50
	26.97/27	23.97/24
	33.716/33.75	29.976/30.00
	56.25	50
	67.43/67.5	59.94/60

連接外置設備

⚠ 注意


- ▶ 要避免固定影像長時間停留在電視機螢幕。以防影像永久殘留在電視螢幕，請於有需要時使用螢幕保護，避免電視螢幕長時間顯示固定影像。
- ▶ 在電腦模式時，部份解像度、垂直影像、對比或光暗等也會引致雜訊。更改電腦模式至另一解像度、更改刷新率至另一刷新率或在功能表調較光暗及對比至影像清晰為止。如果不能改變電腦影像卡的刷新率，請更換電腦影像卡或向該卡的生產商查詢。
- ▶ 水平及垂直的同步輸入波形頻率是獨立的。
- ▶ 把個人電腦顯示器輸出埠的訊號線連接至電視的 RGB (PC) 埠或把個人電腦 HDMI 輸出埠的訊號線連接至電視的 HDMI 輸入 (或 HDMI/DVI 輸入) 埠。
- ▶ 連接電腦的音頻纜線到電視的音頻輸入 (Audio input)。(音頻纜線不包含於電視內)。
- ▶ 如果使用聲卡，調整電腦至所需聲音。
- ▶ 如果電腦影像卡不能同時輸出類比和數碼 RGB，僅連接 RGB 或 HDMI 輸入 (或 HDMI/DVI 輸入) 其中一個，在電視中顯示電腦。
- ▶ 如果電腦影像卡不能同時輸出類比和數碼 RGB，僅切換電視連接 RGB 或 HDMI 其中一個；(設定其他模式為電視自動隨插即用。)
- ▶ 如果您使用 HDMI 連接 DVI 纜線，DOS 模式或會不能運作，要視乎視訊卡而定。
- ▶ 使用過長的 RGB-PC 纜線時，螢幕或會出現雜訊。我們建議使用短於 5 米的纜線，可提供最佳畫質。
- ▶ 如不支援的像素或圖像卡在電腦上使用，可能會出現錯誤。
- ▶ 電腦模式時，我們建議採用以下能提供最佳畫質的解像度：1920x1080, 60Hz

設定電腦模式的螢幕

螢幕重設

把位置、大小及階段設定回出廠預設。

此功能於下列模式運作：RGB[PC]。

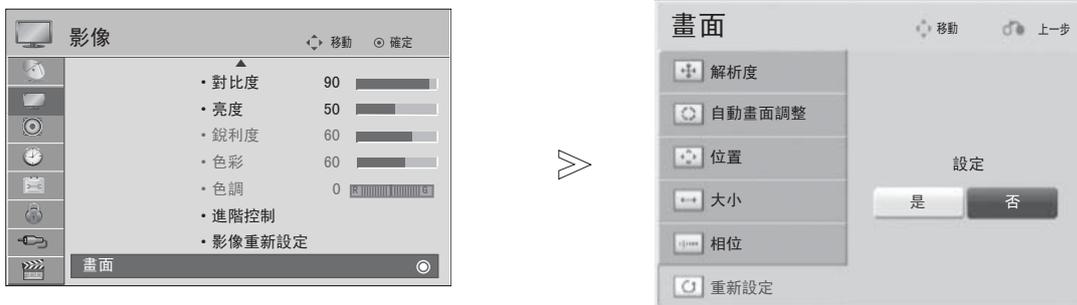

- 1   選擇影像。
- 2   選擇畫面。
- 3   選擇重設。
- 4   選擇是。
- 5  選擇重設。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。


連接外置設備

自動畫面調整 (僅限 RGB [PC] 模式)

自動調較影像位置，盡量減少影像晃動。調較後，如果影像位置不正確，即使您的電視運作正常，但仍需要作進一步調較。

自動畫面調整

此功能可自動調較螢幕位置、大小及階段。自動配置進行期間，顯示的影像將會不穩定。此情況會持續數秒。

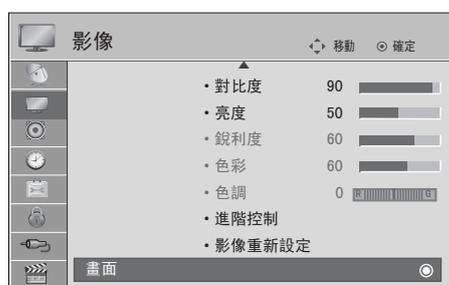

- 1 MENU 選擇影像。
- 2 OK 選擇畫面。
- 3 OK 選擇自動畫面調整。
- 4 OK 選擇是。
- 5 OK 選擇自動畫面調整。


- 如果影像位置仍然不正確，請再嘗試自動調較。
- 假如透過 RGB (PC) 模式自動調較後，您可以位置、大小及相位，調較仍需調較的影像。





- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

选项解析度

若要觀看正常影像，請配合 RGB 模式的解像度。

此功能於下列模式運作：RGB [PC]

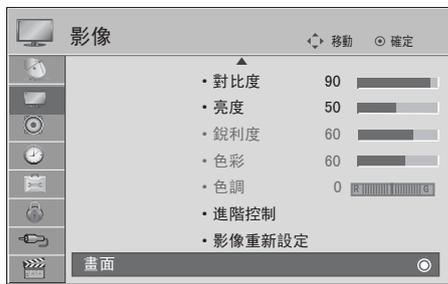

- 1   選擇影像。
- 2   選擇畫面。
- 3   選擇解析度。
- 4   選擇想要的解像度。
- 5 


- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

連接外置設備

調較螢幕位置、大小及相位

如果自動調較後的影像不清晰（尤其時文字仍然晃動時），請手動調較影像階段。

此功能於下列模式運作：RGB[PC]。

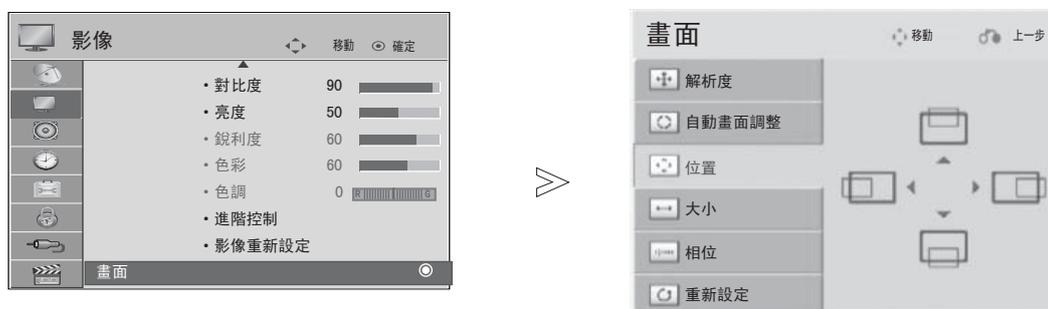

1. MENU 選擇影像。
2. OK 選擇畫面。
3. OK 選擇位置，大小 或 相位。
4. OK 作適當調較。
5. OK

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

觀看電視 / 操控頻道

遙控器鍵功能 (只限 22/26LU5***)

使用遙控器時，請對準電視的遙控接收器。



電視/收音機 在數碼模式中選擇收音機或電視頻道。

AV 模式 這助您在連接 AV 裝置時选项及設定影像及聲音。(▶ 第 68 頁)

電源 把電視從備用模式切換至開啓或從關閉切換至備用模式。

輸入 外置輸入模式以規則的次序旋轉。
把電視從備用模式切換至開啓。(▶ 第 62 頁)

節能模式 調較電視的節省節能模式。(▶ 第 98 頁)

0~9 數字按鈕 選擇頻道。
在功能表選擇有編號的頻道。

快速交替檢視 返回前一個觀賞頻道。

清單 顯示頻道表。(▶ 第 60 頁)

導航鈕 (上/下/左/右) 讓您控制螢幕上的功能表，並根據喜好調較系統設定。

確定 接受選項或顯示當前模式。

功能表 選擇功能表。
清除所有螢幕的顯示，從任何功能表中返回電視觀看畫面。(▶ 第 50 頁)

重新設定 (EXIT) 允許用戶在互動應用程式或其他用戶互動功能中返回一個步驟。


有色按鈕 這些按鈕供編輯頻道時用。

1 數碼電視 這些按鈕供數碼電視文字廣播用。詳情可參閱「數碼電視文字廣播」部份。(▶ 第 128 頁)

字幕 在數碼模式中重現您偏好的字幕。

SIMPLINK 檢視連接至電視的 AV 裝置清單。
按此按鈕時，螢幕會顯示 Simplink 功能表。(▶ 第 65 頁)

觀看電視 / 操控頻道

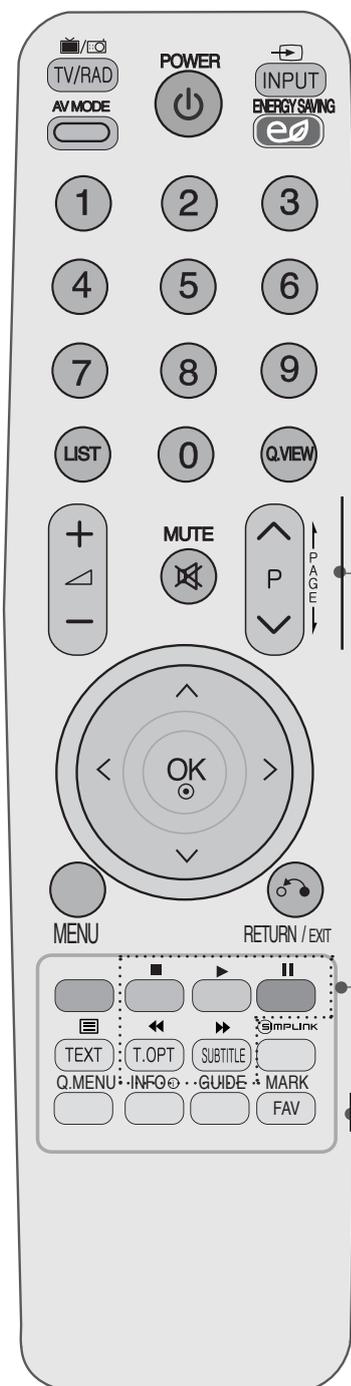

音量 (上/下) 調較音量。
 靜音 切換至音響開或關。
 頻道 (上/下) 選擇頻道。
 頁 (上/下) 從一全螢幕的資料跳到下一頁。

SIMPLINK 讓您控制螢幕上的功能表，並根據喜好調較系統設定。
 功能表控制按鈕

快速功能表 选项想要的快速功能表來源。(畫面比例，清晰人聲 II，影像模式，聲音模式，音效，睡眠時間設定，我最喜愛的頻道，比例) (▶ 第 49 頁)
 資訊 ⓘ 顯示目前畫面資訊。
 指南 顯示節目時間表。(▶ 第 92 頁)
 靜音 選擇輸入來源以使用圖像精靈設定。
 最愛 顯示所選的最愛頻道。

安裝電池

- 打開遙控器背面的電池盒蓋，然後根據正負極，正確地裝上電池 (+ 對 +、- 對 -)。
- 請裝入兩顆 1.5V AAA 電池。切勿把新舊電池混合使用。
- 蓋上盒蓋。

遙控器鍵功能 (42/47LH9***, 22/26LU5***, 42/47/55SL8***, 42/47SL9*** 除外)

使用遙控器時，請對準電視的遙控接收器。

節能模式 調較電視的節省節能模式。(▶ 第 98 頁)

比例 選擇理想的影像格式。(▶ 第 95 頁)

電源 把電視從備用模式切換至開啓或從關閉切換至備用模式。

輸入 外置輸入模式以規則的次序旋轉。
把電視從備用模式切換至開啓。(▶ 第 62 頁)

電視/收音機 在數碼模式中選擇收音機或電視頻道。

重新設定 (EXIT) 允許用戶在互動應用程式或其他用戶互動功能中返回一個步驟。

資訊 ⓘ 顯示目前畫面資訊。

AV 模式 這助您在連接 AV 裝置時选项及設定影像及聲音。(▶ 第 68 頁)

音量 (上/下) 調較音量。

選取 檢查和不檢查在功能表內的 USB 節目或選擇輸入，以使用圖像精靈設定。

最愛 顯示所選的最愛頻道。

靜音 切換至音響開或關。

頻道 (上/下) 選擇頻道。

頁 (上/下) 從一全螢幕的資料跳到下一頁。

0~9 數字按鈕 選擇頻道。
在功能表選擇有編號的頻道。

清單 顯示頻道表。(▶ 第 60 頁)

快速交替檢視 返回前一個觀賞頻道。

有色按鈕 這些按鈕供編輯頻道時用。

1 數碼電視 這些按鈕供數碼電視文字廣播用。詳情可參閱「數碼電視文字廣播」部份。(▶ 第 128 頁)

SIMPLINK 檢視連接至電視的 AV 裝置清單。
按此按鈕時，螢幕會顯示 Simplink 功能表。(▶ 第 65 頁)

觀看電視 / 操控頻道



快速功能表 选项想要的快速功能表來源。(畫面比例，清晰人聲 II，影像模式，聲音模式，音效，睡眠時間設定，我最喜愛的頻道，比例，USB 裝置) (▶ 第 49 頁)

功能表 選擇功能表。
清除所有螢幕的顯示，從任何功能表中返回電視觀看畫面。(▶ 第 50 頁)

指南 顯示節目時間表。(▶ 第 92 頁)

導航鈕 (上/下/左/右) 讓您控制螢幕上的功能表，並根據喜好調較系統設定。

確定 接受選項或顯示當前模式。

SIMPLINK/USB 功能表控制按鈕 控制 SIMPLINK/ USB 功能表。

字幕 在數碼模式中重現您偏好的字幕。

安裝電池

- 打開遙控器背面的電池盒蓋，然後根據正負極，正確地裝上電池 (+ 對 +、- 對 -)。
- 請裝入兩顆 1.5V AAA 電池。切勿把新舊電池混合使用。
- 蓋上盒蓋。

遙控器鍵功能

(只限 42/47LH9***, 42/47/55SL8***)

使用遙控器時，請對準電視的遙控接收器。



電源 把電視從備用模式切換至開啓或從關閉切換至備用模式。

開啟/關閉 鍵燈光開啓或關閉。

電視/收音機 在數碼模式中選擇收音機或電視頻道。

節能模式 調較電視的節省節能模式。(▶ 第 98 頁)

資訊 ⓘ 顯示目前畫面資訊。

輸入 外置輸入模式以規則的次序旋轉。(▶ 第 62 頁)

0~9 數字按鈕 選擇頻道。
在功能表選擇有編號的頻道。

清單 顯示頻道表。(▶ 第 60 頁)

快速交替檢視 返回前一個觀賞頻道。

功能表 選擇功能表。
清除所有螢幕的顯示，從任何功能表中返回電視觀看畫面。(▶ 第 50 頁)

快速功能表 选项想要的快速功能表來源。(畫面比例，清晰人聲 II，影像模式，聲音模式，音效，睡眠時間設定，我最喜愛的頻道，比例，USB 裝置)(▶ 第 49 頁)

導航鈕 (上/下/左/右) 讓您控制螢幕上的功能表，並根據喜好調較系統設定。

確定 接受選項或顯示當前模式。

指南 顯示節目時間表。(▶ 第 92 頁)

重新設定 (EXIT) 允許用戶在互動應用程式或其他用戶互動功能中返回一個步驟。

有色按鈕 這些按鈕供編輯頻道時用。

1 **數碼電視 文字廣播** 這些按鈕供數碼電視文字廣播用。詳情可參閱「數碼電視文字廣播」部份。(▶ 第 128 頁)

字幕 在數碼模式中重現您偏好的字幕。

觀看電視 / 操控頻道



音量 (上/下) 調較音量。
 最愛 顯示所選的最愛頻道。
 選取 檢查和不檢查在功能表內的 USB 節目或選擇輸入，以使用圖像精靈設定。
 靜音 切換至音響開或關。
 頻道 (上/下) 選擇頻道。
 頁 (上/下) 從一全螢幕的資料跳到下一頁。

SIMPLINK/USB 控制 SIMPLINK/ USB 功能表。(相片清單及音樂清單或短片清單。)

SIMPLINK 檢視連接至電視的 AV 裝置清單。按此按鈕時，螢幕會顯示 Simplink 功能表。(▶ 第 65 頁)
 比例 調較電視的節省節能模式。(▶ 第 91 頁)
 AV 模式 這助您在連接 AV 裝置時选项及設定影像及聲音。(▶ 第 68 頁)

安裝電池

- 打開遙控器背面的電池盒蓋，然後根據正負極，正確地裝上電池 (+ 對 +、- 對 -)。
- 請裝入兩顆 1.5V AAA 電池。切勿把新舊電池混合使用。
- 蓋上盒蓋。

遙控器鍵功能


(只限 42/47SL9***)

使用遙控器時，請對準電視的遙控接收器。



- 電源** 把電視從備用模式切換至開啓或從關閉切換至備用模式。
- 開啟/關閉** 鍵燈光開啓或關閉。
- 電視/收音機** 在數碼模式中選擇收音機或電視頻道。
- 節能模式** 調較電視的節省節能模式。(▶ 第 98 頁)
- AV 模式** 這助您在連接 AV 裝置時选项及設定影像及聲音。(▶ 第 68 頁)
- 輸入** 外置輸入模式以規則的次序旋轉。(▶ 第 62 頁)
- 0~9 數字按鈕** 選擇頻道。
在功能表選擇有編號的頻道。
- 清單** 顯示頻道表。(▶ 第 60 頁)
- 快速交替檢視** 返回前一個觀賞頻道。
- 功能表** 選擇功能表。
清除所有螢幕的顯示，從任何功能表中返回電視觀看畫面。(▶ 第 50 頁)
- 比例** 調較電視的節省節能模式。(▶ 第 91 頁)
- 快速功能表** 选项想要的快速功能表來源。(畫面比例，清晰人聲 II，影像模式，聲音模式，音效，睡眠時間設定，我最喜愛的頻道，比例，USB 裝置) (▶ 第 49 頁)
- 導航鈕 (上/下/左/右)** 讓您控制螢幕上的功能表，並根據喜好調較系統設定。
- 確定** 接受選項或顯示當前模式。
- 指南** 顯示節目時間表。(▶ 第 92 頁)
- 資訊 ⓘ** 顯示目前畫面資訊。
- 重新設定 (EXIT)** 允許用戶在互動應用程式或其他用戶互動功能中返回一個步驟。
- 有色按鈕** 這些按鈕供編輯頻道時用。

觀看電視 / 操控頻道

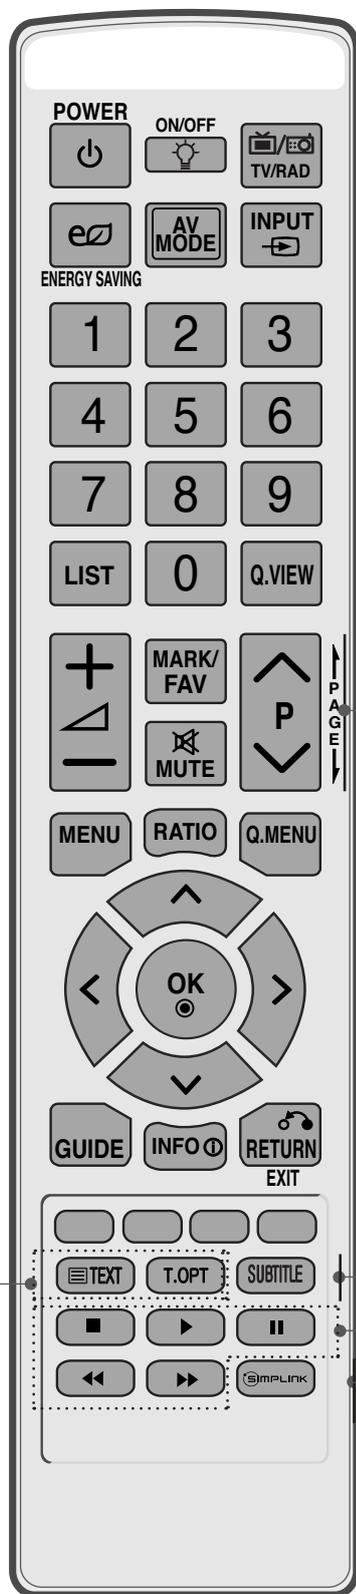

音量 (上/下) 調較音量。

選取 檢查和不檢查在功能表內的 USB 節目或選擇輸入，以使用圖像精靈設定。

最愛 顯示所選的最愛頻道。

靜音 切換至音響開或關。

頻道 (上/下) 選擇頻道。

頁 (上/下) 從一全螢幕的資料跳到下一頁。


1 數碼電視 這些按鈕供數碼電視文字廣播用。詳情可參閱「數碼電視文字廣播」部份。(▶ 第 128 頁)

字幕 在數碼模式中重現您偏好的字幕。

SIMPLINK/USB 控制 SIMPLINK/ USB 功能表。(相片清單及音樂清單或短片清單。)


SIMPLINK 檢視連接至電視的 AV 裝置清單。按此按鈕時，螢幕會顯示 Simplink 功能表。(▶ 第 65 頁)

安裝電池



- 打開遙控器背面的電池盒蓋，然後根據正負極，正確地裝上電池 (+ 對 +, - 對 -)。
- 請裝入兩顆 1.5V AAA 電池。切勿把新舊電池混合使用。
- 蓋上盒蓋。

簡單遙控器

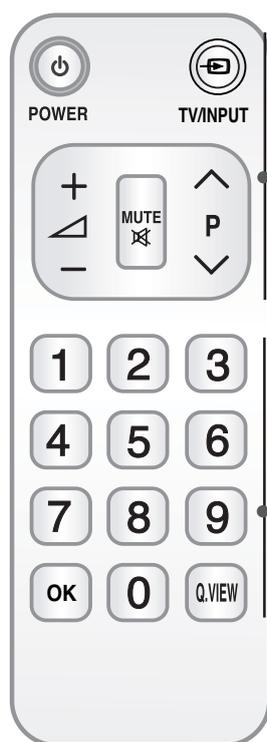

電源 把電視從備用模式切換至開啓或從關閉切換至備用模式。

電視/輸入 外置輸入模式以規則的次序旋轉。(► 第 62 頁)

音量 (上/下) 調較音量。

靜音 切換至音響開或關。

頻道 (上/下) 選擇頻道。

0~9 數字按鈕 選擇頻道。
在功能表選擇有編號的頻道。

確定 接受選項或顯示當前模式。

快速交替檢視 返回前一個觀賞頻道。

安裝電池



- 打開遙控器背面的電池盒蓋，然後根據正負極，正確地裝上電池 (+ 對 +、- 對 -)。
- 請裝入兩顆 1.5V AAA 電池。切勿把新舊電池混合使用。
- 蓋上盒蓋。

觀看電視 / 操控頻道

開啟電視

- 電視開啓後，您可以享用其功能。

- 1 首先，正確連接電源線及檢查電視的主電源。
此時，電視會切換至備用模式。
- 2 按電視上的 、、INPUT 或 P   (或 P  ) 或遙控器上的 POWER、INPUT、P  、數字等按鈕，電視便可從備用模式中開啓。

初始化設定

- 1 如果開啟電視機後，螢幕顯示螢幕顯示 (OSD) 功能圖示，您可以調整國家或地域、模式設定或自動較台。

注意：

- a. 如您在未完成起始設定就關閉電視，起始設定功能表可以再次顯示。
- b. 「商店演示模式」僅限於商人顯示，並不適用於一般客戶使用。
- c. 「家居使用模式」是適用於家電環境的最佳設定，並且是電視的預設模式。
- d. 「商店演示模式」是適用於商店環境的最佳設定。如果用戶調整影像質素數據，「商店演示模式」會在一段時間後初始化產品至我們設定的影像質素。
- e. 可以於選項功能表中執行更改模式(家居使用、商店演示)。
- f. 可以於選項 (OPTION) 功能表中執行模式設定以轉換模式 (家居使用、商店樣本)。

頻道选项

- 1 按 P   或數字按鈕，选项頻道編號。

音量調較

- 1 按  + 或 - 按鈕調較音量。

假如想關閉聲音，請按靜音 (MUTE) 按鈕。

您可以按靜音 (MUTE)  + 或 - 按鈕以擇消靜音功能。

快速功能表

您的電視的 OSD (螢幕顯示) 可能與使用說明書上的圖示有少許差異。
快速功能表 (Q.Menu) 是用戶可能最常使用功能的功能表。

-  **畫面比例**：選擇理想的影像格式。
縮放設定方面，請在比率功能表中選項 14:9, 放大及 影院模式 1。完成縮放設定後，螢幕會返回快速功能表。
-  **清晰人聲 II**：能分辨人聲的範圍，助使用者聽到更優質的人聲。
-  **影像模式**：選擇您想要的畫面模式。
-  **聲音模式**：這是自動設定聲音組合的功能，是最佳的影像觀賞。選項您想要的聲音模式。
-  **音效**：選擇聲音輸出。
-  **睡眠時間設定**：選擇睡眠時間制。
-  **我最喜愛的頻道**：選擇我最喜愛的頻道頻道。
-  **USB 裝置**：選擇 “USB 刪除” 以擇出 USB 裝置。(22/26LU5***, 32/37/42LH2*** 除外)
-  **節能模式**：選擇節省能源模式。
(只限 22/26LU5***, 32/37/42LH2***)



(只限 22/26LU5***, 32/37/42LH2***)



(22/26LU5***, 32/37/42LH2*** 除外)

- 1   顯示全部功能表。
- 2  選擇理想的來源。
- 3  按快速功能表按鈕，返回觀看電視畫面。
按重新設定按鈕以移至上一個功能表的畫面。


觀看電視 / 操控頻道

选项及調較螢幕功能表

您的電視的 OSD (螢幕顯示) 可能與使用說明書上的圖示有少許差異。

- 顯示的可能與您的電視有所不同。

觀看電視 / 操控頻道

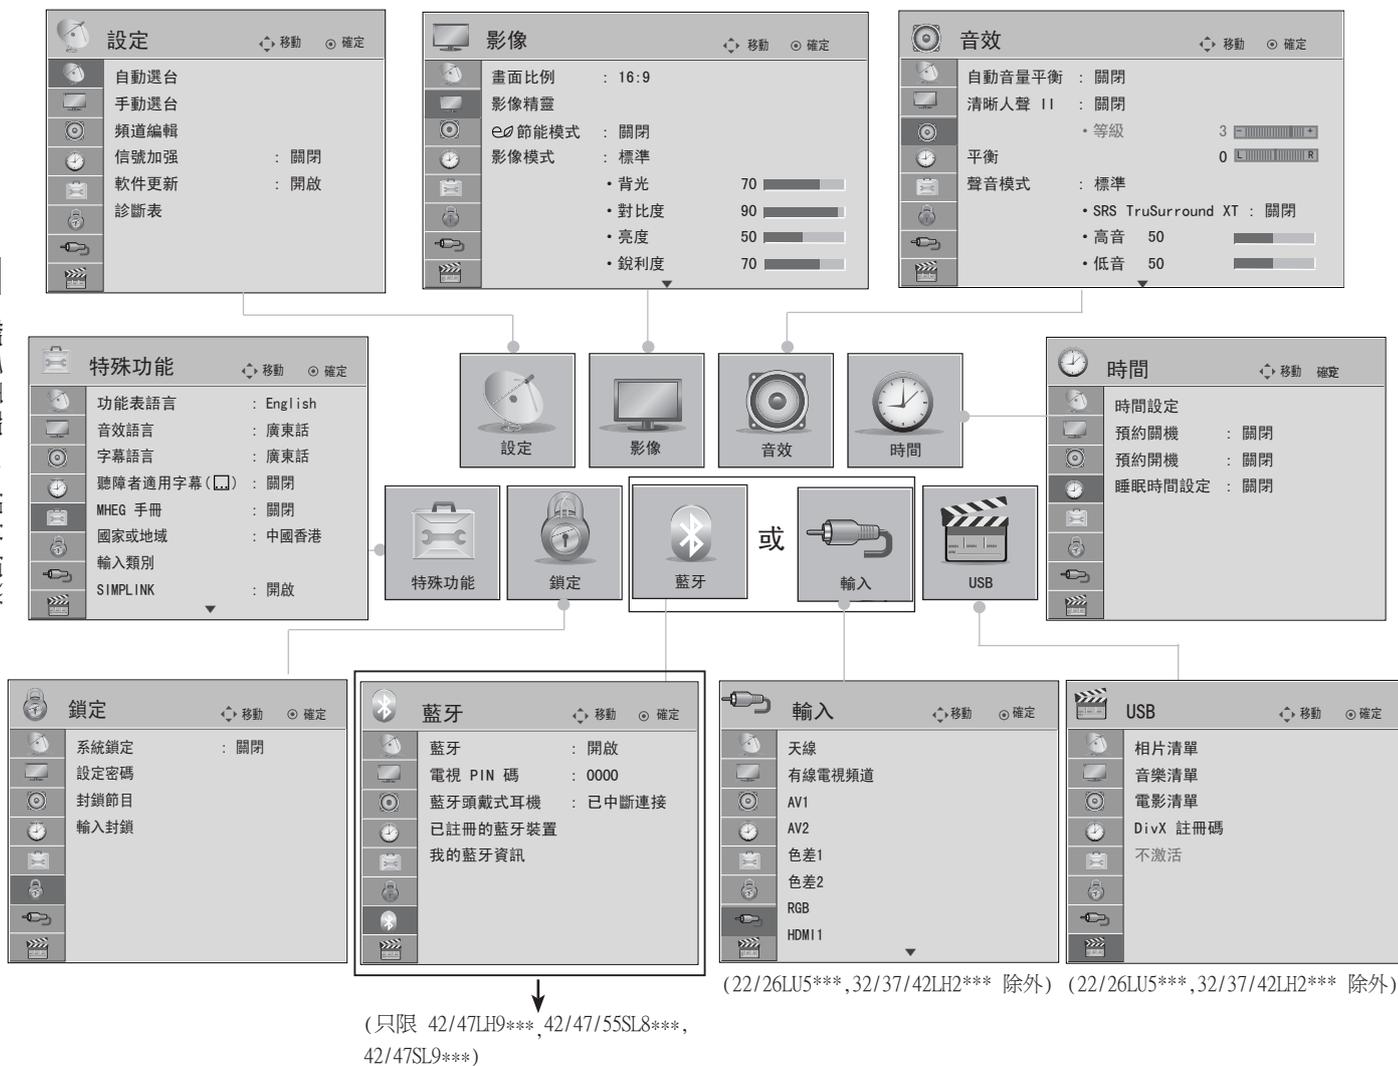

1. 顯示全部功能表。
2. 選擇功能表項目。
3. 移到跳出功能表。

- 按 **INFO** 按鈕，您可檢查簡單人手操作功能表。
- 按功能表 (**MENU**) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

注意

- 在類比模式不可使用推進器。

自動較台

使用此功能自動尋找並儲存所有可用節目。

當您在數碼模式中開始自動編程時，所有以前儲存的服務信息將被刪除。

最多能儲存 500 個節目，數量會因不同的廣播訊號而略有不同。



- 1   選擇設定。
- 2   選擇自動選台。
- 3   選擇是。
- 4  選擇自動選台。


- 在鎖定系統為「開啓」時用數字按鈕輸入 4 位密碼。
- 如果您想要自動調台，使用 ^ v 按鈕选项是。然後按确定 (OK) 按鈕。否則选项否。
- 自動編碼：選擇在較台時是否使用廣播站傳送的節目號碼。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

觀看電視 / 操控頻道

手動較台 (數碼模式)

手動調台讓您可以手動添加頻道至您的頻道清單。

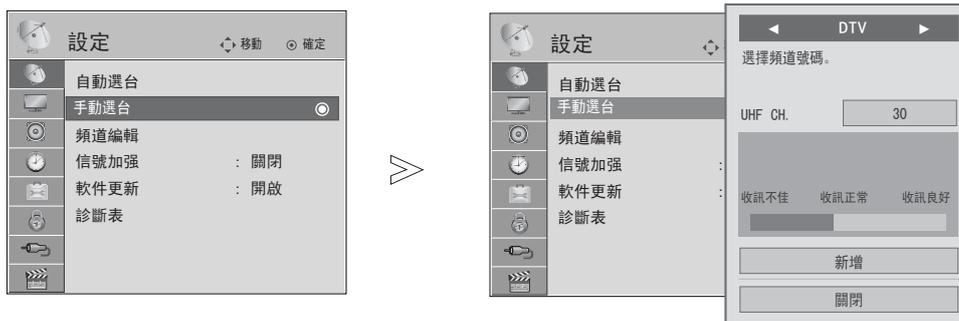




1.   選擇設定。
2.   選擇手動選台。
3.   選擇DTV。
4.   選擇想要的頻道數字。
5.   更新。

· 在鎖定系統為「開啓」時用數字按鈕輸入 4 位密碼。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

手動較台 (類比模式)

手動較台讓您可以根據喜好，手動調較或安排各電視頻道。

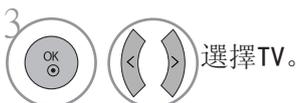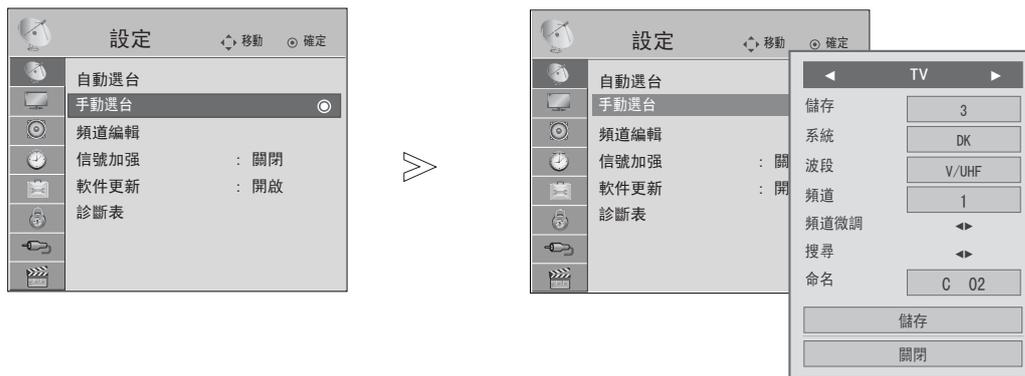

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

· 在鎖定系統為「開啓」時用數字按鈕輸入 4 位密碼。


1: PAL I/II (英國 / 愛爾蘭 / 香港 / 南非)

DK: PAL D/K、(西班牙文 / 中國/非洲 / CIS)

NTSC M : 美國 / 韓國 / 菲律賓




· 要儲存另一頻道，請重複步驟 4 至 9。

觀看電視 / 操控頻道

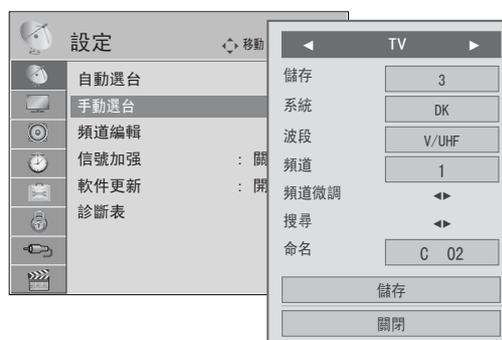




■ 設定頻道名稱

您可以為每個頻道設定 5 個字元的名稱。

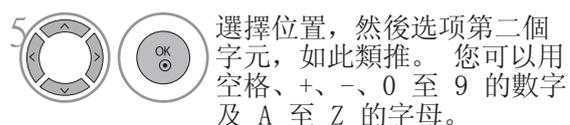

■ 微調

微調通常於接收訊號差時適用。

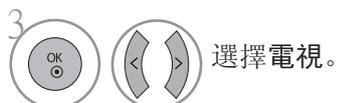

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

頻道編輯


越過某一頻道後，觀看電視時，您將不能利用 P ^ v 按鈕选项該頻道。

如想要选项略過的頻道，請直接使用數字按鈕輸入頻道編號或在頻道編輯功能表中选项。

此功能讓您越過已儲存的頻道。

如您使用自動較台而沒有用「自動編號」，您可以利用「移動」功能更改節目號碼，



- 1   選擇設定。
- 2   選擇頻道編輯。
- 3  輸入頻道編輯。
- 4  选项要儲存或移動的頻道。

· 在鎖定系統為「開啓」時用數字按鈕輸入 4 位密碼。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

觀看電視 / 操控頻道

在 DTV/RADIO模式

■ 越過頻道數字

- 1  選擇要越過的頻道數字。
- 2  把頻道數字轉為藍色。
- 3  釋放。

- 越過某一頻道後，觀看電視時，您將不能利用 P ^ v 按鈕选项該頻道。
- 如想要選取略過的頻道，請直接使用數字按鈕輸入頻道編號或在頻道編輯或 EPG 中選取。

在 TV/CATV模式

此功能讓您刪除或越過已儲存的頻道。同時，您可以移動部份頻道至其他頻道編號，或複製一個空白頻道資料至已選取的頻道編號。


■ 刪除頻道

- 1  選擇要刪除的頻道數字。紅
- 2  把頻道數字轉為紅色。

- 3  刪除。  取消。

- 所選頻道已刪除，所有緊接的頻道會前進一步，填補已刪除頻道的位置。

■ 移動頻道

- 1  选项要移動的頻道數字。
- 2   要的頻道數字轉為黃色。

- 3  釋放。  取消。


■ 越過頻道數字

- 1  選擇要越過的頻道數字。
- 2  把頻道數字轉為藍色。
- 3  釋放。

- 越過某一頻道後，觀看電視時，您將不能利用 P ^ v 按鈕选项該頻道。
- 如想要選取略過的頻道，請直接使用數字按鈕輸入頻道編號或在頻道編輯或 EPG 中選取。

信號加強 (數碼模式)

如果接收訊號差時，選擇開啓推進器。
當訊號轉強時，請選擇「關閉」。

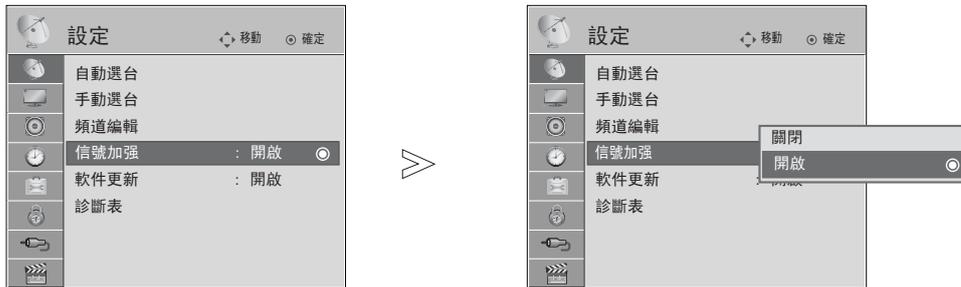




- 1 MENU   選擇設定。
- 2   選擇信號加強。
- 3   選擇開啟或關閉。
- 4  儲存。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

觀看電視 / 操控頻道

軟件更新


軟體更新指軟體可以通過光學陸地廣播系統下載。

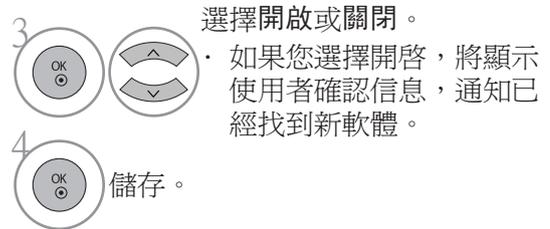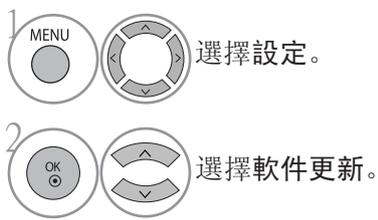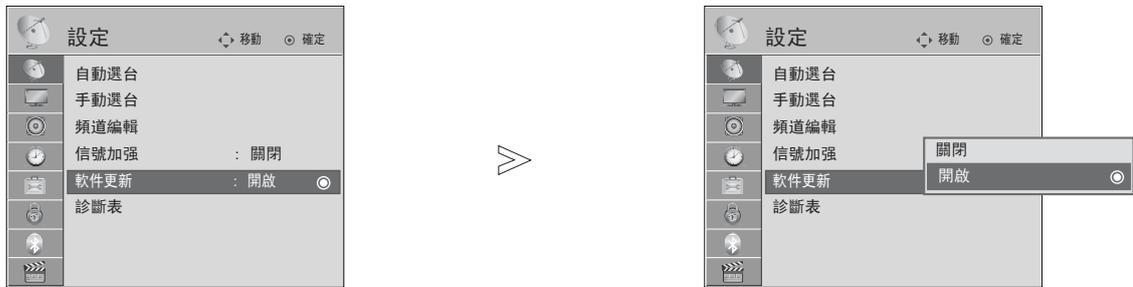


觀看電視 / 操控頻道

* 當設定「軟件更新」時

有時，已更新的數碼軟體資訊傳輸將顯示於電視的螢幕上。

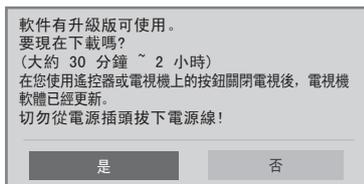

簡單更新：為近期更新的流串而設

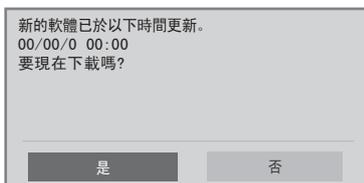

簡單更新：為近期更新的流串而設

按 < > 按鈕是，然後您會看到以下圖片。



當電源開啓，就會開始下載。當電源開啓然後開始下載時，會顯示狀態。

軟件更新完成後，系統將要重新開啓。



- 在軟體更新過程中，請留意以下幾點：
- 切勿關閉電視電源。
- 切勿關閉電視。
- 切勿斷開天線連接。
- 軟體更新後，您可以在診斷功能表中確認更新軟體版本。
- 可能需要上數小時才能下載軟件，所以請在下載的時候保持電源開啓。


診斷表

此功能使您可以檢視製造商、型號 / 類型、序列號及軟體版本資訊。

此功能顯示所選 MUX 的資訊及訊號強度。

此功能顯示所選 MUX 的訊號資訊及服務名稱。

(*MUX：數碼廣播頻道內的更高目錄 (單一的 MUX 包含多個頻道。))

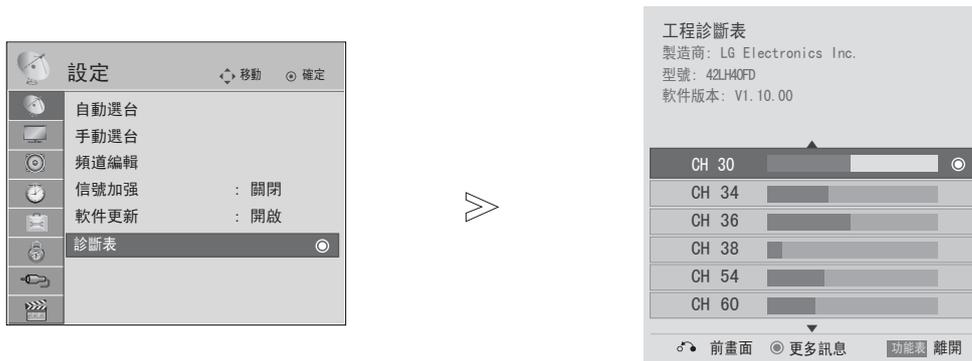


1.   選擇設定。
2.   選擇診斷表。
3.  顯示製造商、型號及軟件版本。
4.   顯示頻道的資訊。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

觀看電視 / 操控頻道

选项頻道清單

您可以透過顯示頻道清單，檢查儲存在記憶體內的頻道。

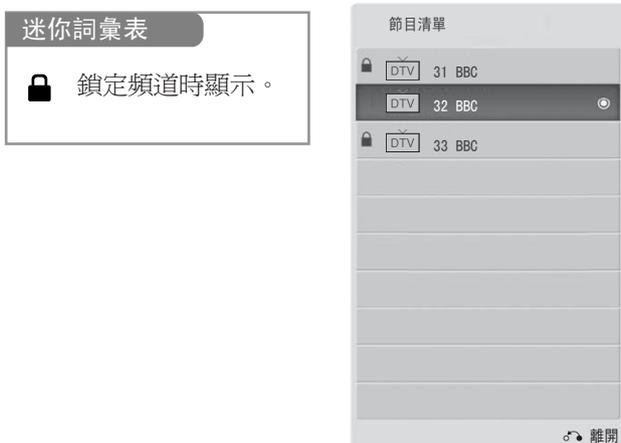

顯示頻道表



顯示節目清單。

- 您或會找到一些藍色的頻道。這些頻道於頻道編輯模式下被設定為越過的頻道。
- 頻道表中的部份頻道沒有特定名稱，遂以編號表示。


在頻道表選擇頻道



1 選擇節目。



2 電視將會切換至所選的頻道。

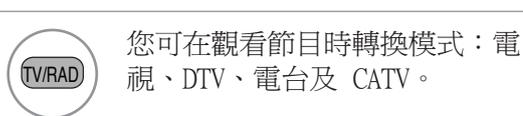


您可在觀看節目時轉換模式：電視、DTV、電台及 CATV。

頻道表的頁碼



1 翻閱頁面。

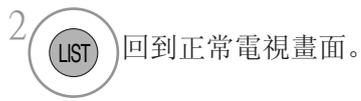

2 回到正常電視畫面。

最愛頻道設定

■ 選擇最愛頻道

最愛頻道是一個方便的功能，助您快速找到喜愛的節目而不需要續個頻道搜索喜歡的節目。



(只限 22/26LU5***, 32/37/42LH2***)



(22/26LU5***, 32/37/42LH2*** 除外)

1  或  選擇您需要頻道。

2   選擇我最喜愛的頻道。

3  選擇我最喜愛的頻道。

4  回到電視畫面。

· 這將自動包括您最愛頻道清單中所選擇的頻道。

■ 顯示最愛頻道表





1  顯示我最喜愛的頻道。

觀看電視 / 操控頻道

輸入清單


使用 TV/RAD 按鈕，您可把外置輸入轉至 RF 輸入或至 DTV/RADIO/TV/CATV 模式中最後觀看的節目。

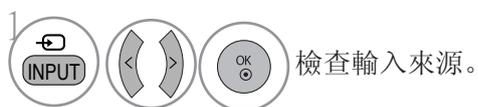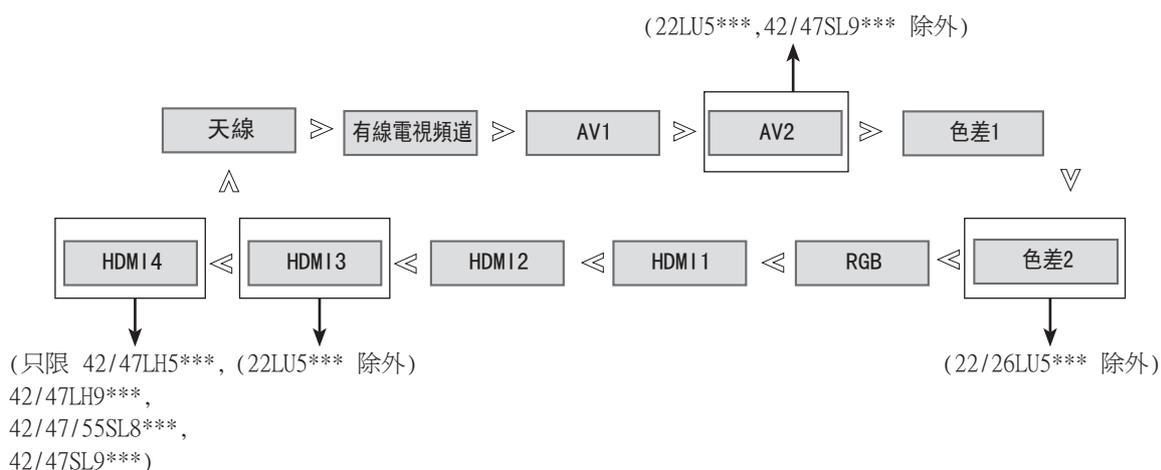

- 天線 : 觀看DTV/TV時選擇。
- 有線電視頻道 : 觀看CATV時選擇。
- AV : 觀看 VCR 或使用外置儀器時選擇。
- 色差 : 使用 DVD 或數位視訊轉換器時選擇，視乎連接器而定。
- RGB : 使用電腦時選擇，視乎連接器而定。
- HDMI : 使用 DVD, PC 或數位視訊轉換器時選擇，視乎連接器而定。

MHEG 手冊

此功能表會決定當一個使用者按「手冊」鍵時，要使用 UI 指南或由 MHEG 提供的指南。
如您設定「MHEG 手冊」為開，會使用廣播公司傳送的「數碼電視文字廣播」。(參閱第 128 頁)

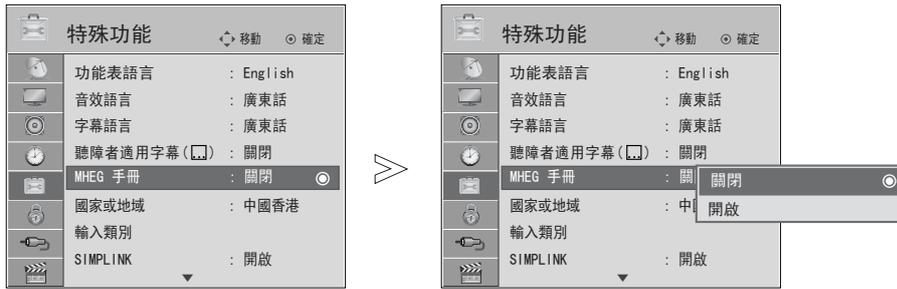

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

輸入類別

為每個輸入來源選擇標籤。




- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。




觀看電視 / 操控頻道

簡單人手操作 簡易手冊

您可透過檢視電視的簡單說明書，就能簡單及有效地存取電視的資訊。
當簡易手冊時，將會變為靜音。

■ 顯示的可能與您的電視有所不同。

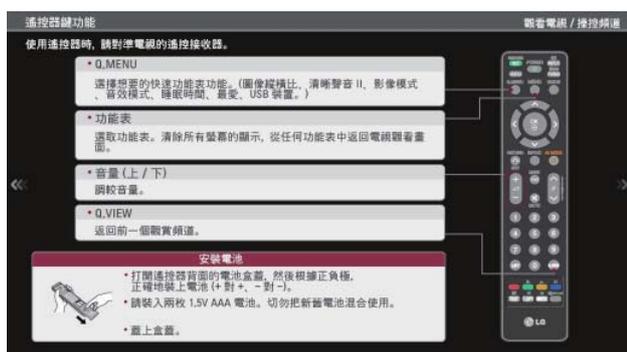

1.   選擇選項。
2.   選擇簡易手冊。
3.   選擇您需要的人手操作部份。


· 按功重新設定按鈕，返回觀看電視畫面。



此功能只適用於有 SIMPLINK 標誌的裝置上。
請檢查 SIMPLINK 標號。

當配合其他配備HDMI-CEC功能的產品使用時，本產品可能不能正常運作。
此功能讓您無需額外纜線或設定，僅透過 HDMI 纜線來控制及播放其他連接至顯示屏的 AV 裝置。

如果您不需要 SIMPLINK 功能表，請选项「關閉」。

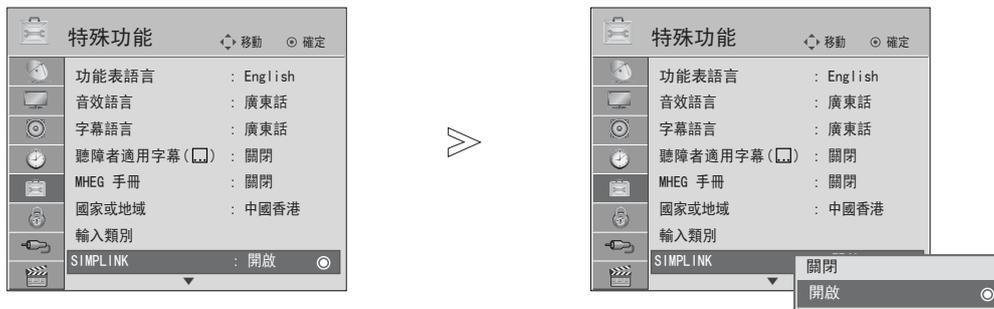

- 1 MENU 選擇選項。
- 2 OK 選擇SIMPLINK。
- 3 OK 選擇開啟或關閉。
- 4 OK 儲存。


- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

觀看電視 / 操控頻道

連接有 SIMPLINK 標記的家庭影院。

- 1 連接 HDMI/DVI IN 1 (DVI) , HDMI2 , HDMI3 (22LU5*** 除外) 或 HDMI4 (只限 42/47LH5***, 42/47LH9***, 42/47/55SL8***, 42/47SL9***) 終端至電視的後面及使用 HDMI 纜線連接家庭影院的 HDMI 輸出終端。
- 2 使用光學纜線連接電視的後面的數碼聲音輸出終端及家庭影院的數碼聲音輸入終端。
- 3 按 SIMPLINK 按鈕在揚聲器功能表選項家庭影院。

▶ 用家庭影院功能選項或操作媒體裝置時，揚聲器會自動切換至家庭影院揚聲器。

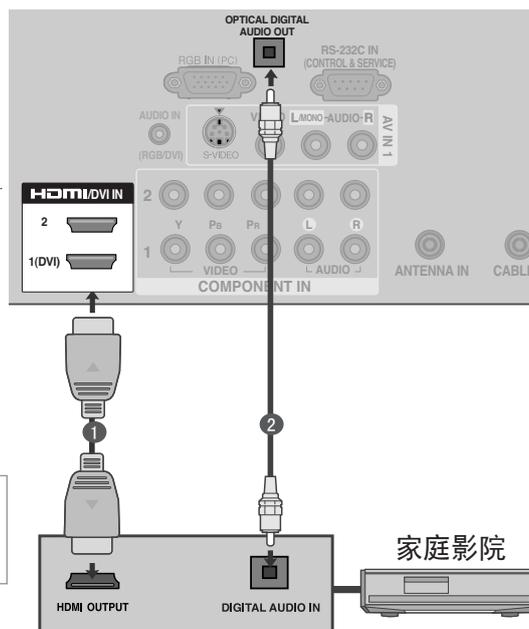

! 注意

- ▶ 用 HDMI 纜線連接電視的 HDMI/DVI IN 或 HDMI IN 端至 SIMPLINK 裝置 (HDMI 端)。
- ▶ 按遙控器上的輸入 (INPUT) 按鈕切換輸入來源時，您可以停止由 SIMPLINK 控制的裝置。

SIMPLINK 功能

影碟播放

按 \wedge \vee \lt \gt 、OK、 \blacktriangleright 、 \blacksquare 、 \parallel 、 \ll 及 \triangleright 按鈕以控制已連接的 AV 裝置。

直接播放

連接 AV 裝置至電視後，無須額外設定，也可以直接控制裝置及播放媒體。

選擇 AV 裝置

讓您選項及播放其中一個已連接至電視的 AV 裝置。

關閉所有裝置

關閉電視時，所有已連接的裝置均會同時關閉。

關掉音頻輸出

提供一個簡易的關掉音頻輸出的方法。

時效開啟

當有 Simplink 功能的裝置連接 HDMI 終端開始播放，電視會自動變更至開啓模式。

* 已透過 HDMI 纜線連接至電視但不支援 SIMPLINK 的裝置將不會有此功能。

注意：要啓動 SIMPLINK，要使用 1.3 版本以上及備有 *CEC 的功能的 HDMI 纜線。
(*CEC:家電控制)

SIMPLINK 功能表

按 \wedge \vee \lt \gt 按鈕，然後按確定 (OK) 按鈕，選項想要的 SIMPLINK 來源。

- ① 觀看電視：不論當前是甚麼模式，均能切換至先前所觀看的電視頻道。
- ② 影碟播放：選項及播放影碟。
如有多於一隻影碟供選項，影碟標題將會顯示在螢幕底部，方便選項。
- ③ 錄影機播放：播放及控制已連接的錄影機。
- ④ 硬碟錄影播放：播放及控制儲存在硬碟內的錄影。
- ⑤ 音頻輸出至家庭影院/音頻輸出至電視：選項音頻輸出至家庭影院或電視揚聲器。





觀看電視 / 操控頻道

AV 模式

連接 AV 裝置至外置輸入時，您可以選擇最佳的影像及聲音。

關閉	關閉 AV 模式。
劇院	優化觀看電影時的影像和聲音。
運動	優化觀看體育項目時的影像和聲音。
遊戲	優化遊戲時的影像和聲音。

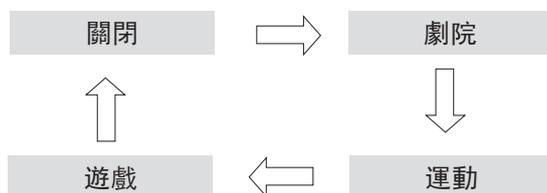

1 重複按 AV MODE 按鈕以選擇想要的來源。




- 如果您在 AV 模式中選擇電影院模式，電影院模式會在影像及音訊功能表中分別選擇影像及聲音模式。
- 如果您在 AV 模式選擇「關閉」，會選擇您原先設定的影像及圖像。

初始化（重設至原廠設定）

此功能會把一切設定初始化。

 日和  夜的圖片設定不能初始化。
當您移到其他城市或國家時，把產品初始化十分有用。
當原廠設定完成，您必須重新開始初始化設定。

如鎖定系統為「開啓」，會出現輸入密碼的訊息。

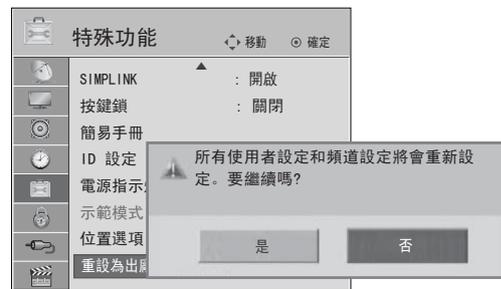

1 MENU  選擇選項。

2   選擇位置選項。

3   選擇是。

4  選擇位置選項。

- 如鎖定系統為「開啓」，在您忘記密碼時，在遙控器上按「7」、「7」、「7」、「7」。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

要使用藍牙 (只限 42/47LH9***, 42/47/55SL8***, 42/47SL9***)

藍牙?

藍牙是使用無線 2.4 GHz 頻率連接多種資訊裝置，如電腦、手提電話、PDA 的短距離網絡工具，不需任何纜線連接就可以交換數據。

有藍牙通訊工具，您可使用這電視接收影像及連接藍牙耳機裝置。

- 通訊規格：藍牙規格版本 2.0 + EDR (增強資料速率)
- 輸出：藍牙 Power Class 2
- 最遠通訊範圍：無阻隔大概 10 米範圍 (30 呎)
- 頻率：2.4 GHz band (2.4 GHz ~ 2.4835 GHz)
- 藍芽模數：EAX57538201 (LG 電子)
- 相容的藍芽協定：A2DP (藍牙音頻傳輸模型協定)
 - OPP (物件交換協定)
 - GAVDP (常規音頻/視頻分發配置文件)
 - HSP (免提裝置協定)
 - BIP (基本圖像規範)
 - FTP (檔案傳輸協定)

CE0678

使用 USB 裝置時的預防措施

- ▶ 在 10 米 (-45° ~ 45°) 範圍內使用。
如您在範圍之外或多障外物的範圍內使用裝置，會發生通訊錯誤。
- ▶ 會因周圍的裝置影響而產生通訊錯誤。
- ▶ 使用相同頻率 (2.4 GHz) 的產品 (無線 LAN 或微波爐等等) 會因使用相同的頻率頻寬而引起通訊錯誤。
- ▶ 裝置搜索時間會因藍牙裝置數目及運作狀況而不同，當裝置的數目較少時，搜尋到的機會會較高。
- ▶ 裝置數量較少提升搜尋的機會。
- ▶ 電磁波有可能會干擾無線應用裝置。
- ▶ 因為應用的無線裝置有可能會干擾電波，它們不可以用於與人類生命有關的事情上。
- ▶ 只能同時連接一個藍芽裝置耳機。
- ▶ 當您在使用藍牙耳機時，不能從其他藍芽裝置接收相片 (僅 JPEG 檔) 或聽音樂
- ▶ 有關使用藍牙的詳細資料，請參考藍牙裝置的使用者手冊。
- ▶ USB (相片清單、音樂清單、電影清單) 藍牙不能同時支援。
- ▶ 運作受以下兩個情況管制：(1) 此裝置不會引至 (有害的) 干擾，及 (2) 裝置必須接受任何接收的干擾，包括會引起不良運作 (對裝置) 的干擾。

QDID (藍牙裝置認證編號)：B014836


設定藍牙

如您使用藍牙耳機聽廣播或透過外置的裝置接收 jpeg 圖片在電視觀看，以手機聽音樂（藍芽裝置）可不需用任何線纜就可做到。

您可以在藍牙功能表上選擇「開啟」。
假如您不需要使用藍牙功能，請選擇「關閉」。

如連接至外置的藍牙裝置，在中斷連接後請選擇「關閉」。

當藍芽設定為「啟動」，並已連接其他裝置時，如其他輸入模式已廣播，可自動改為藍芽。如果發生以上情況，把藍芽設定為「關閉」。

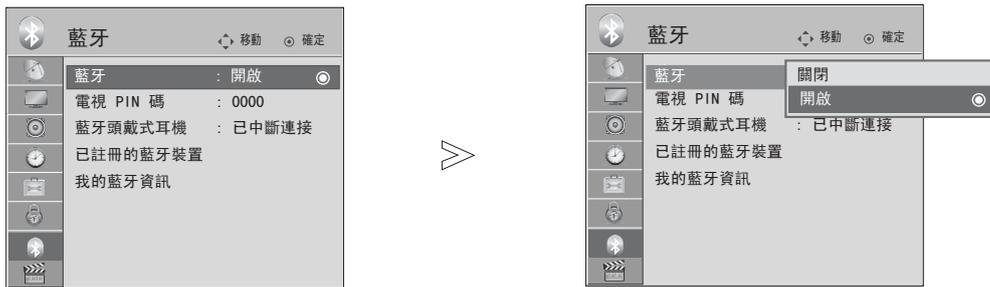

- 1   選擇藍牙。
- 2   選擇藍牙。
- 3   選擇開啟或關閉。
- 4  儲存。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

要使用藍牙

設定電視 PIN 碼

接受外置的藍牙裝置連接或連接至外置的藍牙裝置。

要知道如果設定外置藍牙裝置的 PIN，請參考裝置的使用者手冊。

電視 PIN 最多為 10 個數字。

電視 PIN 最少為 1 個數字。

要使用藍牙



1.   選擇藍牙。
2.   選擇設定電視 PIN 碼。
3.   選擇想要的 PIN 數字。
4. 

• 按 < 按鈕，續一刪除數字。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

藍牙耳機

當您選擇藍牙立體聲耳機，您可透過無線傳送聽到藍牙立體聲耳機輸出的電視聲音。您第一次使用時必須將之 and 新的藍牙裝置配對。詳細資料請參考裝置的使用者手冊。最多配搭 12 個裝置。
當產品搜索藍牙立體聲耳機時，其他按鈕（停止及 OK 按鈕除外）都不能運作。

連接新的藍牙耳機

您只能在非連線的狀態下搜尋藍牙立體聲耳機。當您執行搜尋，就會顯示有關的藍牙立體聲耳機。找到新的藍牙裝置後，要輸入 PIN 以連接裝置。詳細資料請參考裝置的使用者手冊。

- 1   選擇藍牙。
- 2   選擇藍牙耳機。
- 3   選擇藍牙耳機。
- 4   選擇想要的藍牙耳機 PIN 數字。有關 PIN 數字的資料請參考裝置的使用者手冊。
- 5  選擇藍牙耳機。

連接已註冊的藍牙耳機

最常使用的藍牙立體聲耳機會顯示在清單的最上方，最近使用的耳機會在最頂端。

- 1   選擇藍牙。
- 2   選擇藍牙耳機。
- 3   選擇藍牙耳機。
- 4   提出連接選擇的訊息會顯示藍牙耳機。選擇確定或擇消。
- 5  選擇藍牙耳機。

- 在連接或使用藍牙立體聲耳機後，耳機會在開啟或關閉電視時自動設定至未連接狀態。
- 連接藍牙立體聲耳機後，電視揚聲器會轉至靜音狀態，聲音會由耳機輸出。


要使用藍牙

在使用蓝牙耳机時中斷連接



當要求連接蓝牙耳机至電視時

當藍牙功能表”開啓”並有連接請求，就會出現此訊息。只適用於支援此功能的耳機。(詳細資料請參考藍牙耳機的使用者手冊。)
即使某些耳機並不包含在已註冊裝置列表內，某些耳機在關或開時仍能嘗試連接。

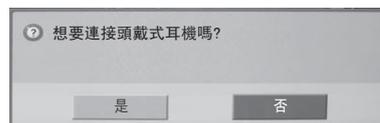


注意

- ▶ LG 建議使用以下耳機型號。
 - 單聲道 / 立體聲 : Nokia : BH501 / Jabra : BT620s / Sony : DR-BT30Q / Phillips : SHB7100 / Plantronics : Pulsar590 / Motorola : HT820 / Motorola : S9 / LG : HBS200
 - 只有立體聲 : Logitech : Freepulse-wireless
 - 只有單聲道 : Motorola : H800 / Jabra : BT250v / Jabra : BT2040 / Plantronics : Discovery665 / Nokia : BH-900 / Sony Ericsson : HBH-GV435 / Samsung : WEP500 / LG: Prada HBM-510音頻可能會因為耳機的緩衝記憶大小不同而延遲。
- ▶ 只有立體聲/單聲道的藍牙耳機才能搜尋及連接。
- ▶ 只有支援A2DP 或 HSP 功能的立體聲/單聲道藍牙裝置才能連接。
- ▶ 如電視周圍的環境如下所示，裝置或不能搜尋及連接。
 - 如有強烈的電磁波。
 - 如有太多藍牙裝置。
 - 如立體聲耳機關閉，未放好或出錯。
 - 因為以下的產品：微波爐、無線 LAN、等離子燈及氣爐等會使用同一頻率範圍，有可能引起通訊錯誤。
- ▶ 同時只能連接一個立體聲耳機。
- ▶ 因關閉電視而印起的連接中斷，不會自動修復。要再次連接裝置時。
- ▶ 當使用耳機時，其他運作可能會變慢。
- ▶ 即時您在 Simplink 運作時使用耳機，然後再選項 simplink 家庭影院，產品並不會自動轉至家庭影院揚聲器。
- ▶ 當耳機連接多次失敗，再配對裝置一次。
- ▶ 單聲道的耳機的音效質素不會和立體聲的耳機一樣好。
- ▶ 單聲道的耳機可能會因與電視距離變遠而受雜音影響，因為單聲道耳機和立體聲耳機用不同的傳送方法。
- ▶ 當使用藍牙耳機時，音量 +/- 及靜音鍵不會運作，亦不可把音效功能表回到預設。
- ▶ 當設定藍牙為開啓，如有任何已註冊的裝置啓動，電視會自動轉至藍牙模式，即使您正在以其他輸入模式觀看。

管理已註冊的藍牙裝置

如沒有已註冊的裝置，註冊的 B/T 裝置功能表將關閉及不能使用。

如已有 12 種裝置已經註冊，您不能在註冊更多，將沒有其他外置裝置與電視配對。這情況下，您要刪除其中一個裝置（必須先中斷和電視的连接）然後註冊其他裝置。

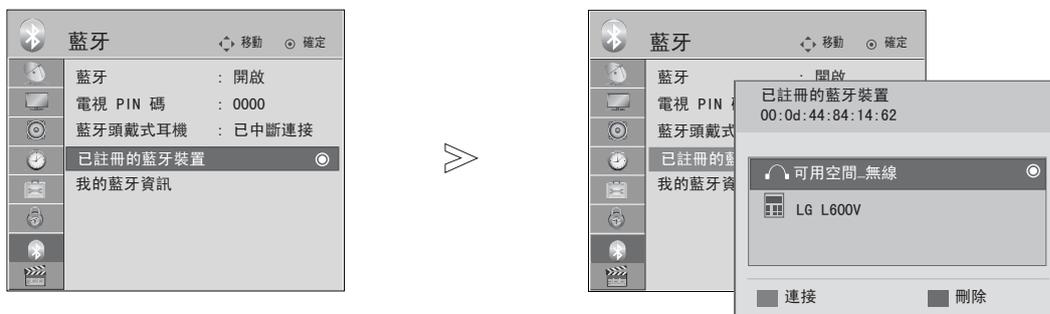

- 1 選擇藍牙。
- 2 選擇已註冊的藍牙裝置。
- 3 檢查已註冊的藍牙裝置。

■ 選擇已註冊的藍牙立體聲耳機。

- 1 選擇您需要的已註冊藍牙立體聲耳機。
- 2 會顯示提出連接選擇藍牙裝置的訊息。
- 3 選擇是或否。

■ 刪除已註冊的藍牙裝置

當您選取不連接電視的裝置時，可使用「刪除」的功能。

- 1 選擇您需要的藍牙裝置。
- 2 會顯示提出刪除選擇藍牙裝置的訊息。
- 3 選擇是或否。

■ 中斷已註冊的藍牙裝置

- 1 選擇現正連接電視的藍芽裝置。
- 2 中斷藍芽裝置。


要使用藍牙

我的藍牙資訊

此功能為使用者提供我的藍牙資訊。
當電視不連接至任何裝置時，可使用「編輯」的功能。

您可編輯我的裝置名稱。
您可編輯我的裝置地址。

要使用藍牙

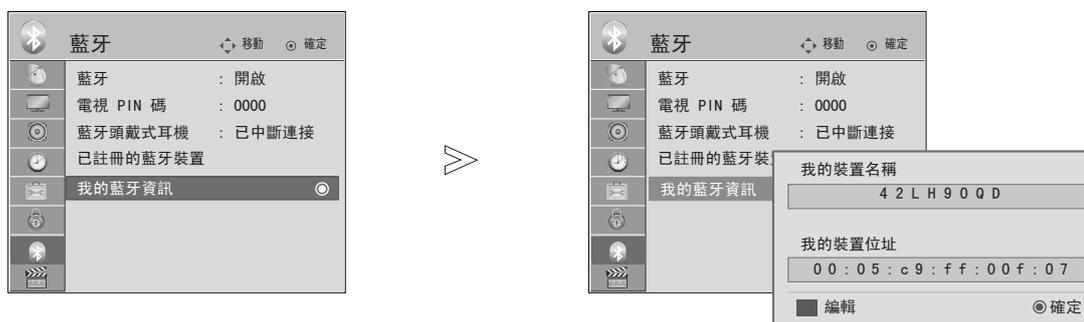

1 MENU 選擇藍牙。

2 OK 選擇我的藍牙資訊。


3 藍 您可以用空格、+、-、0 至 9 的數字及 A 至 Z 的字母。

4 OK 儲存。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

透過外置的藍芽裝置接收相片

要知道如何透過外置藍芽裝置傳送相片（僅限 JPEG檔），請參考裝置的使用者手冊。

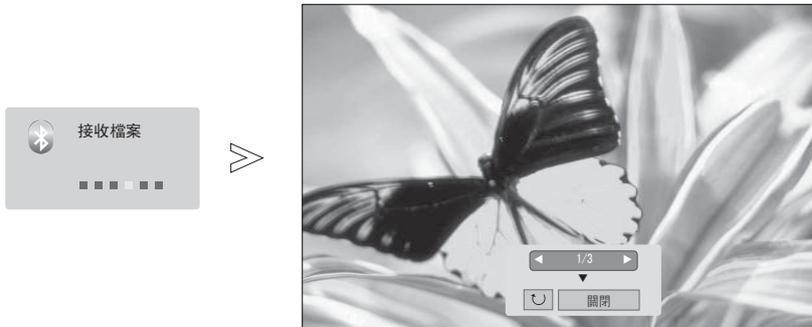

- 當您以 \wedge \vee \lt \gt 按鈕選擇關閉，OSD 會消失。
當您按 OK 按鈕，OSD 會再次出現。



選擇想要的相片。

 (旋轉)：旋轉相片。

- 按**確定(OK)**按鈕開啓  (旋轉) 將照片順時針旋轉 90°。

- 最大累積圖片大小為8MBytes。
- 當使用藍牙立體聲耳機時，不能接受圖片。
- 當使用藍牙立體聲耳機聽音樂時，不能接收圖片。
- 當外置藍芽裝置正在傳送圖片，可按返回按鈕停止接收圖片。所有已接收的相片將會被刪除。
- 某些藍芽裝置不能傳送影像檔案（JPEG）到電視。
- 您可透過藍牙傳送相片，記憶體容量支援最多 8M 及 64 張照片。

從外置的藍芽裝置聽音樂

要知道如何透過外置藍芽裝置聽音樂，請參考裝置的使用者手冊。

您必須使用支援 A2DP（作為外置裝置）的藍芽裝置

- 某些藍芽裝置不能透過電視擴音系統播放音樂。



- 按 \triangleleft + 或 - 按鈕調較音量。
- 假如想關閉聲音，請按靜音（MUTE）按鈕。
- 按**重新設定**按鈕以移至上一個功能表的畫面。

⚠ 注意

- ▶ 當使用藍芽立體聲耳機時，不能聽音樂。
- ▶ 您可以在接收圖像時同時聽音樂。

使用 USB 裝置

- ▶ USB 功能不適用於 22/26LU5***, 32/37/42LH2*** 型號。


連接 USB 裝置時

連接 USB 裝置時，螢幕會自動顯示跳出功能表。當 OSD 連功能表啟動或當藍芽耳機連接時，「彈出功能表」將不會顯示。

如果沒有顯示彈出式視窗，您可在 USB 選單選擇音樂清單、相片清單或短片清單。

在 USB 裝置中，您不能新增資料夾或刪除目前已有資料夾。

1 連接USB裝置至電視機側的USB輸入插口。

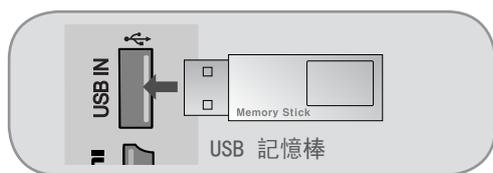


- 只支援相片 (JPEG)、音樂 (MP3)及電影 (DAT, MPG, MPEG, VOB, AVI, DIVX, MP4, MKV, TS, TRP, TP)。

2 選擇相片清單，音樂清單或電影清單。



移除 USB 裝置時

在擇出 USB 裝置前選擇 USB 退出功能表。

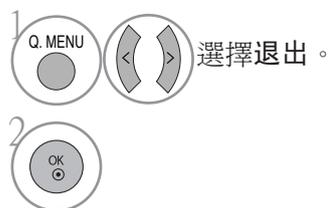

使用 USB 裝置時的預防措施

- ▶ 僅識別 USB 儲存裝置。
- ▶ 如果 USB 儲存裝置不是連接到 USB 接口，則不能識別裝置。
- ▶ 可能不能識別使用自動識別程式的 USB 儲存裝置。
- ▶ 不能識別使用獨有驅動器的 USB 儲存裝置。
- ▶ USB 儲存裝置的識別速度會因各個裝置而異。
- ▶ 當連接的 USB 儲存裝置運作時，請不要關閉電視或卸除 USB 裝置。突然分開或卸除裝置可能會損壞已儲存的檔案或 USB 儲存裝置。
- ▶ 切勿連接在電腦人工操作的 USB 儲存裝置。裝置會造成產品的故障或不能播放。
- ▶ 請連接電源至需要外來電源的 USB 儲存裝置。否則，可能不能識別裝置(0.5 A 以上)。
- ▶ 請連接 USB 儲存裝置至 USB 製造商的纜線。
- ▶ 可能不能順利地支援或操作一些 USB 儲存裝置。
- ▶ USB 儲存裝置的檔案排列方法和 Window XP 相似，最多認可至 100 個字元。
- ▶ 請確保把重要的檔案備份，因為儲存在 USB 記憶裝置的數據有可能損壞。我們不會負上任何有關數據損失的責任。
- ▶ 如 USB HDD 沒有任何外來電源，可能不能偵測該 USB 裝置。所以請確保連接至外來電源。
- ▶ 不要忘記僅使用一個存有正常音樂檔案或圖像檔案的 USB 儲存裝置。
- ▶ 如您的 USB 記憶體裝置上，有多個磁碟分區，又或您正使用 USB 多合一記憶卡閱讀器，系統最多能使用四個磁碟分區或 USB 記憶體裝置。
- ▶ 只有 FAT32 檔案系統支援刪除的功能。
- ▶ 如 USB 記憶裝置連接至多合一記憶卡閱讀器，或會不能偵測到量數據。
- ▶ 如 USB 記憶裝置不能正常運作，請中斷連接然後再次連接。
- ▶ USB 記憶體被偵測的速度會因裝置不同而有差異。
- ▶ 如 USB 連接至待機模式，當電視開啓時，特定的硬碟會自動載入。
- ▶ T對於 USB 外置硬碟的建議容量為1TB 或更少，對於 USB 記憶體建議容量為 32GB 或更少。
- ▶ 其實沒有建議的裝置可能不能正常運作。
- ▶ 如有「節約能源」功能的 USB 外置硬碟不能運作，請關上硬碟並再次開啓。
- ▶ 當透過 USB 延長線纜使用 USB HDD 時，請連接支援的電源來源。† 如 USB 裝置內的資料夾及檔案名稱是中文或英文以外的文字，或不能被偵測到。

相片清單

您只能在 USB 儲存裝置檢視相片檔案。

這裡顯示的可能與您的電視有所不同。圖像作為例子，輔助您進行電視機操作。

當您正在使用相片清單功能瀏覽相片時，不能改變影像模式。

图片 (*. JPEG) 支援檔案

最低限度：64 x 64 ~ 15360 x 8640

逐行掃描：64 x 64 ~ 1920 x 1440

- 您只可播放 JPEG 檔案。
- 非支援檔案會以 bitmap 形式顯示。

螢幕組成

1 MENU 選擇USB。

2 OK 選擇相片清單。

1 進入上層資料夾

2 目前頁 / 總頁數

3 已標記的相片總數

4 遙控器上的相應按鈕

相片清單

頁面 2/3 未選取


Drive1	前一個資料夾	KY103	09/10/2008
JMJ001	KY101	KY104	09/10/2008
1366*768, 125KB	KY102	KY105	09/10/2008
	JMJ001	JMJ005	09/10/2008
	JMJ002	JMJ006	09/10/2008
	JMJ003	JMJ007	09/10/2008
	JMJ004	JMJ008	09/10/2008

前一個資料夾

方向鍵 特殊功能 變更頁面

使用 USB 裝置

選擇相片和跳出功能表

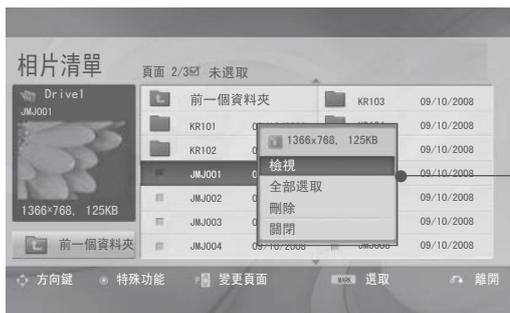

- ▶ 檢視：顯示所選的項目。
- ▶ 全部選取：標記螢幕上所有的相片。
- ▶ 取消全部選取：擇消所有標記相片的选项。
- ▶ 刪除或刪除已選取的檔案(只限 FAT32 檔案系統)：刪除所選的相片項目。
- ▶ 關閉：關閉跳出功能表。


-  選擇目標資料夾或裝置。
-   選擇想要的相片。
-  顯示跳出功能表。
-   選擇想要的快速功能表。

- 使用 P ^ v 按鈕在頁面中檢視。
- 使用標記按鈕來標記或擇消標記相片。如果有超過一張相片被標記，您可以單張查看相片或以幻燈片播放形式查看標記相片。如果沒有相片被標記，您可以單張查看所有相片或以幻燈片播放形式查看所有相片。

- 按重新設定按鈕，返回正常電視觀看畫面。

如何檢視相片

您可以變更儲存在 USB 裝置中的照片的全螢幕顯示設定。

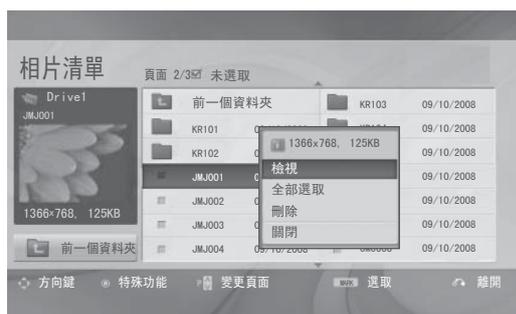

照片的圖像縱橫比可能會改變全螢幕模式下照片的顯示大小。按重新設定按鈕以移至上一個功能表的畫面。

1  選擇目標資料夾或裝置。

2   選擇想要的相片。


3  顯示跳出功能表。

4  選擇檢視。

5  所選擇的相片將以全螢幕顯示。

• 使用 P   按鈕在相片頁面中檢視。


使用 USB 裝置



選擇幻燈片播放、背景音樂、 (旋轉)、刪除、特殊功能 或 隱藏。

- 按 < > 按鈕，選擇上一張或下一張相片。
- 使用 < > 按鈕來選擇並控制全螢幕畫面中的功能表。

- ▶ **幻燈片播放**：如果沒有選擇相片，目前資料夾中所有相片都會在幻燈片播放中顯示。若有選擇，則會在幻燈片播放中顯示已選擇的相片。
 - 在選項設定幻燈片播放播放的時間間隔。
- ▶ **背景音樂(背境音樂)**：當全螢幕查看相片時聽音樂。
 - 在使用此功能之前，請在選項設定 BGM 的音樂資料夾。
- ▶ (旋轉)：旋轉相片。
 - 順時鐘 90°，180°，270°，360° 旋轉相片。
 - 如圖片的闊度比支援的還要大，就不可以旋轉它。
- ▶ **刪除** (只限 FAT32 檔案系統)：旋轉相片。
- ▶ **特殊功能**：設定幻燈片播放度值以及 BGM 用的音樂資料夾。
 - 使用 ^ v < > 按鈕和确定 (OK) 按鈕來設定數值。然後移到並按 确定按鈕儲存設定。
 - 當BGM正在播放時，您無法變更音樂資料夾。
- ▶ **隱藏**：在全螢幕畫面中隱藏功能表。
 - 若要在全螢幕中再次顯示功能表，請按确定 (OK) 按鈕。

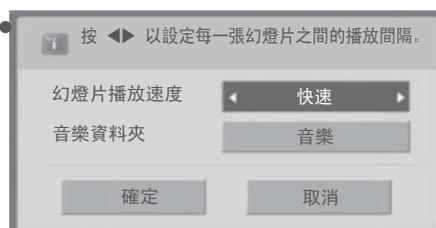

音樂清單

您只能在 USB 儲存裝置播放音樂檔案。

購買的音樂檔案 (*.MP3) 可能含有版權限制。本型號或許不支援這類檔案的播放。

您 USB 裝置中的音樂檔案可以使用本機播放。


這裡顯示的可能與您的電視有所不同。圖像作為例子，輔助您進行電視機操作。

音樂 (*.MP3) 支援檔案

位元速率: 32 ~ 320kbps

- 抽樣頻率 MPEG1 layer 3: 32kHz, 44.1kHz, 48kHz
- 抽樣頻率 MPEG2 layer 3: 16kHz, 22.05kHz, 24kHz
- 抽樣頻率 MPEG2.5 layer 3: 8kHz, 11.025kHz, 12kHz

螢幕組成



- 1 預覽：如果檔案的專輯封面（專輯美術圖片）存在，會顯示此圖片。
- 2 進入上層資料夾
- 3 目前頁 / 總頁數
- 4 已標記的音樂總數
- 5 遙控器上的相應按鈕



使用 USB 裝置

選港音樂和跳出功能表

如圖所示，每頁最多可顯示六個音樂名稱。



- ▶ **播放**（當播放時）：停止播放音樂。當一首歌播放結束之後，會播放所選擇的下一首歌。如果沒有選擇音樂播放，則會播放當前資料夾中的下一首樂曲。如果您進入另一資料夾並按下確定按鈕，當前的音樂會停止播放。
- ▶ **僅播放已選取的項目**：播放選擇的音樂。當一首樂曲播放結束之後，會自動播放所選擇的下一首樂曲。
- ▶ **停止播放**（當播放時）：停止播放音樂。
- ▶ **和相片一起播放**：開始播放選擇的音樂並進入圖片列表。
- ▶ **全部選取**：標記資料夾中所有的音樂。
- ▶ **取消全部選取**：擇消所有標記音樂的选项。
- ▶ **刪除或刪除已選取的檔案**（只限 FAT32 檔案系統）：刪除选项的音樂。
- ▶ **關閉**：关闭跳出功能表。

- 1  選擇目標資料夾或裝置。
- 2   選擇想要的音樂。
- 3  顯示跳出功能表。
- 4   選擇想要的快速功能表。

- 使用 P ^ v 按鈕上/下檢視音樂頁。
- 使用標記按鈕來標記或擇消標記音樂。當多於一首音樂被標記時，所標記的音樂會連續播放。例如，如果您只想重複聽一首樂曲，將其標記並播放。如果沒有音樂被標記，資料夾中所有的音樂都會連續播放。

• 按重新設定按鈕，返回正常電視觀看畫面。

- 如果您在播放期間沒有按下任何按鈕，播放資訊視窗（如下所示），會作為螢幕保護浮動。
- 「螢幕保護」？
螢幕保護是為了防止螢幕像素由於長時間顯示同一圖像而損壞。



! 注意

- ▶ 當音樂正在播放時，🎵 會顯示於音樂名稱後面。
- ▶ 已損壞或不完整的音樂不會播放，但播放時間顯示 00:00。
- ▶ 從有償服務下載的帶有版權保護的音樂不會播放，但會顯示錯誤的播放時間資訊。
- ▶ 如果您按確定 ■ 按鈕，螢幕保護會停止。
- ▶ 搖控器上的播放(▶)按鈕及暫停(⏸),(■),(▶▶),(◀◀)按鈕亦適用於此模式。
- ▶ 您亦可以用▶▶按鈕選擇下一個音樂及◀◀選擇上一個音樂。 the previous music.

使用 USB 裝置

電影清單

您只能在 USB 儲存裝置播放電影檔案。

檢測到 USB 時，影片列表便會啟動。用於在電視機上播放短片檔案。

顯示 USB 資料夾中的短片並支持播放。

允許播放資料夾中所有的短片以及使用者所需檔案。

它是顯示資料夾資訊和短片檔案的短片清單。

這裡顯示的可能與您的電視有所不同。

短片(*.dat/*.mpg/*.mpeg/*.ts/*.trp/*.tp/*.vob/*.mp4/*.mkv/*.avi/*.divx) 支援檔案

視訊格式：DivX3.11, DivX4.12, DivX5.x, DivX6, Xvid1.00, Xvid1.01, Xvid1.02, Xvid1.03, Xvid 1.10-beta-1/beta-2, Mpeg-1, Mpeg-2, Mpeg-4, H.264/AVC

音訊格式：杜比數位, AAC, Mpeg, MP3, LPCM, HEAAC


抽樣頻率：32 ~ 320kbps 以內(MP3)

位元速率：*.smi/*.srt/*.sub(MicroDVD, SubViewer1.0/2.0)/*.ass/*.ssa/*.txt(TMPlayer)/*.psb(PowerDivx)

- 某些使用者自製的字幕可能不能正常運作。
- 字幕可能不支援某些特別的字元。
- 字幕不支援 HTML 標籤。
- 支援字元以外的字幕語言不適用。
- 外來字幕檔案的時間資訊必須以播放先後以排列。
- 當音效語言變更，螢幕可能會有暫時的干擾（影像停止、加快播放等等）。
- 已損壞的電影檔案可能不能正常播放，某些播放器的功能可能不可使用。
- 某些編碼器生產的影片檔案可能不能正常地播放。
- 若錄製檔案的視頻及音頻結構為非交錯，會輸出視頻或音頻。
- 最高支援 1920x1080@25/30P 或 1280x720@50/60P 的 HD 影片，按幀數而定。
- 解像度高於 1920x1080@25/30P 或 1280x720@50/60P 的影片或不能正常運作，按幀數而定。
- 特定類型格式以外的短片檔案可能不能正常運作。
- 可以播放的短片檔案最大比特律為 20Mbps。
- H.264/AVC 格式的影片，如使用版本 4.1 或以上的編碼方式，我們不保證能夠播放流暢。
- 不支援 DTS音頻轉碼。
- 不會支援超過 30GB 的短片檔案播放。
- DivX 電影檔和它的字幕檔案必須放在同一個資料夾。
- 影片的檔名及副檔名必須一置才能顯示。
- 當透過一個不支援高速播放的 USB 連接播放影片，有可能不可正常運作。
- 低於 USB 2.0 的儲存裝置亦可支援。但它們未必可在電影清單正常運作。
- 以 GMC (全域動態補償功能) 編碼的檔案可能不能播放。
- 只有以 ACL 編碼儲存的檔案才能支援電影外置的字幕。
- 每行字幕最多有 500 個字母或數字。
- 字幕檔案最多只支持 10,000 個 sync block。
- 當您正在使用短片清單欣賞短片時，可用遙控器的節省能源及 AV 模式鍵調整影像。無法操作使用者設定的影像模式。

檔案 檔案名稱	視頻轉碼	音頻轉碼	分辨率 (最大)
mpg, mpeg, vob	MPEG1, MPEG2	Dolby Digital, MPEG, MP3, LPCM	1920x1080@30p
dat	MPEG1	Dolby Digital, MPEG, MP3, LPCM	
ts, trp, tp	MPEG2, H.264/AVC	Dolby Digital, AAC, MPEG	
mp4	MPEG4 SP, MPEG4 ASP, Divx 3.11, Divx 4.12, Divx 5.x Divx 6, Xvid 1.00, Xvid 1.01, Xvid 1.02, Xvid 1.03 Xvid 1.10 - beta1, Xvid 1.10-beta 2, H.264/AVC	Dolby Digital, HEAAC, AAC, MPEG, MP3, LPCM	
avi	MPEG 2, MPEG 4 SP, MPEG4 ASP, Divx 3.11, Divx 4, Divx 5, Divx 6 Xvid 1.00, Xvid 1.01, Xvid 1.02, Xvid 1.03, Xvid 1.10 - beta 1 Xvid 1.10 - beta 2, H.264/AVC	Dolby Digital, HEAAC, AAC, MPEG, MP3, LPCM	
mkv	H.264/AVC, MPEG 1, MPEG 2, MPEG 4 SP, MPEG4 ASP	Dolby Digital, HEAAC, AAC, MPEG, MP3, LPCM	
divx	MPEG 2, MPEG 4 SP, MPEG4 ASP, Divx 3.11, Divx 4, Divx 5, Divx 6 Xvid 1.00, Xvid 1.01, Xvid 1.02, Xvid 1.03, Xvid 1.10 - beta 1 Xvid 1.10 - beta 2, H.264/AVC	Dolby Digital, HEAAC, AAC, MPEG, MP3, LPCM	

螢幕組成




1 MENU



選擇USB。



2 OK



3 選擇電影清單。

- 1 進入上層資料夾
- 2 目前頁 / 總頁數
- 3 已標記的音樂總數
- 4 遙控器上的相應按鈕



• 不支援的檔案或損壞的檔案在下面顯示。



使用 USB 裝置

選擇短片和跳出功能表



- ▶ **播放** (當播放時)：停止播放音樂。當畫面變更時，Divx 播放終止。
- ▶ **和相片一起播放**：開始播放選擇的音樂並進入圖片列表。
- ▶ **全部選取**：標記資料夾中所有的音樂。
- ▶ **刪除或刪除已選取的檔案**(只限 FAT32 檔案系統)：刪除选项的音樂。
- ▶ **關閉**：关闭跳出功能表。

- 1  選擇目標資料夾或裝置。
- 2   選取需要的短片標題。
- 3   顯示跳出功能表。
- 4   選擇想要的快速功能表。

- 使用 P ∨ ^ 按鈕在短片頁面中檢視。
- 使用標記按鈕來標記或取消標記短片。當多於一部短片被標記時，所標記的短片會連續播放。

- 按重新設定按鈕，返回正常電視觀看畫面。

! 注意

- ▶ 若有不支援的檔案，會顯示對於不支援檔案的信息。

使用短片列表功能，播放



⚠ 注意

- ▶ 只支援英語和中文的字幕。

- ▶ **影像大小**：在短片播放時選取您想要的影像格式。
- ▶ **音效語言 及 字幕語言**：在短片播放期間轉換字幕/語言組。
- ▶ **同步**：在短片播放期間，在 -10 秒 ~ +10 秒範圍內以 0.5 秒為單位調整字幕的同時性。
- ▶ **位置**：在播放期間向上或向下變更字幕位置。從 '-2' 到 '+2' 選擇位置。


使用遙控器

◀◀ / ▶▶	<p>重複按 REW(◀◀) 按鈕來提高速度 (◀◀)(x2) → (◀◀◀◀)(x4) → (◀◀◀◀◀◀)(x8) → (◀◀◀◀◀◀◀◀)(x16) → (◀◀◀◀◀◀◀◀◀◀)(x32)。</p> <p>重複按 FF(▶▶) 按鈕來提高速度 (▶▶) → (▶▶▶▶)(x4) → (▶▶▶▶▶▶)(x8) → (▶▶▶▶▶▶▶▶)(x16) → (▶▶▶▶▶▶▶▶▶▶)(x32)。</p> <ul style="list-style-type: none"> ▪ 重複按這些按鈕來提高快捲和快速回捲速度。
⏸	<p>在播放過程中，按暫停 (⏸) 按鈕。</p> <ul style="list-style-type: none"> ▪ 會顯示靜止畫面。 ▪ 如果在暫停之後 10 分鐘都沒有按遙控器上的任何按鈕，電視會回到播放狀態。 ▪ 按暫停 (⏸) 按鈕再使用 FF(▶▶) 按鈕慢速播放。
> <	<ul style="list-style-type: none"> ▪ 當在播放時使用 < 或 > 按鈕時，游標會指示螢幕上可以檢視的位置。
播放 (▶)	<p>按播放 (▶) 按鈕，返回正常電視觀看畫面。</p>
ENERGY SAVING e2	<p>重覆按節約能源按鈕以增加您螢幕的光度。(第 98 頁)</p>
AV MODE ○	<p>重覆按 AV 模式按鈕以選取想要的來源。(第 68 頁)</p>


使用 USB 裝置

DIVX 註冊碼

確認電視機的 DivX 註冊碼。使用此註冊碼，可以在 www.divx.com/vod 購買或出租短片。無法使用其他電視機的 DivX 註冊碼播放出租或購買的 DivX 檔案。(只有所購電視的註冊碼和 DivX 檔案相符時，才能播放 DivX 檔案。)

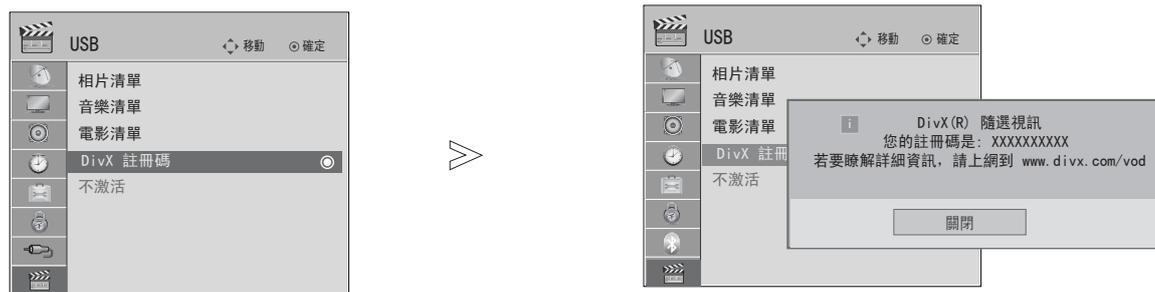

使用 USB 裝置

1.   選擇USB。
2.   選擇DivX 註冊碼。
3.  選擇DivX 註冊碼。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

DivX 獲授權播放最高 HD 1080p 之視訊，包括優質內容。
關於 DIVX 影片：DivX® 是由 DivX, Inc 建立的數碼視頻格式。
這是 DivX 官方認可，播放 DivX 視頻的裝置。
更多資料請參閱 www.divx.com，並有軟件工具把您的檔案轉換為 DivX 視頻。




關於 DIVX 應求視訊 (VIDEO-ON-DEMAND)：DivX Certified® 必須註冊才能播放 DivX Video-on-Demand (VOD) 的內容。要產生註冊碼，先找出裝置設定功能表中的 DivX VOD 部份。到 vod.divx.com，使用此代碼完成註冊程序並了解更多有關 DivX VOD 的資料。

注意

- ▶ 支援的短片檔案如下
 - 分辨率：低於 1920x1080 WxH 像素
 - 幀速率：低於 30 幀 / 秒(1920x1080)，低於 60 幀 / 秒(低於 1280x720)
- ▶ 視頻編碼：MPEG 1, MPEG 2, MPEG 4, H.264/AVC, Divx 3.11, Divx 4.12, Divx 5.x, Divx 6, Xvid 1.00, Xvid 1.01, Xvid 1.02, Xvid 1.03, Xvid 1.10-beta1, Xvid 1.10-beta2.

關閉

取消啟動功能的用途，是當使用者在 網頁_伺服器啟動了所有裝置後，不能再啟動更多的裝置時，可取消啟動部分的裝置。DivX VOD 讓使用者在同一帳戶下，啟動最多六個裝置。如要取消啟動或取代部分裝置，您必須聯絡 DivX 客戶服務部。現在使用此新增的功能，客戶可自行取消啟動部分裝置，管理 DivX VOD 裝置就更見輕易。

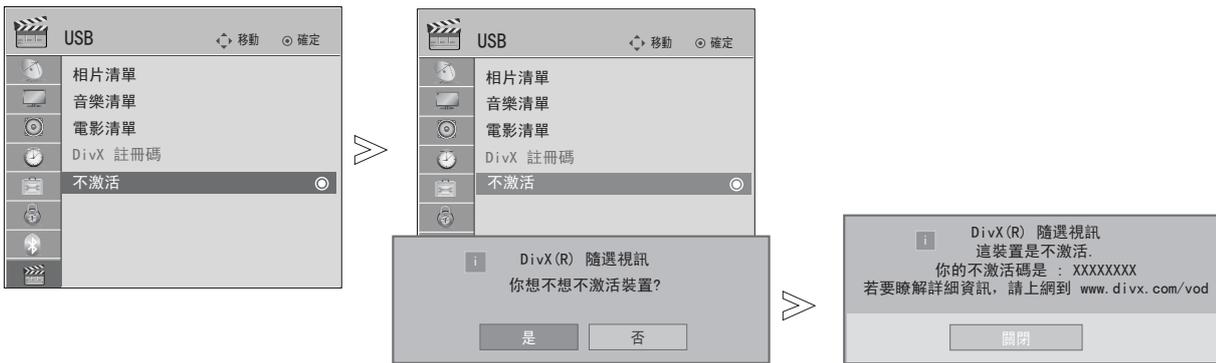

- 1   選擇USB。
- 2   選擇不激活。
- 3   選擇是。
- 4  不激活顯示。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

電子頻道指南 (EPG) (數碼模式)

本系統設有電子頻道指南 (EPG) 以助您導覽所有可能的檢視選項。

EPG 提供的資訊包括頻道清單、所有可供應的服務的開始及結束時間。此外，有關頻道的詳情也可於 EPG 中取得 (視乎不同的廣播機構，頻道的供應及數量可能會有所不同)。

本功能僅可以於當廣播公司廣播 EPG 資訊時使用。

EPG 會顯示未來 8 日的頻道詳情。

	顯示目前畫面資訊。		與 DTV 頻道顯示。		與字幕頻道顯示。
	與電台頻道顯示。		與 MHEG 頻道顯示。		以擾亂程式顯示。
	與 AAC 頻道顯示。		與杜比頻道顯示。		與杜比數碼 + 頻道顯示。
	廣播節目的圖像縱橫比。	576i/p, 720p, 1080i/p : 廣播節目的解析度			
	廣播節目的圖像縱橫比。				

開/關 EPG

1  開啓或關閉 EPG。

選擇頻道

1  或  選擇您需要的頻道。

2  移至選擇的頻道後，EPG 會消失。

於目前/下一個 (NOW/NEXT) 指南模式中的按鈕

您可觀看現正在廣播的節目及下一個預定節目。

-  紅 變更 EPG 模式。
-  黃 進入時間擊提示設定模式。
-  藍 進入時間擊提示清單模式。
-  移至選擇的頻道後，EPG 會消失。
-  選擇目前或下一個頻道。
-  選擇廣播頻道。
-  上 / 下。

節目導覽

31	YLE TV1	2007年 4月 6日 下午 3:09
全部	正播放	下一步
31	YLE TV1	That 70s show Keno
32	YLE TV2	Your World Today World Business
34	TV...	Legenen om Den... Fantomen
35	YLE FST	Naturtimmen Kritiskt
36	CNN	Lyssna ABC
38	YLE24	Glamour Tänään otskoissa

FAY 我最喜愛的頻道 INFO 節目資訊 變更頻道 TV/RAD RADIO
 模式 預約 預約清單

-  或  關閉 EPG。
-  選擇電視或收音機頻道。
-  詳細資料開啓或關閉。

於 8 天指南模式中的按鈕功能

-  變更 EPG 模式。
-  進入數據設定模式。
-  進入時間掣提示設定模式。
-  進入時間掣提示清單模式。
-  移至選擇的頻道後，EPG 會消失。
-  選擇頻道。
-  選擇廣播頻道。



-  上 / 下。
-  或  關閉 EPG。
-  選擇電視或收音機頻道。
-  詳細資料開啓或關閉。

於日期變更模式中的按鈕功能

-  關閉日期設定模式
-  變更至已選日期
-  選擇日期
-  關閉日期設定模式
-  或  關閉 EPG。



電子頻道指南 (EPG) (數碼模式)

於延伸描述框中的按鈕功能



文字上 / 下。



進入時間掣提示設定模式。



或 詳細資料開啓或關閉。



關閉 EPG。



於提醒設定模式中的按鈕功能



變更至指南或日程模式。



選擇餘下的功能設定。



選擇日期、開始時間、或程式。



儲存時間掣提醒。



於時間表模式中的按鈕功能

如果您建立了日程表，已編程的節目會在預定的時間顯示，即使您當時正在觀看其他節目。當彈出式視窗開啓，只有上/下/確認/返回鍵可以使用。



新增新的提示設定模式。



或 變更至指南模式。



關閉 EPG。



選擇您需要的選項(修改/刪除/刪除全部)。



選擇時間表。



上 / 下。



注意

- ▶ 節目表可分兩種。(EPG：電子節目指南)。第一種是“電視機內置電子節目指南”，資料儲存於電視機內，第二種是“數碼電視文字(MHEG-5)”，由廣播訊號站發送。
- ▶ 電視機內置電子節目指南的設計風格乃按照 LG 電子的廠方設計。它與 LG Electronics 的功能表設計風格及運作方式相配合。但「數碼電視文字廣播」的設計風格會根據個別廣播公司而有所不同。一般來說，它與 LG Electronics 的功能表設計風格及運作方式不相配。

影像控制

控制影像大小（圖像縱橫比）

您可用多種影像格式觀看螢幕；16: 9、點對點掃描、原始比例、4: 3、14: 9、縮放及劇院縮放。

若長時間於螢幕上顯示一個固定影像，該影像將刻印於螢幕上並持續可見。

您可利用 \vee \wedge 按鈕調較擴大的比例。

這功能對下列訊號有作用。



- 您亦可於影像功能表或影像功能表調較畫面比例。
- 至於縮放設定，在快速功能表或比例功能表選擇 14: 9、縮放、劇院縮放。完成縮放設定後，螢幕會返回快速功能表。

• 16: 9

選擇後會以非線性比例把影像橫向調較，以符合整個螢幕（用作觀看 4: 3 格式化的 DVD）。



• 原始比例

電視接收到闊螢幕訊號時，會自動變更將傳送的影像格式。



• 點對點掃描

以下選擇將帶您檢視最高品質的影像，不會丟失高解像度影像中的原始影像。


注意：如在原本的圖片內有雜訊，您會在邊源看到雜訊。



影像控制


• 4: 3

選擇後會以完整大小 4:3 的比例觀看影像，而左右兩旁會出現灰色長帶。

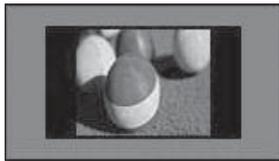


• 14: 9

您可透過 14:9 模式享受 14:9 或一般電視節目的影像格式。14:9 螢幕就像向左 / 右放大的 4:3 螢幕一樣。



• 縮放


選擇後影像不會作任何大小變動，並填滿整個螢幕。然而，影像的頂部及底部將被削去。然而，影像的頂部及底部將被削去。

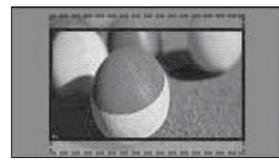

• 劇院縮放

如果您想在正確的位置放大圖片，請選擇影院縮放。

注意：放大或縮小圖片，可能會使影像失真。



◀ 或 ▶ 按鈕：調節影院縮放的擴大比例。調整範圍為 1~16。

▼ 或 ▲ 按鈕：移動螢幕。

! 注意


- ▶ 您只限於在Component模式的 4:3、16:9 (寬廣)、14:9、縮放、劇院縮放選擇。
- ▶ 您只限於在 HDMI 模式的 4:3、原本、16:9 (闊)、14:9、縮放/影院縮放中選取。
- ▶ 您只限於RGB/HDMI-PC 模式選擇 4:3、16:9 (寬廣)。
- ▶ 在 DTV/HDMI / Component (大於 720p) 模式，可以使用僅掃描。

影像精靈

利用此功能，您可調整原本圖像的質素。

您可透過調節黑白階或其他設定，來校準螢幕質素。一般使用者可跟隨每項步驟簡單地校準螢幕質素。當您調節圖片至低、建議或高，您可看到變更的結果作為例子。

使用 RGB-PC/HDMI-PC/DVI-PC 模式時，已更改的色彩、色相、橫向和垂直銳利度數值並不適用。

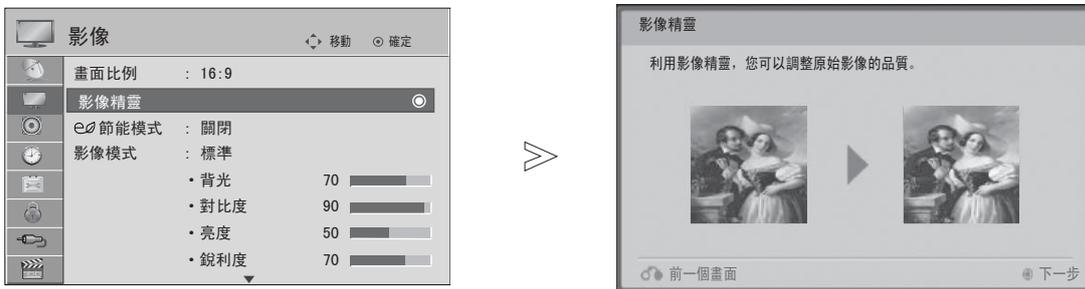

1.   選擇影像。
 2.    選擇影像。
 3.   調較黑階水平、白階水平、色彩、色相、橫向銳利度、垂直銳利度、色溫 (22/26LU5***, 32/37/42LH2***, 32/37/42/47/55LH4***, 42/47LH5*** 除外)、動態對比 (22/26LU5***, 32/37/42LH2***, 32/37/42/47/55LH4***, 42/47LH5*** 除外)、色彩增益 (22/26LU5***, 32/37/42LH2***, 32/37/42/47/55LH4***, 42/47LH5*** 除外) 以及背光。
 4.    選輸入來源及使用設定。
 5. 
- 如您在最後階段前停止設定，將不會執行那些變更。
 - 調整值已儲存至專業1。
 - 當圖片精靈設定了圖像的質素，會關閉能源節約。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

影像控制

e○ 節能模式


它可減低電視的耗電。

它可減低等離子的耗電。

原廠設定符合能源標籤的規定並而調整為家庭觀看的最舒適程度。

您可設定 節能 程度或圖像模式以提升亮度。

在 MHEG 模式調教能源節約時，能源節約模式設定會在 MHEG 完成時使用。

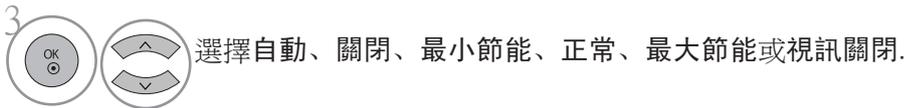

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

- 當選擇了視訊關閉，電視會在 3 秒後關上。
- 如您選擇自動能源為最少、中等或最大，背光功能將不適用。
- 您可以使用遙控器上的能源節約按鈕調較此功能。
- 選擇自動之後，背光會根據周圍的環境自動透過智能感應器調節，智能感應器在電視之內。

預設影像設定

影像模式 — 預設

明亮	加強明亮圖像的對比、亮度、色彩及清晰度。
標準	最普通的螢幕顯示狀態。
自然	最自然的螢幕顯示狀態。
劇院	觀看電影時的最佳圖像設定。
運動	觀看體育項目時的最佳圖像設定。
遊戲	遊戲時的最佳圖像設定。



1. 選擇影像。
2. 選擇影像模式。
3. 選擇智慧型感測器、明亮、標準、自然、劇院、運動或遊戲。

- 影像模式為電視調較出最佳影像容貌。按照頻道類型，在影影像模式能表中選擇預設值。按照頻道類型，在影像模式功能表中選擇預設值。
- 當開啓智能感應器功能時，會根據周圍環境自動調節到最適合的影像。
- 您也可以**在Q. 功能表中調較影像模式。**
- **智慧型感測器** 根據周圍環境調整畫面。


影像控制

手動調較影像

影像模式 — 使用者選項

- **背光**
控制螢幕亮度，調整 LCD 面板的亮度。
我們建議在調整電視光度時調節背光。
- **對比度**
調較影像光暗水平差距。如畫面的光亮部份飽和，您可使用對比度。
- **亮度**
增加或降低影像的白色。
- **銳利度**
調較影像光暗區域之間邊緣的銳利水平。
水平越低，影像越柔和。
- **色彩**
調較所有色彩濃度。
- **色調**
調較紅色及綠色水平的平衡。

不能在「智慧型感測器」使用此功能。(22/26LU5***, 32/37/42LH2*** 除外)

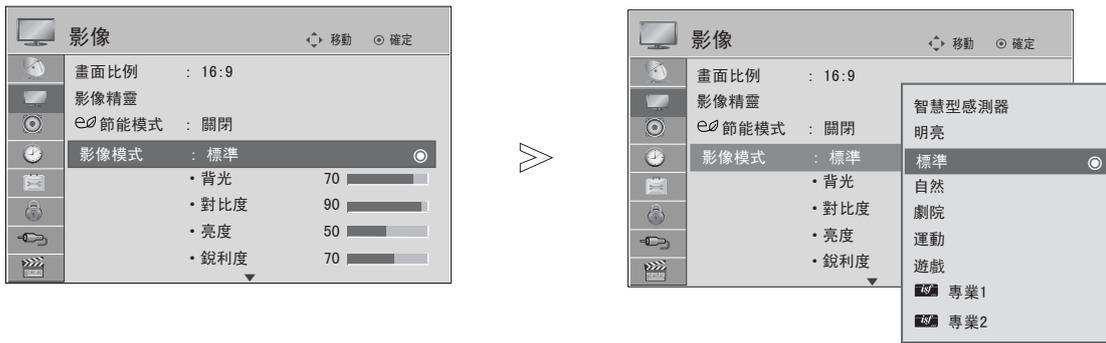

1. MENU 選擇影像。
2. OK 選擇影像模式。
3. OK 選擇明亮、標準、自然、劇院、運動或遊戲。
4. OK 選擇背光、對比度、亮度、銳利度、色彩或色調。
5. OK 作適當調較。

· 使用背光的好處

- 電力用量減低 60 %。
- 減少黑色亮度。(因為黑色有更高的色深，您可享受更高質的解像度。)
- 您可在維持原本訊號解析度下調節明亮度。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

! 注意

- ▶ 您無法於 RGB-PC/HDM-PC 模式中調較色彩、銳利度及色相。
- ▶ 如選取了專業1/2，您可選擇背光、對比度、亮度、水平銳利度、垂直銳利度、色彩或色調。

影像提升技術

您可在每個畫像模式校準螢幕或根據影片特用的螢幕設定影片的數值，為各個輸入設定影片數值。如要在設定畫像模式調整後再回歸原廠設定，請在各個畫像模式調整至「重新設定」功能。



1 MENU 選擇影像。

2 OK 選擇進階控制。

3 OK 選擇理想的來源。

選擇 色溫、動態對比度、動態色彩、降低雜訊、Gamma 值、黑階設定、護眼模式、真實劇院、TruMotion 200Hz(只限 42/47/55LH45**, 42/47LH5***, 42/47LH9***, 42/47/55SL8***) 或 TruMotion 100Hz(只限 42/47SL9***)、色域、邊緣增強器、xvYCC 或 OPC。(請參閱第 103 及 104 頁)

4 左右箭頭 作適當調較。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

影像控制


影像專業控制

透過將分類分段，專業1及專業2可為使用者提供更多功能分類，設合他們的要求，為使用者提供最優質的畫像。

調節影片的詳細項目可能只限在特定的影片使用，不能用於一般影片。

這亦可以幫助專業使用者在播放特定的影片時優化電視的性能。

顯示的可能與您的電視有所不同。

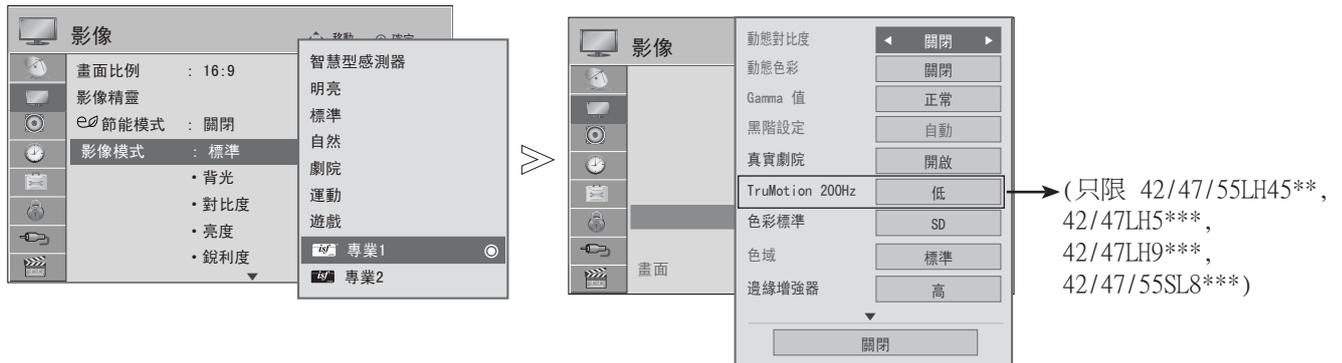

1. MENU 選擇影像。
2. OK 選擇影像模式。
3. OK 選擇 專業1 或 專業2。
4. OK 選擇專業控制。
5. OK 選擇理想的來源。
6. 作適當調較。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

*並非所有型號均備有此功能。


<p>色溫 [進階控制] (暖色系/正常/冷色系)</p>	<ul style="list-style-type: none"> ■ 選擇三種自動色彩調較之一。設定為暖色，增強暖色系，如紅色；或設定為冷色，令影像帶藍色。
<p>動態對比度 (關閉/低/正常/高)</p>	<ul style="list-style-type: none"> ■ 根據螢幕的光度調整對比度以達到最佳水平。把光的部份變更光亮及把暗的部份更暗，改善畫像。
<p>動態色彩 (關閉/低/高)</p>	<ul style="list-style-type: none"> ■ 調整螢幕色彩以令影像更生動、豐富和清晰。此功能提升色調、飽和度和明視度，令紅色、藍色、綠色更鮮明。
<p>降低雜訊 (關閉/低/正常/高)</p>	<ul style="list-style-type: none"> ■ 減低螢幕的雜訊同時不會影響影片質素。
<p>Gamma 值 (低/正常/高)</p>	<ul style="list-style-type: none"> ■ 您可調整陰暗部份的光度及畫面中階灰色的部份。 <ul style="list-style-type: none"> · 低：令陰暗及中階灰色的畫面部份更光。 · 正常：顯示畫面原本的層次。 · 高：令陰暗及中階灰色的畫面部份更暗。
<p>黑階設定 (低/高)</p>	<ul style="list-style-type: none"> · 低：螢幕映像變得陰暗。 · 高：螢幕映像變得光亮。 · 自動：了解螢幕的黑階水平，並自動設定為高或低。 ■ 設定正常的黑階設定。 ■ 此功能於下列模式運作可啓用”低”或”高”：AV (NTSC-M)、HDMI 或 Component。不然黑階設定會定為「自動」。
<p>護眼模式 (開啟/關閉)</p>	<p>*並非所有型號均備有此功能。</p> <ul style="list-style-type: none"> ■ 調整螢幕的明亮度以防止螢幕太亮。把太明亮的畫面調暗。 ■ 此功能不適用於「明亮、電影、智慧型感測器畫(22/26LU***, 32/37/42LH2***除外)像模式」。
<p>真實劇院/影片模式 (開啟/關閉)</p>	<ul style="list-style-type: none"> ■ 您可去除顫抖效果，令電影片顯得更為自然。 ■ 看影片才能使用此功能。 ■ 當關閉 TruMotion 時，才能使用此功能。
<p>TruMotion 100Hz 或 TruMotion 200Hz (關閉/低/高)</p>	<p>*並非所有型號均備有此功能。</p> <ul style="list-style-type: none"> · 高：提供更流暢的的影像運動。 · 低：提供流暢的影像運動。標準用時選取此設定。 · 關閉：當使用「高」或「低」設定時產生雜訊，請使用此設定。 ■ TruMotion 100Hz 每秒鐘顯示一百幅影像，可減低快速移動畫面時的模糊情況。 ■ 用於當您輸入快速影像或電影來源時，可提供最佳畫質，避免影像模糊或晃動。 ■ 此功能不適用於 RGB-PC 模式。 ■ 如使用「TruMotion 100Hz 或 TruMotion 200Hz」可能使螢幕出現雜訊。 ■ 如出現此情況，請設置「TruMotion 100Hz 或 TruMotion 200Hz」至「關閉」。 ■ TruMotion 200Hz 技術，結合 100Hz 顯示技術及背光掃描功能，可每秒顯示二百幀畫面。此技術獲 Intertek & TuV Rheinland 認證。

影像控制

<p>色域 (寬廣/標準)</p>	<ul style="list-style-type: none"> · 標準：透過獨立於顯示特性的輸入訊號標準以重現原有色彩的模式。 · 寬廣：用作使用及設定顏色豐富地區的顯示。 ■ 盡量顯示能夠展現的色彩部份。
<p>邊緣增強器 (關閉/低/高)</p>	<ul style="list-style-type: none"> ■ 影片中角落畫像顯現得更清晰和突出。 ■ 此功能可在「影像模式 - 電影, 專業」使用。
<p>xvYCC (自動/關閉/關閉)</p>	<p>*並非所有型號均備有此功能。</p> <ul style="list-style-type: none"> ■ 能可表現更豐富的色彩。 ■ 當 xvYCC 訊號透過 HDMI 輸入時, 此功能會在「圖像模式 - 影院、專業」啓用。
<p>OPC (開啟/關閉)</p>	<p>*並非所有型號均備有此功能。</p> <ul style="list-style-type: none"> ■ 一個可以同時保持明亮度及節約能源的技術, 它可減低能源的消耗、同時改善對比度。
<p>色彩標準 (SD/HD)</p>	<ul style="list-style-type: none"> ■ 轉換不同影片的色彩至 HD 色彩。此功能為 SD video (BT-601) 及 HD video (BT-709) 色彩格式而設定。
<p>專家圖樣 (關閉/圖像1/圖像2)</p>	<ul style="list-style-type: none"> ■ 這是專業人士必須使用的式樣。 ■ 當您觀看 DTV 時, 此功能會在「圖像模式 - 專業」啓用。
<p>色彩過濾 (關閉/紅/綠/藍)</p>	<ul style="list-style-type: none"> ■ 這功能用於過濾影片特定顏色。 您可用 RGB 過濾更準確地設定飽和度和色調。
<p>色溫 [專業控制] (正常/暖色系/冷色系)</p>	<ul style="list-style-type: none"> ■ 這功能用於調節螢幕整體顏色。 a · 方法：2 點 · 式樣：Inner, Outer · 紅色/綠色/藍色對比度, 紅色/綠色/藍色亮度: 調整範圍為 -50 ~ +50。 b · 方法：10 點 IRE · 式樣：Inner, Outer · IRE (無線電工程師協會) 是顯示影片訊號大小的單位, 它可設定為 10, 20, 30 - 100。您可以按照各個設定調節紅色、綠色或藍色。 · 亮度：此功能顯示伽瑪值為 2.2 時的亮度數值。與其使用系統指定對應 2.2 伽瑪值的亮度, 您可輸入您喜歡的亮度數值為 100 IRE。調校範圍是從 10 IRE 到 90 IRE, 每次提高10 IRE。
<p>色彩管理系統</p>	<ul style="list-style-type: none"> ■ 是讓專業透過使用測試圖樣去調節的工具, 不會影響其他顏色但它可以讓入選擇性地調節 6 個顏色區 (紅色、綠色、藍色、青綠色、洋紅色、黃色) 即使您在一般的影片調節, 色差不一定會十分明顯。 ■ 調節紅色/綠色/藍色/黃色/青綠色/洋紅色。 · 紅色/綠色/藍色/黃色/青綠色/洋紅色 洋紅色色彩 -30 ~ +30。 · 紅色/綠色/藍色/黃色/青綠色/洋紅色 洋紅色色調 -30 ~ +30。 ■ 此功能不適用於 RGB-PC 及 HDMI (PC) 模式。

影像重新設定


設定選擇的圖像模式回到原廠設定。

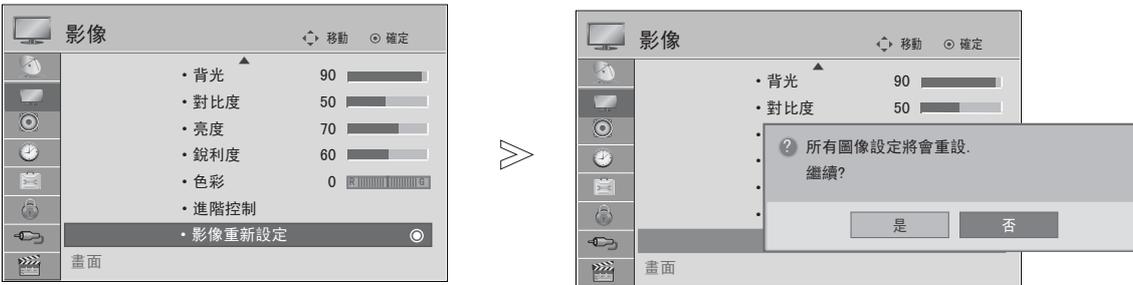

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

LED 本機調光控制 (只限 42/47LH9***)

當螢幕部份分析輸入影片的訊號後，它會調節背光以改善對比度。

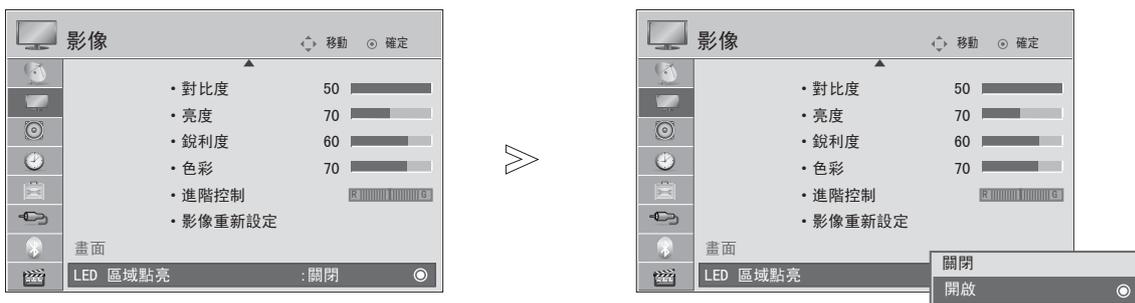

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

影像控制

開關指示燈 (22/26LU5*** 除外)

此功能在幫助您調校電源開啓時移動 LED 的亮度和聲音。

開機音效


設定開始聲音為關閉、低、正常或高。


待機指示燈

設定電視前的待機燈在待機模式時為開啟或關閉。

電源指示燈

設定電視開啓時電視前的指示燈為開啟或關閉。

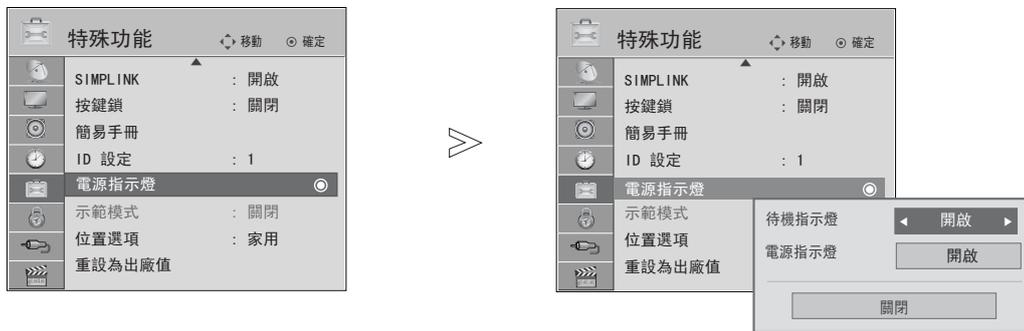

1.   選擇特殊功能。
2.   選擇電源指示燈。
3.   選擇待機指示燈或電源指示燈。
4.  選擇理想的來源。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

示範模式


顯示投影片介紹電視機不同標誌的功用。

不能在家用模式啓用示範模式。

在商店展示，示範模式自動設定為開啓。

一旦示範模式於商店展示時關閉，就不會執行示範模式，只會重設螢幕。

在商店展示，5 分鐘後會自動重設螢幕。

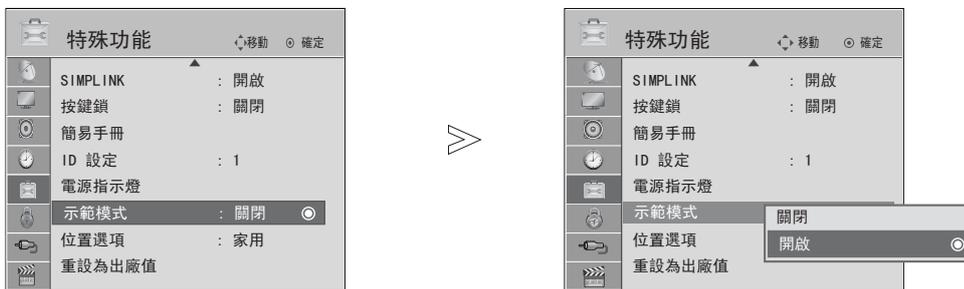

1.   選擇特殊功能。
2.   選擇示範模式。
3.   選擇開啟以顯示電視的不同標誌。
4.  回到電視畫面。
要停止示範，按任何按鈕。
(靜音、 + , - 按鈕除外)

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

影像控制

位置選項

我們建議您設定電視至「家用」以擇得家居環境的最佳圖像。
「商店展示」是適用於商店環境的最佳設定。



1.   選擇特殊功能。
2.   選擇位置選項。
3.   選擇商店展示或家用。
4.  儲存。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

聲音及語言控制


自動音量平衡器

即使你變更頻道，自動音量會自動保持音量水平平衡。

即使你變更頻道，自動音量會自動保持音量水平平衡。

因為各個廣播台有自己的訊號狀態，當頻道轉換時有可能需要自己調整聲音。此功能可自動為節目調整聲音，讓使享受到穩定的聲量。

如聲音質素或音量不在您想要的範圍，我們建議您使用另一個家庭影院系統或可按照使用者環境需要而設的揚聲器。

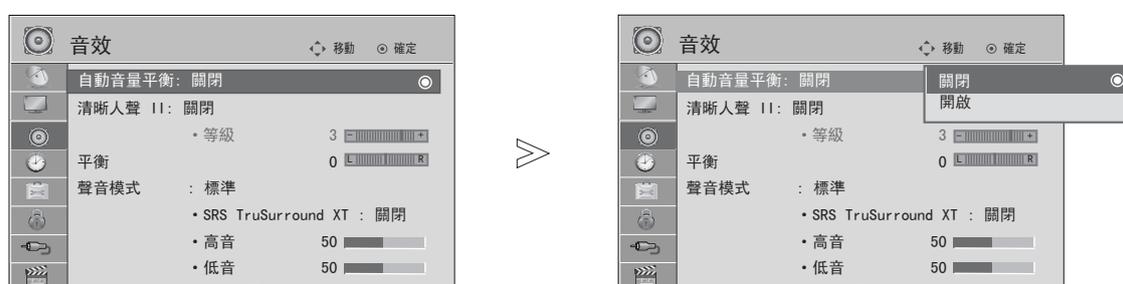


1.   選擇音效。
2.   選擇自動音量平衡。
3.   選擇開啟或關閉。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

聲音及語言控制

清晰人聲 II

能分辨人聲的範圍，助使用者聽到更優質的人聲。

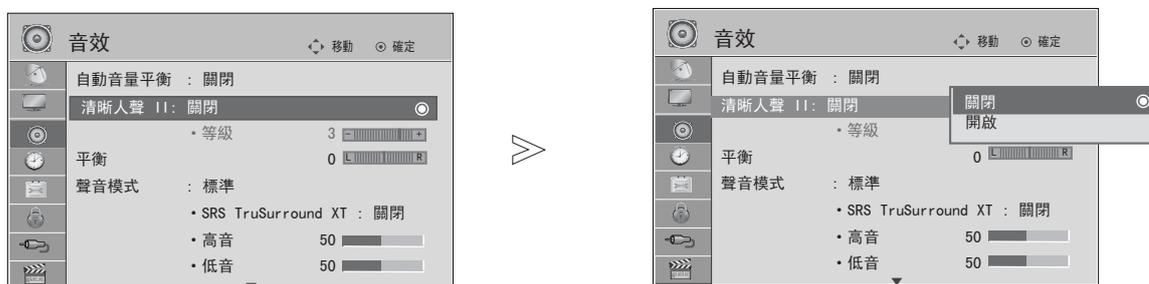

- 1 MENU 選擇音效。
- 2 OK 選擇清晰人聲 II。
- 3 OK 選擇開啟或關閉。

使用炫亮人聲時的等級調教。

- 4 OK 選擇等級。
- 5 OK 作出您需要的調較。

- 如您開啟啓了清晰人聲 II，就不能使用 SRS TruSurround XT功能。
- 從「-6」至「+6」選擇等級。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。


預設聲音設定 — 聲音模式

可選取所需聲音設定：標準、音樂、劇院、運動及遊戲，亦可調較高音或低音。

由於電視會根據頻道內容而設定相應的聲音選項，所以聲音模式可讓您即使不用作任何特別調較，也能享受最佳聲音。

標準、音樂、劇院、運動及遊戲乃為良好音質而設的原廠設。

標準	提供標準的聲音質素。
音樂	提供最佳的音樂播放聲音質素。
劇院	觀看電影時的最佳聲音質素。
運動	觀看體育項目時的最佳聲音質素。
遊戲	遊戲時的最佳聲音質素。

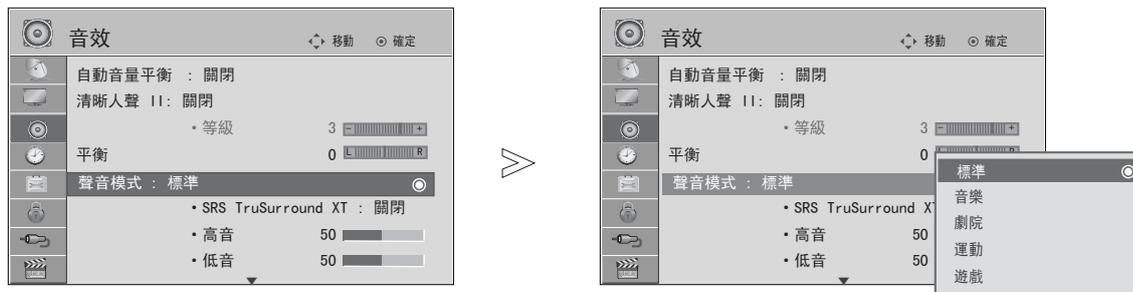

1 MENU 選擇音效。

2 OK 選擇聲音模式。

3 OK 選擇標準、音樂、劇院、運動或遊戲。

· 您也可以在此功能表中調較聲音模式。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

聲音及語言控制

聲音設定調較 — 使用者模式



1. 選擇音效。
2. 選擇聲音模式。
3. 選擇標準、音樂、劇院、運動或遊戲。
4. 選擇高音、低音。
5. 選擇需要的聲音水平。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

SRS TRUSURROUND XT

選擇本項享受最真實的聲音。

1. 選擇音效。
2. 選擇SRS TruSurround XT。
3. 選擇開啟或關閉。

· SRS TruSurround XT: TruSurround XT 是 SRS technology 專利的科技，它可解決在兩個揚聲器播放 5.1 multichannel 內容時出現的問題。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

- ▶ 是 SRS Labs, Inc. 的商標。
- ▶ 於SRS Labs, Inc. 授權下合作研發TruSurround XT 技術。

平衡

您可把揚聲器聲音平衡調較至所需的水平。



1.   選擇音效。
2.   選擇音效。
3.   出您需要的調較。


- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

聲音及語言控制

電視揚聲器開/關設定

您可調較內置揚聲器狀態。

於 AV、色差、RGB 及配備 HDMI 連接 DVI 纜線的 HDMI 中，即使沒有視訊，電視揚聲器也可運作。若您想使用外置的 Hi-Fi 系統，關掉電視的內置揚聲器。

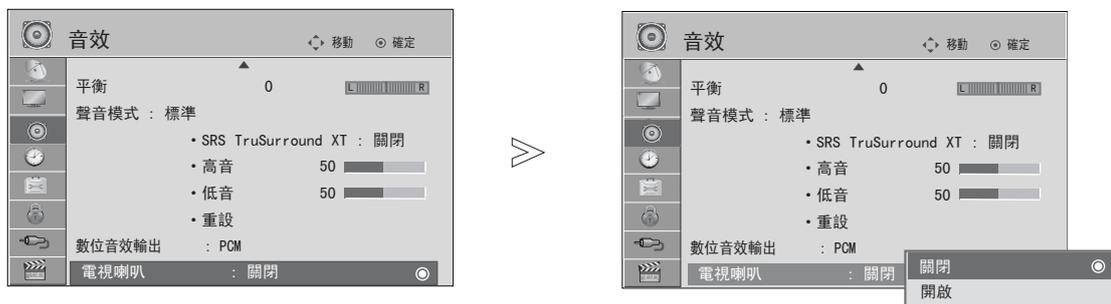

1.   選擇音效。
2.   選擇電視喇叭。
3.   選擇開啟或關閉。

注意

- ▶ 當 Simplink 家庭影院運作時，電視的揚聲器開啓，聲音輸出會自動轉至家庭影院的揚聲器，但當電視的揚聲器開啓，聲音會從電視揚聲器輸出。
- ▶ 當電視的揚聲器設定為關時，音效裡的某些功能表可能不適用。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

選擇數碼音訊輸出


此功能能讓您選出您需要的數碼音訊輸出。

如頻道是以杜比數碼音效廣播的，電視只會以杜比數碼輸出。

如杜比數碼適用，請在數碼音訊輸出功能表選自動，設定 SPDIF 輸出至杜比數碼。

如杜比數碼不適用，即使在數碼音訊輸出功能表的選擇為自動，SPDIF 將變為 PCM。

即使杜比數碼及音訊語言已設在廣播杜比數碼音訊的頻道，亦只會播放杜比數碼。

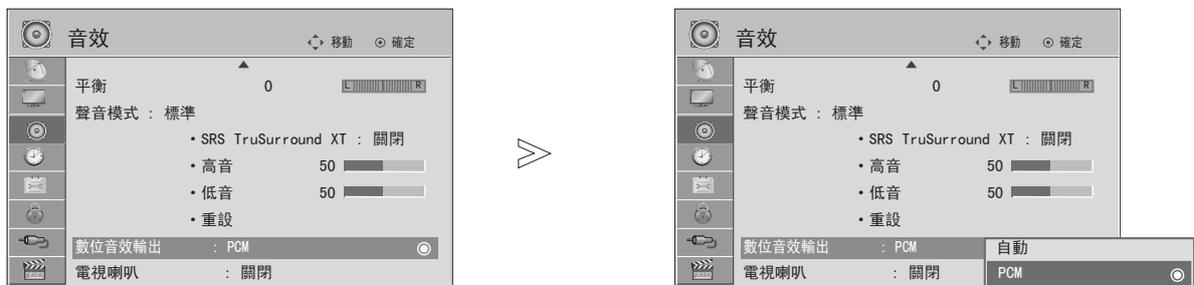

1.   選擇音效。
2.   選擇數位音效輸出。
3.   選擇自動或PCM。



於杜比實驗室 (Dolby Laboratories) 授權下生產。
“杜比” (Dolby) 及 雙 D 標誌均為杜比實驗室的註冊商標。

- 在 HDMI 模式時，某些 DVD 播放機或不能發出 SPDIF 聲音。
這時候，設定 DVD 播放器的數碼音頻輸出為 LPCM。(在 HDMI，不支援杜比數碼 +)


項目	音頻輸入	數位音效輸出
自動(揚聲器開啓)	MPEG	LPCM
	DD	DD
	DD+	DD
	HE-AAC	LPCM
自動(揚聲器關閉)	MPEG	LPCM
	DD	DD
	DD+	DD
	HE-AAC	DD
LPCM	LPCM	LPCM

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

聲音及語言控制

音頻重設

設定選擇的聲音模式回到原廠設定。

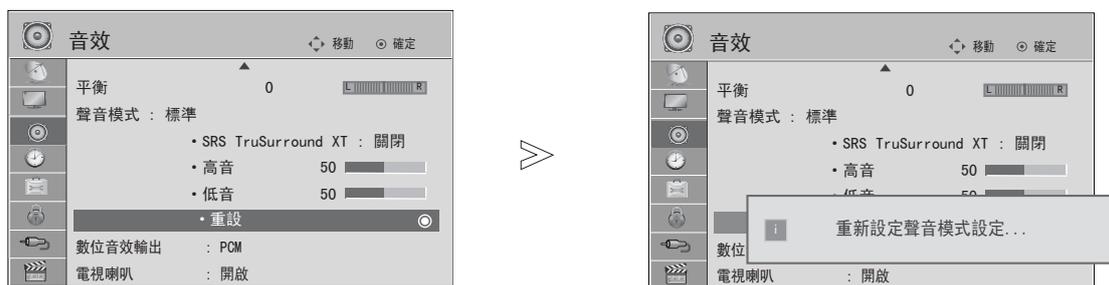

1.   選擇音效。
2.   選擇重設。
3.  初始化已調較的數值。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

I/II

立體聲 / 雙聲道接收 (僅適用於類比模式)

選擇頻道後，該頻道的聲音資料會和頻道號碼及頻道名稱一起顯示。



廣播	螢幕上顯示
單聲道	單聲道
立體聲	立體聲
雙聲道	雙聲道 I, 雙聲道 II, 雙聲道 I+II

- 選擇單聲道
若立體聲訊號微弱，可切換至單聲道。單聲道接收時，聲音的清晰度會有所改善。
- 選擇雙聲道廣播語言
如果頻道可以接受兩種語言（雙語），您可設換至雙聲道 I、雙聲道 II 或 雙聲道 I+II。

雙聲道 I 傳送第一聲道至揚聲器。
雙聲道 II 傳送第二聲道至揚聲器。
雙聲道 I+II 把兩種語言分別傳送至每個揚聲器。

聲音及語言控制

麗音廣播接收(僅適用於類比模式)

若電視備有麗音廣播接收器，可接收高質素麗音 (NICAM 納坎系統) 數碼聲音廣播。

聲音輸出可以根據收擇的廣播類型來選擇。

-
- 1 接收到NICAM 單聲道時，您可選擇NICAM 單聲道 或 FM單聲道。
 - 2 接收到NICAM 單聲道時，您可選擇NICAM 立體聲 或 FM單聲道。
若立體聲訊號微弱，則切換至 FM單聲道。
 - 3 接收到NICAM 單聲道時，您可選擇NICAM 雙聲道 I、NICAM 雙聲道 II 或 NICAM 雙聲道 I+II 或 FM單聲道。
-

選擇揚聲器聲音輸出

在 AV, 色差, RGB 及 HDMI 模式下，您可選擇左及右揚聲器的聲音輸出。

選擇聲音輸出。

L+R: 來自左邊音頻輸入的音頻訊號會傳送至左揚聲器；來自右邊音頻輸入的音頻訊號會傳送至右揚聲器。

L+L: 來自左邊音頻輸入的音頻訊號會傳送至左及右揚聲器。


R+R: 來自右邊音頻輸入的音頻訊號會傳送至左及右揚聲器。

國家或地域選擇

安裝設定功能表會於第一次開啓電視時在電視畫面中出現。



* 如要變換語言 / 地域或國家選項

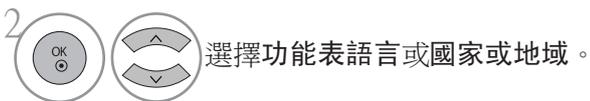

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

注意

- ▶ 如果您沒有按返回按鈕完成安裝設定或螢幕顯示 (OSD) 已過時，安裝指南將會於每次開啓電視時出現，至完成設定為止。
- ▶ DTV 模式控制按鈕可能因各個國家的廣播狀況而不能運作。
- ▶ 在一些數碼廣播條例未確定的國家，DTV 功能可能因各個國家的廣播狀況不同而不能運作。


聲音及語言控制

語言選擇 (僅適用於數碼模式)

音頻功能允許所需語言的選擇。如果所需語言的音頻數據並沒有廣播，則會播放預設的語言音頻。

如果所需語言的字幕數據並沒有廣播，則會播放預設語言的字幕。


如您選取作為第一音訊及字幕語言的語言不受支援，您可選擇在第二種類的語言。

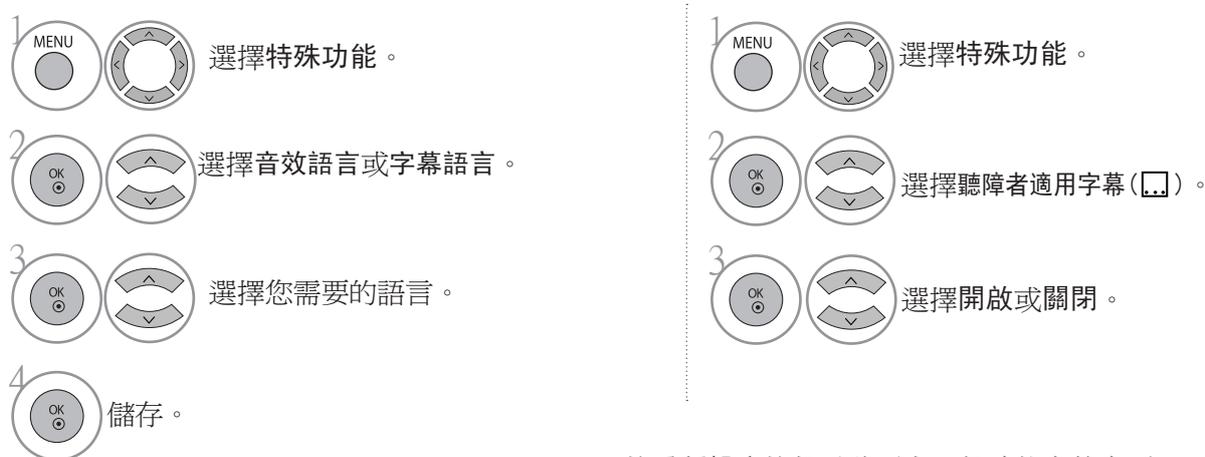

· 按重新設定按鈕以移至上一個功能表的畫面。


<音頻語言選擇 >

- ▶ 如廣播兩個或以上的音訊語言，您可選擇音訊語言。

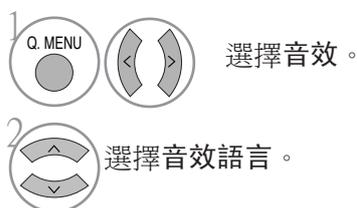

<字幕語言選擇 >

- ▶ 當廣播兩至三種語言的字幕時，您可以使用遙控器上的字幕按鈕選擇字幕語言。
- ▶ 按 ∨ ^ 按鈕，選擇字幕語言。

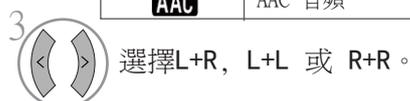

音頻語言螢幕資訊

顯示	狀態
不適用	不適用
MPEG	MPEG 音頻
Dolby Digital	杜比數碼 音頻
Visual Impairment	為「視障者」而設的音頻
ABC	為「聽障者」而設的音頻
Dolby Digital Plus	杜比數碼 Plus 音頻
AAC	AAC 音頻

字幕語言螢幕資訊


顯示	狀態
不適用	不適用
ABC	專為「弱聽者」而設的字幕

- 可以由服務供應商廣播 1 - 3 個字元以簡單顯示音頻/字幕。
- 當您選擇補充音頻時（「視覺/聽覺受損」而設的音頻），電視會輸出主要音頻。

時間設定

時鐘設定

使用開啓 / 關閉時間功能前，您必須正確設定時間。
若現行時間因停電或電視插頭被拔出而清除了，重設時鐘。

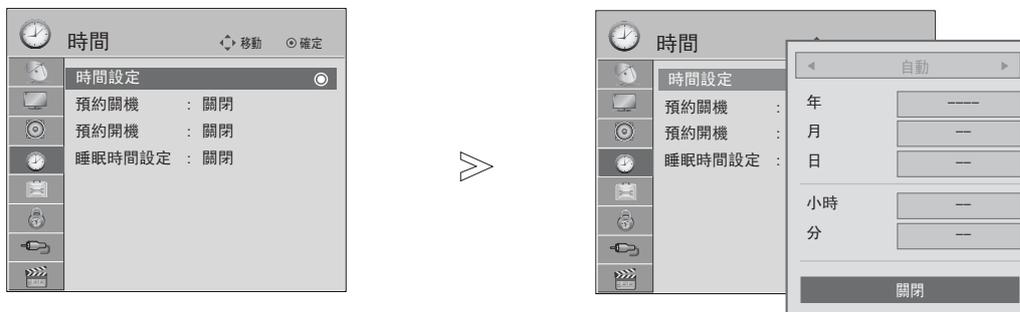

- 1   選擇時間。
- 2   選擇時間設定。
- 3   選擇自動或手動。
- 4  選擇年、日或時間選項。
- 4  設定年、日或時間選項。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

時間設定


設定自動開/關時間制

關閉時間會於預設時間自動把電視切換至備用模式。

除非按下任何按鈕，否則經開啓時間功能開啓的電視會於兩小時後自動切換至備用模式。

若開/關時間設定為同一時間，關閉時間功能會擇代開啓時間功能。

電視必須處於備用模式，開啓時間制才能生效。

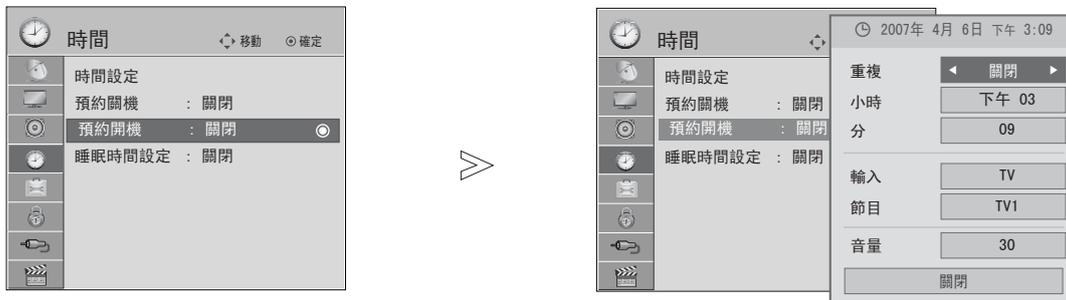

1. 選擇時間。
2. 選擇預約開機或預約開機。
3. 選擇重複。
4. 選擇關閉、一次、每天、星期一 ~ 星期五、星期一 ~ 星期六、星期六 ~ 星期日或星期日。
5. 設定小時。
6. 設定分。



- 要取消開/關時間功能，選擇關閉。
- 只適用於開啓時間功能

1. 選擇輸入。
2. 選擇TV、AV、色差、RGB 或 HDMI。
3. 設定節目。
4. 在開啓狀態下調節音量水平。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

設定睡眠時間制

您睡前不用記掛著要關掉電視。
預設時間一過去，睡眠時間制會自動把電視切換至備用模式。

1   選擇睡眠時間設定。

2  選擇關閉，10，20，30，60，90，120，180 或 240 分。


- 當您關閉電視時，會擇消預設的睡眠時間。
- 您亦可於時間功能表調較睡眠時間制。




頻道鎖碼 / 評級

設定密碼及鎖定系統

輸入密碼，在遙控器上按「0」、「0」、「0」、「0」。

如頻道已鎖定，輸入密碼並暫時解鎖。

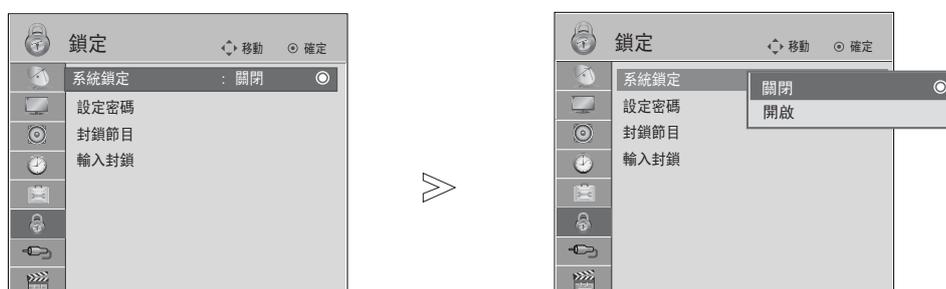

-  選擇時間。
-  選擇系統鎖定。
-  選擇開啟。
-  設定密碼。
-  輸入 4 位安全密碼。
切記不可忘記密碼！
再之輸入新密碼以確認。

· 如果您忘記密碼，在遙控器上按「7」、「7」、「7」、「7」。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

封鎖頻道

鎖上一些您不想看或不想被您孩子看的節目。

在封鎖系統開啓時可使用此功能。

輸入密碼以觀看封鎖的頻道。



- 1 MENU 選擇時間。
- 2 OK 選擇封鎖節目。
- 3 OK 輸入封鎖節目。
- 4 GREEN 選擇要封鎖的頻道。


- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

頻道鎖碼 / 評級

封鎖外置輸入

可讓您封鎖輸入。

在封鎖系統開啓時可使用此功能。

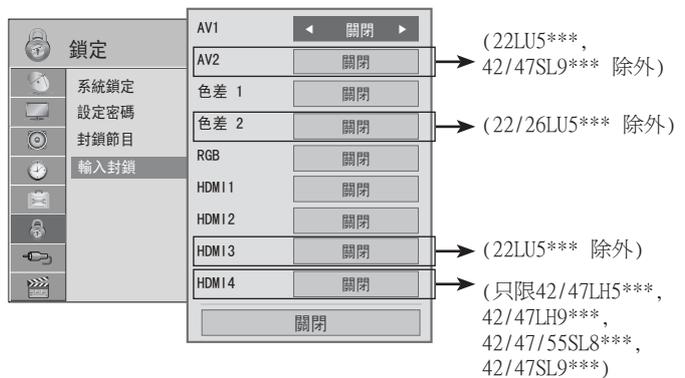

1. MENU 選擇時間。
2. OK 選擇輸入封鎖。
3. OK 選擇輸入來源。
4. OK 選擇開啟或關閉。
5. OK 儲存。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

按鍵鎖

電視可以設定為必須以遙控器來控制。
此功能可以防止未經授權觀看電視。



1. MENU 選擇選項。
2. OK 選擇按鍵鎖。
3. OK 選擇開啟或關閉。
4. OK 儲存。

- 按鍵鎖「開」但電視已關閉時，可按電視上的 P / I 、INPUT、P \blacktriangle 或 \blacktriangledown (或 P \wedge \vee) 按鈕或遙控器上的 TV 或 POWER、INPUT、P \wedge \vee 或數字按鈕。
- 按鍵鎖開啓時按電視機前面板的按鈕時，螢幕將會顯示「 按鍵鎖開」。

- 按功能表 (MENU) 按鈕，返回觀看電視畫面。
- 按重新設定按鈕以移至上一個功能表的畫面。

數碼電視文字廣播

此電視可讓您存取數碼電視文字廣播，它提升多方面效能，例如文字，圖像等等。
數碼電視文字可存取特別的數碼電視文字廣播服務及特定廣播數碼電視文字的服務。

您應先在字幕語言功能表按關閉，按 SUBTITLE (字幕) 顯示電視文字。

- 顯示的可能與您的電視有所不同。

數碼服務以內的電視文字廣播

- 1 按擇數字或 P ^ v 按鈕，選擇廣播數碼電視文字的數碼服務。
要知道哪個為數碼電視文字廣播服務，請參考 EPG 服務列表。
- 2 根據數碼電視文字的指示並按 GUIDE(指南)、TEXT (文字)、OK ^ v < >、紅色、綠色、黃色、藍色或數字鍵等等移至下一個步驟。
- 3 要更改數碼電視文字服務，可按數字或 P ^ v 按鈕選取不同的服務。



數碼服務內的電視文字廣播

- 1 按擇數字或 P ^ v 按鈕，選擇廣播數碼電視文字的一些服務。
- 2 按 GUIDE(指南)、TEXT (文字) 或顏色按鈕開啓電視文字廣播。
- 3 根據數碼電視文字的指示並按 OK ^ v < > 、紅色、綠色、黃色、藍色或數字鍵等等移至下一個步驟。
- 4 按 GUIDE(指南)、TEXT (文字)或顏色按鈕以關閉數碼電視文字，並返回正常電視觀看畫面。

某些服務不能透過按紅鍵存取文字服務。



附錄

疑難排解

電視無法正常操作。	
遙控器無法運作	<ul style="list-style-type: none">■ 檢查電視及遙控器之間是否有任何阻礙物。 確認您將遙控器直接指向電視。■ 確認電池按極性正確地安裝 (+ 對 +、- 對 -)。■ 安裝新電池。
電源突然關閉	<ul style="list-style-type: none">■ 是否設定了睡眠時間？■ 檢查電源控制設定， 電源供應受到干擾。■ 如在 15 分鐘後都沒有接收到任何訊號或沒有運作， 電視會自動轉換至待機模式。
視頻功能不正常運作。	
沒有影像及聲音	<ul style="list-style-type: none">■ 檢查電視是否開啓。■ 嘗試另一頻道，或許是廣播故障。■ 電線是否正確插入主機？■ 檢查天線的方向及 / 或位置。■ 插上另一部電視至同一插座以測試主電源插座。
開啟後影像緩慢地出現	<ul style="list-style-type: none">■ 此屬正常情況，電視始動過程中，影像是靜音的。若影像五分鐘後還未出現，請聯絡您的服務中心。若影像五分鐘後還未出現，請聯絡您的服務中心。
沒有色彩、色彩差劣或影像差劣	<ul style="list-style-type: none">■ 在功能表選項調較色彩。■ 電視與錄影機之間保持足夠距離。■ 嘗試另一頻道，或許是廣播故障。■ 視訊纜線有否正確插入？■ 啓動任何功能，修復影像光亮度。
橫/直條或晃動影像	<ul style="list-style-type: none">■ 檢查周圍的干擾，例如：電子裝置或電源工具。
某些頻道的接收較差	<ul style="list-style-type: none">■ 頻道或纜線出現故障，轉換至另一頻道。■ 頻道訊號微弱，重新調較天線以接收較微弱頻道。■ 檢查來源的可能干擾。
影像出現線條	<ul style="list-style-type: none">■ 檢查天線（變更天線指 / 方向）。
連接 HDMI 時，沒有影像	<ul style="list-style-type: none">■ 檢查 1.3 或更高版本的 HDMI 纜線。 如果 HDMI 纜線不支援 HDMI 1.3 版，可能會導致閃動或沒有畫面。請使用最新的支援 HDMI 1.3 版的纜線。

音頻功能無法運作。

影像沒問題但沒有聲音	<ul style="list-style-type: none">按  + 或 - 按鈕。靜音？按靜音按鈕。嘗試另一頻道，或許是廣播故障。音頻纜線有否正確插入？
其中一個揚聲器沒有輸出	<ul style="list-style-type: none">在功能表選項調較平衡。
電視內部出現不尋常聲音	<ul style="list-style-type: none">周遭環境的濕度或溫度轉變均有可能導致電視開啓或關閉時出現不尋常雜音，這並不代表電視有故障。
連接 HDMI 或 USB 時，沒有聲音	<ul style="list-style-type: none">檢查高於 1.3 版本的 HDMI 纜線。檢查高於 2.0 版本的 HDMI 纜線。

*並非所有型號均備有此功能。

PC 模式出現問題。(只適用於 PC 模式)

訊號超出了範圍 (無效的格式)	<ul style="list-style-type: none">調較解像度、橫向頻率或直線頻率。檢查輸入來源。
背景出現直條或直線、橫向雜音及位置不正確	<ul style="list-style-type: none">執行自動驗證或調校時鐘、時期或 H/V 位置。(選項)
螢幕色彩不穩或單色	<ul style="list-style-type: none">檢查訊號纜線。重新安裝 PC 視頻卡。

圖像設定出現問題。

當使用者更改圖片設定，電視會在若干時間後自動調節回到最初的設定。	<ul style="list-style-type: none">這代表電視現正處於商店演示模式模式。 轉至家用模式需要以下步驟： 從電視模式，选项選項 → 选项模式設定 → 选项家用模式。 現在已完成轉換至家用模式的程序。
----------------------------------	---

附錄

維修保養

初期的故障是可避免的。小心且定期清潔電視可延長新電視的壽命。

警告：要確定在開始任何清潔之前，先關掉電視且拔出電線。

清潔螢幕

- 1 把溫水及少許織物柔軟劑或洗潔精混和，以此弄濕一塊軟布來清潔螢幕是清除螢幕上的灰塵的最佳方法。然後把軟布擰至差不多乾，抹擦螢幕。
- 2 確保螢幕上沒有多餘水份。開啓電視前，先讓水份及濕氣蒸發。

清潔櫥櫃

- 要抹走污垢或塵埃，用乾且無塵的軟布擦拭櫥櫃。
- 切勿使用濕布。

長期離家

▲ 小心

- ▶ 若您準備長時間暫停使用電視（例如：出外度假），拔出電線，保護電視免受閃電或電源中斷可能引起的損壞。

產品規格

型號		32LH4*** 32LH40FD-CE	37LH4*** 37LH40FD-CE	42LH4*** 42LH40FD-CE 42LH45YD-CB	
尺寸 (闊 x 高 x 厚)	連底座	804.4 x 586.3 x 223.8 毫米 31.7 x 23.1 x 8.8 吋	924.7 x 666.7 x 296.2 毫米 36.4 x 26.3 x 11.7 吋	1036.0 x 721.3 x 296.2 毫米 40.8 x 28.4 x 11.7 吋	
	不連底座	804.4 x 529.2 x 81.0 毫米 31.7 x 20.9 x 3.2 吋	924.7 x 599.9 x 89.6 毫米 36.4 x 23.6 x 3.5 吋	1036.0 x 655.4 x 89.8 毫米 40.8 x 25.8 x 3.6 吋	
重量	連底座	12.7 公斤 / 28.0 磅	15.8 公斤 / 34.9 磅	18.9 公斤 / 41.7 磅	
	不連底座	11.5 公斤 / 25.4 磅	14.0 公斤 / 30.9 磅	17.1 公斤 / 37.7 磅	
電源要求		AC100-240V~ 50/60Hz	AC100-240V~ 50/60Hz	AC100-240V~ 50/60Hz	
型號		47LH4*** 47LH40FD-CE 47LH45YD-CB	55LH4*** 55LH45YD-CB	42SL9*** 42SL90QD-CA	47SL9*** 47SL90QD-CA
尺寸 (闊 x 高 x 厚)	連底座	1153.2x791.5x337.4毫米 45.4x31.2x13.3吋	1339.0x901.0x423.0毫米 52.7x35.5x16.7吋	1009.2x694.5x286.5毫米 39.7x27.3x11.3吋	1119.6x757.1x286.5毫米 44.1x29.8x11.3吋
	不連底座	1153.2x719.0x99.8毫米 45.4x28.3x3.9吋	1339.0x828.6x108.6毫米 52.7x32.6x4.3吋	1009.2x629.7x29.3毫米 39.7x24.8x1.2吋	1119.6x691.3x29.3毫米 44.1x 27.2x1.2吋
重量	連底座	22.2公斤/49.0磅	36.0公斤/79.4磅	24.6公斤/54.2磅	28.5公斤/62.8磅
	不連底座	19.6公斤/43.2磅	32.5公斤/71.6磅	20.1公斤/44.3磅	24.0公斤/52.9磅
電源要求		AC100-240V~50/ 60Hz	AC100-240V~50/ 60Hz	AC100-240V~50/ 60Hz	AC100-240V~50/ 60Hz
電視系統		DTMB, PAL D/K, PAL I, NTSC M			
頻道覆蓋		DTV: 21~69 PAL D/K: VHF/UHF 1~62, CATV 1~41 PAL I: VHF/UHF 1~69, CATV 1~47 NTSC M: VHF/UHF 2~83, CATV 1~71			
外置天線阻抗		75 Ω			
環境狀況	運作溫度	0 ~ 40 °C / 32 ~ 104 °F			
	運作濕度	低於 80%			
環境狀況	存放溫度	-20 ~ 60 °C / -4 ~ 140 °F			
	存放濕度	低於 85%			
支援的電影檔案		參閱第 86 ~ 87 頁			

■ 上述規格或會因改善品質而改變，並不作預先通知。

附錄

型號		42LH5*** 42LH50YD-CA	47LH5*** 47LH50YD-CA	42LH9*** 42LH90QD-CC	47LH9*** 47LH90QD-CC
尺寸 (闊 x 高 x 厚)	連底座	1052.2 x 719.2 x 296.2 毫米 41.5 x 28.3 x 11.7 吋	1173.4 x 789.7 x 337.4 毫米 46.2 x 31.1 x 13.3 吋	1065.9 x 776.0 x 361.7 毫米 42x 30.5 x 14.2 吋	1179x 851.4 x 398.8 毫米 46.4 x 33.5 x 15.7 吋
	不連底座	1052.2 x 657.3 x 90.8 毫米 41.5 x 25.9 x 3.6 吋	1173.4 x 723.4 x 100.8 毫米 46.2 x 28.5 x 4.0 吋	1065.9 x 716.4 x 94.4 毫米 42 x 28.2 x 3.7 吋	1179 x 780.6 x 105.9 毫米 46.4 x 30.7 x 4.2 吋
重量	連底座	19.0 公斤 / 41.9 磅	23.4 公斤 / 51.6 磅	23.2 公斤 / 51.1 磅	27.3 公斤 / 60.1 磅
	不連底座	17.2 公斤 / 37.9 磅	20.8 公斤 / 45.9 磅	19.5 公斤 / 42.9 磅	23.5 公斤 / 51.8 磅
電源要求		AC100-240V~ 50/60Hz	AC100-240V~ 50/60Hz	AC100-240V~ 50/60Hz	AC100-240V~ 50/60Hz
型號		42SL8*** 42SL80YD-CA	47SL8*** 47SL80YD-CA	55SL8*** 55SL80YD-CA	
尺寸 (闊 x 高 x 厚)	連底座	1001.2 x 688.7x 261.0 毫米 39.4 x 27.1 x 10.3 吋	1109.6 x 751.7 x 320.2 毫米 43.7 x 29.6 x 12.6 吋	1279 x 854.3 x 320.2 毫米 50.4 x 33.6 x 12.6 吋	
	不連底座	1001.2 x 623.2x 45.0 毫米 39.4 x 24.5 x 1.8 吋	1109.6 x 685.3 x 45.5 毫米 43.7 x 27.0 x 1.8 吋	1279 x 780.5 x 45.5 毫米 50.4 x 30.7 x 1.8 吋	
重量	連底座	21 公斤 / 46.3 磅	26.6 公斤 / 58.6 磅	35.2 公斤 / 77.6 磅	
	不連底座	18.7 公斤 / 41.2 磅	23.7 公斤 / 52.2 磅	32.0 公斤 / 70.5 磅	
電源要求		AC100-240V~ 50/60Hz	AC100-240V~ 50/60Hz	AC100-240V~ 50/60Hz	
電視系統 頻道覆蓋		DTMB, PAL D/K, PAL I, NTSC M DTV: 21~69 PAL D/K: VHF/UHF 1~62, CATV 1~41 PAL I: VHF/UHF 1~69, CATV 1~47 NTSC M: VHF/UHF 2~83, CATV 1~71			
外置天線阻抗		75 Ω			
環境狀況	運作溫度 運作濕度	0 ~ 40 °C / 32 ~ 104 °F 低於 80%			
	存放溫度 存放濕度	-20 ~ 60 °C / -4 ~ 140 °F 低於 85%			
支援的電影檔案		參閱第 86 ~ 87 頁			

■ 上述規格或會因改善品質而改變，並不作預先通知。

型號		32LH2*** 32LH20FD-CA	37LH2*** 37LH20FD-CA	42LH2*** 42LH20FD-CA
尺寸 (闊 x 高 x 厚)	連底座	805.0 x 583.0 x 224.0 毫米 31.7 x 23.0 x 8.8 吋	922.0 x 659.0 x 297.0 毫米 36.3 x 26.0 x 11.7 吋	1028.0 x 715.4 x 297.0 毫米 40.5 x 28.2 x 11.7 吋
	不連底座	805.0 x 528.0 x 79.9 毫米 31.7 x 20.8 x 3.2 吋	922.0 x 595x 88.0 毫米 36.3 x 23.4 x 3.5 吋	1028.0 x 655.0x 88.7 毫米 40.5 x 25.8 x 3.5 吋
重量	連底座	11.5 公斤 / 25.4 磅	14.8 公斤 / 32.6 磅	18.0 公斤 / 39.5 磅
	不連底座	10.3 公斤 / 22.7 磅	13.0 公斤 / 28.7 磅	16.2 公斤 / 35.5 磅
電源要求		AC100-240V~ 50/60Hz	AC100-240V~ 50/60Hz	AC100-240V~ 50/60Hz
型號		22LU5*** 22LU50FD-CA	26LU5*** 26LU50FD-CA	
尺寸 (闊 x 高 x 厚)	連底座	529.1 x 416.6 x 196.0 毫米 20.9 x 16.4 x 7.7 吋	668.0 x 538.3 x 236 毫米 26.3 x 21.2 x 9.3 吋	
	不連底座	529.1 x 342.3 x 65.0 毫米 20.9 x 13.5 x 2.6 吋	668.0 x 456.0 x 81.0 毫米 26.3 x 18.0 x 3.2 吋	
重量	連底座	5.4 公斤 / 11.9 磅	8.9 公斤 / 19.6 磅	
	不連底座	4.6 公斤 / 10.2 磅	7.7 公斤 / 17 磅	
電源要求		AC100-240V~ 50/60Hz	AC100-240V~ 50/60Hz	
電視系統		DTMB, PAL D/K, PAL I, NTSC M		
頻道覆蓋		DTV: 1~57 PAL D/K: VHF/UHF 1~62, CATV 1~41 PAL I: VHF/UHF 1~69, CATV 1~47 NTSC M: VHF/UHF 2~83, CATV 1~71		
外置天線阻抗		75 Ω		
環境狀況	運作溫度	0 ~ 40 °C / 32 ~ 104 °F		
	運作濕度	低於 80%		
	存放溫度	-20 ~ 60 °C / -4 ~ 140 °F		
	存放濕度	低於 85%		

■ 上述規格或會因改善品質而改變，並不作預先通知。

附錄

IR 編碼

編碼 (十六進位)	功能	注意
95	節能模式	R/C 按鈕
08	能源	R/C 按鈕 (電源開 / 關)
0B	輸入	R/C 按鈕
79	比例	R/C 按鈕 (22/26LU5*** 除外)
F0	TV/RAD	R/C 按鈕
45	快速功能表	R/C 按鈕
43	功能表	R/C 按鈕
AB	手冊	R/C 按鈕
40	上 (▲)	R/C 按鈕
41	下 (▼)	R/C 按鈕
07	左 (◀)	R/C 按鈕
06	右 (▶)	R/C 按鈕
44	確定 (●)	R/C 按鈕
28	重新設定/離開	R/C 按鈕
AA	資訊 ⓘ	R/C 按鈕
30	AV 模式	R/C 按鈕
02	△ +	R/C 按鈕
03	△ -	R/C 按鈕
1E	FAV (選取)	R/C 按鈕
09	靜音	R/C 按鈕
00	P ▲	R/C 按鈕
01	P ▼	R/C 按鈕
10~19	數字鍵 0~9	R/C 按鈕
53	清單	R/C 按鈕
1A	快速交替檢視	R/C 按鈕
72	紅色鍵	R/C 按鈕
71	綠色鍵	R/C 按鈕
63	黃色鍵	R/C 按鈕
61	藍色鍵	R/C 按鈕
20	文字	R/C 按鈕
21	T. OPT(文字選項)	R/C 按鈕
39	字幕	R/C 按鈕
7E	SIMPLINK	R/C 按鈕

(42/47LH9***, 42/47/55SL8***, 42/47SL9*** 除外)

71	■	R/C 按鈕
63	▶	R/C 按鈕
61		R/C 按鈕
21	◀◀	R/C 按鈕
39	▶▶	R/C 按鈕

(只限 42/47LH9***, 42/47/55SL8***, 42/47SL9***)


B1	■	R/C 按鈕
B0	▶	R/C 按鈕
BA		R/C 按鈕
8F	◀◀	R/C 按鈕
8E	▶▶	R/C 按鈕

外置控制裝置設定

RS-232C 設定


連接 RS-232C (序列埠) 輸入插孔至外置控制裝置 (例如：電腦或 A/V 控制系統) 並從外部控制電視的功能。連接外置控制裝置的序列埠至產品後面板的 RS-232C 插孔。

注意：RS-232C 連接纜線並非與產品一起提供。

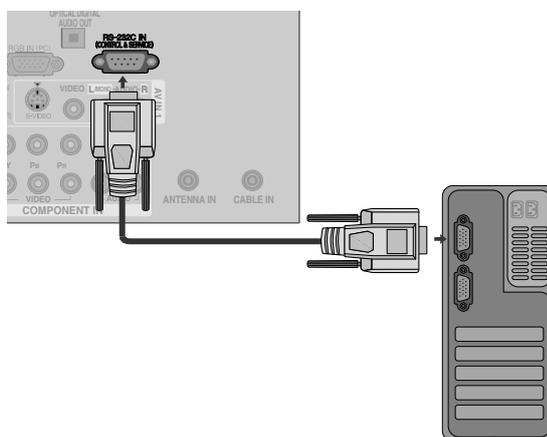

連接器類型； D-Sub 9-Pin 插入式配件

號碼	Pin 名稱
1	沒有連接
2	RXD (接收數據)
3	TXD (傳送數據)
4	DTR (DTE 方預備好)
5	GND
6	DSR (DCE 方預備好)
7	RTS (預備發送)
8	CTS (清晰發送)
9	沒有連接

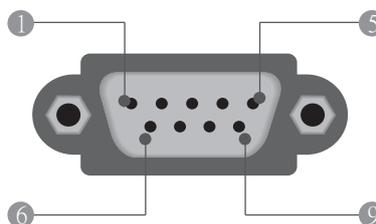

RS-232C 配置

電線配置 (標準 RS-232C 纜線)

	電腦	TV	
RXD	2	3	TXD
TXD	3	2	RXD
GND	5	5	GND
DTR	4	6	DSR
DSR	6	4	DTR
RTS	7	8	CTS
CTS	8	7	RTS
	D-Sub 9	D-Sub 9	

3電線配置(不標準)


	電腦	TV	
RXD	2	3	TXD
TXD	3	2	RXD
GND	5	5	GND
DTR	4	6	DTR
DSR	6	4	DSR
RTS	7	7	RTS
CTS	8	8	CTS
	D-Sub 9	D-Sub 9	

附錄

ID 設定

使用此功能特定設定 ID 號碼。
參閱「實際數據地圖」。▶ 第 143 頁



1.   選擇特殊功能。
2.   選擇 ID 設定。
3.   調節設定識別以選擇需要的電視 ID 設定。
設定 ID 的調校範圍為 1~99。

- 按重新設定按鈕以移至上一個功能表的畫面。

通訊參數

- 傳輸速率：9600 bps (UART)
- 數據長度：8 位元
- 同等：沒有
- 停止位元：1 位元
- 通訊代碼：ASCII 代碼
- 使用相反(反向) 纜線。

指令參考清單

	指令1	指令2	數據 (十六進位的)
01. 電源	k	a	00 ~ 01
02. 畫面比例	k	c	參閱第 140 頁
03. 螢幕靜音	k	d	參閱第 140 頁
04. 音量靜音	k	e	00 ~ 01
05. 音量控制	k	f	00 ~ 64
06. 對比度	k	g	00 ~ 64
07. 亮度	k	h	00 ~ 64
08. 色彩	k	i	00 ~ 64
09. 色調	k	j	00 ~ 64
10. 銳利度	k	k	00 ~ 64
11. OSD 選擇	k	l	00 ~ 01
12. 遙控鎖定模式	k	m	00 ~ 01
13. 高音	k	r	00 ~ 64
14. 低音	k	s	00 ~ 64
15. 平衡	k	t	00 ~ 64
16. 色溫	k	u	00 ~ 02
17. 節能模式	j	q	參閱第 142 頁
18. 自動畫面調整	j	u	01
19. 轉換指令	m	a	參閱第 142 頁
20. 頻道新增/跳過	m	b	00 ~ 01
21. 按鍵	m	c	按鍵編碼
22. 控制背光	m	g	00 ~ 64
23. 輸入選擇 (主要)	x	b	參閱第 143 頁

- * 當設定 17 ~ 23 時，功能表不會在螢幕出現。
- * 注意：在 USB 運作時，例如 Dvix 或 EMF，將不能執行所有指令，(Power(ka) 及 Key(mc) 除外)並會視為 NG。

傳輸/接收守則

傳輸

[指令1][指令2][][ID 設定][][資料][Cr]

[指令1] : 控制電視的第一個指令。(j,k,m or x)

[指令2] : 控制電視的第二個指令。

[ID 設定] : 您可以在設定功能表中調較設定識別以選擇想要的電視識別碼。調整範圍為1~ 99。選擇ID 設定「0」時，均控制每個電視的連接。ID 設定在功能表以數字(1~99)顯示及在傳輸/接收守則以十六進位的數值顯示(0x0~ 0x63)。

[資料] : 傳送指令數據。傳送「FF」數據以讀擇指令狀況。

[Cr] : 歸位
ASCII 編碼 「0x0D」

[] : ASCII 編碼 「空格(0x20)」

確定確認

[指令2][][ID 設定][][確定][資料][x]

- * 接收正常數據時，電視會根據此格式傳送 ACK (確認)。同時，如果數據為讀擇模式，會顯示現時狀態數據。如果數據為書寫模式，則會返回至電腦的數據。

錯誤確認

[指令2][][ID 設定][][NG][資料][x]

- * 從不能運作的功能或通訊錯誤接收不正常數據時，電視會根據此格式傳送 ACK (確認)。

數據 00 : 通法程式碼

附錄

01. 電源 (指令: k a)

- ▶ 控制電視的電源開/關。

傳輸

[k][a][][ID 設定][][資料][Cr]

數據 00 : 電源關閉 數據 01 : 電源開啓

確認

[a][][ID 設定][][確定/NG][資料][x]

- ▶ 顯示電源開啓/關閉。

傳輸

[k][a][][ID 設定][][FF][Cr]

確認

[a][][ID 設定][][確定/NG][資料][x]

- * 在相似的情況下，若是其他功能傳送根據這個格式的「0xFF」資料，接收回應的資料會回饋每一個功能的現狀。
- * 開啓電視時，OK Ack、Error Ack 或其他訊息可能會顯示在螢幕上。

02. 畫面比例 (指令: k c) (主影像大小)

- ▶ 調較螢幕格式。(主影像格式)
您可使用**快速功能表**或**影像功能表**的畫面比例調校螢幕格式。

傳輸

[k][c][][ID 設定][][資料][Cr]

數據 01 : 正常螢幕(4:3) 07 : 14:9
02 : 闊螢幕(16:9) 09 : 點對點掃描
04 : 縮放 10~1f : 劇院縮放 1~15
06 : 原始比例

確認

[c][][ID 設定][][確定/NG][資料][x]

- * 使用 RGB-PC、Component 或 HDMI 輸入時，選項 16:9 或 4:3 螢幕的畫面比例。
- * 在 DTV/HDMI (1080i 50Hz/60Hz, 720p 50Hz/60Hz, 1080p 24Hz/30Hz/50Hz/60Hz), Component (720p, 1080i, 1080p 50Hz/60Hz) 模式，可以使用僅掃描。

03. 螢幕靜音 (指令: k d)

- ▶ 選項螢幕靜音開啓/關閉。

傳輸

[k][d][][ID 設定][][資料][Cr]

數據 00 : 螢幕靜音關閉(影像開啓)
螢幕靜音開啓(影像關閉)
00 : 影片靜音關閉
10 : 影片靜音開啓

確認

[d][][ID 設定][][確定/NG][資料][x]

- * 在影片靜音的情況下，電視會顯示螢幕顯示 (OSD)。

04. 音量靜音 (指令: k e)

- ▶ 選項音量靜音開啓/關閉。
- ▶ 您可以使用遙控器上的靜音按鈕調較靜音。

傳輸

[k][e][][ID 設定][][資料][Cr]

數據 00 : 音量靜音開啓(音量關閉)
01 : 音量靜音關閉(音量開啓)

確認

[e][][ID 設定][][確定/NG][資料][x]

05. 音量控制 (指令: k f)

- ▶ 調較螢幕音量。
您可以使用遙控器上的音量按鈕調較音量。

傳輸

[k][f][][ID 設定][][資料][Cr]

數據 最少: 00 ~ 最多: 64
參閱「實際數據地圖1」。詳見第 143 頁。

確認

[f][][ID 設定][][確定/NG][資料][x]

06. 對比度 (指令: k g)

- ▶ 調較螢幕對比度。
您也可以在影像功能表中調較對比度。

傳輸

[k][g][][ID 設定][][資料][Cr]

數據 最少: 00 ~ 最多: 64
參閱「實際數據地圖1」。詳見第 143 頁。

確認

[g][][ID 設定][][確定/NG][資料][x]

07. 亮度 (指令: k h)

- ▶ 調較螢幕亮度。
您也可以在影像功能表中調較亮度。

傳輸

[k][h][][ID 設定][][資料][Cr]

數據 最少: 00 ~ 最多: 64
參閱「實際數據地圖1」。詳見第 143 頁。

確認

[h][][ID 設定][][確定/NG][資料][x]

08. 色彩 (指令: k i)

- ▶ 調較螢幕色彩。
您也可以在影像功能表中調較色彩。

傳輸

[k][i][][ID 設定][][資料][Cr]

數據 最少: 00 ~ 最多: 64
參閱「實際數據地圖1」。詳見第 143 頁。

確認

[i][][ID 設定][][確定/NG][資料][x]

09. 色調 (指令: k j)

- ▶ 調較螢幕色調。
您也可以在影像功能表中調較色調。

傳輸

[k][j][][ID 設定][][資料][Cr]

數據 最少：00 ~ 最多：64
參閱「實際數據地圖1」。詳見第 143 頁。
確認

[j][][ID 設定][][確定/NG][資料][x]

10. 銳利度 (指令: k k)

- ▶ 調較螢幕銳利度。
您也可以在影像功能表中調較銳利度。

傳輸

[k][k][][ID 設定][][資料][Cr]

數據 最少：00 ~ 最多：64
參閱「實際數據地圖1」。詳見第 143 頁。
確認

[k][][ID 設定][][確定/NG][資料][x]

11. OSD 选项 (指令: k l)

- ▶ 搖距控制時，选项螢幕顯示(OSD)開啓/關閉。

傳輸

[k][l][][ID 設定][][資料][Cr]

數據 00：OSD 關閉 01：OSD 開啓
確認

[l][][ID 設定][][確定/NG][資料][x]

12. 遙控鎖定模式 (指令: k m)

- ▶ 鎖定電視機前面板的控制及遙控器。

傳輸

[k][m][][ID 設定][][資料][Cr]

數據 00：鎖定關閉 01：鎖定開啓
確認

[m][][ID 設定][][確定/NG][資料][x]

- * 若是您沒有正在使用遙控器與電視機前面板控制項，請使用這個模式。
當主電源開./關時，即會將遙控器開鎖。
- * 本機電源鍵正常運作。

13. 高音 (指令: k r)

- ▶ 調較高音。
您也可以在聲音功能表中調較平衡。

傳輸

[k][r][][ID 設定][][資料][Cr]

數據 最少：00 ~ 最多：64
參閱「實際數據地圖1」。詳見第 143 頁。

確認

[r][][ID 設定][][確定/NG][資料][x]

14. 低音 (指令: k s)

- ▶ 調較低音。
您也可以在聲音功能表中調較平衡。

傳輸

[k][s][][ID 設定][][資料][Cr]

數據 最少：00 ~ 最多：64
參閱「實際數據地圖1」。詳見第 143 頁。

確認

[s][][ID 設定][][確定/NG][資料][x]

15. 平衡 (指令: k t)

- ▶ 調較螢幕平衡。
您也可以在聲音功能表中調較平衡。

傳輸

[k][t][][ID 設定][][資料][Cr]

數據 最少：00 ~ 最多：64
參閱「實際數據地圖1」。詳見第 143 頁。

確認

[t][][ID 設定][][確定/NG][資料][x]

16. 色溫 (指令: k u)

- ▶ 調較螢幕色溫。
您也可以在影像功能表中調較色溫。

傳輸

[k][u][][ID 設定][][資料][Cr]

數據 00：正常 01：冷色系 02：暖色系

確認

[u][][ID 設定][][確定/NG][資料][x]

附錄

17. 節能模式 (指令: j q)

- ▶ 減少電視所消耗的電源。您可以在選項功能表中調整能源節約。

傳輸

[j][q][][ID 設定][][資料][Cr]

省電功能				級別	描述
7	6	5	4		
0	0	0	0	省電	關閉
0	0	0	0	省電	最小節能
0	0	0	0	省電	最小節能
0	0	0	0	省電	最大節能
0	0	0	0	省電	自動節能
0	0	0	0	省電	視訊關閉

(22/26LU5***, 32/37/42LH2*** 除外)

確認

[q][][ID 設定][][確定/NG][資料][x]

18. 自動配置 (指令: j u)

- ▶ 自動調較影像位置，盡量減少影像晃動。只能在 RGB(PC) 模式下使用。

傳輸

[j][u][][ID 設定][][資料][Cr]

數據 01: 設定

確認

[u][][ID 設定][][確定/NG][資料][x]

19. 轉換指令 (指令: m a)

- ▶ 選擇頻道以跟隨實際編號

傳輸

[m][a][][ID 設定][][資料0][][資料1][][資料2][Cr]

數據 00: 高頻道數據

數據 01: 低頻道數據

ex. No. 47 -> 00 2F (2FH)
No. 394 -> 01 8A (18AH),
DTV No. 0 -> 無須理會

數據 02 0x00: 類比主要
0x10: DTV 主要
0x20: 電台主要
0x80: CATV 主要

頻道數據範圍

類比 - 最少: 00 ~ 最多: 63 (0~99)
數位 - 最少: 00 ~ 最多: 3E7 (0~999)

確認

[a][][ID 設定][][確定/NG][資料][x]

數據 最少: 00 ~ 最多: 7DH

20. 節目新增/略過頻道 (指令: m b)

- ▶ 設定目前頻道的掠過狀態。

傳輸

[m][b][][ID 設定][][資料][Cr]

數據 00: 略過頻道 01: 新增

確認

[b][][ID 設定][][確定/NG][資料][x]

21. 按鍵 (指令: m c)

- ▶ 要發送 IR 遙控鍵編碼。

傳輸

[m][c][][ID 設定][][資料][Cr]

數據 00: 按鍵編碼 - 參閱第 136 頁。

確認

[c][][ID 設定][][確定/NG][資料][x]

22. 控制背光 (指令: m g)

控制背光。

傳輸

[m][g][][ID 設定][][資料][Cr]

數據 最少: 00 ~ 最多: 64

確認

[g][][ID 設定][][確定/NG][資料][x]


23. 輸入选项 (指令: x b)
(主圖像輸入)

▶ 若要选项電視的輸入源

傳輸

[x][b][][ID 設定][][資料][Cr]

數據：結構

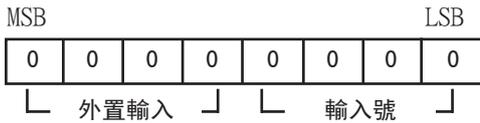

外置輸入				數據
0	0	0	0	DTV
0	0	0	1	類比
0	0	1	0	AV
0	1	0	0	色差
0	1	1	0	RGB
1	0	0	1	HDMI

輸入號				數據
0	0	0	0	輸入1
0	0	0	1	輸入2
0	0	1	0	輸入3
0	0	1	1	輸入4

確認

[b][][ID 設定][][確定/NG][資料][x]

* 詳細：CATV(0001 0001)

* 實際數據地圖 1

00:	步驟 0
⋮	
A :	步驟 10 (ID 設定 10)
⋮	
F :	步驟 15 (ID 設定 15)
10:	步驟 16 (ID 設定 16)
⋮	
64:	步驟 100
⋮	
6E:	步驟 110
⋮	
73:	步驟 115
74:	步驟 116
⋮	
C7:	步驟 199
⋮	
FE:	步驟 254
FF:	步驟 255

* 實際數據地圖 2

00:	-40
01:	-39
02:	-38
⋮	
28:	0
⋮	
4E:	+38
4F:	+39
50:	+40

附錄

開啟來源軟件通知

以下執行的 GPL及本產品使用的 LGPL/MPL 庫受限於 GPL2.0/LGPL2.1/MPL1.1 牌照協定：

執行的 GPL：

- Linux kernel 2.6
- busybox
- lzo

LGPL 庫：

- uClibc

MPL 庫：

- Nanox

LG Electronics 在您的 CD-ROM 上提供來源編碼，並收取費用以支付成本，如分發、媒體費、裝運費以及處理發送電郵要求至 opensource@lge.com 予 LG Electronics 的費用。opensource@lge.com 此優惠從本產品由 LG Electronics 發貨日起的 3 年內有效。

您可以從 <http://www.gnu.org/licenses/old-licenses/gpl-2.0.html>, <http://www.gnu.org/licenses/old-licenses/lgpl-2.1.html>, <http://www.mozilla.org/MPL/MPL-1.1.html> 取得GPL、LGPL 及 MPL 的牌照副本。

您可以從 <http://www.gnu.org/licenses/old-licenses/gpl-2.0-translations.html>, <http://www.gnu.org/licenses/old-licenses/lgpl-2.1-translations.html> 取得GPL 及 LGPL 的牌照副本。

此軟件是根據獨立的 JPEG Group copyright © 1991-1998, Thomas G. Lane 工作的。

本產品包括

- libpng library : copyright © 2004 Glenn Randers-Pehrson
- Zlib compression library: Copyright © 1995-2002 Jean-loup Gailly 及 Mark Adler.
- Tinyxml library : copyright (c) 2000-2006 Lee Thomason

OPEN SOURCE LICENSE

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

附錄

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

附錄

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the program's name and a brief idea of what it does.>  
Copyright (C) <year> <name of author>
```

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author Gnomovision comes with ABSOLUTELY NO  
WARRANTY; for details type `show w'. This is free software, and you are welcome to redistribute it under certain  
conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program `Gnomovision' (which makes passes at com-  
pilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989  
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

GNU LESSER GENERAL PUBLIC LICENSE

Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc. 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts as the successor of the GNU Library Public License, version 2, hence the version number 2.1.]

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public Licenses are intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some specially designated software packages--typically libraries--of the Free Software Foundation and other authors who decide to use it. You can use it too, but we suggest you first think carefully about whether this license or the ordinary General Public License is the better strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish); that you receive source code or can get it if you want it; that you can change the software and use pieces of it in new free programs; and that you are informed that you can do these things.

To protect your rights, we need to make restrictions that forbid distributors to deny you these rights or to ask you to surrender these rights. These restrictions translate to certain responsibilities for you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis or for a fee, you must give the recipients all the rights that we gave you. You must make sure that they, too, receive or can get the source code. If you link other code with the library, you must provide complete object files to the recipients, so that they can relink them with the library after making changes to the library and recompiling it. And you must show them these terms so they know their rights.

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

附錄

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

附錄

- c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.
- d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.
- e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

- a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.
- b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library 'Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

MOZILLA PUBLIC LICENSE
Version 1.1

1. Definitions.

- 1.0.1. "Commercial Use" means distribution or otherwise making the Covered Code available to a third party.
- 1.1. "Contributor" means each entity that creates or contributes to the creation of Modifications.
- 1.2. "Contributor Version" means the combination of the Original Code, prior Modifications used by a Contributor, and the Modifications made by that particular Contributor.
- 1.3. "Covered Code" means the Original Code or Modifications or the combination of the Original Code and Modifications, in each case including portions thereof.
- 1.4. "Electronic Distribution Mechanism" means a mechanism generally accepted in the software development community for the electronic transfer of data.
- 1.5. "Executable" means Covered Code in any form other than Source Code.
- 1.6. "Initial Developer" means the individual or entity identified as the Initial Developer in the Source Code notice required by Exhibit A.
- 1.7. "Larger Work" means a work which combines Covered Code or portions thereof with code not governed by the terms of this License.
- 1.8. "License" means this document.
 - 1.8.1. "Licensable" means having the right to grant, to the maximum extent possible, whether at the time of the initial grant or subsequently acquired, any and all of the rights conveyed herein.
- 1.9. "Modifications" means any addition to or deletion from the substance or structure of either the Original Code or any previous Modifications. When Covered Code is released as a series of files, a Modification is:
 - A. Any addition to or deletion from the contents of a file containing Original Code or previous Modifications.
 - B. Any new file that contains any part of the Original Code or previous Modifications.
- 1.10. "Original Code" means Source Code of computer software code which is described in the Source Code notice required by Exhibit A as Original Code, and which, at the time of its release under this License is not already Covered Code governed by this License.
 - 1.10.1. "Patent Claims" means any patent claim(s), now owned or hereafter acquired, including without limitation, method, process, and apparatus claims, in any patent Licensable by grantor.
- 1.11. "Source Code" means the preferred form of the Covered Code for making modifications to it, including all modules it contains, plus any associated interface definition files, scripts used to control compilation and installation of an Executable, or source code differential comparisons against either the Original Code or another well known, available Covered Code of the Contributor's choice. The Source Code can be in a compressed or archival form, provided the appropriate decompression or de-archiving software is widely available for no charge.
- 1.12. "You" (or "Your") means an individual or a legal entity exercising rights under, and complying with all of the terms of, this License or a future version of this License issued under Section 6.1. For legal entities, "You" includes any entity which controls, is controlled by, or is under common control with You. For purposes of this definition, "control" means (a) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (b) ownership of more than fifty percent (50%) of the outstanding shares or beneficial ownership of such entity.

2. Source Code License.

2.1. The Initial Developer Grant.

The Initial Developer hereby grants You a world-wide, royalty-free, non-exclusive license, subject to third party intellectual property claims:

- (a) under intellectual property rights (other than patent or trademark) Licensable by Initial Developer to use, reproduce, modify, display, perform, sublicense and distribute the Original Code (or portions thereof) with or without Modifications, and/or as part of a Larger Work; and

(b) under Patents Claims infringed by the making, using or selling of Original Code, to make, have made, use, practice, sell, and offer for sale, and/or otherwise dispose of the Original Code (or portions thereof).

(c) the licenses granted in this Section 2.1(a) and (b) are effective on the date Initial Developer first distributes Original Code under the terms of this License.

(d) Notwithstanding Section 2.1(b) above, no patent license is granted: 1) for code that You delete from the Original Code; 2) separate from the Original Code; or 3) for infringements caused by: i) the modification of the Original Code or ii) the combination of the Original Code with other software or devices.

2.2. Contributor Grant.

Subject to third party intellectual property claims, each Contributor hereby grants You a world-wide, royalty-free, non-exclusive license

(a) under intellectual property rights (other than patent or trademark) Licensable by Contributor, to use, reproduce, modify, display, perform, sublicense and distribute the Modifications created by such Contributor (or portions thereof) either on an unmodified basis, with other Modifications, as Covered Code and/or as part of a Larger Work; and

(b) under Patent Claims infringed by the making, using, or selling of Modifications made by that Contributor either alone and/or in combination with its Contributor Version (or portions of such combination), to make, use, sell, offer for sale, have made, and/or otherwise dispose of: 1) Modifications made by that Contributor (or portions thereof); and 2) the combination of Modifications made by that Contributor with its Contributor Version (or portions of such combination).

(c) the licenses granted in Sections 2.2(a) and 2.2(b) are effective on the date Contributor first makes Commercial Use of the Covered Code.

(d) Notwithstanding Section 2.2(b) above, no patent license is granted: 1) for any code that Contributor has deleted from the Contributor Version; 2) separate from the Contributor Version; 3) for infringements caused by: i) third party modifications of Contributor Version or ii) the combination of Modifications made by that Contributor with other software (except as part of the Contributor Version) or other devices; or 4) under Patent Claims infringed by Covered Code in the absence of Modifications made by that Contributor.

3. Distribution Obligations.

3.1. Application of License.

The Modifications which You create or to which You contribute are governed by the terms of this License, including without limitation Section 2.2. The Source Code version of Covered Code may be distributed only under the terms of this License or a future version of this License released under Section 6.1, and You must include a copy of this License with every copy of the Source Code You distribute. You may not offer or impose any terms on any Source Code version that alters or restricts the applicable version of this License or the recipients' rights hereunder. However, You may include an additional document offering the additional rights described in Section 3.5.

3.2. Availability of Source Code.

Any Modification which You create or to which You contribute must be made available in Source Code form under the terms of this License either on the same media as an Executable version or via an accepted Electronic Distribution Mechanism to anyone to whom you made an Executable version available; and if made available via Electronic Distribution Mechanism, must remain available for at least twelve (12) months after the date it initially became available, or at least six (6) months after a subsequent version of that particular Modification has been made available to such recipients. You are responsible for ensuring that the Source Code version remains available even if the Electronic Distribution Mechanism is maintained by a third party.

3.3. Description of Modifications.

You must cause all Covered Code to which You contribute to contain a file documenting the changes You made to create that Covered Code and the date of any change. You must include a prominent statement that the Modification is derived, directly or indirectly, from Original Code provided by the Initial Developer and including the name of the Initial Developer in (a) the Source Code, and (b) in any notice in an Executable version or related documentation in which You describe the origin or ownership of the Covered Code.

3.4. Intellectual Property Matters

(a) Third Party Claims.

If Contributor has knowledge that a license under a third party's intellectual property rights is required to exercise the rights granted by such Contributor under Sections 2.1 or 2.2, Contributor must include a text file with the Source Code distribution titled "LEGAL" which describes the claim and the party making the claim in sufficient detail that a recipient will know whom to contact. If Contributor obtains such knowledge after the Modification is made available as described in Section 3.2, Contributor shall promptly modify the LEGAL file in all copies Contributor makes available thereafter and shall take other steps (such as notifying appropriate mailing lists or newsgroups) reasonably calculated to inform those who received the Covered Code that new knowledge has been obtained.

附錄

(b) Contributor APIs.

If Contributor's Modifications include an application programming interface and Contributor has knowledge of patent licenses which are reasonably necessary to implement that API, Contributor must also include this information in the LEGAL file.

(c) Representations.

Contributor represents that, except as disclosed pursuant to Section 3.4(a) above, Contributor believes that Contributor's Modifications are Contributor's original creation(s) and/or Contributor has sufficient rights to grant the rights conveyed by this License.

3.5. Required Notices.

You must duplicate the notice in Exhibit A in each file of the Source Code. If it is not possible to put such notice in a particular Source Code file due to its structure, then You must include such notice in a location (such as a relevant directory) where a user would be likely to look for such a notice. If You created one or more Modification(s) You may add your name as a Contributor to the notice described in Exhibit A. You must also duplicate this License in any documentation for the Source Code where You describe recipients' rights or ownership rights relating to Covered Code. You may choose to offer, and to charge a fee for, warranty, support, indemnity or liability obligations to one or more recipients of Covered Code. However, You may do so only on Your own behalf, and not on behalf of the Initial

Developer or any Contributor. You must make it absolutely clear than any such warranty, support, indemnity or liability obligation is offered by You alone, and You hereby agree to indemnify the Initial Developer and every Contributor for any liability incurred by the Initial Developer or such Contributor as a result of warranty, support, indemnity or liability terms You offer.

3.6. Distribution of Executable Versions.

You may distribute Covered Code in Executable form only if the requirements of Section 3.1-3.5 have been met for that Covered Code, and if You include a notice stating that the Source Code version of the Covered Code is available under the terms of this License, including a description of how and where You have fulfilled the obligations of Section 3.2. The notice must be conspicuously included in any notice in an Executable version, related documentation or collateral in which You describe recipients' rights relating to the Covered Code. You may distribute the Executable version of Covered Code or ownership rights under a license of Your choice, which may contain terms different from this License, provided that You are in compliance with the terms of this License and that the license for the Executable version does not attempt to limit or alter the recipient's rights in the Source Code version from the rights set forth in this

License. If You distribute the Executable version under a different license You must make it absolutely clear that any terms which differ from this License are offered by You alone, not by the Initial Developer or any Contributor. You hereby agree to indemnify the Initial Developer and every Contributor for any liability incurred by the Initial Developer or such Contributor as a result of any such terms You offer.

3.7. Larger Works.

You may create a Larger Work by combining Covered Code with other code not governed by the terms of this License and distribute the Larger Work as a single product. In such a case, You must make sure the requirements of this License are fulfilled for the Covered Code.

4. Inability to Comply Due to Statute or Regulation.

If it is impossible for You to comply with any of the terms of this License with respect to some or all of the Covered Code due to statute, judicial order, or regulation then You must: (a) comply with the terms of this License to the maximum extent possible; and (b) describe the limitations and the code they affect. Such description must be included in the LEGAL file described in Section 3.4 and must be included with all distributions of the Source Code. Except to the extent prohibited by statute or regulation, such description must be sufficiently detailed for a recipient of ordinary skill to be able to understand it.

5. Application of this License.

This License applies to code to which the Initial Developer has attached the notice in Exhibit A and to related Covered Code.

6. Versions of the License.

6.1. New Versions.

Netscape Communications Corporation ("Netscape") may publish revised and/or new versions of the License from time to time. Each version will be given a distinguishing version number.

6.2. Effect of New Versions.

Once Covered Code has been published under a particular version of the License, You may always continue to use it under the terms of that version. You may also choose to use such Covered Code under the terms of any subsequent version of the License published by Netscape. No one other than Netscape has the right to modify the terms applicable to Covered Code created under this License.

6.3. Derivative Works.

If You create or use a modified version of this License (which you may only do in order to apply it to code which is not already Covered Code governed by this License), You must (a) rename Your license so that the phrases "Mozilla", "MOZILLAPL", "MOZPL", "Netscape", "MPL", "NPL" or any confusingly similar phrase do not appear in your license (except to note that your license differs from this License) and (b) otherwise make it clear that Your version of the license contains terms which differ from the Mozilla Public License and Netscape Public License. (Filling in the name of the Initial Developer, Original Code or Contributor in the notice described in Exhibit A shall not of themselves be deemed to be modifications of this License.)

7. DISCLAIMER OF WARRANTY.

COVERED CODE IS PROVIDED UNDER THIS LICENSE ON AN "AS IS" BASIS, WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, WARRANTIES THAT THE COVERED CODE IS FREE OF DEFECTS, MERCHANTABILITY, FIT FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE COVERED CODE IS WITH YOU. SHOULD ANY COVERED CODE PROVE DEFECTIVE IN ANY RESPECT, YOU (NOT THE INITIAL DEVELOPER OR ANY OTHER CONTRIBUTOR) ASSUME THE COST OF ANY NECESSARY SERVICING, REPAIR OR CORRECTION. THIS DISCLAIMER OF WARRANTY CONSTITUTES AN ESSENTIAL PART OF THIS LICENSE. NO USE OF ANY COVERED CODE IS AUTHORIZED HEREUNDER EXCEPT UNDER THIS DISCLAIMER.

8. TERMINATION.

8.1. This License and the rights granted hereunder will terminate automatically if You fail to comply with terms herein and fail to cure such breach within 30 days of becoming aware of the breach. All sublicenses to the Covered Code which are properly granted shall survive any termination of this License. Provisions which, by their nature, must remain in effect beyond the termination of this License shall survive.

8.2. If You initiate litigation by asserting a patent infringement claim (excluding declaratory judgment actions) against Initial Developer or a Contributor (the Initial Developer or Contributor against whom You file such action is referred to as "Participant") alleging that:

(a) such Participant's Contributor Version directly or indirectly infringes any patent, then any and all rights granted by such Participant to You under Sections 2.1 and/or 2.2 of this License shall, upon 60 days notice from Participant terminate prospectively, unless if within 60 days after receipt of notice You either: (i) agree in writing to pay Participant a mutually agreeable reasonable royalty for Your past and future use of Modifications made by such Participant, or (ii) withdraw Your litigation claim with respect to the Contributor Version against such Participant. If within 60 days of notice, a reasonable royalty and payment arrangement are not mutually agreed upon in writing by the parties or the litigation claim is not withdrawn, the rights granted by Participant to You under Sections 2.1 and/or 2.2 automatically terminate at the expiration of the 60 day notice period specified above.

(b) any software, hardware, or device, other than such Participant's Contributor Version, directly or indirectly infringes any patent, then any rights granted to You by such Participant under Sections 2.1(b) and 2.2(b) are revoked effective as of the date You first made, used, sold, distributed, or had made, Modifications made by that Participant.

8.3. If You assert a patent infringement claim against Participant alleging that such Participant's Contributor Version directly or indirectly infringes any patent where such claim is resolved (such as by license or settlement) prior to the initiation of patent infringement litigation, then the reasonable value of the licenses granted by such Participant under Sections 2.1 or 2.2 shall be taken into account in determining the amount or value of any payment or license.

8.4. In the event of termination under Sections 8.1 or 8.2 above, all end user license agreements (excluding distributors and resellers) which have been validly granted by You or any distributor hereunder prior to termination shall survive termination.

9. LIMITATION OF LIABILITY.

UNDER NO CIRCUMSTANCES AND UNDER NO LEGAL THEORY, WHETHER TORT (INCLUDING NEGLIGENCE), CONTRACT, OR OTHERWISE, SHALL YOU, THE INITIAL DEVELOPER, ANY OTHER CONTRIBUTOR, OR ANY DISTRIBUTOR OF COVERED CODE, OR ANY SUPPLIER OF ANY OF SUCH PARTIES, BE LIABLE TO ANY PERSON FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES OF ANY CHARACTER INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF GOODWILL, WORK STOPPAGE, COMPUTER FAILURE OR MALFUNCTION, OR ANY AND ALL OTHER COMMERCIAL DAMAGES OR LOSSES, EVEN IF SUCH PARTY SHALL HAVE BEEN INFORMED OF THE POSSIBILITY OF SUCH DAMAGES. THIS LIMITATION OF LIABILITY SHALL NOT APPLY TO LIABILITY FOR DEATH OR PERSONAL INJURY RESULTING FROM SUCH PARTY'S NEGLIGENCE TO THE EXTENT APPLICABLE LAW PROHIBITS SUCH LIMITATION. SOME JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THIS EXCLUSION AND LIMITATION MAY NOT APPLY TO YOU.

附錄

10. U.S. GOVERNMENT END USERS.

The Covered Code is a "commercial item," as that term is defined in 48 C.F.R. 2.101 (Oct. 1995), consisting of "commercial computer software" and "commercial computer software documentation," as such terms are used in 48 C.F.R. 12.212 (Sept. 1995). Consistent with 48 C.F.R. 12.212 and 48 C.F.R. 227.7202-1 through 227.7202-4 (June 1995), all U.S. Government End Users acquire Covered Code with only those rights set forth herein.

11. MISCELLANEOUS.

This License represents the complete agreement concerning subject matter hereof. If any provision of this License is held to be unenforceable, such provision shall be reformed only to the extent necessary to make it enforceable. This License shall be governed by California law provisions (except to the extent applicable law, if any, provides otherwise), excluding its conflict-of-law provisions. With respect to disputes in which at least one party is a citizen of, or an entity chartered or registered to do business in the United States of America, any litigation relating to this License shall be subject to the jurisdiction of the Federal Courts of the Northern District of California, with venue lying in Santa Clara County, California, with the losing party responsible for costs, including without limitation, court costs and reasonable attorneys' fees and expenses. The application of the United Nations Convention on Contracts for the International Sale of Goods is expressly excluded. Any law or regulation which provides that the language of a contract shall be construed against the drafter shall not apply to this License.

12. RESPONSIBILITY FOR CLAIMS.

As between Initial Developer and the Contributors, each party is responsible for claims and damages arising, directly or indirectly, out of its utilization of rights under this License and You agree to work with Initial Developer and Contributors to distribute such responsibility on an equitable basis. Nothing herein is intended or shall be deemed to constitute any admission of liability.

13. MULTIPLE-LICENSED CODE.

Initial Developer may designate portions of the Covered Code as "Multiple-Licensed". "Multiple-Licensed" means that the Initial Developer permits you to utilize portions of the Covered Code under Your choice of the NPL or the alternative licenses, if any, specified by the Initial Developer in the file described in Exhibit A.

EXHIBIT A -Mozilla Public License.

"The contents of this file are subject to the Mozilla Public License Version 1.1 (the "License"); you may not use this file except in compliance with the License. You may obtain a copy of the License at <http://www.mozilla.org/MPL/>

Software distributed under the License is distributed on an "AS IS" basis, WITHOUT WARRANTY OF ANY KIND, either express or implied. See the License for the specific language governing rights and limitations under the License.

The Original Code is _____.

The Initial Developer of the Original Code is _____.

Portions created by _____ are Copyright (C) _____
_____. All Rights Reserved.

Contributor(s): _____.

Alternatively, the contents of this file may be used under the terms of the _____ license (the "[] License"), in which case the provisions of [] License are applicable instead of those above. If you wish to allow use of your version of this file only under the terms of the [] License and not to allow others to use your version of this file under the MPL, indicate your decision by deleting the provisions above and replace them with the notice and other provisions required by the [] License. If you do not delete the provisions above, a recipient may use your version of this file under either the MPL or the [] License."

[NOTE: The text of this Exhibit A may differ slightly from the text of the notices in the Source Code files of the Original Code. You should use the text of this Exhibit A rather than the text found in the Original Code Source Code for Your Modifications.]

LG Electronics Inc.