

Owner's Manual IPS LED MONITOR (LED MONITOR*)

*LG LED Monitors are LCD Monitors with LED Backlighting.

Please read this manual carefully before operating your set and retain it for future reference.

IPS LED MONITOR MODEL

22MP57A	23MP57A	24MP57D	27MP57HQ
22MP57D	23MP57D	24MP57HQ	27MP57VQ
22MP57HQ	23MP57H	24MP57VQ	27MP57HT
22MP57VQ	23MP57HQ		
	23MP57VQ		

CONTENTS

3 LICENSE

4 ASSEMBLING AND PREPAR-ING

- 4 Unpacking
- 6 Parts and buttons
- 7 How to Use the Joystick Button
- 8 Moving and Lifting the Monitor
- 9 Setting up the Monitor set
- 9 Attaching the Stand Base
- 9 Detaching the Stand Base
- 10 Mounting on a table
- 11 Using the cable holder
- 13 Mounting on a wall

14 USING THE MONITOR SET

- 14 Connecting to a PC
- 14 D-SUB connection
- 14 DVI-D connection
- 14 HDMI connection
- 15 Connecting to AV Devices
- 15 HDMI connection
- 16 Connecting to External Devices
- 16 Peripheral device connection

17 INSTALLING THE LG MONI-TOR SOFTWARE

- 17 Installing The Screen Split
- 19 Installing The LG Color Cloning

21 CUSTOMIZING SETTINGS

- 22 Customizing settings
- 22 Menu Settings
- 22 -Quick Settings
- 24 -Picture

- 26 -General
- 27 -Auto Configuration
- 28 -Reset
- 29 -Picture mode

30 TROUBLESHOOTING

32 SPECIFICATIONS

- 40 Preset Modes (Resolution)
- 40 Indicator

22MP57HQ|22MP57VQ| 23MP57H |23MP57HQ|23MP57VQ|24MP57HQ|24MP57VQ 27MP57HQ|27MP57VQ|27MP57HT

LICENSE

Each model has different licenses. Visit www.lg.com for more information on the license.



The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

The following content is only applied to the monitor which is sold in Europe market and which needs to meet the ErP Directive:


* This monitor is set to be turned off automatically in 4 hours after you turned on display if there is no adjustment to display.

* To make this setting be disabled, change the option to 'Off' in OSD menu of "Automatic Standby".

ASSEMBLING AND PREPARING

Unpacking

Check your product box for the following items. If there are any missing accessories, contact the local dealer where you purchased your product. The illustrations in this manual may differ from the actual product and accessories.

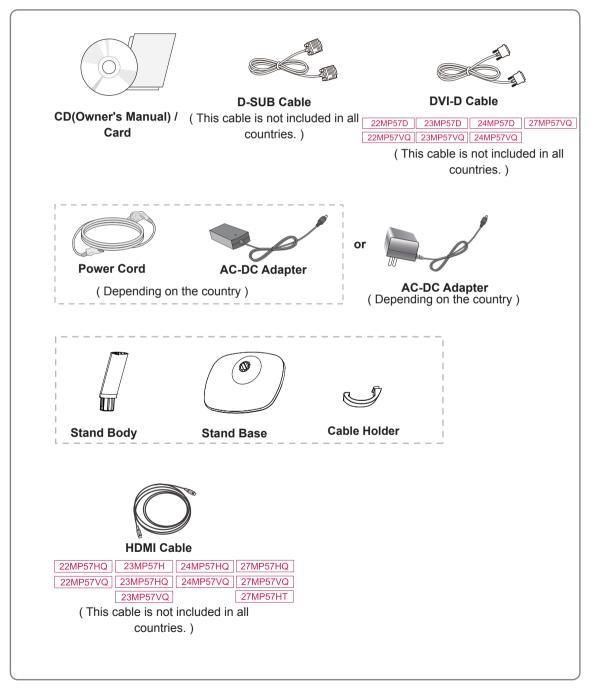


CAUTION -

- Do not use any unapproved accessories to ensure the safety and product life span.
- Any damages or injuries by using unapproved accessories are not covered by the warranty.

- The accessories supplied with your product may vary depending on the model.
- Product specifications or contents in this manual may be changed without prior notice due to upgrade of product functions.

Parts and buttons

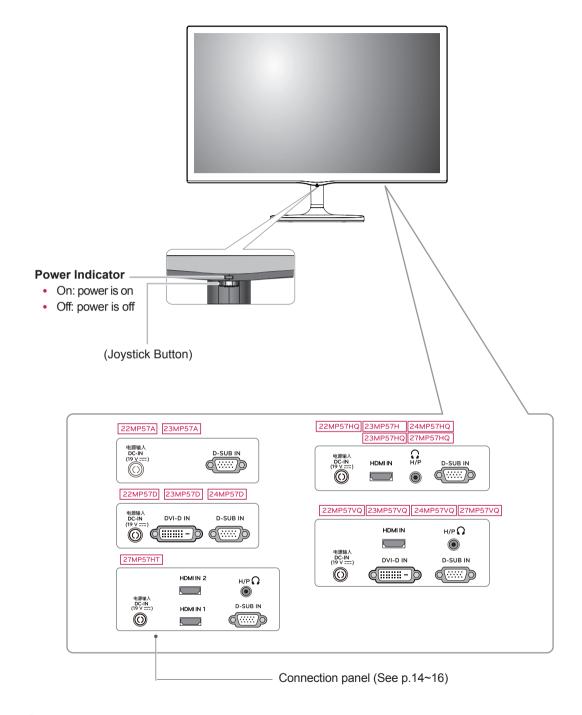

• The joystick button is located at the bottom of the monitor.

How to Use the Joystick Button

You can easily control the functions of the monitor by pressing the joystick button or moving it left/right with your finger.


Basic Functions

	<u>ل</u>	Power on	Press the joystick button once with your finger to turn on the monitor.
		Power off	Press and hold the joystick button once with your finger to turn off the monitor.
	◀/►	Volume Control	You can control the volume by moving the joystick button left/right.

Moving and Lifting the Monitor

When moving or lifting the monitor, follow these instructions to prevent the monitor from being scratched or damaged and to ensure safe transportation regardless of its shape or size.

- It is advisable to place the monitor in the original box or packing material before attempting to move it.
- Before moving or lifting the monitor, disconnect the power cord and all cables.
- Hold the top and bottom of the monitor frame firmly. Do not hold the panel itself.



• When holding the monitor, the screen should face away from you to prevent it being scratched.



- When moving the monitor, avoid any strong shock or vibrations to the product.
- When moving the monitor, keep it upright, never turn the monitor on its side or tilt it sideways.

 As far as possible, avoid touching the monitor screen. This may result in damage to the screen or some of the pixels used to create images.




Setting up the Monitor set

Attaching the Stand Base

1 Place the Monitor set with the screen side down on a flat and cushioned surface.


Lay a foam mat or soft protective cloth on the surface to protect the screen from damage.

- 2 1 Insert the Cable Holder.
 - 2 Attach the **Stand Body** to the monitor set.
 - 3 Attach the Stand Base to Stand Body.
 - **4** Tighten the screw to the right.



Detaching the Stand Base

- 1 Place the Monitor set with the screen side down on a flat and cushioned surface.
- 2 1 Turn the screw to the left.
 - **2** Pull out the **Stand Base**.
 - 3 Pull out the **Stand Body** from the monitor set.
 - Separate the Cable Holder.

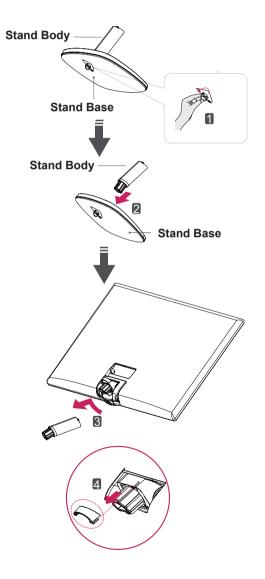


- Illustrations in this document represent typical procedures, so they may look different from the actual product.
- Do not carry the monitor upside down by just holding the stand base. This may cause the monitor to fall off the stand and could result in personal injury.
- When lifting or moving the monitor, do not touch the monitor screen. The force applied to the monitor screen may cause damage to it.
- If you use the monitor panel without the stand base, its joystick button may cause the moni-tor to become unstable and fall, resulting in damage to the monitor or human injury. In addition, this may cause the joystick button to malfunction.


Mounting on a table

1 Lift and tilt the Monitor set into its upright position on a table.


Leave a 100 mm (minimum) space from the wall for proper ventilation.



2 Connect the AC-DC Adapter and Power Cord to a wall outlet.



or




3 Press the joystick button on the bottom of the monitor to turn on the monitor.


CAUTION

Unplug the power cord before moving the Monitor to another location. Otherwise electric shock may occur.


Using the cable holder

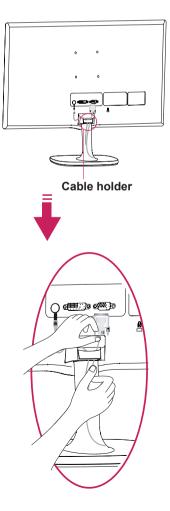


When you adjust the angle, do not hold the bottom of the Monitor set frame as shown on the following illustration, as may injure your fingers.



Do not touch or press the screen when adjusting the angle of the monitor.




Do not hold this set like below picture.Monitor screen can detach from stand base and injure your body.



		
22MP57A	23MP57A	24MP57D
22MP57D	23MP57D	24MP57HQ
22MP57HQ	23MP57H	24MP57VQ
22MP57VQ	23MP57HQ	
	23MP57VQ	


Tilt from +20 to -5 degrees up or down to adjust the angle of the Monitor set to suit your view.




Using the Kensington security system

The Kensington security system connector is located at the back of the Monitor set. For more information of installation and using, refer to the manual supplied with the Kensington security system or visit *http://www.kensington.com*.

Connect the Kensington security system cable between the Monitor set and a table.






The Kensington security system is optional. You can obtain it from most electronics stores.

Mounting on a wall

For proper ventilation, allow a clearance of 100 mm on each side and from the wall. Detailed instructions are available from your dealer, see the optional Tilt Wall Mounting Bracket Installation and Setup Guide.




If you intend to mount the Monitor set to a wall, attach Wall mounting interface (optional parts) to the back of the set.

When you install the Monitor set using a wall mounting interface (optional parts), attach it carefully so it will not drop.


- 1 If you use screw longer than standard, the monitor might be damaged internally.
- 2 If you use improper screw, the product might be damaged and drop from mounted position. In this case, LG Electronics is not responsible for it.

Model	22MP57A 23MP57A 24MP57D			
	22MP57D 23MP57D 24MP57HQ			
	22MP57HQ 23MP57H 24MP57VQ			
	22MP57VQ 23MP57HQ			
	27MP57HQ 23MP57VQ			
	27MP57VQ 27MP57HT			
Wall Mount (A x B)	75 x 75			
Standard screw	M4 x L10			
Number of screws	4			
Wall Mount	RW120			
Plate (Optional)				

• Wall Mount (A x B)



- Disconnect the power cord first, and then move or install the Monitor set. Otherwise electric shock may occur.
- If you install the Monitor set on a ceiling or slanted wall, it may fall and result in severe injury.
- Use only an authorized LG wall mount and contact the local dealer or qualified personnel.
- Do not over tighten the screws as this may cause damage to the Monitor set and void your warranty.
- Use only screws and wall mounts that meet the VESA standard. Any damages or injuries by misuse or using an improper accessory are not covered by the warranty.
- Screw length from outer surface of back cover should be under 8mm.



- Use the screws that are listed on the VESA standard screw specifications.
- The wall mount kit will include an installation manual and necessary parts.
- The wall mount bracket is optional. You can obtain additional accessories from your local dealer.
- The length of screws may differ depending on the wall mount. Be sure to use the proper length.
- For more information, refer to the instructions supplied with the wall mount.


USING THE MONITOR SET

Connecting to a PC

• Your Monitor set supports Plug & Play*. *Plug & Play: A PC recognizes a connected device that users connect to a PC and turn on, without device configuration or user intervention.


D-SUB connection

Transmits analog video from your PC to the Monitor set. Connect the PC and the Monitor set with the supplied D-sub 15 pin signal cable as shown in the following illustrations.

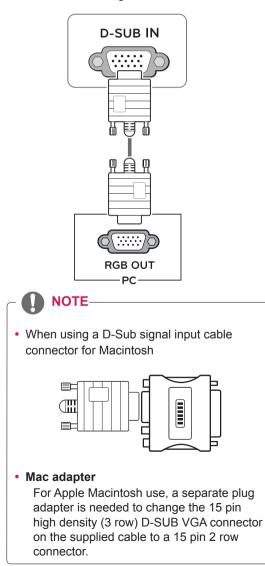


DVI-D connection

Transmits a digital video signal from your PC to the Monitor set. Connect the PC and the Monitor set with a DVI cable as shown in the following illustrations.



HDMI connection

Transmits the digital video and audio signals from your PC to the Monitor set. Connect the PC and the Monitor set with the HDMI cable as shown in the following illustrations.



- If you use HDMI PC, it can cause compatibility problem.
- Use a certified cable with the HDMI logo attached. If you do not use a certified HDMI cable, the screen may not display or a connection error may occur.
- Recommended HDMI cable types
- High-Speed HDMI[®]/[™] Cable
- High-Speed HDMI[®]/[™] Cable with Ethernet

- Connect the signal input cable and tighten it by turning the screws clockwise.
- Do not press the screen with your finger for a long time as this may result in temporary distortion on the screen.
- Avoid displaying a fixed image on the screen for a long period of time to prevent image burn. Use a screensaver if possible.


- When you want to use two PC in our Monitor, please connect the signal cable(D-SUB/ DVI-D/HDMI) respectively in Monitor set.
- If you turn the Monitor set on while it is cold, the screen may flicker. This is normal.
- Some red, green, or blue spots may appear on the screen. This is normal.

Connecting to AV Devices

HDMI connection

Transmits the digital video and audio signals from your AV devices to the monitor. Connect your AV device to the monitor with the HDMI cable as illustrated below.

22MP57HQ	23MP57H	24MP57HQ	27MP57HQ
22MP57VQ	23MP57HQ	24MP57VQ	27MP57VQ
	23MP57VQ		27MP57HT




- If you use HDMI PC, it can cause compatibility problem.
- Use a certified cable with the HDMI logo attached. If you do not use a certified HDMI cable, the screen may not display or a connection error may occur.
- Recommended HDMI cable types
- High-Speed HDMI[®]/[™] Cable
- High-Speed HDMI $^{\! \mathbb{B}/^{TM}}$ Cable with Ethernet

Connecting to External Devices


Peripheral device connection

Connect peripheral devices to the monitor using headphone ports.





- Peripheral devices are sold separately.
- Cables with angled plugs may have clearance issues, use straight plugs when possible.



 Headphones or speakers may not work normally, depending on the server PC settings.

INSTALLING THE LG MONITOR SOFTWARE

Installing The Screen Split

Insert the the owner's manual CD included in the product package into your PC's CD driver and install the Screen Split.

1 Set the default Web browser to Internet Explorer.



2 Click the "Screen Split " on the CD's main screen. When the file download window appears, click the Run button. (The file download window may vary depending on the operating system and the Internet Explorer version, but the installation procedures are same.)



• Service Pack 1 or higher is required for Windows 7 & Windows 8.


3 Follow the instructions to proceed with the installation.



4 Check "I accept the terms of the agreement" on the License Agreement screen and then click the [Next] button.



5 The Screen Split installation starts as shown below.



ΝΟΤΕ

 Screen Split: This program automatically splits the program window as desired.
 Monitor Selection only supported in extend display.

% This program supported Windows 7 & Windows 8.

6 When the installation is complete, restart your system.



If you run Screen Split, the Screen Split icon []] appears in the system tray at the right bottom of the PC screen.



Right-click the Screen Split icon and select a layout you want.



Installing The LG Color Cloning

Insert the the owner's manual CD included in the product package into your PC's CD driver and install the LG Color Cloning.

The installation screen images are for reference only. The actual installation screen images may vary de pending on the model.

1 Set the default Web browser to Internet Explorer.



2 Click the "LG Color Cloning" on the CD's main screen. When the file download window appears, click the Run button. (The file download window may vary depending on the operating system and the Internet Explorer version, but the installation procedures are same.)



- CAUTION
 CAUTION
 Service Pack 1 or higher is required for
 - Windows 7 & Windows 8.

3 Follow the instructions to proceed with the installation.



4 Check the I accept the terms of the agreement checkbox on the License Agreement screen and then click the Next button.




5 Click the install button.

#	LG C	olor Clon	ing - Install	Shield Wiza	ard	×
	to Install the Pr izard is ready to be		n.			と
Click I	install to begin the	installation.				
If you exit ti	want to review or	change any o	f your installatio	n settings, click	Back. Click C	Cancel to
ence						
InstallShiel	d		< Back	Taskal		Cancel
			< Back	Instal		Carricel

6 The LG Color Cloning starts the installation as shown below.



7 Click the complete button.



8 When the installation is complete, restart your system.





• LG Color Cloning: This program matches the color quality and brightness of two monitors using your Smartphone.

NOTE

 Double-click the LG Color Cloning icon on des-ktop to run LG Color Cloning Application.



- To use the LG Color Cloning function, you must execute both the "LG Color Cloning" Windows application and the "LG Color Cloning" android application at the same time.
- For details on supported Smartphones and graphic cards, see the LG Color Cloning help manual.

INSTALLING THE LG COLOR CLONING APPLI CATION (ANDROID)

- Open the playstore on your android phone.
 Search "LG Color Cloning" on the playstore.
- If you read the QR code on the first page of the on "LG Color Cloning" Windows Application, you can open the download page of the"LG Color Cloning" android application.
- For details, see the LG Color Cloning help manual ?
 - 3. Click "install" button.

When the installation of "LG Color Cloning" Android Application is complete, the LG Color Cloning icon appears on your "Application".

CUSTOMIZING SETTINGS Activating the Main Menu

- 1 Press the joystick button on the bottom of the monitor.
- 2 Move the joystick up/down $(\blacktriangle/\triangledown)$ and left/right($\triangleleft/\triangleright$) to set the options.

Menu Status

Main menu disabled

Main menu enabled

- Power Indicator Joystick Button
- 3 Press the joystick button once more to exit the main menu.


Button

R

Description					
Enables the main menu.					
Exits the main menu. (Holding down the button to turn off the monitor: You can turn off the monitor this way at any time, including when the OSD is on.)					
22MP57HQ 23MP57H 24MP57HQ 27MP57HQ 22MP57VQ 23MP57HQ 24MP57VQ 27MP57VQ 23MP57VQ 27MP57HT 23MP57HQ 27MP57HT Adjusts the monitor volume level. 22MP57A 23MP57D 24MP57D					
Enables the main menu.					
Enters the menu features.					

■ €",			the monitor this way at any time, including when the OSD is on.)
	•	Main menu disabled	22MP57HQ 23MP57H 24MP57HQ 27MP57HQ 22MP57VQ 23MP57HQ 24MP57VQ 27MP57VQ 23MP57VQ 27MP57HT 27MP57HT Adjusts the monitor volume level. 22MP57A 22MP57D 24MP57D Enables the main menu. 23MP57A 23MP57D 24MP57D
		Main menu enabled	Enters the menu features.
	Þ	Main menu disabled	22MP57HQ23MP57H24MP57HQ27MP57HQ22MP57VQ23MP57HQ24MP57VQ27MP57VQ23MP57VQ27MP57HT27MP57HTAdjusts the monitor volume level.22MP57A22MP57D23MP57A22MP57A22MP57D23MP57A23MP57D24MP57DEnables the main menu.
		Main menu enabled	22MP57D 23MP57D 24MP57D 27MP57HQ 22MP57HQ 23MP57H 24MP57HQ 27MP57VQ 22MP57VQ 23MP57HQ 24MP57VQ 27MP57HT 23MP57VQ 23MP57VQ 27MP57HT 23MP57VQ Operates the Input change. 23MP57A 23MP57A Operates the Auto function. 23MP57A 23MP57A
		Main menu disabled	Enables the main menu.
		Main menu enabled	Enters the picture mode feature.
F.S.		Main menu disabled	Enables the main menu.
E, L		Main menu enabled	Turns off the monitor.

Main Menu Features

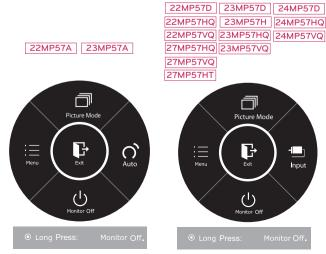


Main Menu	Description			
Menu Configures the screen settings.				
Picture Select picture mode to achieve the best display effect.				
Input	You can operate the change of input signals. • When two input signals over are connected and select the input menu, input signal(D-SUB/ DVI-D/HDMI) will be changed sequentially. • When only one signal is connected, it is auto- matically detected. The default setting is D-SUB.			
Auto	Press the Auto button to automatically ad- just your display image to the ideal setting. (Only supported in Analog Mode)			
Monitor Off Turns off the monitor.				
Exit	Exits the main menu.			

Customizing settings

Menu Settings

-Quick Settings

- 1 To view the **OSD menu**, press the **joystick button** at the bottom of the monitor and then enter the **Menu**.
- 2 Go to **Quick Settings > Brightness** by moving the joystick.
- 3 Configure the options following the instructions that appear in the bottom right corner.
- 4 To return to the upper menu or set other menu items, move the joystick to ◄ or pressing (● / OK) it.
- 5 If you want to exit the OSD menu, move the joystick to ◀ until you exit.



Each option is described below.

Menu > Quick Settings		Description	
Brightness			
Contrast	Adjusts the co	olor contrast and brightness of the screen.	
Volume	Adjusts the vo	lume.	
22MP57HQ 24MP57HQ 22MP57VQ 24MP57VQ 23MP57H 27MP57HQ 23MP57HQ 27MP57VQ 23MP57VQ 27MP57VQ	• Jog joys	E	
	enable/disable the Mute function.		
Ratio	Adjusts the so	reen ratio.	
	Wide	Displays the video in wide-screen, regardless of the video signal input.	
	Original	Displays a video according to the input video signal aspect ratio.	
SMART ENERGY SAVING	High Enables SMART ENERGY SAVING you can save energy with this energy function.		
	Low	Enables SMART ENERGY SAVING you can save energy with this energy- low efficient function.	
	Off	Disables SMART ENERGY SAVING .	


* SMART ENERGY SAVING : Conserve energy by using luminance compensation algorithm.

- The display may look the same for Wide, Original options at the recommended resolution (1920 x 1080).
- The ratio is disabled in the interlaced signal.

- Saving Data depends on the Panel. So, those values should be different from each panel and panel vendor. If option of SMART ENERGY SAVING is High or Low, monitor luminance become higher or lower depend on source.
- If option of SMART ENERGY SAVING is High or Low, Picture Mode will automatically be Custom and Color Wizard will automatically be Off.

-Picture

- 1 To view the **OSD menu**, press the **joystick button** at the bottom of the monitor and then enter the **Menu**.
- 2 Go to **Picture** by moving the joystick.
- 3 Configure the options following the instructions that appear in the bottom right corner.
- 4 To return to the upper menu or set other menu items, move the joystick to ◄ or pressing (● / OK) it.
- 5 If you want to exit the OSD menu, move the joystick to ◀ until you exit.

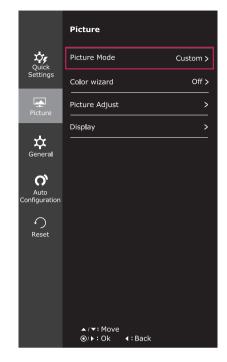

Each option is described below.

Menu > Picture		Description
Picture Mode	Custom	Allows the user to adjust each element. The color mode of the main menu can be adjusted.
	Reader 1	It is a mode that the screen is adjusted to the best for the newspaper. If you want screen more bright, you can control brightness in Menu OSD.
	Reader 2	It is a mode that the screen is adjusted to the best for the cartoon. If you want screen more bright, you can control brightness in Menu OSD.
Photo Cinema		Optimizes the screen to view photos.
		Optimizes the screen to improve the visual effects of a video.
	Game	Optimizes the screen for gameplay.
Color wizard	Red weakness	It is a mode for user who has inability to see red color. It make color weakness user can easily distinguish red colors.
	Green weakness	It is a mode for user who has inability to see green color. It make color weakness user can easily distinguish green colors.
	Off	It is a mode that Color Wizard mode is off.

- "Color wizard" feature is not within the scope of CUD certification.
- This is subsidiary for color weakness user. Therefore if you feel uncomfortable with the screen, please turn off this function.
- This function can't distinguish some colors in some images.
- If option of Color Wizard is not Off, SMART ENERGY SAVING will be Off and Picture Mode will automatically be Custom.

				COSTOMIZINO SETTINOS 23		
Picture Adjust	Picture	SUPER RESOLU- TION+		Optimized picture quality is displayed when a user wants crystal clear images. It is effective forhigh quality video or game.		
		22MP57HQ 24MP57HQ 22MP57TQ 24MP57YQ 23MP57D 27MP57HQ 23MP57TQ 27MP57HQ 23MP57TQ 27MP57HQ 23MP57VQ 27MP57HQ	· ·	The optimized picture quality is displayed when a user wants images between low and highmodes for comfortable viewing. It is effective for UCC or SD video.		
			· ·	The optimized picture quality is displayed when a user wants smooth and natural images. It iseffective for slow-moving pictures or still images.		
				Select this option for everyday viewing. SUPER RESOLUTION+ is turned off in this mode.		
		Sharpness	Adjusts the	e sharpness of the screen.		
		Black Level	Offset: a	 Sets the offset level (for HDMI only). Offset: as a reference for a video signal, this is the darkest color the monitor can display. 		
		23MP57H 27MP57HQ 23MP57HQ 27MP57VQ	High	Keeps the current contrast ratio of the screen.		
		23MP57HQ 27MP57HQ 23MP57VQ 27MP57HT	Low	Lowers the black levels and raises the white levels from the current contrast ratio of the screen.		
		Response Time 22MP57HQ 24MP57HQ 22MP57VQ 24MP57VQ 23MP57H 27MP57HQ 23MP57HQ 27MP57VQ 23MP57VQ 27MP57TVT	screen. Fo Normal. Fo High.	ponse time for displayed pictures based on the speed of the or a normal environment, it is recommended that you use or a fast-moving picture, it is recommended that you use High may cause image sticking.		
			High	Sets the response time to High.		
			Middle	Sets the response time to Middle.		
			Low	Sets the response time to Low.		
			Off	Sets the response time to Off.		
		Overscan 22MP57HQ 24MP57HQ 22MP57VQ 24MP57VQ 23MP57TQ 27MP57HQ 23MP57HQ 27MP57TQ 23MP57TQ 27MP57TQ 23MP57TQ 27MP57TQ	(only for H	he range of output image for DTV timing in HDMI input. DMI input)Recommend overscan function to turn on when / equipment.		
	Color	Gamma	the monito gamma values disp	wn gamma value. : Gamma 0, Gamma 1, Gamma 2, Off on r, high gamma values display whitish images and low play blackish images. 't want adjusted gamma, user can select Gamma off.		
		Color Temp	Selects the factory default picture color. Warm: Sets the screen color to a reddish tone. Medium: Sets the screen color between a red and blue tone. Cool: Sets the screen color to a bluish tone.			
			Custom			
			Red Green Blue	You can customize the picture color using Red, Green, and Blue colors.		
		Six Color	saturation Green_Sa Saturatior	user requirements for colors through adjusting the color and of the six colors(Red_Hue, Red_Saturation, Green_Hue, turation, Blue_Hue, Blue_Saturation, Cyan_Hue, Cyan_ n, Magenta_Hue, Magenta_Saturation, Yellow_Hue, Yel- ration) and saving the settings.		
			*Saturation value, less	ists tone of the screen. h: Adjusts the saturation of the screen colors. The lower the saturated and bright the colors become. The higher the more saturated and dark the colors become.		
		Reset		e color settings to the default settings.		
Display	Horizontal	To move image left and				
	Vertical	To move image up and down.				
	Clock	To minimize any vertical bars or stripes visible on the screen background. The horizontal screen size will also change.				
	Phase	To adjust the focus of the or sharpen the image of		iis item allows you to remove any horizontal noise and clear		

-General

- 1 To view the **OSD menu**, press the **joystick button** at the bottom of the monitor and then enter the **Menu**.
- 2 Go to General by moving the joystick.
- 3 Configure the options following the instructions that appear in the bottom right corner.
- 4 To return to the upper menu or set other menu items, move the joystick to ◀ or pressing (● / OK) it.
- 5 If you want to exit the OSD menu, move the joystick to ◀ until you exit.

	General	
Quick	Language	English >
Settings	Power LED	Off >
Picture	Automatic standby	Off >
	Resolution	Off >
Ç General	OSD Lock	Off >
Auto Configuration		

Each option is described below.

Menu > General	Description		
Language	To choose the language in which the control names are displayed.		
Power LED	Turns the power	indicator on the front side of the monitor on/off.	
	On The power indicator is automatically turned on.		
	Off	The power indicator is turned off.	
Automatic Standby 22MP57HQ 24MP57HQ 22MP57VQ 24MP57VQ 23MP57HQ 27MP57HQ 23MP57HQ 27MP57VQ 23MP57HQ 27MP57VQ	The monitor will automatically switch to standby mode after a certain period.		
Resolution	User can set the desired resolution. This option is enabled only when the screen resolution on your computer is set to the following(D-SUB only).		
	The function is enabled only when the screen resolution on your computer is set to the following, except that the PC output wrong resolution.		
	1024x768, 1280x768, 1360x768, 1366x768,Off		
	1280x960, 1600x900,Off		
	1440x900, 1600x900,Off		
OSD Lock	Prevents incorrect key input.		
	On	Key input is disabled.	
	All functions except for the OSD Lock mode and the Exit button for Brightness, C trast, Volume, Input, and General are disabled.		
	Off	Key input is enabled.	

-Auto Configuration

- 1 To view the **OSD menu**, press the **joystick button** at the bottom of the monitor and then enter the **Menu**.
- 2 Go to Auto Configuration by moving the joystick.
- 3 Configure the options following the instructions that appear in the bottom right corner.
- 4 To return to the upper menu or set other menu items, move the joystick to ◄ or pressing (● / OK) it.
- 5 If you want to exit the OSD menu, move the joystick to ◀ until you exit.



Each option is described below.

Menu > Auto Configuration	Description	
Do you want to Auto Configuration?		
Yes	Operate the Auto Configuration for optimal display in D-SUB.	
Cancel	Cancel the select.	

• This function will be enable only in analog input.

-Reset

- 1 To view the **OSD menu**, press the **joystick button** at the bottom of the monitor and then enter the **Menu**.
- 2 Go to **Reset** by moving the joystick.
- 3 Configure the options following the instructions that appear in the bottom right corner.
- 4 To return to the upper menu or set other menu items, move the joystick to ◀ or pressing (④ / OK) it.
- 5 If you want to exit the OSD menu, move the joystick to ◀ until you exit.




Each option is described below.

Menu > Reset	Description
Do you want to reset your settings?	
Reset	Returns to the default settings.
Cancel	Cancel the select.

-Picture mode

- 1 Press the joystick button on the bottom of the monitor.
- 2 Go to **Picture mode** by moving the joystick button to \blacktriangle .
- 3 Configure the options following the instructions that appear in the bottom.

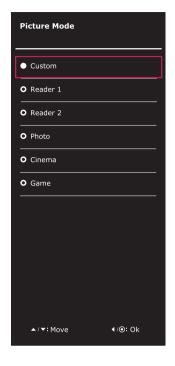

Each option is described below.

Joystick Button > Picture Mode	Description		
Picture Mode	Custom	Allows the user to adjust each element. The color mode of the main menu can be adjusted.	
	Reader 1	It is a mode that the screen is adjusted to the best for the newspaper. If you want screen more bright, you can control brightness in Menu OSD.	
	Reader 2	It is a mode that the screen is adjusted to the best for the cartoon. If you want screen more bright, you can control brightness in Menu OSD.	
	Photo	Optimizes the screen to view photos.	
	Cinema	Optimizes the screen to improve the visual effects of a video.	
	Game	Optimizes the screen for gameplay.	

NOTE

Į.

 If option of Picture Mode is non-Custom, SMART ENERGY SAVING and Color Wizard will automatically be Off.

TROUBLESHOOTING

Check the following before calling for service.

No image appears		
Is the power cord of the display connected?	Check and see if the power cord is connected properly to the power outlet.	
Is the power indicator light on?	Press the Power button.	
Is the power indicator flickering?	 If the display is in power saving mode, try moving the mouse or pressing any key on the keyboard to bring up the screen. Try to turn on the PC. 	
Do you see an "OUT OF RANGE" message on the screen?	• This message appears when the signal from the PC (video card) is out of horizontal or vertical frequency range of the display. See the 'Specifications' section of this manual and configure your display again.	
Do you see a "NO SIGNAL" message on the screen?	 After the monitor is on "NO SIGNAL", the monitor goes to DPM mode. This is displayed when the signal cable between the PC and the monitor is missing or disconnected. Check the cable and reconnect it. 	

Can 't you control some functions in OSD?	
Can't you select some menu in OSD?	You can unlock the OSD controls at any time by entering the OSD
	lock menu and changing items to off.

Display image is incorrect	
Display Position is incorrect.	 Enter the Auto Configuration function and select the "Yes" item to automatically adjust your display image to the ideal setting.
On the screen background, vertical bars or stripes are visible.	 Enter the Auto Configuration function and select the "Yes" item to automatically adjust your display image to the ideal setting.
Any horizontal noise appearing in any image or characters are not clearly portrayed.	 Enter the Auto Configuration function and select the "Yes" item to automatically adjust your display image to the ideal setting. Check Control Panel ► Display ► Settings and adjust the display to the recommended resolution or adjust the display image to the ideal setting. Set the color setting higher than 24 bits (true color).

- Check **Control Panel** ► **Display** ► **Settings** and see if the frequency or the resolution were changed. If yes, readjust the video card to the recommend resolution.
- If the recommended resolution (optimal resolution) is not selected, letters may be blurred and the screen may be dimmed, truncated or biased. Make sure to select the recommend resolution.
- The setting method can differ by computer and O/S (Operation System), and resolution mentioned above may not be supported by the video card performance. In this case, please ask to the computer or the video card manufacturer.

Display image is incorrect	
The screen color is mono or abnormal.	 Check if the signal cable is properly connected and use a screwdriver to fasten if necessary. Make sure the video card is properly inserted in the slot. Set the color setting higher than 24 bits (true color) at Control Panel Settings.
The screen blinks.	Check if the screen is set to interlace mode and if yes, change it to the recommend resolution.

Do you see an "Unrecognized monitor, Plug&Play (VESA DDC) monitor found" message?		
Have you installed the display driver?	 Be sure to install the display driver from the display driver CD (or diskette) that comes with your display. Or, you can also download the driver from our web site: http://www.lg.com. Make sure to check if the video card supports Plug&Play function. 	

22MP57HQ	23MP57H	24MP57HQ	27MP57HQ
22MP57VQ	23MP57HQ	24MP57VQ	27MP57VQ
	23MP57VQ		27MP57HT

The screen is flickering.	
Did you select the recommended resolution?	• If the selected resolution is HDMI 1080i 60/50 Hz, the screen may be flickering. Change the resolution to the recommended resolution 1080P .

22MP57A 22	MP57D 22MP57HQ	22MP57VQ			
Display	Screen Type	Flat Panel Active matrix-TFT LCD Anti-Glare coating			
	Pixel Pitch	0.248 mm x 0.248 mm (Pixel Pitch)			
Resolution	Мах	1920 x 1080 @ 60 Hz			
	Recommend	VESA 1920 x 1080 @ 60 Hz			
Power Consumption	On Mode : 21 W (ENERG Sleep Mode \leq 0.3 W Off Mode \leq 0.3 W	GY STAR® standard)*			
Power Input	19 V 1.3 A				
AC-DC Adapter	or Type ADS-40FSG-19 190250 or Type LCAP21, manufacture or Type LCAP26-A, manufacture or Type LCAP26-E, manufacture	manufactured by SHENZHEN HONOR ELECTRONIC GPG-1, manufactured by SHENZHEN HONOR ELECTRONIC GPBR-1, manufactured by SHENZHEN HONOR ELECTRONIC GPI-1, manufactured by SHENZHEN HONOR ELECTRONIC GPCU-1, manufactured by SHENZHEN HONOR ELECTRONIC GPB-2, manufactured by SHENZHEN HONOR ELECTRONIC d by LIEN CHANG ELECTRONIC ENTERPRISE ured by LIEN CHANG ELECTRONIC ENTERPRISE red by LIEN CHANG ELECTRONIC ENTERPRISE red by LIEN CHANG ELECTRONIC ENTERPRISE red by LIEN CHANG ELECTRONIC ENTERPRISE			
Dimensions	With Stand	51.0 cm x41.1 cm x 19.5 cm			
(Width x Height x Depth)	Without Stand	51.0 cm x 31.4 cm x 6.5 cm			
Weight	2.7 kg				
Tilt Range	-5° to 20°				
Environmental conditions	Operating Temperature Operating Humidity10°C to 35 °C 10 % to 80 %				
	Storage Temperature Storage Humidity-20°C to 60 °C 5 % to 90 % non-Condensing				
Stand Base	Attached (), Detached	(0)			
Power cord	Wall-outlet type				

Product specifications shown above may be changed without prior notice due to upgrade of product functions.

* The power consumption level can be different by operating condition and monitor setting. * The On mode power consumption is measured with ENERGY STAR® test standard.

			22MP57A	22MP57D	22MP57HQ	22MP57VQ
Sync Input	Horizontal Frequency	30 kHz to 83 kHz (Automatic)	•	٠	•	•
		30 kHz to 61 kHz (Automatic)				
	Vertical	56 Hz to 75 Hz (D-SUB)	٠	•	•	•
	Frequency	56 Hz to 75 Hz (DVI-D)		•		•
		56 Hz to 61 Hz (HDMI)			•	•
	Input Form	Separate Sync.	•	•	•	•
		Digital		٠	•	•
Video Input Signal Input	Signal Input	15 pin D-SUB Connector	٠	•	•	•
		DVI-D Connector (Digital)		٠		•
		HDMI Connector			•	•
Input Form		RGB Analog (0.7 Vp-p/ 75 ohm)	٠	٠	•	•
		Digital		•	•	•
Plug & Play	DDC 2B(Anal	og)	•	•	•	•
	DDC 2B(Digita	al)		•		•
	DDC 2B(HDM	11)			•	•
					1	1

23MP57A 23	MP57D 23MP57H	23MP57HQ 23MP57VQ			
Display	Screen Type	Flat Panel Active matrix-TFT LCD Anti-Glare coating			
	Pixel Pitch	0.265 mm x 0.265 mm (Pixel Pitch)			
Resolution	Мах	1920 x 1080 @ 60 Hz			
	Recommend	VESA 1920 x 1080 @ 60 Hz			
Power Consumption	On Mode : 23 W (ENERG Sleep Mode \leq 0.3 W Off Mode \leq 0.3 W	GY STAR® standard)*			
Power Input	19 V 1.3 A				
AC-DC Adapter	Type ADS-40SG-19-3 19025G, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19025GPG-1, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19025GPBR-1, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19025GPI-1, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19025GPCU-1, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19025GPB-2, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19025GPB-2, manufactured by SHENZHEN HONOR ELECTRONIC or Type LCAP21, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26-A, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26-E, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26-E, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26-I, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26-B, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE				
Dimensions	With Stand	54.5 cm x 43.1 cm x 19.5 cm			
(Width x Height x Depth)	Without Stand	54.5 cm x 33.4 cm x 6.5 cm			
Weight	3.1 kg				
Tilt Range	-5° to 20°				
Environmental conditions	Operating Temperature Operating Humidity10°C to 35 °C 10 % to 80 %				
	Storage Temperature Storage Humidity-20°C to 60 °C 5 % to 90 % non-Condensing				
Stand Base	Attached (), Detached	(0)			
Power cord	Wall-outlet type				

Product specifications shown above may be changed without prior notice due to upgrade of product functions.

* The power consumption level can be different by operating condition and monitor setting. * The On mode power consumption is measured with ENERGY STAR® test standard.

			23MP57A	23MP57D	23MP57H	23MP57HQ	23MP57VQ
Sync Input	Horizontal Frequency	30 kHz to 83 kHz (Automatic)	•	•	•	•	•
		30 kHz to 61 kHz (Automatic)					
	Vertical Frequency	56 Hz to 75 Hz (D-SUB)	•	•	•	•	•
		56 Hz to 75 Hz (DVI-D)		•			•
		56 Hz to 61 Hz (HDMI)			•	•	•
Input Form	Input Form	Separate Sync.	•	•	•	•	•
		Digital		•	•	•	•
Video Input Signal Input		15 pin D-SUB Connector	•	•	•	•	•
	DVI-D Connector (Digital)		•			•	
		HDMI Connector			•	•	•
	Input Form	RGB Analog (0.7 Vp-p/ 75 ohm)	•	•	•	•	•
		Digital		•	•	•	•
Plug & Play	DDC 2B(Ana	llog)	•	•	•	•	•
	DDC 2B(Digi	ital)		•			•
	DDC 2B(HDI	MI)			•	•	•

24MP57D 24MP57HQ 24MP57VQ

[1	
Display	Screen Type	Flat Panel Active matrix-TFT LCD Anti-Glare coating
	Pixel Pitch	0.2745 mm x 0.2745 mm (Pixel Pitch)
Resolution	Max	1920 x 1080 @ 60 Hz
	Recommend	VESA 1920 x 1080 @ 60 Hz
Power Consumption	On Mode : 22 W (ENERG Sleep Mode \leq 0.3 W Off Mode \leq 0.3 W	GY STAR® standard)*
Power Input	19 V 1.3 A	
AC-DC Adapter	or Type ADS-40FSG-19 19025 or Type LCAP21, manufacture or Type LCAP26-A, manufacture or Type LCAP26-E, manufacture	6, manufactured by SHENZHEN HONOR ELECTRONIC GPG-1, manufactured by SHENZHEN HONOR ELECTRONIC GPBR-1, manufactured by SHENZHEN HONOR ELECTRONIC GPI-1, manufactured by SHENZHEN HONOR ELECTRONIC GPCU-1, manufactured by SHENZHEN HONOR ELECTRONIC GPB-2, manufactured by SHENZHEN HONOR ELECTRONIC ed by LIEN CHANG ELECTRONIC ENTERPRISE ured by LIEN CHANG ELECTRONIC ENTERPRISE ured by LIEN CHANG ELECTRONIC ENTERPRISE red by LIEN CHANG ELECTRONIC ENTERPRISE ured by LIEN CHANG ELECTRONIC ENTERPRISE ured by LIEN CHANG ELECTRONIC ENTERPRISE
Dimensions	With Stand	55.5 cm x 43.6 cm x 19.5 cm
(Width x Height x Depth)	Without Stand	55.5 cm x 33.9 cm x 6.5 cm
Weight	3.2 kg	
Tilt Range	-5° to 20°	
Environmental conditions	Operating Temperature Operating Humidity	10°C to 35 °C 10 % to 80 %
	Storage Temperature Storage Humidity	-20°C to 60 °C 5 % to 90 % non-Condensing
Stand Base	Attached (), Detached	(O)
Power cord	Wall-outlet type	

Product specifications shown above may be changed without prior notice due to upgrade of product functions.

* The power consumption level can be different by operating condition and monitor setting. * The On mode power consumption is measured with ENERGY STAR® test standard.

			24MP57D	24MP57HQ	24MP57VQ
Sync Input	Horizontal Frequency	30 kHz to 83 kHz (Automatic)	•	•	•
		30 kHz to 61 kHz (Automatic)			
	Vertical	56 Hz to 75 Hz (D-SUB)	٠	•	•
	Frequency	56 Hz to 75 Hz (DVI-D)	•		•
		56 Hz to 61 Hz (HDMI)		•	•
Input Form	Separate Sync.	•	•	•	
		Digital	•	•	•
Video Input S	Signal Input	15 pin D-SUB Connector	•	•	•
		DVI-D Connector (Digital)	•		•
		HDMI Connector		•	•
Input Form	RGB Analog (0.7 Vp-p/ 75 ohm)	٠	•	•	
		Digital	•	•	•
Plug & Play	DDC 2B(Anal	DDC 2B(Analog)		•	•
	DDC 2B(Digita	al)	•		•
	DDC 2B(HDM	11)		•	•

27MP57HQ 27MP57VQ 27MP57HT

Display	Screen Type	Flat Panel Active matrix-TFT LCD Anti-Glare coating	
	Pixel Pitch	0.3114 mm x 0.3114 mm (Pixel Pitch)	
Resolution	Max	1920 x 1080 @ 60 Hz	
	Recommend	VESA 1920 x 1080 @ 60 Hz	
Power Consumption	On Mode : 27 W (ENERG Sleep Mode \leq 0.3 W Off Mode \leq 0.3 W	GY STAR® standard)*	
Power Input	19 V 1.6 A		
AC-DC Adapter	Type ADS-40SG-19-3 19032G, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19032GPG-1, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19032GPBR-1, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19032GPI-1, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19032GPCU-1, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19032GPCU-1, manufactured by SHENZHEN HONOR ELECTRONIC or Type LCAP21A, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26A-A, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26A-E, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26A-I, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26A-B, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26A-B, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE		
Dimensions	With Stand	64.2 cm x 48.3 cm x 21.2 cm	
(Width x Height x Depth)	Without Stand	64.2 cm x 39.6 cm x 7.0 cm	
Weight	4.4 kg		
Tilt Range	-3° to 20°		
Environmental conditions	Operating Temperature Operating Humidity	10°C to 35 °C 10 % to 80 %	
	Storage Temperature Storage Humidity	-20°C to 60 °C 5 % to 90 % non-Condensing	
Stand Base	Attached (), Detached	(0)	
Power cord	Wall-outlet type		

Product specifications shown above may be changed without prior notice due to upgrade of product functions.

* The power consumption level can be different by operating condition and monitor setting.

* The On mode power consumption is measured with ENERGY STAR® test standard.

			27MP57HQ	27MP57VQ	27MP57HT
Sync Input	Horizontal Frequency			•	•
		30 kHz to 61 kHz (Automatic)			
	Vertical	56 Hz to 75 Hz (D-SUB)	•	•	•
	Frequency	56 Hz to 75 Hz (DVI-D)		•	
		56 Hz to 61 Hz (HDMI)	•	•	•
Input Form		Separate Sync.	•	•	•
		Digital	•	•	•
Video Input Signa	Signal Input	15 pin D-SUB Connector	•	•	•
		DVI-D Connector (Digital)		•	
		HDMI Connector	•	•	•
	Input Form	RGB Analog (0.7 Vp-p/ 75 ohm)	•	•	•
		Digital	•	•	•
Plug & Play DDC 2B(Anald		og)	•	•	•
	DDC 2B(Digita	al)		•	
DDC 2B(HDMI)		•	•	•	

Preset Modes (Resolution)

D-SUB/DVI-D Timing

Display Modes (Resolution)	Horizontal Frequency(kHz)	Vertical Frequency(Hz)	Polarity(H/V)	
720 x 400	31.468	70	-/+	
640 x 480	31.469	60	-/-	
640 x 480	37.500	75	-/-	
800 x 600	37.879	60	+/+	
800 x 600	46.875	75	+/+	
1024 x 768	48.363	60	-/-	
1024 x 768	60.023	75	+/+	
1152 x 864	67.500	75	+/+	
1280 x 1024	63.981	60	+/+	
1280 x 1024	79.976	75	+/+	
1680 x 1050	65.290	60	-/+	
1920 x 1080	67.500	60	+/+	Recommend Mode

HDMI Timing

22MP57HQ 23MP57H 24MP57HQ 27MP57HQ 22MP57VQ 23MP57HQ 24MP57VQ 27MP57VQ 23MP57VQ 27MP57HQ 27MP57HT

Factory support mode (Preset Mode)	Horizontal Frequency(kHz)	Vertical Frequency(Hz)	HDMI
480P	31.50	60	0
576P	31.25	50	0
720P	37.50	50	0
720P	45.00	60	0
1080P	56.25	50	0
1080P	67.50	60	O Recommend Mode

Indicator

Mode	LED Color
On Mode	White
Sleep Mode	Blinking White
Off Mode	Off



Make sure to read the Safety Precautions before using the product.

Keep the Owner's Manual (CD) in an accessible place for future reference.

The model and serial number of the SET is located on the back and one side of the SET. Record it below should you ever need service.

MODEL

SERIAL