

OWNER'S MANUAL REFRIGERATOR

Please read carefully the manual instruction and safety caution before operating your refrigerator and retain it for future reference.


P/NO : MFL66993302 www.lg.com

CONTENTS

| | | Page I | No. |
|----|----------------------------|--------|-----|
| 1. | Identification of Parts | | 4 |
| 2. | Safety Precautions | | 5 |
| 3. | Caution | ! | 5-6 |
| 4. | Installation | | 7 |
| 5. | Identification of Controls | | 7 |
| 6. | Features | | 8 |
| 7. | Operating Procedures | | 9 |
| 8. | How to get good results | 9. | -10 |
| 9. | Before Calling for Service | | 11 |

Identification of parts

DC-Refrigerator

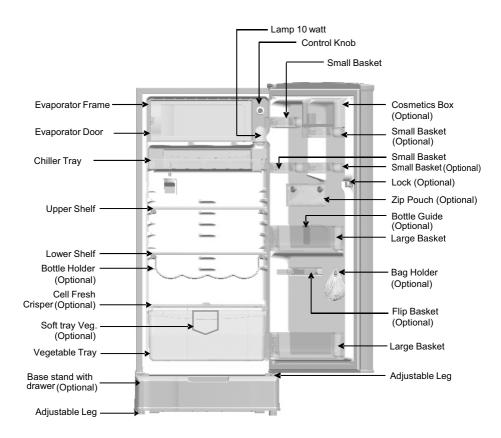



- Due to continuous improvements at LG, specifications of refrigerator are subject to change without prior notice.
- If you find out some parts which are not in your unit, the parts are applied to other models.

Safety Precautions

■ The meanings of the symbols used in this manual are as shown below.

| ⚠ DANGER This symbol indicates the possibility of death or serious injury. | |
|--|---|
| ∴WARNING | This symbol indicates the possibility of injury or damage to properties only. |
| ⚠ CAUTION | This symbol alerts you to the risk of electric shock. |

Λ WARNING

Do not modify or extend the Power Cord length.

It will cause electric shock or fire.

Power Cord Replacement

When the power cord or the power plug is damaged or the holes of the outlet are loosed, do not use them.

It may cause electric shock or short circuit to make fire.

If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.

Lamp Replacement

NOTE Not all appliance bulbs will fit your refrigerator. Be sure to replace the bulb with one of the same size, shape and wattage.

- Unplug the power cord from the outlet.
- · Remove the lamp cover by pulling outside.
- · Make sure the bulbs are cool to touch.
- · Remove the lamp by turning it counterclockwise.
- Put new lamp and tighten it by turning it clockwise.
- · Make sure the bulb is properly tightened.
- Put the cover lamp back and push it gently with your thumb till a click sound appears.

Child Entrapment Warning

An empty refrigerator can be a dangerous attraction to children. Remove gaskets, latches, lids or the entire door from your unused appliance, or take some other action to make it harmless.

About earthing

In the event of an electric short circuit, earthing reduces the risk of electric shock by providing an escape wire for the electric current.

Improper use of the earthing plug can result in an electric shock. Consult a qualified electrician or service person if the grounding instructions are not completely understood, or if you have doubts on whether the appliance is properly earthed.

In order to prevent possible electric shock, this appliance must be earthed.

This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

NEVER STORE EXPLOSIVES AND CHEMICALS INSIDE REFRIGERATOR.

Unplug the appliance before cleaning or maintenance.

Never place glass products in the freezer because they may break due to expansion when their contents are frozen.

∕∖\ CAUTION

Children should be supervised to ensure that they do not play with the appliance.








To prevent injury to the user and property damage, the following instructions must be followed. Incorrect operation due to ignoring of instruction will cause harm or damage, the seriousness is classified by the following indications.

| Plug in the power socket properly. | Operate or stop the unit by switch only. | Do not use a damaged or an unspecified power cord. |
|---|--|--|
| Otherwise, it will cause electric shock or fire due to heat generation or electrical shock. | It will cause electrical shock or fire due to heat generation. | It will cause electrical shock or fire. If the supply cord is damaged, it must be replaced by a special cord or assembly available from the manufacturer or its service agent. |
| Do not modify power cord length or share the outlet with other appliances. | Do not operate with wet hands or in damp environment. | Do not splash water on your refrigerator. |
| It will cause electrical shock or fire due to heat generation. | It may cause electrical shock. | It may cause short circuit. |
| | | 600 |

- Always remove Gasket when discarding Refrigerator.
- This appliance is intended to be used in household and similar applications such as
 - staff kitchen areas in shops, offices and other working environment.
 - farm houses and by clients in hotels, motels and other residential type environment.
 - bed and breakfast type environment.
 - catering and similar non-retail applications.
- Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance.

During Vacations

During average length vacations, you will probably find it best to leave the refrigerator in operation. Place freezable items in freezer for longer life. When you plan to be away for an extended period, remove all food, disconnect the power cord, clean the interior thoroughly, and leave each door OPEN to prevent odour formation. To operate again, let the refrigerator run for 6-8 hrs. for stabilization.



Shifting

While shifting the refrigerator, two people should carry it for its safety. Fasten the door with tape or lock to prevent opening of the refrigerator.



Cleaning

Cleaning of Interior Parts is recommended. Wash all compartments with a mild baking soda solution, then rinse and dry the compartment.

Use a lukewarm solution of mild soap or detergent to clean the exterior finish of your refrigerator. Wipe with a clean, damp cloth and then dry.



Installation


Refrigerator should be located properly in ventilated area.

Levelling of refrigerator should be done with front leg. Refrigerator should be levelled with front to back inclination for base. Install this appliance between 10°C to 43°C. If the temperature around the appliance is too low or high, cooling ability may reduce.

Do not place refrigerator where direct sunlight comes.

⋆ In case of Base stand model,leveling of refrigerator should be done with front leg of Base Stand.







* In selected models only.

Use electrical

connection with

Identification of Controls



Specially designed knob gives you facility to control temperature inside Refrigerator.



Before loading, let refrigerator run for 8 hrs. in No. 4 position



Features

★ COSMETIC BOX

Specified storage location for cosmetics and medicines. (only those medicines which can be placed in refrigerator)



* SOFT TRAY VEG.

Soft Tray Veg. is placed in Tray Veg. And very usefull to keep small vegetables like Lemon, Chilly, Coriander etc.





* BOTTLE HOLDER

Pull down the bottle holder to store 4 no. of one liter water bottles. Fold it when not in use.



★ CELL FRESH CRISPER

Crisper holds Moisture and it helps to keep vegetables fresh and prevents from getting rotten.



* FLIP BASKET


Flip down the basket to keep small items less than 0.5kg only, Flip up the basket to store 2 liter bottles in lower basket.





* BASE STAND WITH DRAWER

Max. storage space is 5kg in base stand drawer. To be used for storage of dry vegetables only like (Potato, Onion, Etc.)



★ EGG CUM ICE TRAY

Specified storage location for eggs. It can also be used to make the ice in Freezer.



* ZIP POUCH

Pouch is a Nylon bag with zip (unzip to keep items and zip after keeping items). It helps to store small items like Lemon, Ginger, Coriander etc.




* BAG HOLDER

It helps for hanging the items with polythene bag.



* In selected models only.

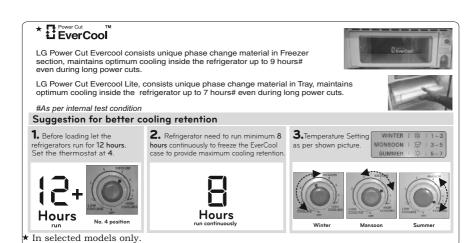

Operating Procedure

DEFROSTING

It is natural for moisture in the air to condense on the cold surface. This leads to a regular build up of frost on the surface of the freezer.

Defrost regularly to avoid heavy frost building on the evaporator which results in reduced cooling efficiency.

Push the defrost Knob after every 3 days / Ice Level reaches defrost indicator.





Ice Making

Fill ice trays with water, place in freeze box.

To remove ice cube, gently twist Ice Tray.





Do not use sharp tool to remove ice tray, otherwise you may puncture the evaporator resulting gas leakage thus non performance of refrigerator.



How to get good results

Cover or wrap all foods that you put into your refrigerator with polythene or aluminium foil, preventing the mixing of flavours and to keep the food from drying.



Don't keep hot milk or hot food in your refrigerator. This will result in an increased temperature and increase in power consumption.



Don't open the refrigerator door too often-hot air will enter and increase the temperature.



Never overload your refrigerator or cover the shelves with paper or plastic sheets as it will reduce its efficiency.



Close the door properly, make sure that there is no gap between the gasket and the cabinet of your LG refrigerator.



Wipe excessive moisture on food or place it inside containers or plastic bags. This will help in retaining its freshness for a longer period of time.



Feel free to call your LG Customer Information Centre (CIC) / Branch / LG Representative in case your refrigerator has suffered a damage in transit.



It is recommended to use Voltage Stabilizer (0.5kVA) if power fluctuations are frequent and out of specified voltage range (135-290V)**, Stabilizer usage increases the refrigerator life.



^{**} As per LG Test Standards.

Before Calling for Service

| Type of Complaint | Probable Cause | Remedy | |
|--|---|---|--|
| Refrigerator does – not work. | Thermostat switch in 'OFF' position. | Check that the thermostat knob is on 'Normal' (No.4) position and not in off position. $ \\$ | |
| - | Power Supply Off. | Check that the refrigerator main supply plug is connected to the wall socket and that the supply is on. Check that the fuse is intact in the supply line. | |
| - | Stabilizer not working properly | Please plug power cord of refrigerator directly in the wall socket and then check, if it works then get the stabilizer checked by Stabilizer Repairing Centre. | |
| Refrigerator – attempts to start, but does not operate. | Low Voltage. | Install a line-correcting transformer in the mains, or a Voltage Stabilizer. | |
| 3. Refrigerator contents – not cooling and – Difficulty in formation of ice and ice-cream. – – | Defrosting over due Restriction of cold air circulation. Improper thermostat control selection. Storing hot foods. | Defrost the refrigerator. Provide space in between the dishes. If the shelves are covered with cloth or polythene, remove it. If the refrigerator is required to give a low temperature turn the thermostat knob towards colder (No.7) position. Avoid storing hot foods in the refrigerator, cool them to room temperature before placing them inside the refrigerator. | |
| Formation of water – drops on exterior of refrigerator. | High humidity during monsoon season. | During the monsoon, when the humidity in the atmosphere reaches around 90% water droplets may form around the sides of the refrigerator cabinet, especially the top portion. This moisture should be wiped off periodically. Contact our serviceman to check the door seal or proper and uniform contact with the cabinet. | |
| 5. Formation of droplets – on the underside of the Chiller tray. | Hot and humid climate. | In hot and humid weather the moist air rushes inside whenever the refrigerator door is opened. This results in excess frosting on the Evaporator and condensation on the Chiller tray bottom. Avoid too frequent door openings. | |
| 6. Smell and odour | Improper covering and wrapping of food. | Wrap and cover food stuffs properly. Place caps on bottles and other liquid stores. If the smell persists, defrost the refrigerator, remove all foodstuffs, clean the refrigerator thoroughly and wipe it dry before restarting. | |
| 7. Noise - | Normal cut-off/ cut-in noise | Whenever refrigerator starts & stop there is noise of Thermostat cut-off/ cut-in & Compressor start/stop. This is a normal phenomenon. | |
| 8. Noise from Freezer - | Hissing noise from Freezer | This is normal gas expansion noise | |



