

Table of Contents

Introduction

Introduction A1

Important Precautions A2

Installation

Connecting the Monitor A4

Making use of USB (Universal Serial Bus) Feature A6

Operation

Location and Function of Controls A8

Control Panel Function A9

On Screen Display (OSD) Control Adjustment A10

On Screen Display(OSD) Selection and Adjustment A11

Technical Information

Energy Saving Design A13

Low Radiation Compliance (MPR II), Self Diagnostics Messages
and DDC (Display Data Channel) A14

Video Memory Modes A15

Troubleshooting A16

Service A17

Specifications A18

Appendix

Communications Regulation Information See back of manual

Environmental Labelling of Personal Computers See back of manual

ENGLISH

Introduction

Introduction

The FLATRON LCD 885LE Flat Panel Monitor has an active matrix TFT (Thin-Film Transistor) LCD (Liquid Crystal Display).

This monitor is designed for use in small working areas or for those who need more working space on the desk.

Features

- The FLATRON LCD 885LE is a 18.1-inch (18.1 inches viewable) intelligent microprocessor based monitor.
- Two signal ports (D-sub port and DVI-I port) on the rear panel allow 2 connection to 2 computers at a time. DVI - I (Digital Visual Interface - integrated) port supports analog, digital and combination of both analog and digital compliant computer and also improves quality of the displayed image by eliminating poor video at monitor input.
- We accomplished to adapt the advanced design and technology to the monitor. Soft touch buttons on the front panel are simple and allow you to conveniently adjust a variety of image controls. The absolute flat screen and screen surface treatment eliminate distracting glares.
- USB (Universal Serial Bus) ports at the back of the monitor are prepared for the USB cable and hub. You can easily and flexibly connect USB-designed devices-such as a mouse, keyboard or printer- to the monitor for true Plug and Play function.
- Digitally controlled auto-scanning is done with the micro-processor for horizontal scan frequencies between 31 and 80kHz, and vertical scan frequencies between 56 - 120Hz. The microprocessor-based intelligence allows the monitor to operate in each frequency mode with the precision of a fixed frequency monitor.
- It supports resolutions up to 1280x1024, and has a wide viewing angle of ± 80 degrees horizontal and ± 80 degrees vertical.
- For greater user health and safety, this monitor complies with the stringent Swedish TCO'99 requirements for low radiation emissions.
- For low cost of monitor operation, this monitor is certified as meeting the EPA Energy Star requirements, and utilizes the VESA Display Power Management Signalling (DPMS) protocol for power saving during non-use periods.

Monitor Registration

The model and serial numbers are found on the rear of this unit. These numbers are unique to this unit and not available to others. You should record requested information here and retain this guide as a permanent record of your purchase. Staple your receipt here.

Date of Purchase : _____
Dealer Purchased From : _____
Dealer Address : _____
Dealer Phone No. : _____
Model No. : _____
Serial No. : _____

Important Precautions

This unit has been engineered and manufactured to assure your personal safety, but improper use can result in potential electrical shock or fire hazard. In order not to defeat the safeguards incorporated in this monitor, observe the following basic rules for its installation, use, and servicing. Also follow all warnings and instructions marked directly on your monitor.

On Safety

Use only the power cord supplied with the unit. In case you use another power cord, make sure that it is certified by the applicable national standards if not being provided by the supplier. If the power cable is faulty in any way, please contact the manufacturer or the nearest authorized repair service provider for a replacement.

Operate the monitor only from a power source indicated in the specifications of this manual or listed on the monitor. If you are not sure what type of power supply you have in your home, consult with your dealer.

Overloaded AC outlets and extension cords are dangerous. So are frayed power cords and broken plugs. They may result in a shock or fire hazard. Call your service technician for replacement.

Do not Open the Monitor.

- There are no user serviceable components inside.
- There are Dangerous High Voltages inside, even when the power is OFF.
- Contact your dealer if the monitor is not operating properly.

To Avoid Personal Injury :

- Do not place the monitor on a sloping shelf unless properly secured.
- Use only a stand recommended by the manufacturer.
- Do not try to roll a stand with small casters across thresholds or deep pile carpets.

To Prevent Fire or Hazards:

- Always turn the monitor OFF if you leave the room for more than a short period of time. Never leave the monitor ON when leaving the house.
- Keep children from dropping or pushing objects into the monitor's cabinet openings. Some internal parts carry hazardous voltages.
- Do not add accessories that have not been designed for this monitor.
- During a lightning storm or when the monitor is to be left unattended for an extended period of time, unplug it from the wall outlet.
- Do not bring magnetic devices such as magnets or motors near the picture tube.

Important Precautions

On Installation

Do not allow anything to rest upon or roll over the power cord, and do not place the monitor where the power cord is subject to damage.

Do not use this monitor near water such as near a bathtub, washbowl, kitchen sink, laundry tub, in a wet basement, or near a swimming pool.

Monitors are provided with ventilation openings in the cabinet to allow the release of heat generated during operation. If these openings are blocked, built-up heat can cause failures which may result in a fire hazard.

Therefore, NEVER:

- Block the bottom ventilation slots by placing the monitor on a bed, sofa, rug, etc.
- Place the monitor in a built-in enclosure unless proper ventilation is provided.
- Cover the openings with cloth or other material.
- Place the monitor near or over a radiator or heat source.

Do not rub or strike the Active Matrix LCD with anything hard as this may scratch, mar, or damage the Active Matrix LCD permanently.

Do not press the LCD screen with your finger for a long time as this may incur some afterimages.

Some dot defects may appear on the screen, like Red, Green or Blue spots on the screen. However, this will have no impact or effect on the monitor performance.

If possible, use the VESA 1280x1024 @60Hz video mode to obtain the best image quality for your LCD monitor. If used under any modes except the VESA 1280x1024 @60Hz video mode, some scaled or processed images may appear on the screen. However, this is the characteristics of the LCD panel which has a fixed resolution of 1280x1024 at 60Hz.

On Cleaning

- Unplug the monitor before cleaning the face of the LCD screen.
- Dust the monitor by wiping the screen and the cabinet with a soft, clean cloth. If the screen requires additional cleaning, use a clean, damp cloth.
- Do not use liquid cleaners or aerosol cleaners.

On Repacking

- Do not throw away the carton and packing materials. They make an ideal container in which to transport the unit. When shipping the unit to another location, repack it in its original material.

Connecting the Monitor

To set up the monitor, ensure that the power is turned off to the monitor, computer system, and other attached devices, then follow these steps:

1. Place the monitor in a convenient, well-ventilated location near your computer.
2. Remove the stand cover of the monitor to connect the cables.
3. (1) Using graphic card with a DVI - I (Digital Visual Interface - Integrated) port

■ PCFigure 1

Connect the end of monitor signal cable to the port on the rear panel of the monitor through the slot and cable holder on Stand. ● Connect the other end to the DVI-I port on the rear panel of the computer and tighten the screws. ● Make sure the signal cable aligns with the DVI-I connector.

(2) Using graphic card with a D-sub port


■ PC Figure 2

Connect the end of monitor signal cable to the port on the rear panel of the monitor through the slot and cable holder on Stand. ● Connect the other end to the D-sub port on the rear panel of the computer and tighten the screws. ● Make sure the signal cable aligns with the D-sub connector.

■ MAC Figure 3

Connect the end of monitor signal cable to the port on the rear panel of the monitor through the slot and cable holder on Stand ● . Connect the other end of the monitor signal cable to the rear panel of Macintosh computer through a Macintosh adapter and then tighten screws. ●

Figure 1

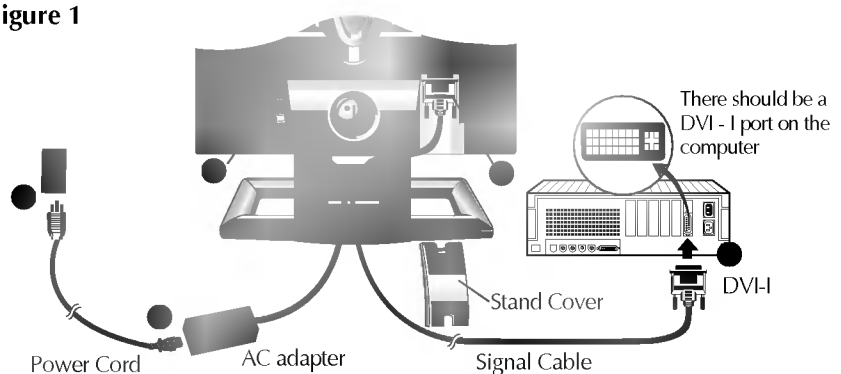

Connecting the Monitor

Figure 2


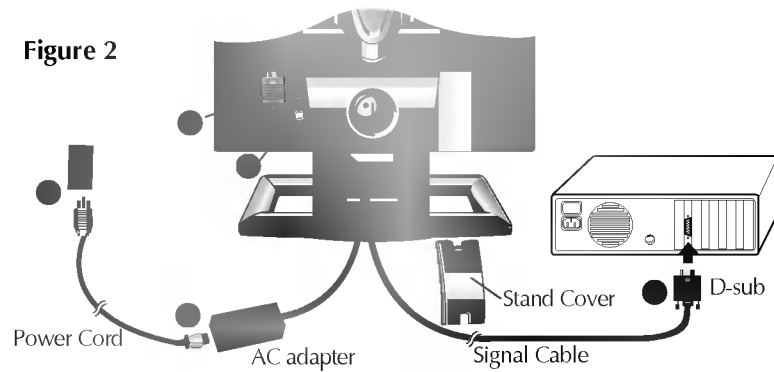


Figure 3

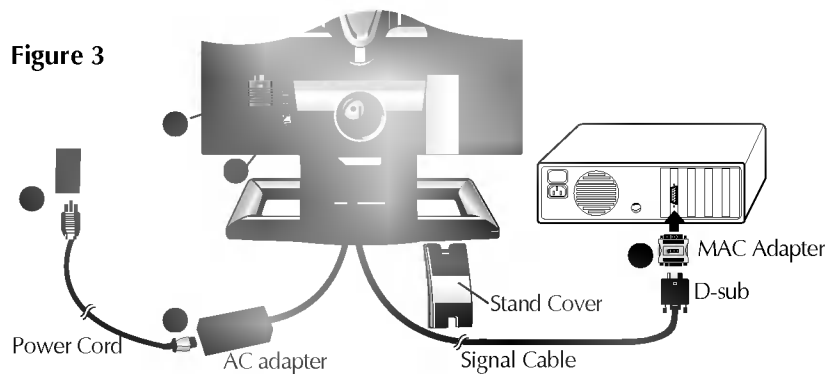

NOTE

- The figure3 shows the connection to an Apple Macintosh, using a separately purchased adapter. For more information on adapter requirements, contact your authorized dealer, reseller, or service provider.

4. Connect the plug from the AC adapter into the back of the monitor. ●
5. Connect one end of the AC power cord to the AC adapter ● and the other end to a properly grounded AC outlet that is easily accessible and close to the monitor. ●
6. After connecting cables, put stand cover correctly into the holes unders stand. If securely connected, you can hear click sound from the latch.
7. Power ON the PC, then the monitor.
8. If you see the NO SIGNAL message, check the signal cable and connectors.
9. After using the system, power OFF the monitor, then the PC.


Note : If you see the INPUT SIGNAL OUT OF RANGE message, check to make sure your system is set to one of the factory preset modes (see page A15), or is set to a resolution and refresh rate within the specification limits of this monitor.

Making use of USB (Universal Serial Bus) Feature


USB (Universal Serial Bus) is an innovation in connecting your different desktop peripherals conveniently to your computer. By using the USB, you will be able to connect your mouse, keyboard, printer, and other peripherals to your monitor instead of having to connect them to your computer. This will give you greater flexibility in setting up your system. USB allows you to connect chain up to 120 devices on a single USB port, and you can “hot” plug (attach them while the computer is running) or unplug them while maintaining Plug and Play auto detection and configuration. This monitor has an integrated self-powered USB hub, allowing up to 4 other USB devices to be attached it.

USB connection


1. Connect the upstream port of the monitor to the downstream port of the USB compliant PC or another hub using the USB cable (Computer must have a USB port).
2. Connect the USB compliant peripherals to the downstream ports of the monitor.

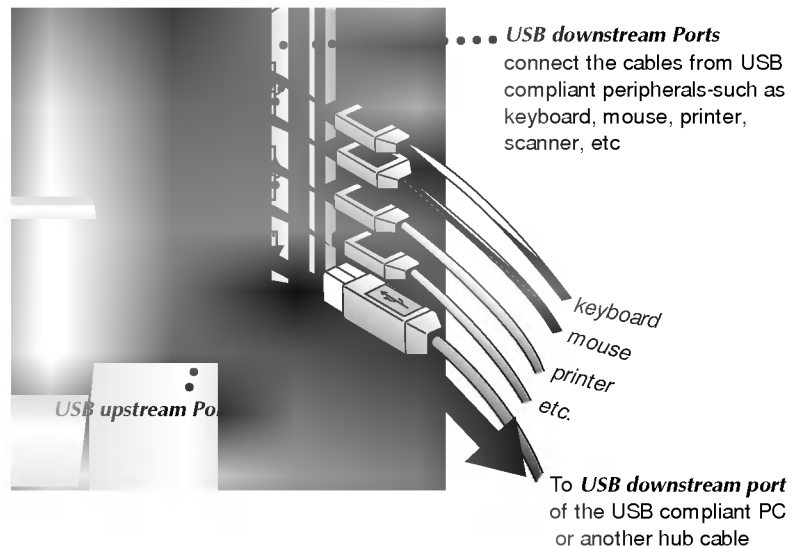


USB Upstream connector



USB Downstream connector



Making use of USB (Universal Serial Bus) Feature

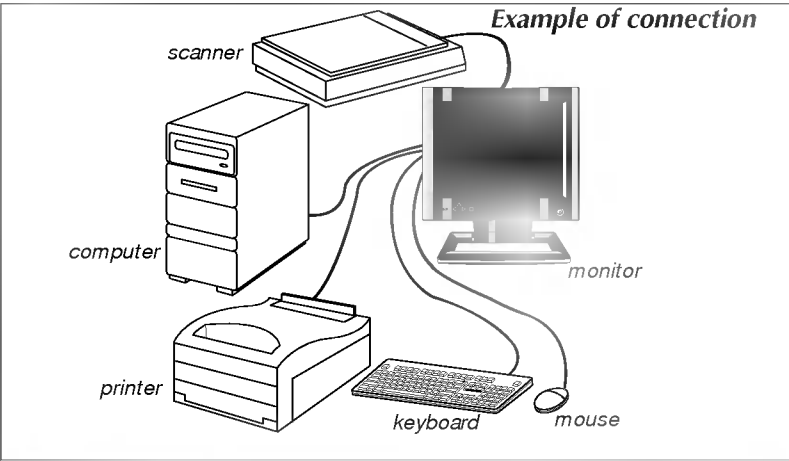

NOTE


- To activate the USB hub function, the monitor must be connected to a USB compliant PC(OS) or another hub with the USB cable(enclosed).
- When connecting the USB cable, check that the shape of the connector at the cable side matches the shape at the connecting side.
- When the monitor is not plugged into an electric socket, the peripherals connected to the downstream ports will not operate.
- Even if the monitor is in a power saving mode, USB compliant devices will function when they are connected the USB ports(both the upstream and downstream) of the monitor.

USB specifications


USB standard	Rev. 1.0 complied self-powered hub
Downstream power supply	500mA for each (MAX)
	12 Mbps (full), 1.5 Mbps (low)
	1 Upstream port
	4 Downstream ports

Location and Function of Controls

Front View

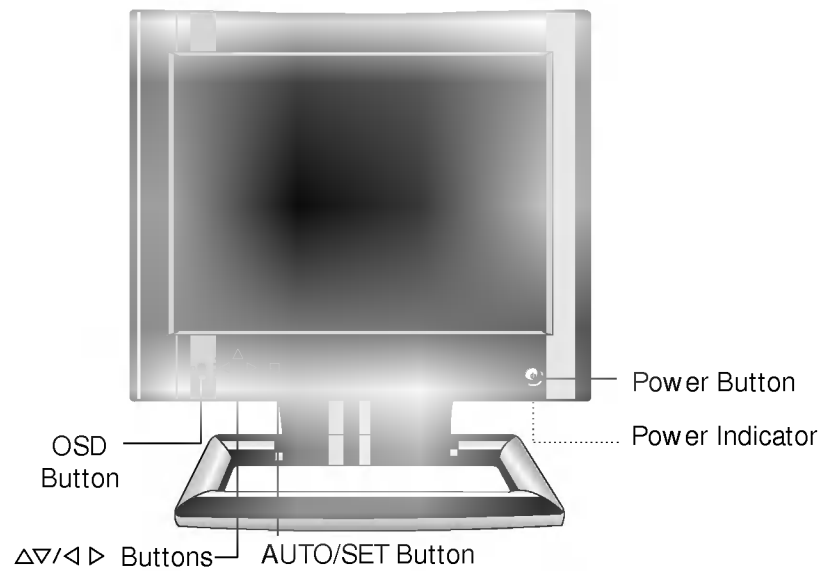

Rear View

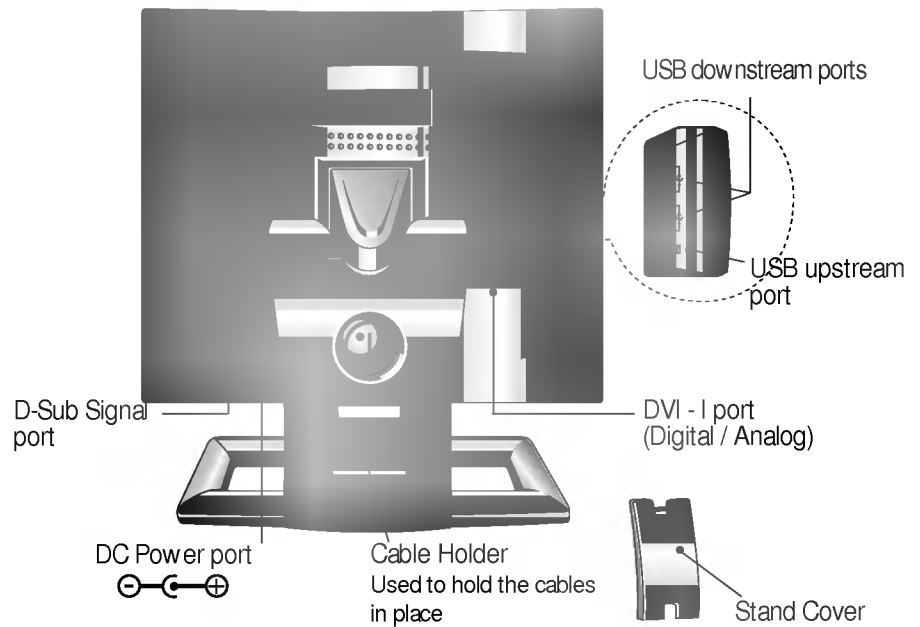

Front Panel Controls


<Shortcut Keys>

- Brightness and Contrast can be adjusted directly without entering the On Screen Display (OSD) system.



Touch the ◀/▶/▲/▼ buttons to adjust the settings and then the **OSD button** to save all changes. The Brightness and Contrast functions are also available in the On Screen Display (OSD) menu.

Control Panel Function

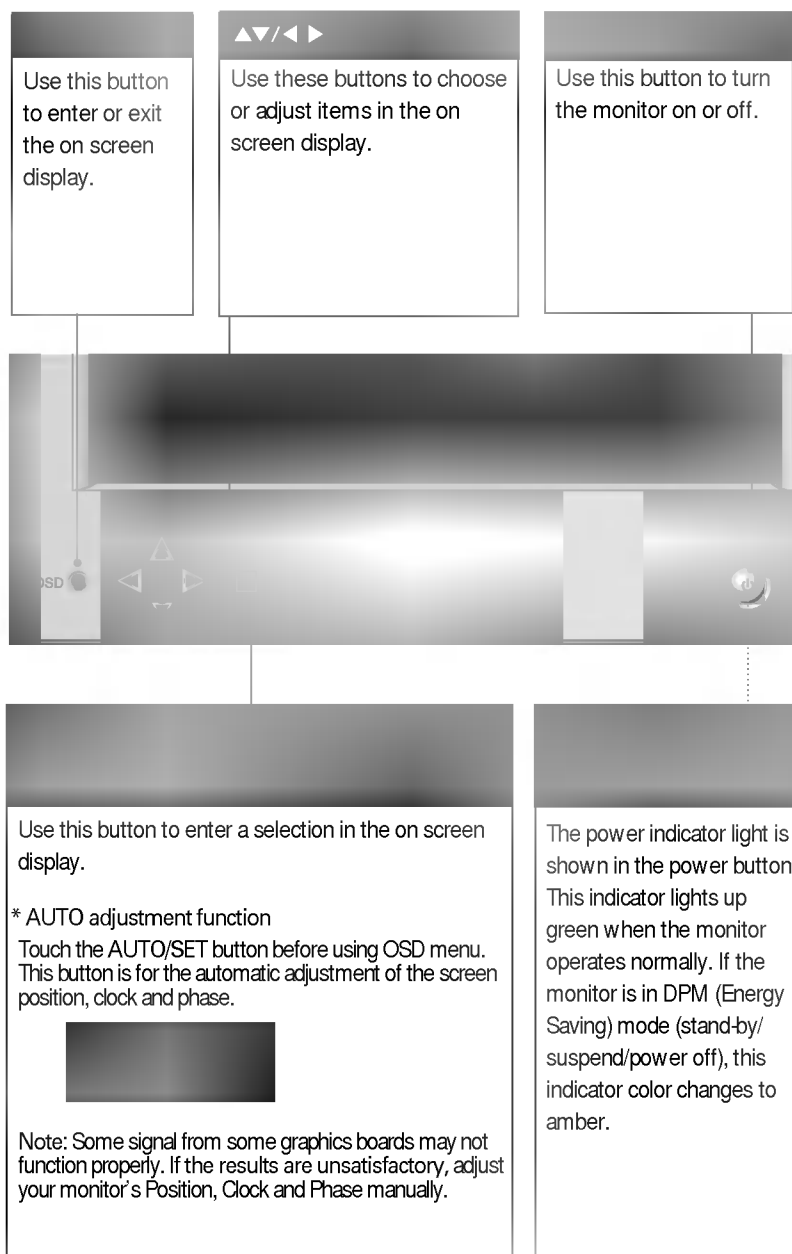


On Screen Display (OSD) Control Adjustment

Making adjustments to the image size, position and operating parameters of the monitor are quick and easy with the On Screen Display Control system. A quick example is given below to familiarize you with the use of the controls. Following section is an outline of the available adjustments and selections you can make using the OSD.

NOTE

- Allow the monitor to stabilize for at least 30 minutes before making image adjustment.

To make adjustments in the On Screen Display, follow these steps:

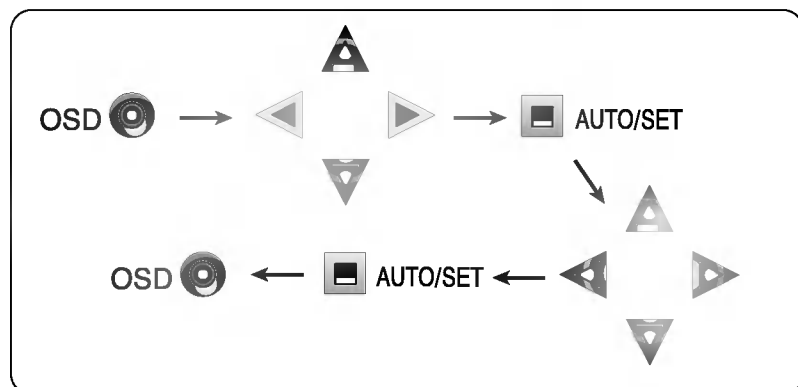


- 1 Touch the OSD Button, then the main menu of the OSD appears.
- 2 To access a control, use the $\triangle$ or ∇ Buttons. When the icon you want becomes highlighted, touch the AUTO/SET Button.
- 3 Use the $\triangle/\nabla/\triangleleft/\triangleright$ Buttons to adjust the item to the desired level.
- 4 Accept the changes by touching the AUTO/SET Button.
- 5 Exit the OSD by touching the OSD Button.

On Screen Display(OSD) Selection and Adjustment

You were introduced to the procedure of selection and adjusting an item using the OSD system.


Listed below are the icons, icon names, and icon descriptions of the items that are shown on the Menu.

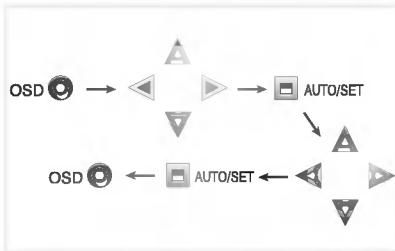

Brightness
Used to adjust the brightness of the screen.




Contrast
Adjust the display to the contrast desired.



PRESET 9300K/5800K
To appear the displays color temperature.
• 9300K:Slightly bluish white.
• 5800K:Slightly reddish white.

**RED
GREEN
BLUE**
To set your own color levels.




Vertical Position
To move image up and down.




Horizontal Position
To move picture image left and right.

NOTE

- COLOR, POSITION and TRACKING OSD menus are not useful at digital input.

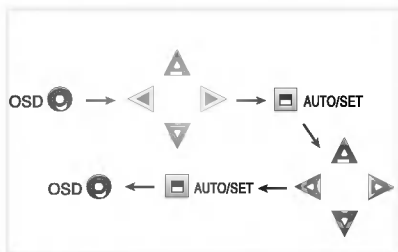

On Screen Display(OSD) Selection and Adjustment




CLOCK

To minimize any vertical bars or stripes visible on the screen background. The horizontal screen size will also change.

PHASE

To adjust the focus of the display. This item allows you to remove any horizontal noise and clear or sharpen the image of characters.

Phase adjustment should be done after adjusting the **Clock**.



LANGUAGE

To choose the language in which the control names are displayed.

IMAGE SIZE

This function displays the image in its original size or enlarged size so as to fit in the full screen of the LCD panel.

IMAGE MIRROR

This function reflects a screen across a vertical axis in order for you to see a mirror image

OSD POSITION

To adjust position of the OSD window on the screen.

BEEP

To select beep ON or OFF.

SIGNAL

To select DSUB ANALOG or DVI ANALOG / DIGITAL as the active input. This feature is used when two computers are connected to the monitor. In case only one signal is presented at either input, the monitor automatically detects and displays that signal.

Energy Saving Design

This monitor complies with the EPA's Energy Star program, which is a program designed to have manufacturers of computer equipment build circuitry into their products to reduce power consumption during time of non-use.

This monitor also goes into its energy saving mode if you exceed the monitor's operating limits, such as the maximum resolution of 1280x1024 or the frequency refresh rates of 31-80kHz horizontal or 56-120Hz vertical. When this monitor is used with a Green or EPA Energy Star PC, or a PC with a screen blanking software following the VESA Display Power Management Signalling (DPMS) protocol, this monitor can conserve significant energy by reducing power consumption during periods of non-use. When the PC goes into the energy saving mode, the monitor will go into a suspended operation state, indicated by the Power LED light changing from a green color to an amber color. After an extended period in the suspended mode, the monitor will then enter a semi-OFF mode to conserve more energy. In the semi-OFF mode or DPMS OFF mode as we call it in our specifications, the Power LED will still show an amber color. When you awaken your PC by hitting a key or moving the mouse, the monitor will also awaken to its normal operating mode, indicated by the green Power LED light. By following these conventions, the power consumption can be reduced to the following levels:

Power Consumption

Mode	Hori. Sync	Verti. Sync	Video	Power Consumption	LED Color
Normal(Max.)	On	On	Normal	≤ 70W	Green
Stand-by	Off	On	Off	≤ 5W	Amber
Suspend	On	Off	Off	≤ 5W	Amber
Power Off	Off	Off	Off	≤ 5W	Amber

Low Radiation Compliance (MPR II), Self Diagnostics Messages and DDC (Display Data Channel)

Low Radiation Compliance (MPR II)

This monitor meets one of the strictest guidelines available today for low radiation emissions, offering the user extra shielding and an antistatic screen coating. These guidelines, set forth by a government agency in Sweden, limit the amount of emission allowed in the Extremely Low Frequency (ELF) and Very Low Frequency (VLF) electromagnetic range.

Self Diagnostics Messages


Special Self Diagnostics messages will appear on the screen when identifying the following monitor conditions:

■ NO SIGNAL



This OSD may pop up when it is ON but no signal is detected. In this case the message NO SIGNAL will be highlighted, alerting you to check the signal cable connections.

■ INPUT SIGNAL OUT OF RANGE



This OSD may appear to inform you that the signal being sent to the monitor is not within its frequency range. In this case, you would need to check the resolution and refresh rate you have your video card set to, and adjust to be within the range of the monitor.

DDC (Display Data Channel)

DDC is a communication channel over which the monitor automatically informs the host system (PC) about its capabilities. This monitor has two DDC function; DDC1 and DDC2B. DDC1 and DDC2B carry out uni-directional communication between the PC and the monitor. Under these situations, the PC sends display data to the monitor but not commands to control the monitor settings.

Video Memory Modes

The monitor has 26 memory locations for display modes, 16 of which are factory preset to popular video modes.

Display Modes (Resolution)

Display Modes (Resolution)			Horizontal Freq. (kHz)	Vertical Freq. (Hz)
1	VGA	640 x 350	31.469	70
2	VGA	720 x 400	31.468	70
3	VGA	640 x 480	31.469	60
4	VESA	640 x 480	37.500	75
5	VESA	640 x 480	43.269	85
6	VESA	800 x 600	37.879	60
7	VESA	800 x 600	46.875	75
8	VESA	800 x 600	53.674	85
9	MAC	832 x 624	49.725	75
10	VESA	1024 x 768	48.363	60
11	VESA	1024 x 768	60.123	75
12	VESA	1024 x 768	68.677	85
13	MAC	1152 x 870	68.681	75
14	VESA	1152 x 900	61.805	65
15	VESA	1280 x 1024	63.981	60
16	VESA	1280 x 1024	79.976	75

User Modes

- Modes 17-26 are empty and can accept new video data. If the monitor detects a new video mode that has not been present before or is not one of the preset modes, it stores the new mode automatically in one of the empty modes starting with mode 17.

If you use up the 10 blank modes and still have more new video modes, the monitor replaces the information in the user modes starting with mode 17.

Recalling Display Modes

- When your monitor detects a mode it has seen before, it automatically recalls the image settings you may have made the last time you used that mode.

You may, however, manually force a recall of each of the 16 preset modes by pressing the Recall button. All preset modes are automatically recalled as the monitor senses the incoming signal.

The ability to recall the preset modes is dependent on the signal coming from your PC's video card or system. If this signal does not match any of the factory modes, the monitor automatically sets itself to display the image.

Troubleshooting

Check the following before calling for service.

Display Position is incorrect.

- Push the AUTO/SET Button.
- If the results are unsatisfactory, adjust the image position using the H position and V position icon in the on screen display.

On the screen background, vertical bars or stripes are visible.

- Push the AUTO/SET Button.
- If the results are unsatisfactory, decrease the vertical bars or stripes using the CLOCK icon in the on screen display.

Any horizontal noise appearing in any image or characters are not clearly portraided.

- Push the AUTO/SET Button.
- If the results are unsatisfactory, decrease the horizontal bars using the PHASE icon in the on screen display.

NO SIGNAL message.

- The signal cable is not connected, or is loose. Check and secure the connection.

INPUT SIGNAL OUT OF RANGE message appears.

Picture is blank.

- The frequency of the signal from the video card is outside the operating range of the monitor.
 - *Horizontal Frequency: 31kHz-80kHz
 - *Vertical Frequency: 56Hz-120Hz

Use the graphics board's utility software to change the frequency setting (Refer to the manual for graphics board).

You can change the setup to the supported resolution using the Safe Mode (Press the F8 key during booting the system).

The power LED is illuminated amber.

- The monitor is in its display power management mode.
- There is no active signal coming from the PC.
- The signal cable is not fastened securely.
- Check the computer power and graphics adapter configuration.

The monitor doesn't enter the power saving off mode (Amber).

- Computer video signal is not VESA DPMS standard. Either the PC or the video controller card is not using the VESA DPMS power management function.

NOTE

- If the power indicator(LED) light is blinking amber, may result in abnormal condition of the monitor.
- Then press a power ON/OFF button on the front panel control and call your service technician for more information.



Service

Unplug the monitor from the wall outlet and refer servicing to qualified service personnel when :



- The power cord or plug is damaged or frayed.
- Liquid has been spilled into the monitor.
- The monitor has been exposed to rain or water.
- The monitor does not operate normally following the operating instructions. Adjust only those controls that are covered in the operating instructions. An improper adjustment of other controls may result in damage and often requires extensive work by a qualified technician to restore the monitor to normal operation.
- The monitor has been dropped or the cabinet has been damaged.
- The monitor exhibits a distinct change in performance.
- Snapping or popping from the monitor is continuous or frequent while the monitor is operating. It is normal for some monitors to make occasional sounds when being turned on or off, or when changing video modes.

Do not attempt to service the monitor yourself, as opening or removing covers may expose you to dangerous voltage or other hazards. Refer all servicing to qualified service personnel.

NOTE

- The working life of this set is 7 years since the date of delivery to consumer.
- 

Signal Connector Pin Assignment



AC-DC Adapter

Specifications

■ 15pin VGA Connector

1	Red Video	9	N.C.
2	Green Video	10	Sync.Ground
3	Blue Video	11	Ground
4	Ground	12	SDA
5	Ground	13	H. Sync.
6	Red Ground	14	V. Sync.
7	Green Ground	15	SCL
8	Blue Ground		

■ DVI-I Connector (Digital/Analog)

1	T. M. D. S. Data2-	16	Hot Plug Detect
2	T. M. D. S. Data2+	17	T. M. D. S. Data0-
3	T. M. D. S. Data2/4 Shield	18	T. M. D. S. Data0+
4	T. M. D. S. Data4-	19	T. M. D. S. Data0/5 Shield
5	T. M. D. S. Data4+	20	T. M. D. S. Data5-
6	DDC Clock	21	T. M. D. S. Data5+
7	DDC Data	22	T. M. D. S. Clock Shield
8	Analog Vertical Sync.	23	T. M. D. S. Clock+
9	T. M. D. S. Data1-	24	T. M. D. S. Clock-
10	T. M. D. S. Data1+	C1	Analog Red
11	T. M. D. S. Data1/3 Shield	C2	Analog Green
12	T. M. D. S. Data3-	C3	Analog Blue
13	T. M. D. S. Data3+	C4	Analog H. Sync.
14	+5V Power	C5	Analog Ground
15	Ground (return for +5V, H. Sync. and V. Sync.)		

T. M. D. S. (Transition Minimized Differential Signaling)

Input	AC 100-240V ~2.0 - 1.0A 50/60Hz
	DC12V 5.8A

Use only the AC-DC adapter supplied with the monitor.

Specifications

Display	Type	18.1inch (45.97cm) Flat Panel Active matrix-TFT LCD Anti-Glare coating
	Viewable Size	18.1inch (45.97cm)
	Viewing Angle (max.)	80° (Left / Right / Up / Down)
	Pixel pitch	0.28 x 0.28mm
	True color	16.7 million color
Sync Input	Horizontal Freq.	31kHz - 80kHz (Automatic)
	Vertical Freq.	56Hz - 120Hz (Automatic)
	Input form	Separate, TTL, Positive/Negative Composite, TTL, Positive/Negative SOG (Sync On Green)
		Digital
Video Input	Signal input	15 pin D-Sub connector / DVI - I connector (Digital/Analog)
	Input Form	Separate, RGB Analog, 0.7Vp-p/75ohm, Positive, Digital
	Resolution (max.)	VESA 1280 x 1024 @75Hz (Digital/Analog)
Power Input	DC 12V 5.8A	
Dimensions	Width	43.6cm / 17.2inches
	Height	45.7cm / 18.0inches
	Depth	20.5cm / 8.07inches
	Net	8.9kg / 19.62lbs
Weight Tilt/Swivel Range	Tilt	5° (Down) / 30° (Up)
	Swivel	30° (Left) / 30° (Right)
Environment Conditions	Operating condition	
	Temperature	10°C to 35°C
	Humidity	10% to 80% non-condensing
	Storage condition	
	Temperature	-20°C to 60°C
	Humidity	5% to 95% non-condensing

NOTE

- Information in this document is subject to change without notice and does not represent a commitment on the part of LG Electronics Inc.