

Room Air Conditioner (Single Split Wall Mounted Type) OWNER'S MANUAL

Before using your air conditioner please read this manual carefully and keep it for future reference.

don, t² ditioning unit must for ap the utility service which dectrice 55-3 Norm). Safety Precautions

Safety Precautions Installation Precautions3 Operation Precautions4

Operating Instructions

Remote Control Features...7 Operation Mode Selection..10

Additional Features15

FOR YOUR RECORDS

Write the model and serial numbers here for the indoor and outdoor units:

Indoor model #	Serial #		
Outdoor model #	Serial #		

You can find them on a label on the side of each unit.

Dealer's Name


Date Purchased

READ THIS MANUAL

- Inside you will find many helpful hints on how to use and maintain your air conditioner properly. Just a little preventive care on your part can save you a great deal of time and money over the life of your air conditioner.
- You'll find many answers to common problems in the chart of troubleshooting tips. If you review our chart of **Troubleshooting Tips** first, you may not need to call for service at all.

CAUTION

- Contact the authorized Service technician for repair or maintenance of this unit.
- Contact the installer for installation of this unit.
- The air conditioner is not intended for use by young children or infirm persons without supervision.
- Young children should be supervised to ensure that they do not play with the air conditioner.



Operating Instructions

Care and Maintenance

Care and Maintenance Care and Maintenance.....19

Operation Tips......22

Troubleshooting tips Before You Call For Service......23

Important safety precautions Read all instructions before using. S ety Precautions To prevent injury to the user or other people and property damage, the following instructions must be followed. Incorrect operation due to ignoring of instruction will cause harm or damage, the seriousness is classified by the following indications. WARNING : This symbol indicates the possibility of death or serious injury. . This symbol indicates the possibility of injury or damage to CAUTION properties only. Meanings of symbols used in this manual are as shown below. **Operating Instructions** Be sure not to do. Be sure to follow the instruction. Do not install, remove and reinstall the unit by yourself. • Improper installation will cause water leakage, electrical shock, or fire. Please consult authorized dealer or specialist for the installation work. Please note fault caused by improper installation is not covered by warranty. Care • Unit must be installed in an easily accessible area. Any additional cost required to hire a special equipment to service the unit will be the responsibility of the customer. and Maintenance CAUTION Please confirm the following important points during installing. ■ This room air conditioner must be earthed. The reverse cycle system of the air conditioner is based on the air cooling type heat pump It may cause electrical shock if

grounding is not perfect.

Do not install the unit at place where leakage of gas may occur and/or in an explosive atmosphere.



In case gas leaks, the gas may accumulates the unit and it may cause fire ignition.


Confirm drainage piping is connected properly.





If it is not connected perfectly, it may cause water leakage and dampen the furniture.

which absorbs heated air from the outdoor unit and discharges it indoor.

Therefore if the outdoor unit is exposed to very low temperature, specifically below 0 °C, the heating capacity drops off rapidly.

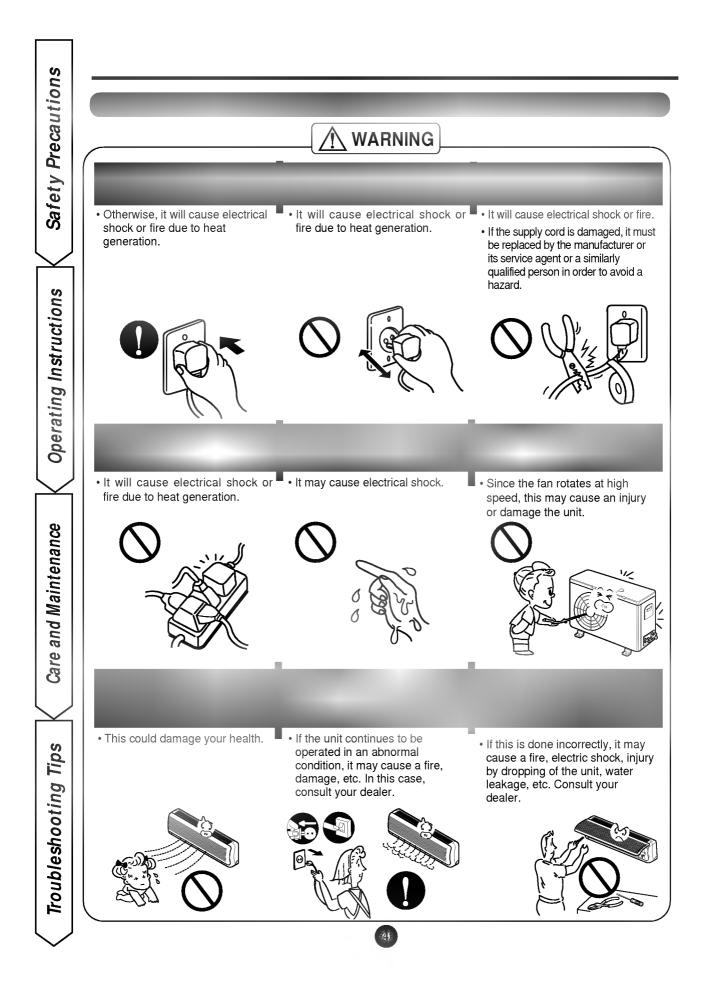


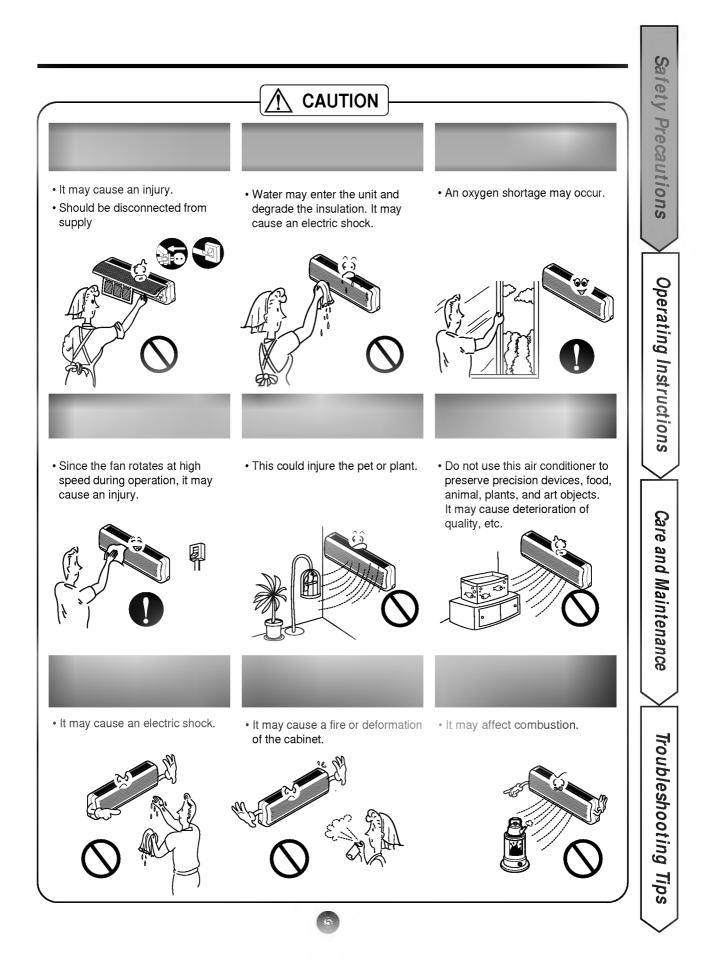


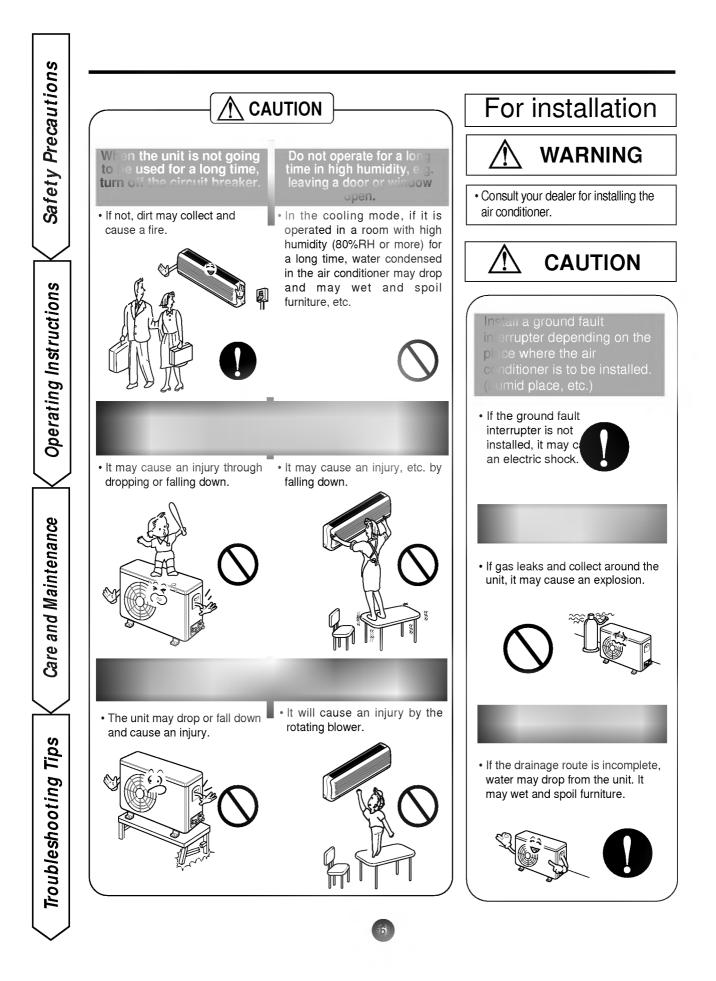

About the remote control on the system

The remote control transmits the signals to the system.

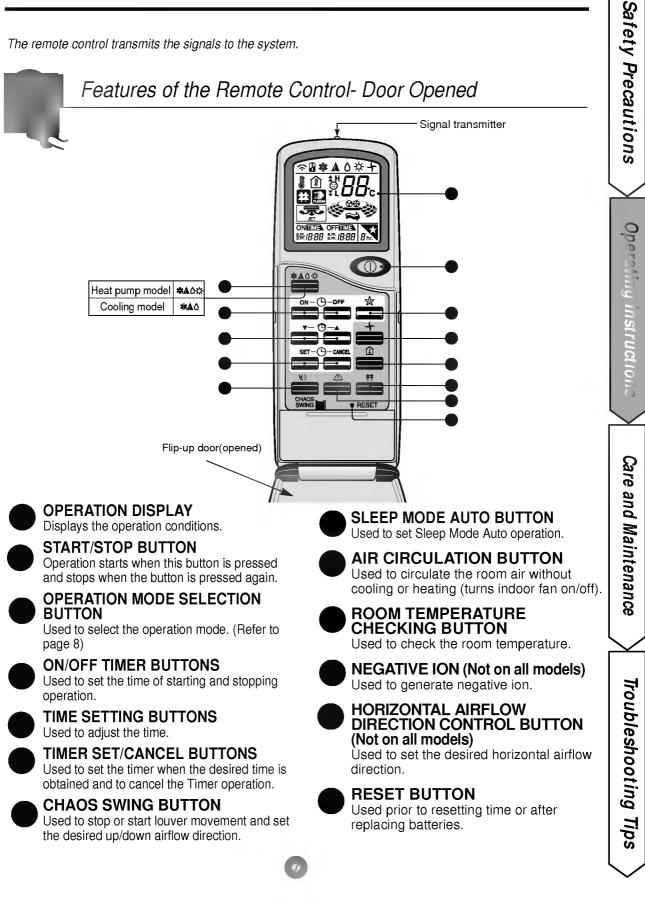


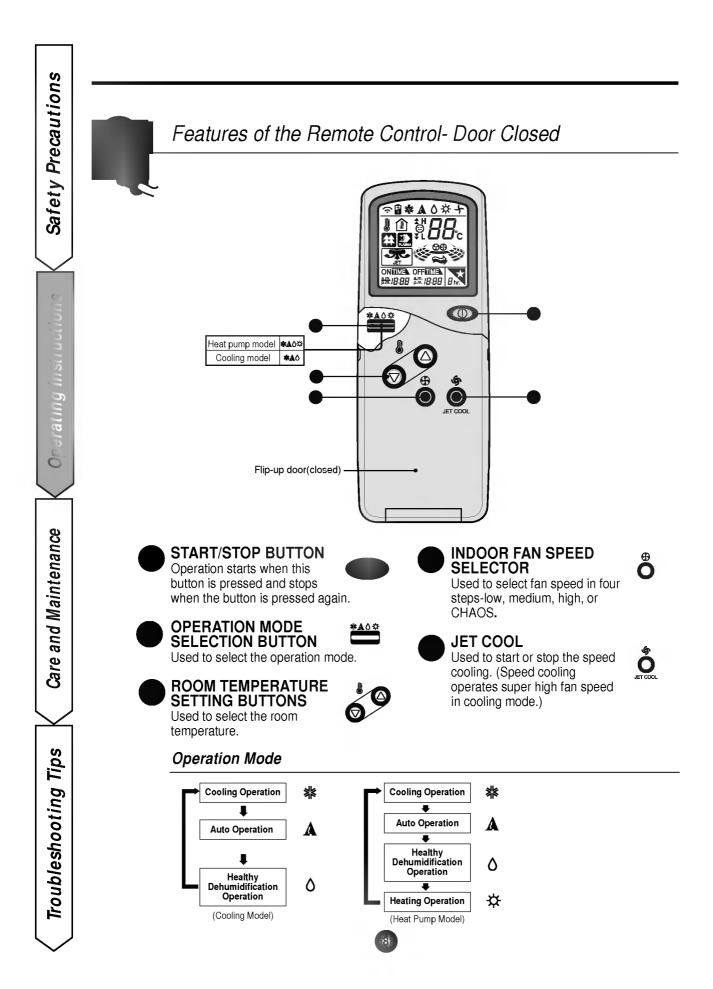

About the remote control on the system

Storage and Tips For Using the Remote Control

• The remote control may be stored inside the system or mounted on a wall.(except 7k, 9k model)



How to Insert the Batteries

- Remove the battery cover by pulling it according to the arrow direction.
- Insert new batteries making sure that the (+) and (-) of battery are installed correctly.
- Reattach the cover by sliding it back into position.

NOTES:

- Use 2 AAA(1.5volt) batteries. Do not use rechargeable batteries.
- Pemove the batteries from the remote control if the system is not going to be used for a long time.

• To operate the room air conditioner, aim the remote control at the signal receptor.

Safety Precautions

Ope

ē

Instruct

0

Care


and

Maintenance

Troubleshooting Tips

• The remote control will operate the air conditioner at a distance of up to 7m.

FORCED OPERATION AUTO RESTART REMOTE CONTROL



Slide Switch Operation (Refer to page 18) FORCED OPERATION: Used for operation when the remote control cannot be used.

Inside the Indoor System

AUTO RESTART: In case the power comes on again after a power failure, the air conditioner will operate in "Auto Restart Operation" mode. This function automatically returns the air conditioner to the pervious operating conditions.


REMOTE CONTROL: If you do not want to use Auto Restart Operation


Signal Receptor

Receives the signals from the remote control. (Signal receiving sound: two short beeps or one long beep.


Operation Indication Lamps


Φ	On/Off	: Lights up during the system operation.	
☆	Sleep Mode	: Lights up during Sleep Mode Auto operation.	
Θ	Timer	: Lights up during Timer operation.	
×	Defrost Mode	e : Lights up during Defrost Mode or Hot Start operat (Heat pump model only)	
OUT DOOR	OUTDOOR UNIT OPERATION	: Lights up during outdoor unit operation. (Cooling model only)	Signa

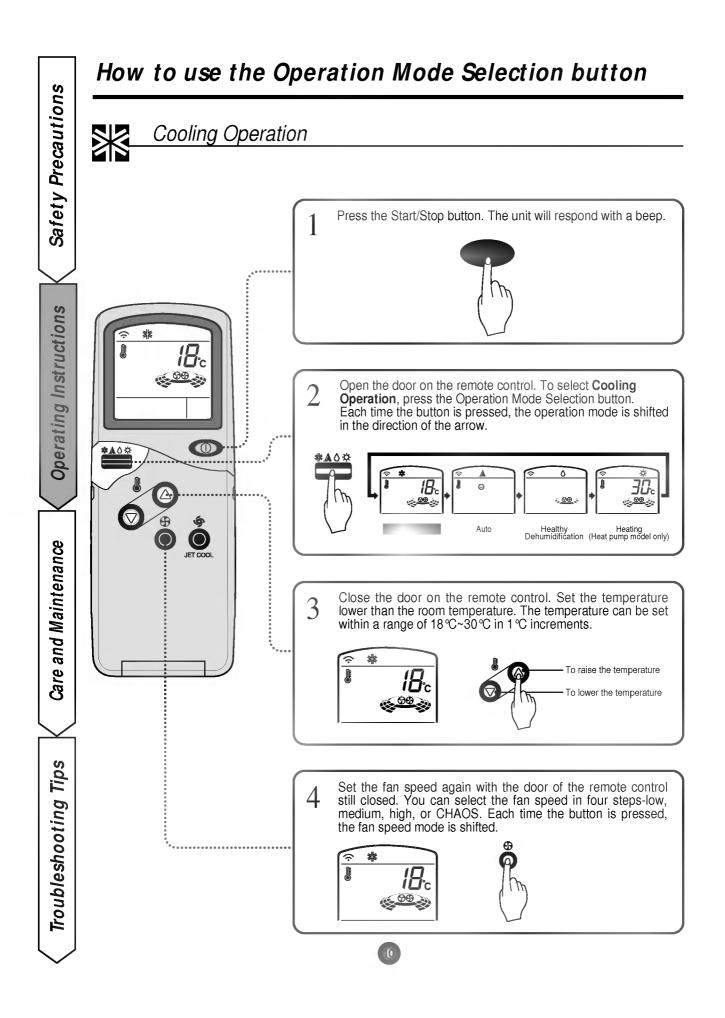


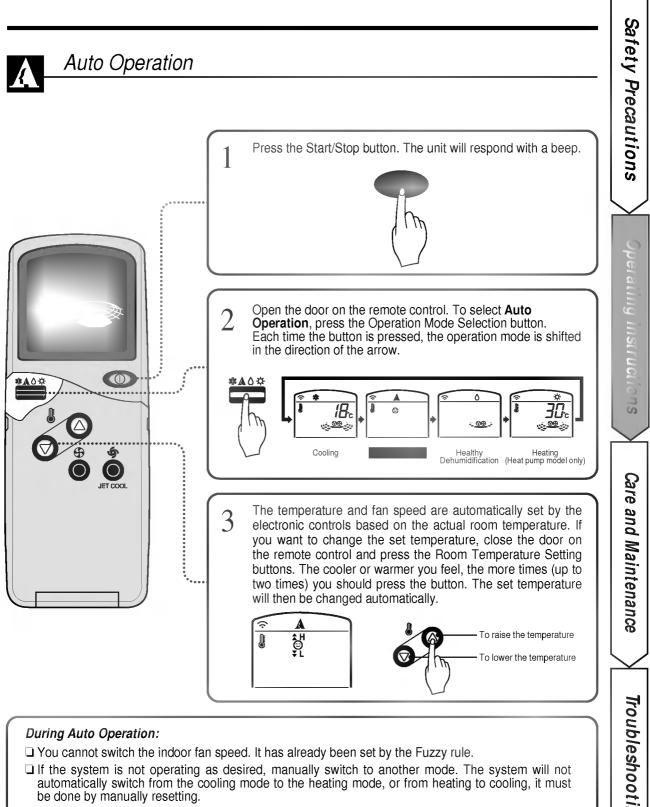

During Auto Operation, pressing the Airfllow direction Start/Stop button makes the horizontal louvers swing up and down automatically. If you want to stop auto-swing, press the Airflow Direction Start/Stop button again.

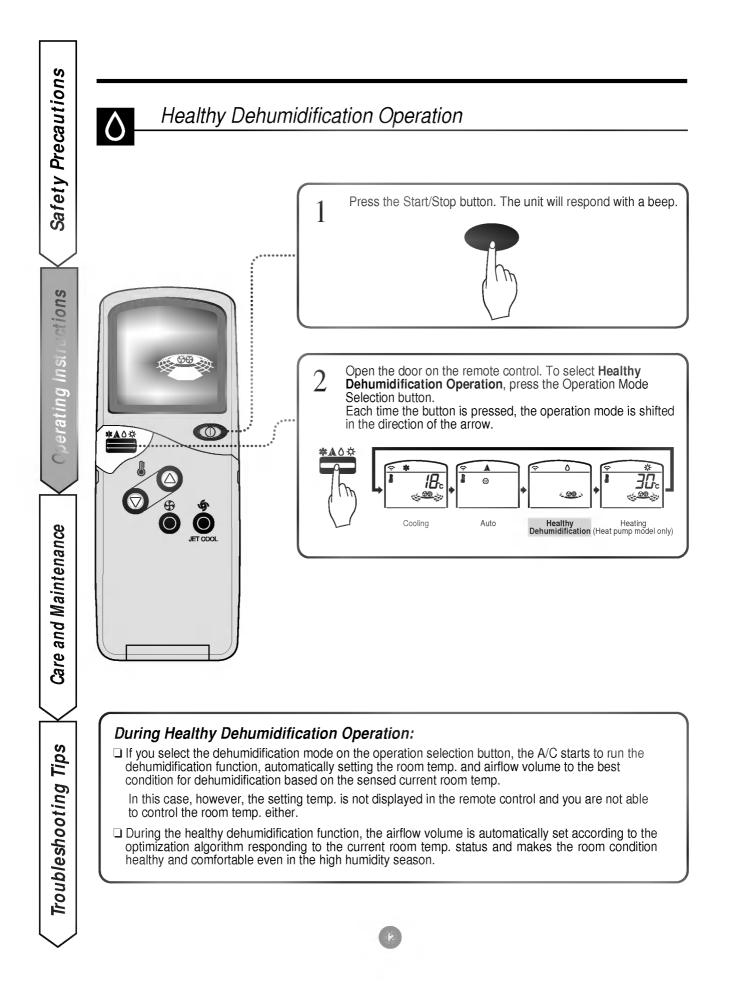

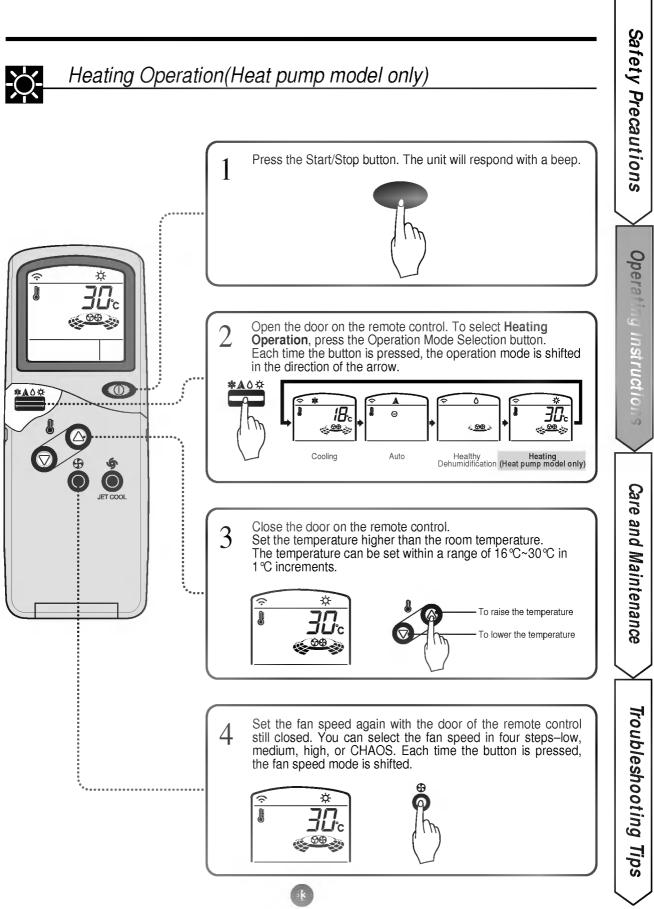

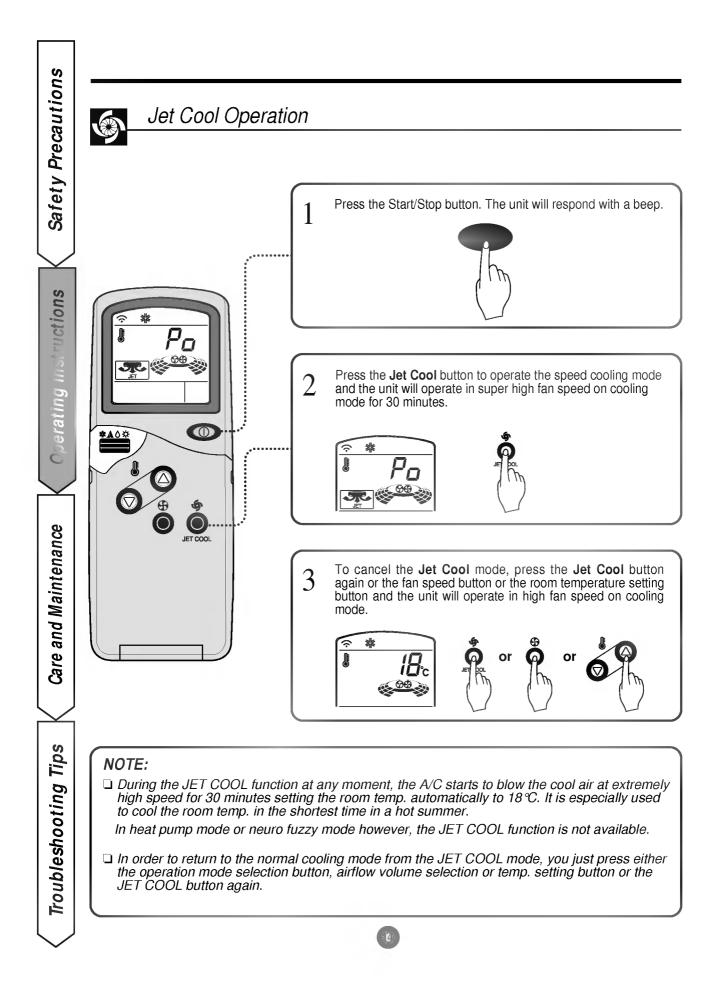

Additional features



Sleep Mode

conditioner.

Press the Sleep Mode Auto button to set the time you want the unit to turn off automatically.

The Timer is programmed in one-hour



increments by pressing the Sleep Mode Auto button 1 to 7 times. The sleep mode is available for 1 to 7 times. To alter the time period in steps of 1 hour, press the Sleep Mode Button while aiming at air

Make sure the Sleep Mode Auto LED lights up.



Setting the Time

Time can be set only when you have pressed the Reset button. If you have just replaced the batteries, the Reset button should be pressed to reset the time.

Delay Start/Pre-Set Stop

Make sure the time is set correctly on the

Press the Start/Stop button.

remote control display.

Press the ON/OFF Timer

buttons to turn Timer on

desired time is set.

or off.



To cancel the Sleep Mode, press the sleep Mode Auto button several times until the star (\bigtriangleup) disappears from the operation display.


NOTE: The Seep Mode will be operated at low fan speed (cooling) or medium fan speed (heat pump only) for quiet sleeping.

IN COOLING MODE: The temperature will automatically rise by 1 °C over the next 30 minutes and by 2 °C in 1 hour for comfortable sleeping.

Press the Time Setting buttons until

7:00

the desired time is set.



setting by pressing tere Timer SET button while aiming the remote control a the signal receptor.

To cancel the setting the timer.




Press the Timer Cancel button while aiming remote control at the signal receptor.

(The timer lamp on the air conditioner and the display will go out.)

NOTE: Select one of the following four types of operation.

3:00





Safety Precautions

 \bigcirc

č

INSTRUCT


SUOL


Care

and

Maintenance

3:30

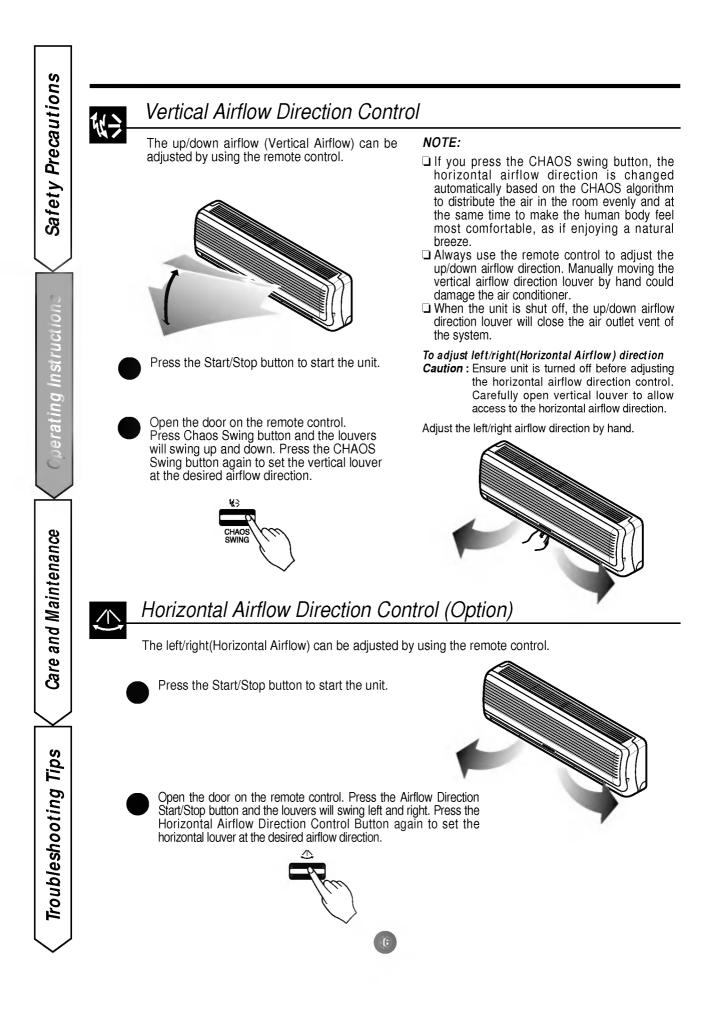

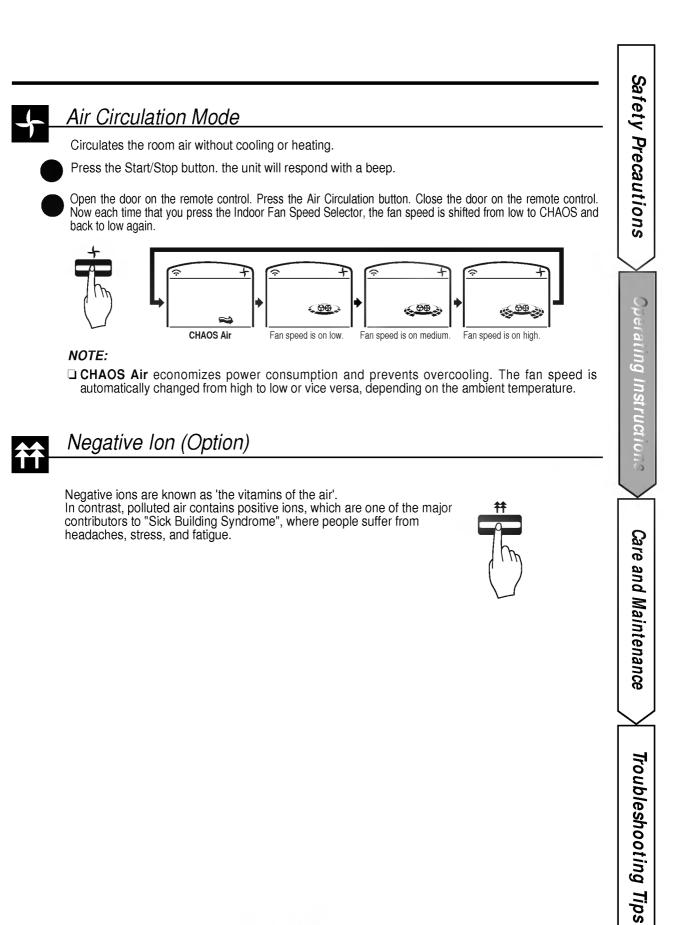



Slide Switch Operation

FORCED OPERATION


Operation procedures when the remote control can't be used.

Open the front panel upward and move the Slide Switch to the Forced Operation position.

If you want to stop operation, move the Slide Switch to the Auto Restart or the Remote Control position.

In case the power comes on again after power failure on the Forced Operation position, the operating conditions are automatically set as follows:

During Forced Operation, the initial mode continues.




	Cooling Model	Heat pump Model		
		Room Temp. \geq 24 °C	21 ℃ ≤ Room Temp. < 24 ℃	Room Temp. < 21 ℃
Operating mode	Cooling	Cooling	Healthy Dehumidification	Heating
Indoor FAN Speed	High	High	Healthy Dehumidification Rule	High
Setting Temperature	22 <i>°</i> C	22 <i>°</i> C	23 °C	24 °C

AUTO RESTART

In case the power comes on again after a power failure, Auto Restarting Operation is the function to operate procedures automatically to the previous operating conditions.

In case the air conditioner does not receive any signal from the remote control, it will turn off automatically after 7 hours. If you want to use this operation, Open the front panel upward and move the slide switch to the Auto Restart position. If you do not want to use this operation, move the Slide Switch to the Remote Control position.



panel upward

When you are out for a while, put the Side Switch on the REMOTE CONTROL

Operation Details

Natural wind by the CHAOS logic



For more fresh feeling than other fan speed, press the Indoor Fan Speed Selector and set to CHAOS mode. In this mode, the wind blows like natural breeze by automatically changing fan speed according to the CHAOS logic.


Helpful information

Fan speed and cooling capacity.

The cooling capacity indicated in the specification is the value when the fan speed is set to high, and the capacity will be lower at low or medium fan speed.

High fan speed is recommended when you wish to cool the room quickly.

18



Operating Instructions


Care and Maintenance

Care and maintenance of the air conditioner


CAUTION: Before performing any maintenance, turn off the main power to the system.


Indoor Unit


Safety Precautions Grille, Case, and Remote Control □ Never use any of the followings: Turn the system off before cleaning. To Water hotter than 40℃ clean, wipé with a soft, dry cloth. Do not Could cause deformation and/or discoloration. use bleach or abrasives. Volatile substances NOTE: Could damage the surfaces of the air Supply power must be disconnected before conditioner. deaning the indoor unit. Remote control storage Air inlet vent Air outlet vent (behind front panel) Vertical louver Horizontal louver :except 7k, 9k model Air filters (behind front panel) Air Filters The air filters behind the front grille should Lift the front access panel and pull the filter tab slightly forward to remove the filter. be checked and cleaned once every 2 weeks or more often if neccessary. Clean the filter with a vacuum or warm, soapy water. · If dirt is conspicuous, wash with a solution of detergent in lukewarm water. • If hot water (40 °C or more) is used, it may be deformed. After washing with water, dry well in the shade. Re-install the air filter. Air Purifying Filters(Option) This filter consists of two filters. One is electrostatic filter to remove very fine dust as small as 0.1 micron such as tobacco smoke and pollen etc., the other is deodorant filter to remove unpleasant smell such as food, sweat, and fungus.

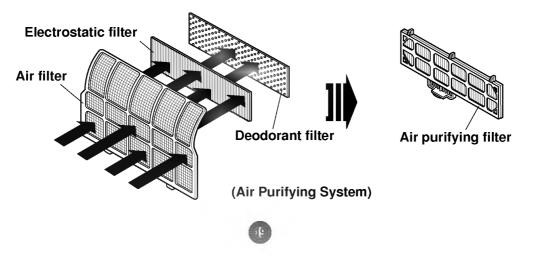


Operating Instructions Care and Maintenance

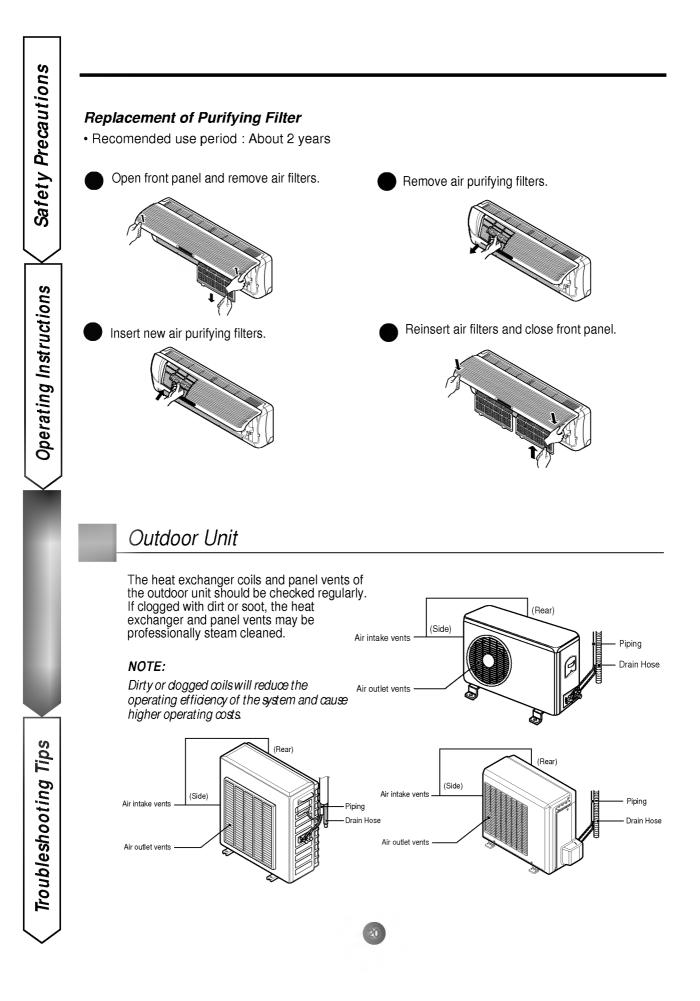

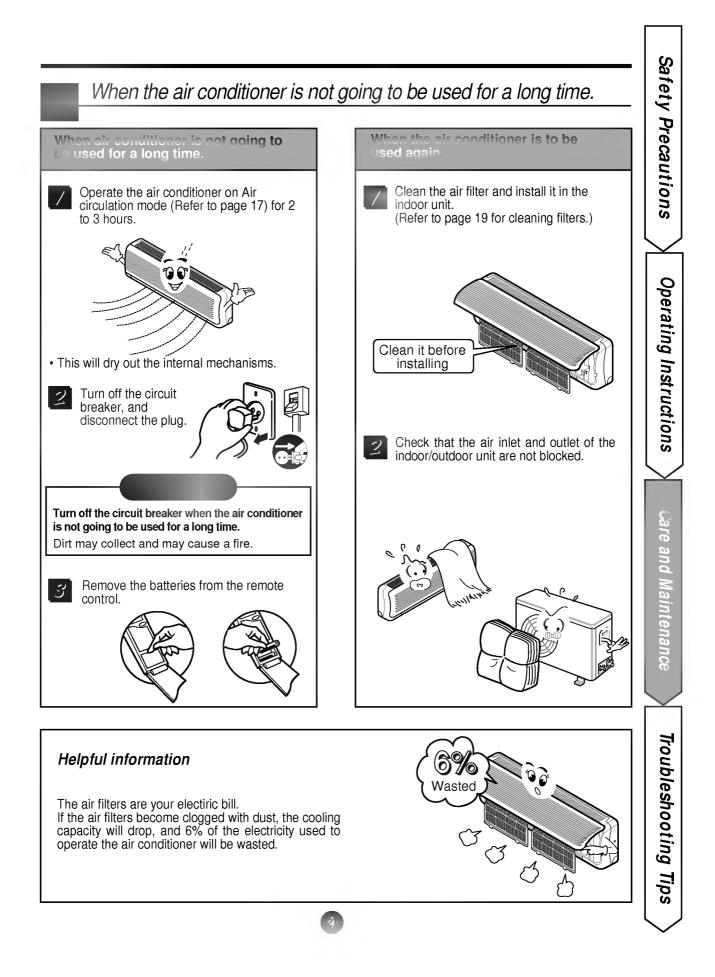

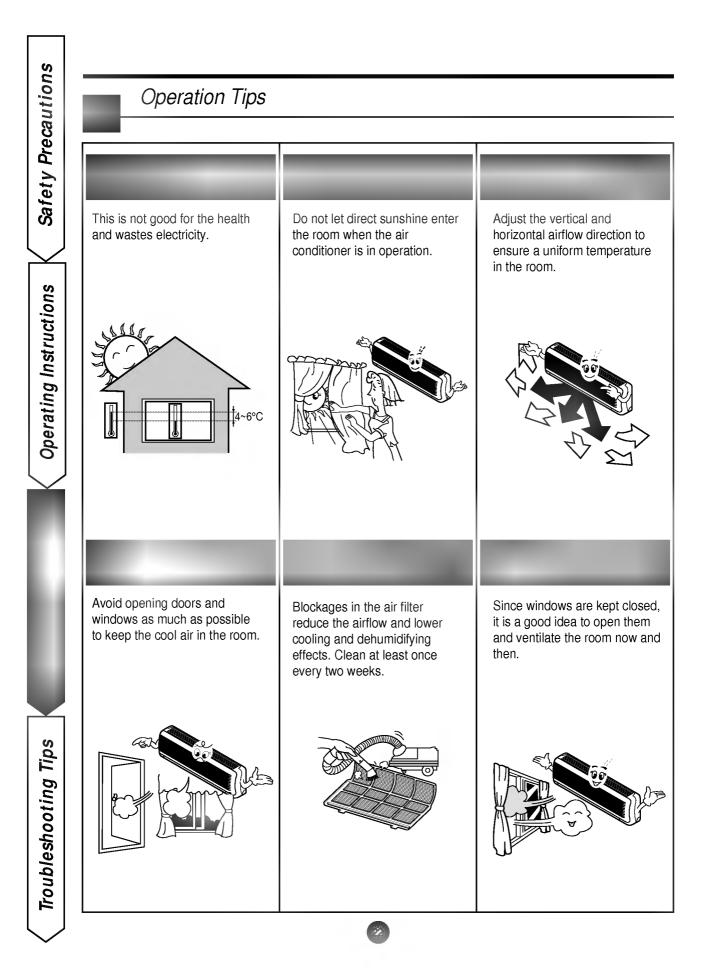

Before you call for service...

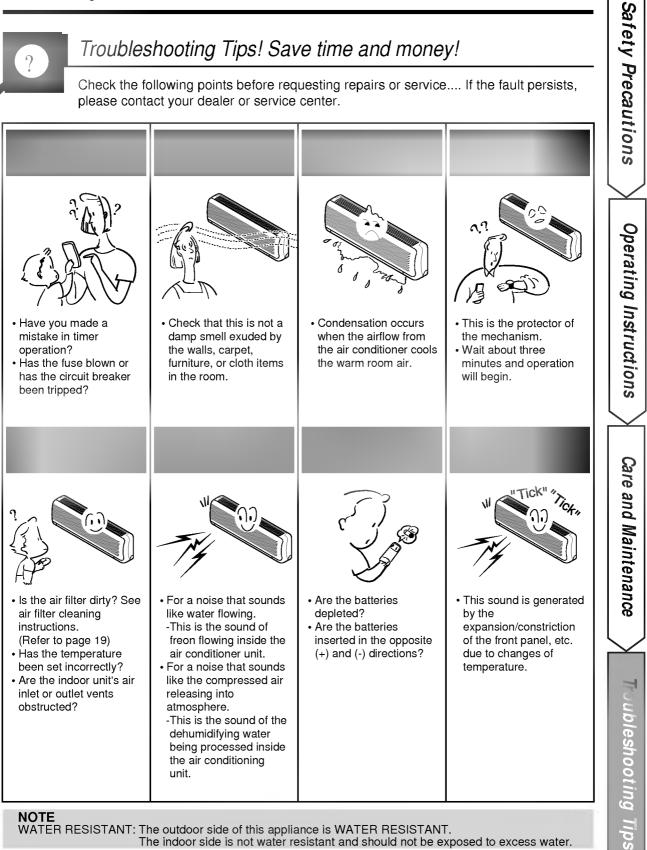

The indoor side is not water resistant and should not be exposed to excess water.



P/No.: 3828A30006K

Printed in Korea