



PCS400R Pro:Centric® Server

Installation & Setup Guide

Warranty

The latest product information and documentation is available online at:

www.lg.com

Copyright © 2017 LG Electronics Inc. All Rights Reserved.

Table of contents

3 Warning! Safety instructions

6 PCS400R Product Description

- 6 Features

7 Setup Information

- 7 PCS400R
- 7 Video Channel Assignments for RF Output (QAM-B)
- 8 Video Channel Assignments for RF Output (DVB-C)
- 8 Video Channel Assignments for RF Output (ISDB-T)
- 9 Video Channel Assignments for IP Output
- 9 ASI Output (Optional)

10 Rear and Front Panel Overviews

- 10 PCS400R Rear View
- 11 PCS400R Front View

12 Rack Installation

- 12 Typical Rack Installation
- 13 Rack-mount Considerations

14 System Setup

- 14 Typical Setup Diagram for PCS400R with ASI Output
- 15 Typical Setup Diagram for PCS400R with RF Output
- 16 Typical Setup Diagram for PCS400R with IP Output
- 17 VPN Network Connections Overview
- 18 Setting Up the Pro:Centric Network

21 PCS400R Configuration Options

- 21 Network and Communication Setup
- 22 Log In to the PCS400R and Access the Main Menu
- 23 View System Information
- 24 Modify Network Settings
- 27 Modify the Server Host Name
- 29 Set the Time Zone
- 30 Set the Date and Time
- 30 Change the Login Password
- 31 Change the Portal Application
- 32 Monitor the System
- 33 Update the PCS400R Operating System
- 33 Update the VPN Setup
- 34 Shut Down the System
- 34 Reset the System
- 34 Exit the Current Session

35 Troubleshooting

- 35 PCS400R Setup
- 36 PCS400R Communication

37 Specifications

39 Open Source Software Notice Information

56 LG PCS400R Pro:Centric Server Warranty



- Design and specifications subject to change without prior notice.
- This document provides examples of typical command line interface and text-based user interface (TUI) displays. Your displays may vary from those shown in this document.

Warning! Safety instructions

- Please read these safety precautions carefully before using the product.
- In this manual, the illustration may be somewhat different from your product because it is just example to help the instruction.
- Manufacturer and installer cannot provide service related to human safety as the applicable wireless device has possibility of electric wave interference.



CAUTION : TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER-SERVICEABLE PARTS INSIDE. REFER TO QUALIFIED SERVICE PERSONNEL.



This symbol is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



This symbol is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

WARNING : TO REDUCE THE RISK OF FIRE AND ELECTRIC SHOCK, DO NOT EXPOSE THIS PRODUCT TO RAIN OR MOISTURE.



TO PREVENT THE SPREAD OF FIRE, KEEP CANDLES OR OTHER ITEMS WITH OPEN FLAMES AWAY FROM THIS PRODUCT AT ALL TIMES.



- Read these instructions.
- Keep these instructions.
- Heed all warnings.
- Follow all instructions.
- Do not use this apparatus near water.
- Clean only with dry cloth.
- Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
- Do not install near any heat sources, such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding-type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
- Protect the power cord from being walked on or pinched, particularly at plugs, convenience receptacles, and the point where it exits from the apparatus.
- Only use attachments/accessories specified by the manufacturer.
- Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination in order to avoid injury from tip-over.
- Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
- Use authorized detergent only when cleaning the product. Do not clean your product with chemicals including glass cleaner, any type of air freshener, insecticide, lubricants, wax (car, industrial), abrasive, thinner, benzene, alcohol etc., which can damage the product and/ or its panel.
 - Product can be deformed.



- Do not install this product on a wall if it could be exposed to oil or oil mist. This may damage the product and cause it to fall.
- If water or another substance enters the product (like a AC adapter, power cord, TV), disconnect the power cord and contact the service centre immediately. Otherwise, this may result in fire or electric shock.
- Only use an authorized AC adapter and power cord approved by LG Electronics. Otherwise, this may result in fire, electric shock, malfunction or product deformation.
- Never Disassemble the AC adapter or power cord. This may result in fire or electric shock.
- Be careful in handling the adapter to prevent any external shocks to it. An external shock may cause damage to the adapter.
- Power Sources
 - This product should be operated only from the type of power source indicated on the marking label. If you are not sure of the type of power supply to your INSTALLATION, consult your product dealer or local power company.
- Overloading
 - Do not overload wall power outlets and extension cords as this can result in a risk of fire or electric shock.
- Disconnect Device
 - The AC mains plug is used as the disconnect device. The disconnect device must remain readily operable.
- Object and Liquid Entry
 - Never push objects of any kind into this product through openings as they may touch dangerous voltage points or short-out parts that could result in a fire or electric shock. Never spill liquid of any kind on the product. Do not use liquid cleaners or aerosol cleaners.
- Outdoor Use
 - To prevent fire or shock hazards, do not expose this product to rain or moisture.
- Wet Location
 - Do not use this product near water or moisture or in an area, such as a basement, that might become flooded. The apparatus shall not be exposed to dripping or splashing and no objects filled with liquids, such as vases, shall be placed on the apparatus.
- Test Equipment
 - In some cases, LG has supplied or recommended the use of test equipment and devices for the setup and testing of the equipment. The operation and maintenance of test equipment is described in their associated instruction manuals. Please refer to these manuals for explicit instructions regarding the safe use and handling of the equipment.
- Damage Requiring Service

Unplug this product from the wall power outlet and refer servicing to qualified service personnel under the following conditions:

 - If the power-supply cord or plug is damaged.
 - If liquid has been spilled, or objects have fallen into the product.
 - If the product has been exposed to rain or water.
 - If the product does not operate normally by following the operating instructions. Adjust only those controls that are covered by the operating instructions, as an improper adjustment of other controls may result in damage and will often require extensive work by a qualified technician to restore the product to its normal operation.
 - If the product has been dropped or the cabinet has been damaged.
 - If the product exhibits a distinct change in performance.

Refer all servicing to qualified service personnel.
- Servicing
 - These servicing instructions are for use by qualified service personnel only. To reduce the risk of electrical shock, do not perform any servicing other than that described in the operating instructions unless you are qualified to do so.
- Replacement Parts
 - When replacement parts are required, be sure the service technician uses replacement parts specified by the manufacturer or that have the same characteristics as the original parts. Unauthorized substitutions may result in fire, electric shock, or other hazards.



- **Safety Check**
 - Upon completion of any service or repairs to this product, ask the service technician to perform safety checks to determine that the product is in proper operating condition.
- **Handling Notice**
 - Only qualified service personnel should handle and install this unit. A series of screws with lock washers are used to secure the top and bottom covers of the unit. Use caution when handling the unit as the lock washers may have rough edges. Do NOT run your fingers over the top and bottom covers of the unit.
- Do not block any of the ventilation openings. Install in accordance with the manufacturer's instructions.
 - The product can be deformed or fire can break out due to overheating inside the product.
- Do not place the product in a built-in installation such as bookcase or rack.
 - Ventilation required.
- **DISCONNECTING DEVICE FROM MAINS**
 - Mains plug is the disconnecting device. The plug must remain readily operable.
- Do not place anything containing liquid on top of the product such as flowerpot, cup, cosmetics or candle.
 - This may cause a fire hazard.

PCS400R Rack Installation (See p. 12, 13)

- Wear a properly grounded, antistatic wrist strap to avoid causing electrostatic (ESD) damage to the PCS400R.
- Carefully slide the PCS400R into a standard 19-inch equipment rack.
- When mounting in the rack, make sure to use the appropriate hardware. ALL FOUR MOUNTING SCREWS MUST BE USED.
- This equipment is not designed to support other devices. Do NOT stack other equipment on the top of the PCS400R.
- Rear cabling must be dressed and supported so that the weight of the cabling is not a strain on the PCS400R connectors.
- MOUNTING OF THE EQUIPMENT IN THE RACK SHOULD BE SUCH THAT A HAZARDOUS CONDITION IS NOT ACHIEVED DUE TO UNEVEN MECHANICAL LOADING.

Rack-mount Considerations

- **Elevated Operating Ambient**
 - If installed in a closed or multi-unit rack assembly, the operating ambient temperature of the rack environment may be greater than room ambient. Therefore, consideration should be given to installing the equipment in an environment compatible with the maximum ambient temperature (T_{ma}) specified by the manufacturer (See specifications information in this document).
- **Reduced Air Flow**
 - Installation of the equipment in a rack should be such that the amount of air flow required for safe operation of the equipment is not compromised. To ventilate the system normally and avoid overheating, leave at least 2.5 cm on each side (including top and bottom) of the PCS400R. Do NOT stack other equipment on the top of the PCS400R. Also, ensure that the unit's AC power adapter is never stacked or bundled with other AC power adapters. Each adapter should have adequate ventilation and should be isolated from other heat sources.
- **Circuit Overloading**
 - Consideration should be given to the connection of the equipment to the supply circuit and the effect that overloading of the circuits might have on overcurrent protection and supply wiring.
- **Reliable Earthing**
 - Maintain reliable earthing of rack-mounted equipment. Particular attention should be given to supply connections other than direct connections to the branch circuit (e.g. use of power strips).
- **Mains Outlet Earthing**
 - The apparatus with Class I construction must be connected to a mains socket outlet with a protective earthing connection.

PCS400R Product Description

The LG PCS400R Pro:Centric® server is a stand-alone, remotely-controlled processor and controller for the Pro:Centric system. The server enables you to create and remotely manage portal and application content for LG TVs over ASI, RF, or IP, using either the Pro:Centric Java or Pro:Centric Direct HTML application.

Features

- Supports the Pro:Centric Java or Pro:Centric Direct HTML application.
- Three output options: ASI, RF, or IP.
 - ASI output: The PCS400R generates one channel for GEM data only or multiplexed GEM/site data.
 - RF output: QAM-B (6 MHz), DVB-C (6 MHz, 7 MHz, or 8 MHz), and ISDB-T (6 MHz) modulations are supported. The PCS400R generates one 256-QAM or 64-QAM RF channel for GEM/site data.
 - IP output: The PCS400R generates two multicast streams for GEM/site data.
- Customer may work with content provider to create Pro:Idiom® encrypted content for RF or IP video playout channels.
 - QAM-B and DVB-C RF output: In addition to the GEM/site data channel, the PCS400R generates up to seven contiguous RF channels for video playout. Each of these channels supports either two or three programme streams multiplexed on each channel. This capability provides output of up to 21 programmes of video content.
 - ISDB-T RF output: In addition to the GEM/site data channel, the PCS400R generates up to one (Java application) or two (HTML application) contiguous RF channels for video playout. Each of these channels supports either two or three programme streams multiplexed on each channel. This capability provides output of up to three (Java application) or six (HTML application) programmes of video content.
 - IP output: In addition to two multicast streams for GEM/site data, the PCS400R generates 21 multicast data streams for video playout. Each data stream supports one programme. This capability provides output of up to 21 programmes of video content.
- Provides remote management capability over Ethernet.
- Small, lightweight chassis.
- 19-inch rack-mountable.
- 1U height profile to minimize rack space usage.

An Internet browser-based Admin Client graphical user interface (GUI), provided for system integrator (SI) partners and lodging/institution administrators, facilitates support and maintenance of the Pro:Centric system. The Admin Client enables users to remotely manage system backups, output configuration, software updates, portal/information section content, TV configuration settings, etc.

Setup Information

Check the following items before you begin the PCS400R installation and setup procedures.

- * **Note :** Once the PCS400R hardware and software is installed and the initial setup completed, output parameters are configured in the appropriate Pro:Centric Admin Client. Along with this document, it is recommended that you have readily available a copy of either the **Pro:Centric Server Admin Client User Guide** (for the Java application) or the **Pro:Centric Direct Admin Client User Guide** (for the HTML application), as applicable.

PCS400R

- Unpack the PCS400R Pro:Centric server unit and all accessories.

PCS400R Accessories: AC Power Cord and Adapter

- Select the location for mounting the PCS400R. Ensure adequate ventilation is available.
- Obtain the necessary attachment hardware to mount the PCS400R chassis in its targeted location.
- Plan and install the necessary cabling and network (Ethernet) and AC power access for the PCS400R. You also will need the following to connect a PC directly to the PCS400R for system setup purposes: FTDI TTL-USB cable (P/N TTL-232R-5V-AJ).

Video Channel Assignments for RF Output (QAM-B)

Each input programme is limited to one-half or one-third of the output channel bitrates (Mbps), which in turn are dependent on the modulation format. 256-QAM modulation supports up to 38.8 Mbps per channel, and 64-QAM modulation supports up to 26.97 Mbps per channel.

- Create a channel assignment plan for the installation site, or modify an existing plan to incorporate the RF output of the PCS400R. Ensure that up to eight contiguous CATV broadcast channels are allocated for the PCS400R RF output. The PCS400R uses a 256-QAM or 64-QAM modulation format, thereby occupying approximately 48 MHz of frequency spectrum.

The RF start channel is user-assigned during system setup (in the Admin Client), and the remaining channels (up to seven) are then automatically assigned per EIA-542 STD CATV frequency allocation standards. For example, if the RF start channel assignment is channel 2, the seven remaining channels will be 3, 4, 5, 6, 95, 96, and 97. Refer to EIA-542 STD CATV frequency allocation tables for further information as required.

The highest available RF channel number for the PCS400R is 135. Thus, to allocate all eight channels available for PCS400R RF output, the RF start channel must be set no higher than 128.

- Find a location on the frequency spectrum that is free of existing noise.

Video Channel Assignments for RF Output (DVB-C)

Each input programme is limited to one-half or one-third of the output channel bitrates (Mbps), which in turn are dependent on the modulation format. 256-QAM modulation supports up to 37.27 Mbps (6 MHz bandwidth), 45.05 Mbps (7 MHz bandwidth) or 50.87 Mbps (8 MHz bandwidth) per channel, and 64-QAM modulation supports up to 27.95 Mbps (6 MHz bandwidth), 33.79 Mbps (7 MHz bandwidth) or 38.15 Mbps (8 MHz bandwidth) per channel.

- Create a channel assignment plan for the installation site, or modify an existing plan to incorporate the RF output of the PCS400R. Ensure that up to eight contiguous CATV channel frequencies are allocated for the PCS400R RF output. The PCS400R uses a 256-QAM or 64-QAM modulation format, thereby occupying approximately 48 MHz, 56 MHz, or 64 MHz (depending on channel bandwidth) of frequency spectrum.

The RF start channel frequency is user-assigned, in KHz, during system setup (in the Admin Client), and the remaining channel frequencies (up to seven) are then automatically assigned in accordance with the specified bandwidth. For example, if the RF start channel frequency assignment is 57,000 KHz with a 7 MHz bandwidth, the seven remaining channel frequencies will be 64,000 KHz, 71,000 KHz, 78,000 KHz, 85,000 KHz, 92,000 KHz, 99,000 KHz, and 106,000 KHz.

The highest available RF channel frequency for the PCS400R is 861,000 KHz.

- Find a location on the frequency spectrum that is free of existing noise.

Video Channel Assignments for RF Output (ISDB-T)

Each input programme is limited to one-half or one-third of the output channel bitrates (Mbps). ISDB-T modulation supports up to 23.23 Mbps (6 MHz bandwidth) per channel.

- Create a channel assignment plan for the installation site, or modify an existing plan to incorporate the RF output of the PCS400R. Ensure that up to two (Java application) or three (HTML application) contiguous CATV broadcast channels are allocated for the PCS400R RF output. The PCS400R occupies up to 18 MHz of frequency spectrum.

The RF start channel is user-assigned during system setup (in the Admin Client), and the remaining channels (up to one for the Java application or two for the HTML application) are then automatically assigned in accordance with the 6 MHz bandwidth. For example, if the RF start channel assignment is channel 7 on a server configured for the HTML application, the two remaining channels will be 8 and 9.

The data channel number must be between 7 and 69. Thus, for example, to allocate all three channels available for PCS400R RF output with the HTML application, the RF start channel must be set no higher than 67.

* **Note:** The Pro:Centric server cannot generate channels 13 and 14 simultaneously. If you intend to configure more than one channel, set the data channel number from 7 to 12 (two channels) or 7 to 11 (three channels) or from 14 to 68.

- Find a location on the frequency spectrum that is free of existing noise.

Video Channel Assignments for IP Output

Each IP stream is limited to 19.4 Mbps.

- The PCS400R outputs IPv4 multicast streams. Ensure the institution's IP network and room receivers support IPv4 multicast and that the network is capable of selectively routing multicast traffic. Refer to vendor equipment documentation for further information.
- Create a channel assignment plan for the installation site, or modify an existing plan to incorporate the IP output of the PCS400R. Ensure that up to 23 unused and unreserved IPv4 multicast addresses, within the designated range 224.0.0.0 to 239.255.255.255, are allocated for the PCS400R IP output.

The IP start channel is user-assigned in the Admin Client, and the remaining channel assignments are then automatically incremented. For example, if the IP start channel assignment is 227.0.0.40, the remaining channels will be 227.0.0.41, 227.0.0.42, etc. Since the first two streams are reserved for site data, the first video content channel in this scenario will be 227.0.0.42.

- Reserve one User Datagram Protocol (UDP) port for the multicast data streams. You can use the system default (1234) or another unassigned port number, for example, 50,000, 50,001, etc. The port must avoid conflict with other protocols in use.
- * **Note:** Refer to the IANA IPv4 Multicast Address Space Registry and/or the IANA Service Name and Transport Protocol Port Number Registry for further IP address/port information as required.

ASI Output (Optional)


ASI output supports up to 19.4 Mbps each for GEM and site data (total of 38.8 Mbps).

- If the system is using ASI output, install the modulator and upconverter that will receive the ASI output signal from the PCS400R. Refer to the manufacturer's documentation.

Rear and Front Panel Overviews

ENGLISH

PCS400R Rear View

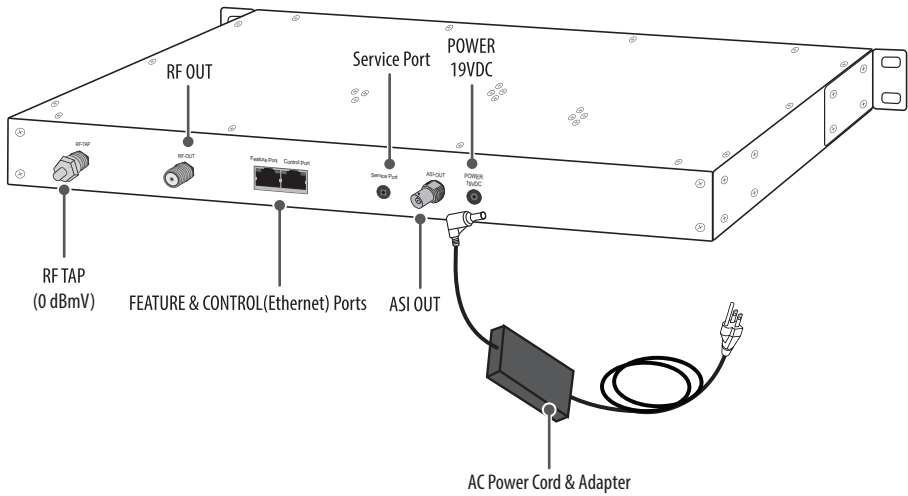


- **Disconnect Device**

The AC mains plug is used as the disconnect device. The disconnect device must remain readily operable.

- **RF TAP Connector**

Reserved for service technician use only. When not in use, this connector must remain terminated with attached terminator accessory.

PCS400R Front View

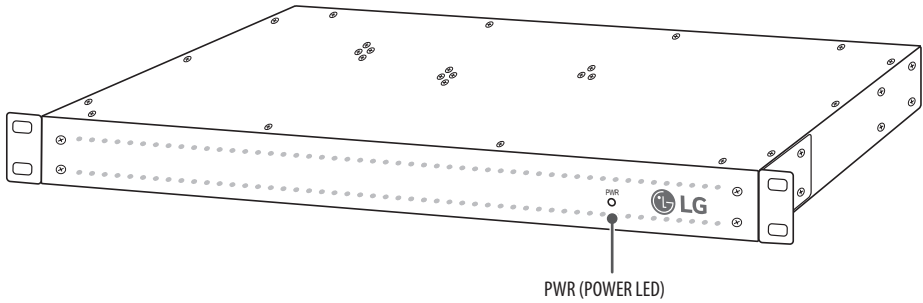

- **Ventilation**

Air flow must not be obstructed. To ventilate the system normally and avoid overheating, leave at least 2.5 cm on each side (including top and bottom) of the PCS400R. Do NOT stack other equipment on the top of the PCS400R.


- **Screws with Lock Washers**

Only qualified service personnel should handle and install the PCS400R. A series of screws with lock washers are used to secure the top and bottom covers of the PCS400R. Use caution when handling the unit as the lock washers may have rough edges. Do NOT run your fingers over the top and bottom covers of the unit.

Rack Installation


Typical Rack Installation

- 1 To avoid causing electrostatic (ESD) damage to the PCS400R during installation, attach an antistatic wrist strap to a properly grounded rack/object and put it on.
- 2 (Optional) As shipped, the PCS400R mounting brackets are attached flush with the front of the unit (See diagram A). If desired, the mounting brackets may be detached from the unit and reattached, for example, so that they are flush with the rear of the unit (See diagram B). If you wish to change the location/orientation of the mounting brackets, carefully remove each of the four (M4 x L10 mm) screws and attendant washers (one flat and one lock washer per screw) holding each bracket in place. Then, use the same screws and washers to reattach the mounting brackets in the desired location.
- 3 Carefully slide the chassis into a standard 19-inch equipment rack.
- 4 Use all four mounting screws to secure the chassis to the rack.

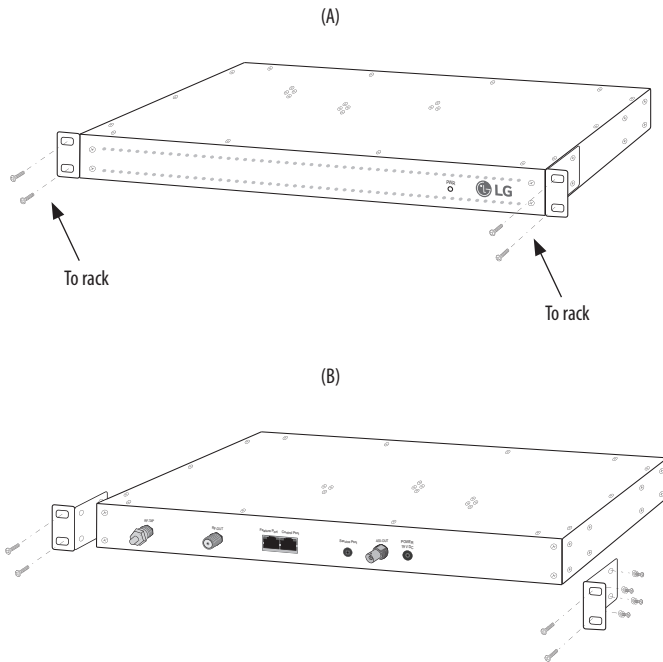

Use flat washer and lock washer with each M4 x L10 mm mounting bracket screw.

Front View of Rack Cabinet

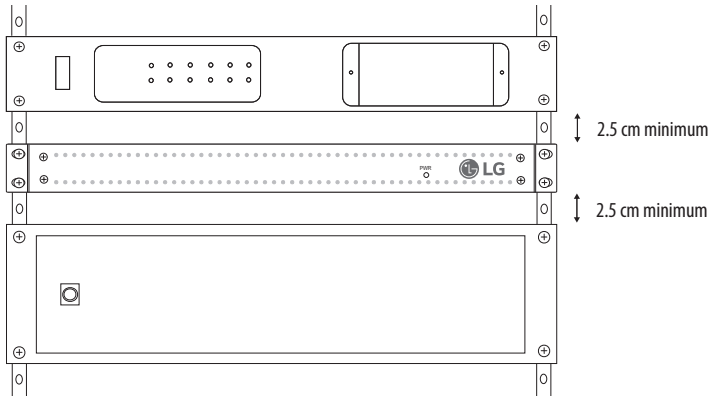

Rack-mount Considerations

A. Elevated Operating Ambient

If installed in a closed or multi-unit rack assembly, the operating ambient temperature of the rack environment may be greater than room ambient. Therefore, consideration should be given to installing the equipment in an environment compatible with the maximum ambient temperature (T_{ma}) specified by the manufacturer (See specifications information in this document).

B. Reduced Air Flow

Installation of the equipment in a rack should be such that the amount of air flow required for safe operation of the equipment is not compromised. To ventilate the system normally and avoid overheating, leave at least 2.5 cm on each side (including top and bottom) of the PCS400R. Do NOT stack other equipment on the top of the PCS400R unit. Also, ensure that the unit's AC power adapter is never stacked or bundled with other AC power adapters. Each adapter should have adequate ventilation and should be isolated from other heat sources.

C. Circuit Overloading

Consideration should be given to the connection of the equipment to the supply circuit and the effect that overloading of the circuits might have on overcurrent protection and supply wiring.

D. Reliable Earthing

Maintain reliable earthing of rack-mounted equipment. Particular attention should be given to supply connections other than direct connections to the branch circuit (e.g., use of power strips).

E. Mains Outlet Earthing

The apparatus with Class I construction must be connected to a mains socket outlet with a protective earthing connection.


System Setup

Refer to the following diagrams, and complete the system installation as described on pages 18 to 20.




* **Caution:** Do NOT make system connections until instructed to do so during the system installation procedure. In some instances, configuration steps must be performed before physical connections are made.


Typical Setup Diagram for PCS400R with ASI Output

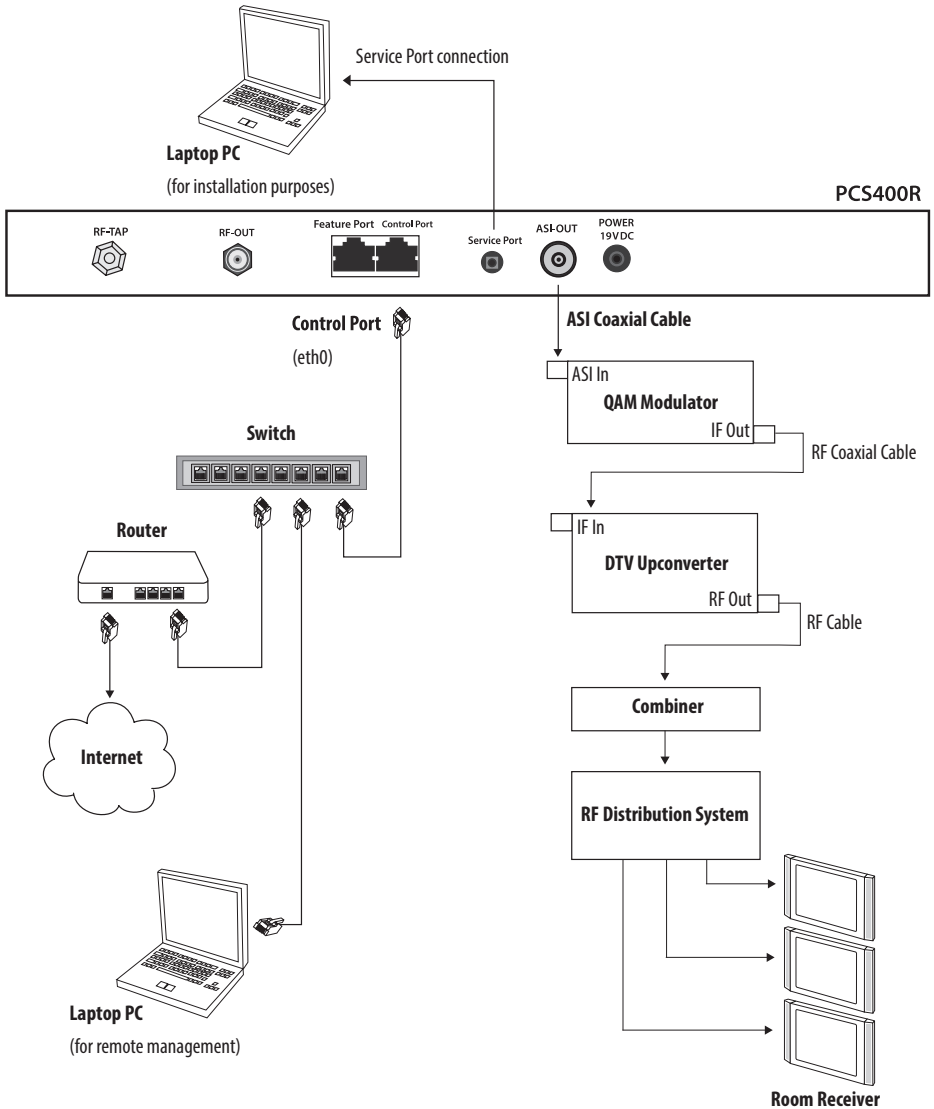


Typical Setup Diagram for PCS400R with RF Output

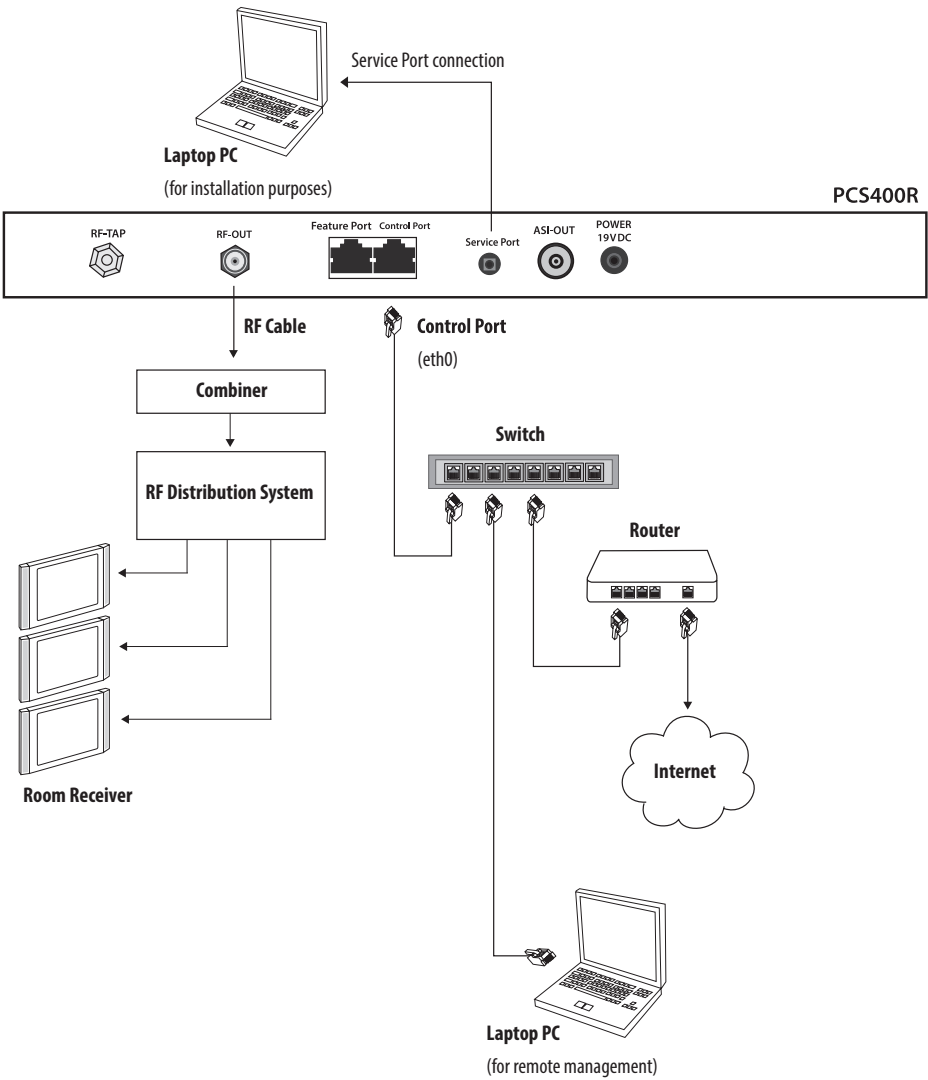

Typical Setup Diagram for PCS400R with IP Output

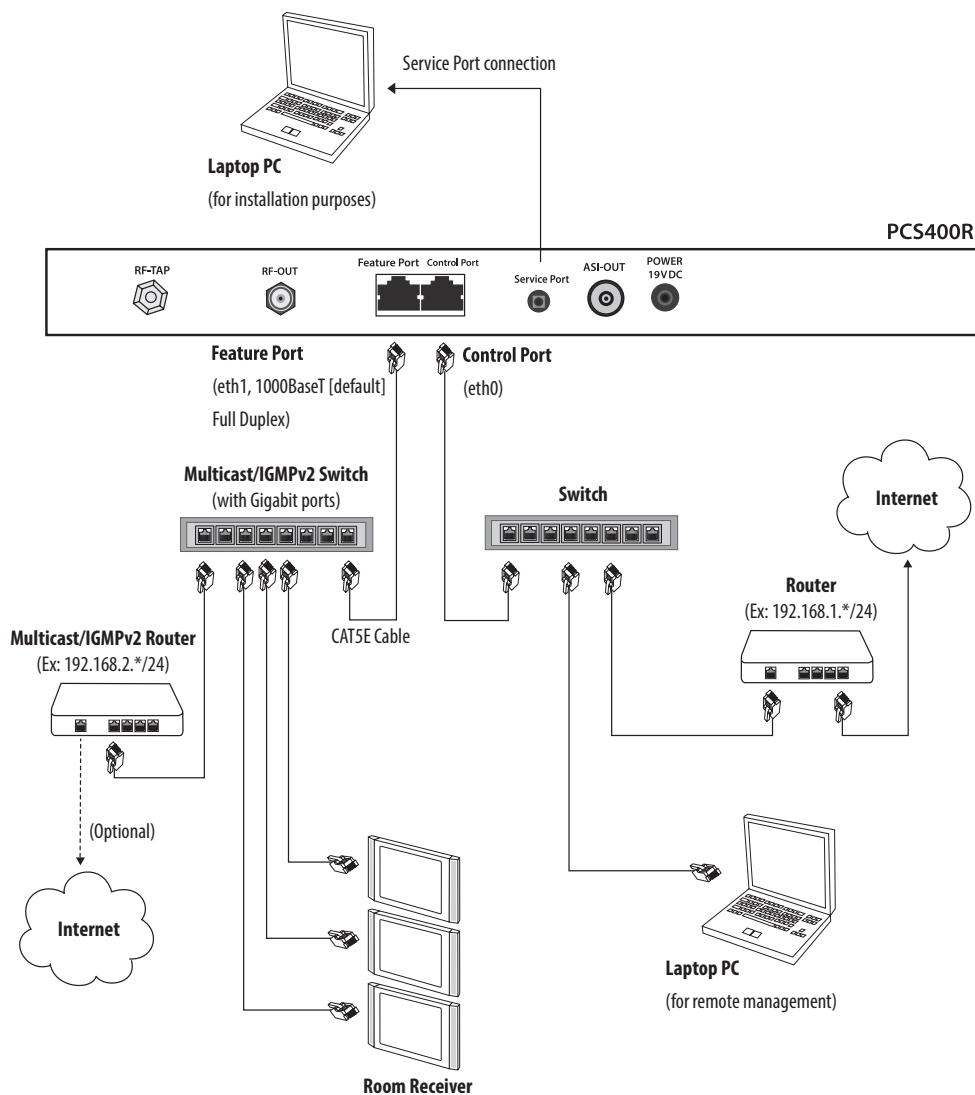

VPN Network Connections Overview

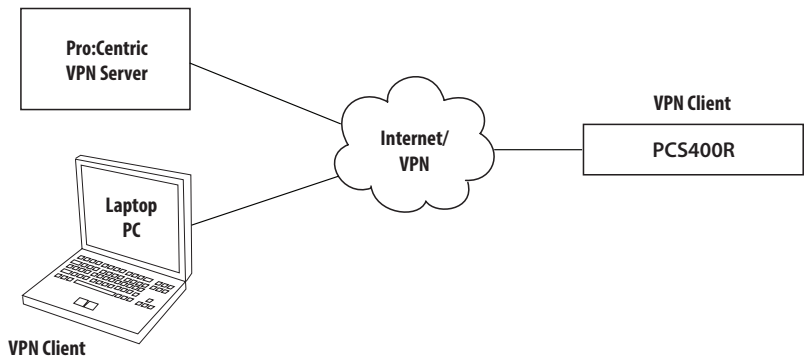

Setting Up the Pro:Centric Network

This section describes how to complete the initial network configuration for the PCS400R. See also typical setup and VPN network connections diagrams above.

- 1 If your system is using ASI output, make the following connections; otherwise, go to step 2.
 - Connect a 75 ohm BNC-to-BNC coaxial cable between ASI OUT on the PCS400R and ASI IN on the modulator.
 - Connect an RF coaxial cable between IF OUT on the modulator and IF IN on the upconverter.



* **Note : The BNC cable must be less than 9.2 meters in length.**

- 2 To enable remote management, connect one end of a CAT5 RJ-45 Ethernet cable to the Control Port on the PCS400R rear panel, and connect the other end of the cable to the institution's network.
- 3 Connect the PCS400R power supply to the POWER connector on the PCS400R rear panel. Then, plug the AC power cord into a powered AC line receptacle. When power is applied, the PWR (Power) LED on the PCS400R front panel will initially flash red and then turn green (blinking during boot-up).
The boot-up process for the PCS400R may take several minutes. When boot-up is complete, the PWR LED on the PCS400R front panel will light continuously green.
- 4 Once the PWR LED is lit continuously (no longer blinking), use the FTDI TTL-232R-5V-AJ cable to connect a PC to the Service Port on the PCS400R rear panel.
- 5 Using HyperTerminal or an equivalent terminal emulation programme on the PC, configure the serial port as follows:
 - Bits per second/baud = 115,200
 - Data bits = 8
 - Parity = None
 - Stop bits = 1
 - Flow Control = None

* **Note:** To avoid configuration errors, make sure the keyboard settings on the terminal emulator assign the backspace character to Ctrl + H (ASCII 8).

Once the connection is established, you should see a login prompt. (If the login prompt is not automatically displayed, press **Enter** to refresh the screen.)
- 6 At the `login as:` prompt, type **admin** and press **Enter**. Then, at the password: prompt, type **Password4Partners** (case-sensitive) and press **Enter**.



* **Note: After the initial system setup is complete, it is highly recommended that you change the admin user password from its default value. See "Change the Login Password" on page 30 for further information.**

The system will display a prompt for you to select the Pro:Centric portal application you will be using:

You must select a portal application to continue.

Available portal applications are:

- 1 pca (Java)
- 2 pcd (HTML)

Enter 1 or 2 to select a portal application:

7 Either:

- Type **1** and press **Enter** to select the Java application.
 - Type **2** and press **Enter** to select the HTML application.
- * **Note:** Select the appropriate application based on the purchase order associated with this server. The software license specifies the Java or HTML application, and the application type must be set accordingly in this step.

Once you make your selection, the server will display confirmation before initiating a reboot, for example:

```
You selected the pcd (HTML) application
System will now reboot to run the selected application
```

8 When the reboot is complete, you should see a new login prompt. Log back in to the server (See step 6).

Once you are logged in, you will see a `Command >` prompt.

The next step describes how to set static IP addresses for the Control Port and/or Feature Port, if desired/applicable. The Control Port is used for remote management/communication purposes, while the Feature Port is designated for PCS400R IP output (not applicable if your system is using RF or ASI output). By default, both ports are configured for DHCP.


- * **Note:** You can press **Enter** at any PCS400R command prompt to view current menu, if desired.
- * **Note:** To view the server's current configuration settings, type **info** and press **Enter** at the `Command >` prompt. The System Information display will show the IP address that has been assigned to the Control Port (if the network is configured for DHCP) and the output configuration. See "View System Information" on page 23 for further information.
- * **Note:** If the Control Port network is configured for DHCP but the Control Port IP address is not displayed in the System Information display (see note above), refer to "Network Setup" troubleshooting information on page 35. If configured, the DHCP server should assign an IP address to the Control Port once the PCS400R successfully connects to the network.

9 (Optional) Set a static IP address for the Control Port and/or Feature Port.

- * **Note:** For detailed information on this step and additional screen samples, see "Modify Network Settings" on pages 24 to 26.

a) At the `Command >` prompt, type **setip** and press **Enter**.

TCP/IP configuration is performed in the CentOS Network Manager TUI (text-based user interface). The system will display the Network Manager menu, for example:

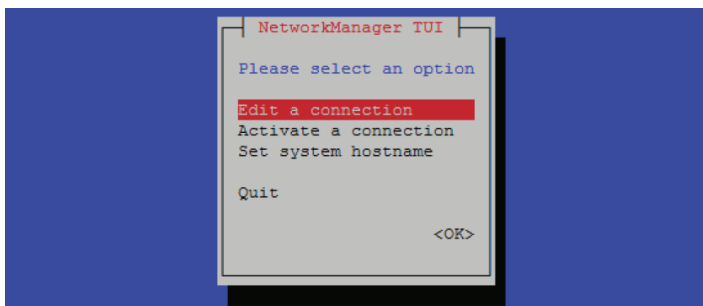

b) Select/highlight **Edit a connection** and press **Enter**.

c) In the next screen, select/highlight the port you wish to configure and press **Enter**.

d) With the Edit Connection screen for the selected port on display, add the appropriate IPv4 port IP address in the format `xxx.xxx.xxx.xxx/xx`, where the last two digits (after the forward slash) identify the network mask bits for the IP address.

Also, add the gateway, and DNS IP addresses in the format `xxx.xxx.xxx.xxx`.



* **Note:** In order to avoid a service interruption, do not modify any of the other fields in the Edit Connection screen. In particular, do NOT modify the data in the Profile Name and Device fields.

* **Note:** The Feature Port IP address MUST be on a different subnet than the Control Port IP address.

e) When you are finished with network configuration for the selected port, select/highlight <OK> at the bottom right of the Edit Connection screen and press **Enter**.

f) Repeat steps (c) to (e), as required, to complete configuration for the second port.

g) When you are finished with port configuration, select/highlight <Quit> at the bottom right of the port selection screen and press **Enter** to return to the Network Manager menu. To exit the Network Manager and return to the `Command >` prompt, select **Quit** and press **Enter**.

* **Note:** Review the configuration data for each port carefully before you confirm the settings. Ensure each of the addresses was entered correctly.

* **Note:** You may also edit the host name from the Network Manager menu, if desired. See "Modify the Server Host Name" on pages 27 to 28 for further information. Avoid using spaces or special characters, such as ?, -, etc., in the host name.

10 (Optional) Set the time zone and/or the date and time on the PCS400R.

By default, the PCS400R is synchronized with an NTP server and configured for the US Eastern time zone. If the PCS400R is connected to the Internet, the NTP client will periodically update the time setting on the PCS400R. You can set the time zone as required. If the PCS400R is not connected to the Internet, you also have the option to specify date and time data manually.

Use the PCS400R "tz" and/or "time" commands (available from the `Command >` prompt) and follow the system prompts to set the time zone and/or date and time on the PCS400R, as necessary. See "Set the Time Zone" on page 29 and/or "Set the Date and Time" on page 30 for further information.

* **Note:** If you changed the time zone, you will be prompted to reset the system. Continue with step 11.

11 If you made any configuration changes in steps 9 or 10, reset the PCS400R: At the `Command >` prompt, type **reset** and press **Enter**. The reset process may take several minutes, after which the PCS400R resumes normal operation.

12 Make the appropriate connection to the RF distribution system or IP distribution network depending on the PCS400R output option to be used:

- ASI output: Connect the RF output on the upconverter to the RF distribution center combiner, and balance the RF signal so that the Pro:Centric signal level at the TV(s) is between 0 to +7 dBmV.
- RF output: Connect RF OUT on the PCS400R to the RF distribution center combiner, and balance the RF signal so that the Pro:Centric signal level at the TV(s) is between 0 to +7 dBmV.
- IP output: Connect a CAT5E or better Ethernet cable between the Feature Port on the PCS400R rear panel and the institution's IP distribution network.

- **Caution: (ASI/RF Output only) For proper system performance, the Pro:Centric signal level at the TV input (ANTENNA IN) must be between 0 to +7 dBmV. Note that additional equipment may be required to adjust the signal level.**
- **Caution: When not in use, the RF TAP (0 dBmV) connector must remain terminated with attached terminator accessory.**



The remainder of the system setup—configuration of ASI, RF, or IP output parameters, video playout settings, Pro:Centric Channel Map, etc.—is performed in the Admin Client that is appropriate for your system (based on your selection in step 7 of the procedure above). Refer to either the *Pro:Centric Server Admin Client User Guide* (Java application) or the *Pro:Centric Direct Admin Client User Guide* (HTML application), as applicable, for further information.

* **Note:** By default, the server output is enabled for 256-QAM-B modulation (RF output), with the data channel set to 75.

PCS400R Configuration Options

Network and Communication Setup

This section describes PCS400R communication options for configuration purposes.



- * **Note:** Before you proceed with any additional configuration, the PCS400R software should be installed and configured as described in the setup procedure on pages 18 to 20.

Also note that configuration updates periodically require that you reset the PCS400R. Make sure to reset the unit when directed to do so.

There are two typical options for communicating with the PCS400R:

- Use an SSH client to communicate with the PCS400R via a command line interface. If necessary, consult the network administrator to obtain the IP address that has been assigned to/configured for the PCS400R's Control Port.
- To establish a direct connection to the PCS400R, connect a PC to the PCS400R using the FTDI TTL-USB cable (P/N TTL-232R-5V-AJ). Plug the USB end of the cable into an open USB port on your PC. If necessary, install the device driver. Plug the other end of the cable into the Service Port jack on the PCS400R rear panel.

Using HyperTerminal or an equivalent terminal emulation programme on the PC, configure the serial port as follows:

- Bits per second/ baud = 115,200
- Data bits = 8
- Parity = None
- Stop bits = 1
- Flow Control = None

- * **Note :** To avoid configuration errors, make sure the keyboard settings on the terminal emulator assign the backspace character to Ctrl + H (ASCII 8).

You will need to know the "admin" user password in order to log in to the command line interface. The default admin user password is "Password4Partners" (case-sensitive). If necessary, for example, if the password has been changed from its default value, consult the system administrator to obtain the current admin user password.

- * **Note :** If you want to connect a PC directly to the PCS400R Control Port using an Ethernet CAT5E cable, in order for communication to be established, the PCS400R's IP address must be on the same subnet as the PC's IP address.

Log In to the PCS400R and Access the Main Menu

* **Note** : The PCS400R must be connected to an IP network for SSH client access. For direct access to the PCS400R Service Port, use the FTDI TTL-USB cable (P/N TTL-232R-5V-AJ). See also "Network and Communication Setup" above for further information.

- 1 Establish communication with the PCS400R using an SSH client or via a direct connection to the PCS400R Service Port. Once communication is established, you should see a login prompt. (If the login prompt is not automatically displayed, press **Enter** to refresh the screen.)
- 2 At the login as: prompt, type **admin** and press **Enter**.
- 3 At the Password: prompt, type the admin password and press **Enter**.
- 4 At the Command> prompt, either:
 - Press **Enter** to display the PCS400R Main Menu (See example below).
 - Type the desired command and press **Enter**.

The following sections describe each of the configuration commands.

* **Note**: You can always press **Enter** at the Command > prompt to display the PCS400R Main Menu.

Example: PCS400R Main Menu

Main Menu	
info	System information
setip	TCP/IP Setup Menu
tz	Timezone setup
time	Time setup
pwd	Change password
portal	Select the portal application
monitor	System monitor
shut	Shutdown the system
reset	System Reset
exit	End the session
Command >	

View System Information

- 1 Log in to the PCS400R as described on the previous page.
- 2 At the `Command` > prompt, type **info** and press **Enter**.

The System Information display identifies important information about the PCS400R, including the unit serial number, hardware ID (firmware version), software versions, MAC addresses, and IP addresses, for example:

```
PCS400R Pro:Centric Server v1.2.1
```

```
Copyright (c) 2017 LG Electronics U.S.A., Inc.
```

```
SN:                601-12480013
Hardware ID:       1
FPGA version:      802
BIOS version:      116
BIOS vendor:       PCS400v2
CPU SN:            000002703544
OS version:        Linux 3.10.0-327.el7.x86_64
OS release:        #1 SMP Thu Nov 19 22:10:57 UTC 2015
Ctrl MAC:          00:13:95:21:a2:7d
Ctrl IP:           10.1.2.3
Feat MAC:          00:0C:63:40:47:db
Feat IP:           192.168.20.120
VPN IP:            n/a
RF config:         Mode 3, 256-QAM-B, RF: 6 MHz, 5.36 MSps, ASI: 38.81 Mbps
RF channel:        75
Channels:          1
Local time:        Tue Apr 25 14:42:02 EDT 2017
```


* **Note** : If RF output is configured for DVB-C modulation, the display will identify the RF frequency (in KHz) in place of the RF channel. If IP output is configured, the display will identify the multicast IP address in place of the RF fields.

It is recommended that you record this information for future reference. If you find it necessary to call customer service or engineering support, please have this information available.


Modify Network Settings

This section describes how to modify the network settings of the PCS400R Ethernet ports. The Control Port is used for remote management/communication purposes, while the Feature Port is designated for PCS400R IP output.

- 1 Log in to the PCS400R as described on the previous page.
- 2 At the `Command >` prompt, type **setip** and press **Enter**.
The system will display the Network Manager menu.
- 3 Select/highlight **Edit a connection** and press **Enter** to modify the IP configuration of either the Control Port or the Feature Port.
 - * **Note** : To exit the Network Manager and return to the Main Menu prompt without modifying any settings, select **Quit**.
 - * **Note** : You may also modify the server's host name from the Network Manager. See "Modify the Server Host Name" on pages 27 to 28 for further information.

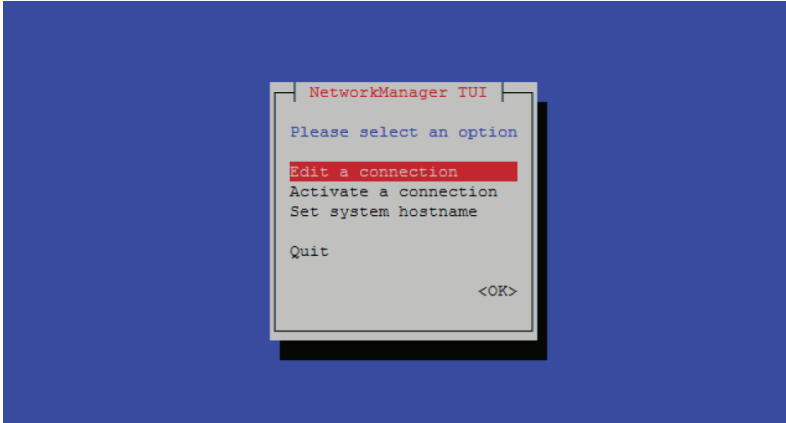

- 4 In the next screen, select/highlight the port profile to modify, and then press **Enter**.

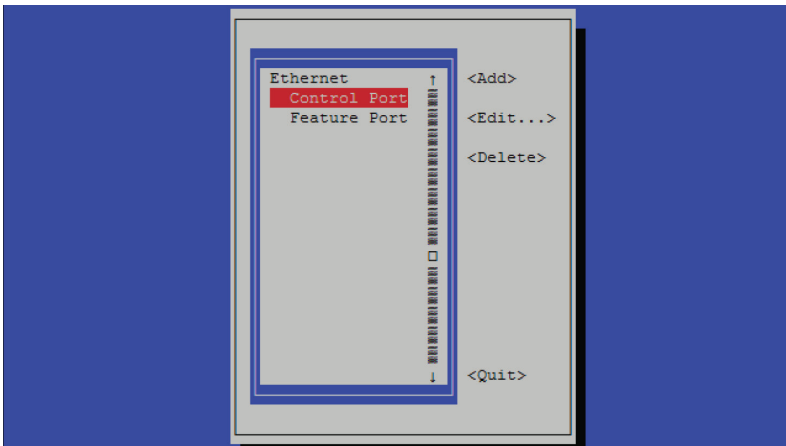

Once you select a port, the Edit Connection screen for that port will be displayed, for example:



* **Note:** Steps 5 to 9 identify all fields that may require modification for the purposes of the Pro:Centric network. In order to avoid a service interruption, do not modify any of the other fields in the Edit Connection screen. In particular, do NOT modify the data in the Profile Name and Device fields.

- 5 To change the port configuration from Automatic to Manual or vice versa, select/highlight the IPv4 Configuration field and press **Enter**. Then, select the appropriate option (**Automatic** or **Manual**) from the drop-down menu.

- 6 The next step depends on your selection in the previous step.
- If you selected **Automatic**, go to step 9.
 - If you selected **Manual**, continue with step 7.
- 7 If you are configuring static (i.e., manual) settings, select/highlight **<Show>** at the right of the IP Configuration field and press **Enter** to view the expanded configuration fields.

8 Complete the following configuration:

- Select/highlight **<Add...>** and press **Enter** in the **Addresses** field. Then, type the appropriate IP address in the format *xxx.xxx.xxx.xxx/xx*, where the last two digits (after the forward slash) identify the network mask bits for the IP address.

Also, type the gateway IP address (in the format *xxx.xxx.xxx.xxx*) in the Gateway field.

The screenshot shows the 'IPv4 CONFIGURATION' screen with the mode set to '<Manual>' and a '<Hide>' button at the top right. The 'Addresses' field is highlighted in blue, with a green cursor at the end of the text '<Add...>'. To the right of this field is a '<Remove>' button. Below 'Addresses' is the 'Gateway' field, also highlighted in blue with '<Add...>' text. At the bottom are 'DNS servers' and 'Search domains', both with '<Add...>' text.

- * **Note** : If you do not specify the network mask bits in the port's IP address, as indicated above, the system will not create a local route over the network interface (unless the interface is used as the system's default route).

- Select/highlight **<Add...>** and press **Enter** in the **DNS Servers** field, and type the primary DNS IP address (in the format *xxx.xxx.xxx.xxx*). As required, select **<Add...>** again and type the secondary DNS IP address.



The screenshot shows the 'IPv4 CONFIGURATION' screen with the mode set to '<Manual>' and a '<Hide>' button at the top right. The 'DNS servers' field is highlighted in blue, with a green cursor at the end of the text '<Add...>'. To the right of this field is a '<Remove>' button. Above it is the 'Gateway' field, highlighted in blue with '<Add...>' text. At the bottom are 'Addresses' and 'Search domains', both with '<Add...>' text.


- * **Note: The Feature Port IP address MUST be on a different subnet than the Control Port IP address.**

- (Recommended) Change the port configuration for IPv6 from Automatic to Ignore: Select/highlight the IPv6 Configuration field and press **Enter**. Then, select Ignore from the drop-down list of options.
- When you are finished, select/highlight **<OK>** at the bottom right of the Edit Connection screen and press **Enter**.
- Repeat steps 4 to 10 for the second port as required. When you are finished with port configuration, select/highlight **<Quit>** at the bottom right of the port selection screen and press **Enter** to return to the Network Manager menu. To exit the Network Manager and return to the Main Menu prompt, select **Quit** and press **Enter**.
- If you changed the port configuration, you will need to reset the system. If you are ready to reset the system immediately, at the **Command >** prompt, type **reset** and press **Enter** (See "Reset the System" on page 34 for further information).
 - * **Note** : If you intend to modify additional configuration settings during the current session, you may wait until all changes are complete before you reset the system.


Modify the Server Host Name

This option enables you modify the PCS400R host name.


- 1 Log in to the server as described on page 22.
- 2 At the `Command >` prompt, type **setip** and press **Enter**.
The system will display the Network Manager menu, for example:

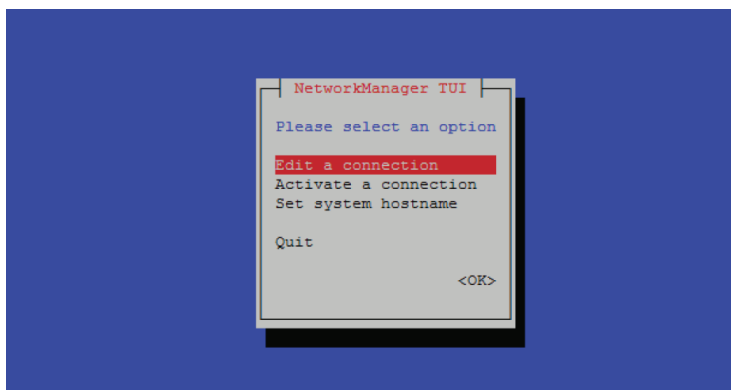

- 3 Select/highlight **Set system hostname** and press **Enter**.
 - * **Note:** To exit the Network Manager and return to the Main Menu prompt without modifying any settings, select **Quit**.
 - * **Note:** You may also modify the Control and/or Feature Port configuration from the Network Manager. See "Modify Network Settings" on pages 24 to 25 for further information.
- 4 The Hostname field in the **Set Hostname** screen shows the current host name. Modify the host name as required (avoid using spaces or special characters, such as ?, -, etc.) and then press **Enter**.

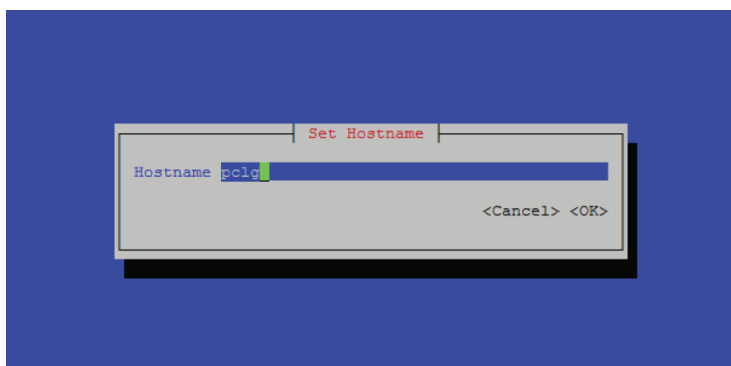

- 5 At the prompt for confirmation, press **Enter**.

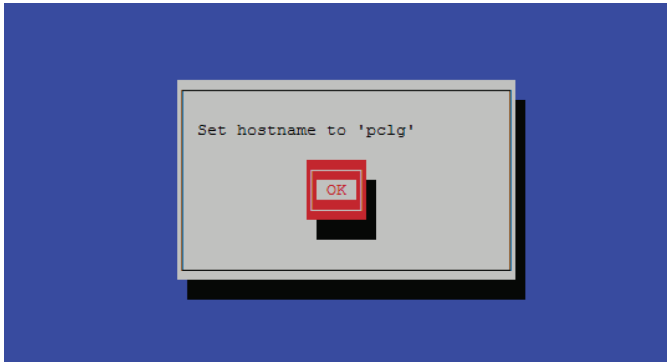

- 6 If you changed the host name, you will need to reset the system. If you are ready to reset the system immediately, at the `Command >` prompt, type **reset** and press **Enter** (See "Reset the System" on page 34 for further information).
- * **Note:** If you intend to modify additional configuration settings during the current session, you may wait until all changes are complete before you reset the system.

Set the Time Zone

- 1 Log in to the PCS400R as described on page 22.
- 2 At the `Command >` prompt, type **tz** and press **Enter**.
The system displays the current time zone information for the PCS400R and prompts you to specify whether or not you wish to change the time zone.
Current time zone is: America/New York
Change the time zone? [y/n]:
- 3 Either:
 - Type **n** and press **Enter** to return to the Main Menu `Command >` prompt without changing the current time zone.
 - Type **y** and press **Enter** to change the time zone. Then, continue with step 4.
- 4 The system will display the following prompt for a location, followed by a list of options:
Please identify a location so that time zone rules can be set correctly.
Please select a continent or ocean.
At the `# ?` prompt, type the number that corresponds to the appropriate option for your location, and then press **Enter**.
- 5 The system will display the following prompt for a country, followed by a list of options:
Please select a country.
At the `# ?` prompt, type the number that corresponds to the appropriate option for your country, and then press **Enter**.
- 6 The system will display the following prompt for a region, followed by a list of options:
Please select one of the following time zone regions.
At the `# ?` prompt, type the number that corresponds to the appropriate option for your region, and then press **Enter**.
After you specify the time zone region, the system displays an overview of your location selections and prompts for confirmation, for example:
The following information has been given:
United States
Central Time
Therefore TZ='America/Chicago' will be used.
Local time is now: Mon Jul 10 16:23:10 CDT 2017.
Universal Time is now: Mon Jul 10 22:23:10 UTC 2017.
Is the above information OK?
1) Yes
2) No
?
- 7 Either:
 - Type **1** and press **Enter** if the information in the display is correct. The system will confirm the setting and then prompt you to reset the PCS400R:
Time zone has been set. Please reset the board.
Continue with step 8.
 - Type **2** and press **Enter** to return to the initial location prompt and reset the time zone (Repeat this procedure from step 4).
- 8 If you are ready to reset the system immediately, at the `Command >` prompt, type **reset** and press **Enter** (See "Reset the System" on page 34 for further information).
 - * **Note:** If you intend to modify additional configuration settings during the current session, you may wait until all changes are complete before you reset the system.

Set the Date and Time

By default, the PCS400R is synchronized with an NTP server and configured for the US Eastern time zone. If the PCS400R is connected to the Internet, the NTP client will periodically update the time setting on the PCS400R. If the PCS400R is not connected to the Internet, you also have the option to specify date and time data manually. Refer to "Set the Time Zone" above for information on setting the time zone.

- 1 Log in to the PCS400R as described on page 22.
- 2 At the `Command >` prompt, type **time** and press **Enter**.
The system will display the current time (for example: `Current time: 2017-06-15 15:45:44`) and then initiate a series of prompts to enable you to set the time.
- 3 At each of the following prompts, type the year, month, and day, respectively. Note that all three of these fields require numerical values. Press **Enter** after each entry.
If applicable, you can also press **Enter** at each prompt to accept the default value in square brackets.
`Enter new year [2017]>`
`Enter new month [6]>`
`Enter new day [15]>`
- 4 At each of the following prompts, type the hour and minute, respectively. Note that the hour should be entered in 24-hour format. Press **Enter** after each entry.
If applicable, you can also press **Enter** at each prompt to accept the default value in square brackets.
`Enter new hour (0-23) [15]>`
`Enter new minute [45]>`
Once you enter the minute value, the system will display the new time and then prompt for confirmation, for example:
`New time: 2017-06-15 15:46:00`
`Apply? [y/n]:`
- 5 Either:
 - Type **y** and press **Enter** to apply the new time configuration. The system will display confirmation, for example: `New time is set`
 - Type **n** and press **Enter** to return to the `Command >` prompt without changing the time configuration.

Change the Login Password

For security purposes, it is recommended that the admin user login password be unique to the system. Note that the login password is case-sensitive.

- 1 Log in to the PCS400R as described on page 22.
- 2 At the `Command >` prompt, type **pwd** and press **Enter**.
The system prompts for the current admin user password:
`Changing password for admin`
`Old password:`
- 3 Type the current password and press **Enter**. The system will then prompt you to type and retype the new password:
`New password:`
`Retype password:`
- 4 Type and then retype the new password at the prompts. Press **Enter** after each entry.

Once you complete the Password fields successfully, the system displays confirmation:

`Password for admin changed by admin.`

Change the Portal Application

This option enables you to change the portal application (Java or HTML), if necessary.



* **Caution:** This option will create a temporary system interruption and should be used only when necessary. After you complete the procedure below, you must perform a number of additional steps in the appropriate Admin Client (i.e., the Admin Client for the new application) in order for portal functionality to be initiated. Software feature licensing, output configuration, and portal configuration are not ported from one application to the other.

1 Log in to the PCS400R as described on page 22.

2 At the `Command >` prompt, type **portal** and press **Enter**.

The system prompts for confirmation that you wish to make a change, for example:

```
The system is configured to use the pcd (HTML) portal application.
Do you wish to change the portal application? [y/n]:
```

3 Either:

- Type **y** and press **Enter** to continue. The system will display the available applications, followed by a prompt for a selection:

```
Available portal applications are:
```

```
1) pca (Java)
```

```
2) pcd (HTML)
```

```
Select a new portal application [2]:
```

Continue with step 4.

- Type **n** and press **Enter** to return to the Main Menu without changing the portal application.

4 At the prompt to select a new portal application, either:

- Type **1** and press **Enter** to select the Java application.
- Type **2** and press **Enter** to select the HTML application.

* **Note:** Select the appropriate application based on the purchase order associated with this server. The software license specifies the Java or HTML application, and the application type must be set accordingly.

Once you make your selection, the server will display confirmation and prompt you to reboot the system, for example:

```
Successfully set to pca (Java) portal application
```

```
You must reset the system now.
```

```
Are you sure you want to reset the system? [y/n]:
```

5 Either:

- Type **y** and press **Enter** to initiate an immediate reset of the PCS400R. The reset process may take several minutes, after which the system resumes normal operation.
- Type **n** and press **Enter** to return to the Main Menu without resetting the system at the current time; however, note that you must eventually reset the system in order to apply the new portal application configuration. See “Reset the System” on page 34 when you are ready to reset the system.

* **Note:** If you intend to modify additional configuration settings during the current session, you may wait until all changes are complete before you reset the system.

The remainder of the new portal application setup—configuration of feature set, output parameters, video playout settings, Pro:Centric Channel Map, customized portal interactive menus, etc.—is performed in the appropriate Admin Client, as indicated at the beginning of this section. Refer to either the *Pro:Centric Server Admin Client User Guide* (Java application) or the *Pro:Centric Direct Admin Client User Guide* (HTML application), as applicable, for further information.



* **Caution:** When your Admin Client portal configuration activities are complete, you must reset the server to activate the new application configuration.

Monitor the System

This option enables you to view dynamic system streaming data.

- 1 Log in to the PCS400R as described on page 22.
- 2 At the `Command >` prompt, type **monitor** and press **Enter** to display the current system data. See example on following page.
- 3 The system data will refresh every second. When you are finished monitoring streaming data, press **Enter** to stop the system monitor and return to the `Command >` prompt.

The system monitor display shows streaming data for each of the active video programmes. The first column in the display shows the channel slot numbers for which video playlists can be defined. Slots 1 and 2 are reserved for GEM/site data and Slot 3 is unused (and is not shown in the display). On servers configured with the Pro:Centric Java application, it is possible to add a site video to Slot 2, and so for these systems, Slot 2 will appear in the system monitor display. On the other hand, it is not possible to add a site video to Slot 2 on servers that are configured with the Pro:Centric Direct HTML application, and so for these systems, Slot 2 will not appear in the system monitor display.

The system monitor example on the following page shows data for a system that is configured for QAM-B RF output with the Pro:Centric Direct HTML application.

- * **Note:** Output parameters are configured in the Admin Client. Refer to either the *Pro:Centric Server Admin Client User Guide* (Java application) or the *Pro:Centric Direct Admin Client User Guide* (HTML application), as applicable, for further information.

Example: System Monitor Display (QAM-B RF Output, HTML Application)

SYSTEM MONITOR

Date: 2017-07-12 16:44:27

SN: 401-12080008

Version: 1.1

Output: RF_QAM256_6M

Pg/RF: 2

Bitrates (Mbps):

Slot	Content	Secs	Mbit	Pct	RF Out
1	GEM Data	685	8.9	-	75-1
4	Video1.ts	6	5.1	1	76-1 :)
5	Video2.trp	205	4.6	78	76-2 :)
7	Video3.ts	40	4.2	12	77-1 :)
8	Video4.trp	172	2.7	66	77-2 :)
10	Video5.ts	12	3.5	3	78-1 :)
11		-	0.0	-	78-2
13	Video6.ts	171	4.7	94	79-1 :)
14		-	0.0	-	79-2
16		-	0.0	-	80-1
17		-	0.0	-	80-2
19		-	0.0	-	81-1
20		-	0.0	-	81-2
22		-	0.0	-	82-1
23		-	0.0	-	82-2

Press <Enter> key to exit the monitor

Update the PCS400R Operating System

This option is only applicable for the Java portal application. It enables you to update the PCS400R operating system via the Ethernet.



- * **Caution:** Do NOT initiate simultaneous menu sessions while a software update is in progress. Doing so may interfere with the active process and may corrupt the system configuration and/or cause the PCS400R to cease normal operation.

The appropriate update file must be provided by LG; the system will not download an improper file.

- 1 Log in to the PCS400R as described on page 22.
- 2 At the `Command >` prompt, type **update** and press **Enter**.
- 3 At the `Enter update filename :` prompt, type in the software update filename and press **Enter**.
The system will initiate the download and confirm progress, for example:
`Downloading file: pcs400r_app_xxxx.upd`
- 4 When the update is successfully completed, reset the system (See "Reset the System" on page 34 for further information).

Update the VPN Setup

This option is only applicable for the Java portal application. It enables you to update the VPN client via a serial link to the PCS400R.

The appropriate update file must be provided by LG; the system will not transfer an improper file.

- 1 Log in to the PCS400R as described on page 22.
- 2 At the `Command >` prompt, type **vpn** and press **Enter**.
- 3 At the `Send VPN client file using Xmodem ...` prompt, transfer the new VPN client file using Xmodem protocol. For example, in HyperTerminal, select **Transfer** and then **Send File....** In the Send File window, enter or select the appropriate filename in the Filename field, and select **Xmodem** in the Protocol field.
The update process may take several minutes. The system will display progress messages as well as the result of the update process.
- 4 When the update is successfully completed, reset the system (See "Reset the System" on page 34 for further information).

Shut Down the System

This command allows you to shut down the system in an orderly manner. Use this command to shut down the PCS400R, for example, if you intend to physically move the unit from one location to another. It is also recommended that you run this command from the PCS400R Service Port in order to track detailed shutdown log messages.

- * **Note:** Once you use this command, you must remove power from (i.e., unplug) the unit and then plug the AC power cord back into a powered AC line receptacle when you are ready to restart the server. It is not possible to restart the server remotely.

1 Log in to the PCS400R as described on page 22.

2 At the `Command >` prompt, type **shut** and press **Enter**.

The system will prompt for confirmation:

Are you sure you want to shut down the system? [y/n]:

3 Either:

- Type **y** and press **Enter** to shut down the system immediately. The shutdown typically takes about a minute. When the PCS400R is in its shutdown state, the front panel LED will blink steadily green.
- Type **n** and press **Enter** to return to the Main Menu without shutting down the system.

Reset the System

1 If not already logged in, log in to the PCS400R as described on page 22.

2 At the `Command >` prompt, type **reset** and press **Enter**.

The system will prompt for confirmation:

Are you sure you want to reset the system? [y/n]:

3 Either:

- Type **y** and press **Enter** to initiate an immediate reset of the PCS400R. The reset process may take several minutes, after which the system resumes normal operation.
- Type **n** and press **Enter** to return to the Main Menu without resetting the system.

Exit the Current Session

At the `Command >` prompt, type **exit** and press **Enter** to end the current session.

Troubleshooting

PCS400R Setup

The following sections provide basic troubleshooting information for the PCS400R.

Equipment Setup Review

- Make sure all connectors and connections are tight and secure on all entertainment system components.
- Check the PCS400R LED. Under standard operating conditions, i.e., when the PCS400R is booted and operating normally, the PWR (Power) LED on the PCS400R front panel is continuously lit green. If there is a hardware fault, the PWR LED will turn and stay red.
 - * **Note:** When power is first applied to the PCS400R, the PWR LED initially flashes red and then turns green (blinking during boot-up).


Network Setup

If the network is configured for DHCP but the PCS400R has not been assigned an IP address, i.e., the Ctrl IP field in the PCS400R System Information display is blank:

- 1 Check the Control Port connector on the rear panel of the PCS400R. Make sure the cable connection is tight and secure.
- 2 Observe the green LED on the Control Port. Once the PCS400R is connected to the network, the LED will be lit continuously.
- 3 Contact the network administrator to verify the network status and check that the DHCP server is working properly.

PCS400R Communication

If you are unable to establish remote communication with the PCS400R, refer to the following flow chart.

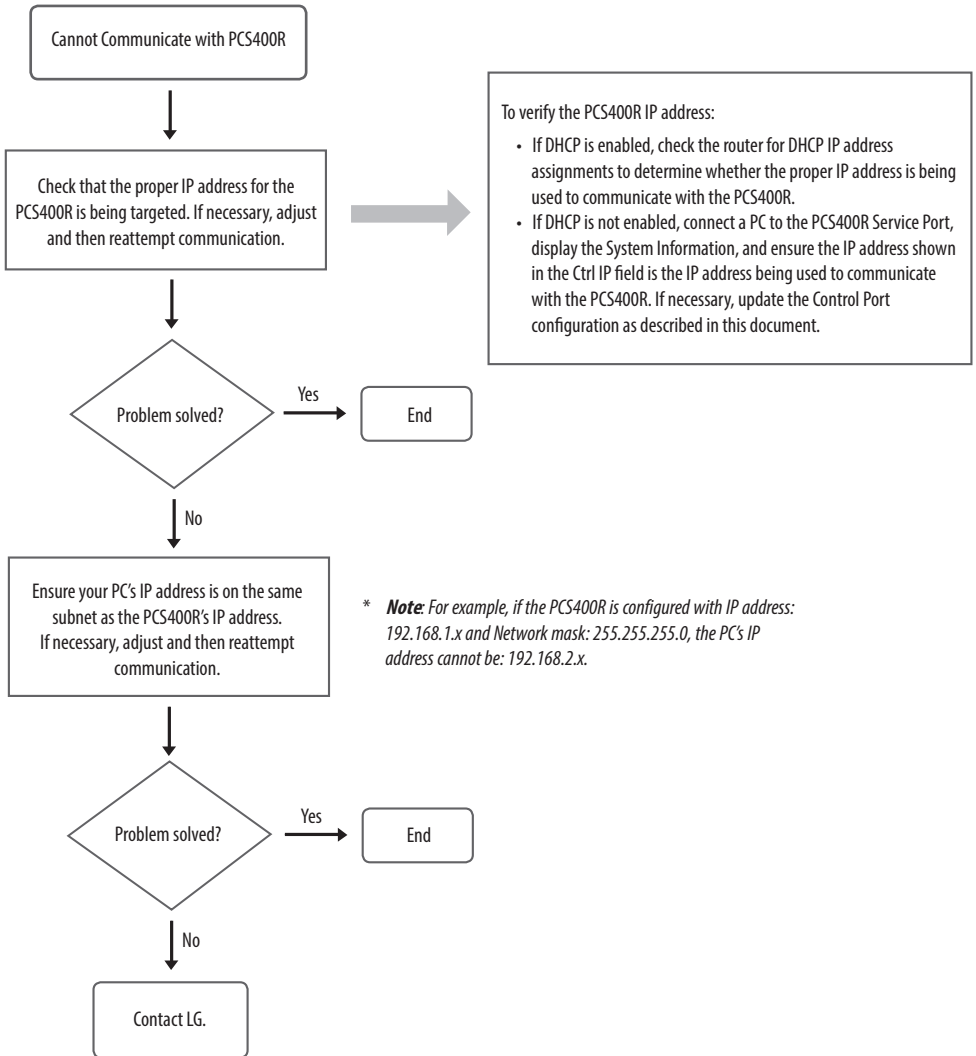

Specifications

* **Note:** Design and specifications subject to change without prior notice.

Dimensions	
Height	42.977 mm
Width	482.6 mm (for EIA standard 19-inch rack mount)
Depth	215.9 mm
Weight	2.56 kg (rack-only weight)

Environmental Operating Conditions		Environmental Storage Conditions	
Temperature (Tma)	0° to 40° Celsius	Temperature	-20° to 70° Celsius
	32° to 104° Fahrenheit		-4° to 158° Fahrenheit
Humidity	95% non-condensing	Humidity	95% non-condensing

Electrical	
RF Out Connectors (2)*	75 Ohm, Type 'F'
Frequency	VHF/UHF 54 - 865 MHz
RF Output Span	Up to 8 Contiguous Channels (typically 48 – 64 MHz)
RF Output Frequency Range	54 MHz to 865 MHz
Active Output Level at RF Out jacks	-1 dBm (+47.75 dBmV) Typical
Test Output Level	-47.75 dBm (+1 dBmV) Typical
Frequency Accuracy	±5 ppm
Impedance at ASI Out jack	75 Ohms
Level at ASI Out jack	800 mv
DC Input	+19 V DC @ 2.2 Amps
Ethernet Connector (Control Port)	10/100/1000BaseT, RJ-45
Ethernet Connector (Feature Port)	100/1000BaseT Full Duplex, RJ-45

* RF TAP connector reserved for service technician use only.

Modulation Specifications	
Standard	ITU-T J.83 Annex B (QAM-B)
Constellations	64-QAM, 256-QAM
Symbol Rate	64-QAM 5.056941 MBaud 256-QAM 5.360537 MBaud
Interleaving	Fixed I = 128, J = 1

Standard	EN 300 429 V1.2.1 (DVB-C)
Constellations	64-QAM, 256-QAM
Symbol Rate	64-QAM / 256-QAM 5.056 MBaud 64-QAM / 256-QAM 6.111 MBaud 64-QAM / 256-QAM 6.9 MBaud

Standard	ABNT NBR 15601:2007 (ISDB-T)
Parameters	64-QAM, 7/8 Convolutional Code, 1/32 Guard Interval Ratio, 2K FFT, 13 Segments
Symbol Rate	8.126984 Ms/s

AC/DC Adapter	
Manufacturer	APD
Model	DA-65G19
Input	AC 100 - 240 V ~ 50/60 Hz
Output	DC 19V – – 3.42 A

Open Source Software Notice Information

Product Type	Pro:Centric Server
Model Number / Range	PCS400R

Those products identified by the Product Type and Model Range above from LG Electronics, Inc. ("LGE") contain the open source software detailed below. Please refer to the indicated open source licences for the terms and conditions of their use.



*** Warning: The PCS400R is intended for Commercial use only. It is not a Consumer product and should not be installed in residential dwellings.**

Open Source	License	Copyright
abrt 2.1.11	GPL-2.0	Copyright (c) 2014 ABRT team
abrt-addon-ccpp 2.1.11	GPL-2.0	
abrt-addon-kerneloops 2.1.11	GPL-2.0	
abrt-addon-pstoreoops 2.1.11	GPL-2.0	
abrt-addon-python 2.1.11	GPL-2.0	
abrt-addon-vmcore 2.1.11	GPL-2.0	
abrt-addon-xorg 2.1.11	GPL-2.0	
abrt-cli 2.1.11	GPL-2.0	
abrt-console-notification 2.1.11	GPL-2.0	
abrt-dbus 2.1.11	GPL-2.0	
abrt-libs 2.1.11	GPL-2.0	
abrt-python 2.1.11	GPL-2.0	
abrt-retrace-client 2.1.11	GPL-2.0	
abrt-tui 2.1.11	GPL-2.0	
acl 2.2.51	GPL-2.0, LGPL-2.1	Copyright (c) 2015 Free Software Foundation, Inc.
alsa-firmware 1.0.28	GPL-2.0	
alsa-lib 1.0.28	LGPL-2.1	Copyright (c) 2000 by Abramo Bagnara <abramo@alsa-project.org>, Jaroslav Kysela <perex@perex.cz>
alsa-tools-firmware 1.0.28	GPL-2.0	
at 3.1.13	GPL-2.0	Copyright (c) 1993, 1994, 1995, 1996, 1997 Thomas Koenig Copyright (c) 2002, 2005 Ryan Murray Atrun & Atq modifications Copyright (c) 1993 David Parsons
atk 2.14.0	LGPL-2.1	
attr 2.4.46	GPL-2.0	Copyright (c) Andreas Grünbacher <agruen@kernel.org>, October 2015
attr-libattr 2.4.46	LGPL-2.1	Copyright (c) Andreas Grünbacher <agruen@kernel.org>, October 2015
audit 2.4.1	GPL-2.0, LGPL-2.1	Copyright (c) 2004-2015 Red Hat Inc., Durham, North Carolina
augeas 1.4.0	LGPL-2.1	Copyright (c) 2007-2016 David Lutterkort

Open Source	License	Copyright
authconfig 6.2.8	GPL-2.0	Copyright (c) 1999-2014 Red Hat, Inc.
autogen 5.18	LGPL-3.0	
avahi 0.6.31	LGPL-2.1	
bash 4.2.46	GPL-3.0	Copyright (c) 2007, 2009, 2011, 2014 Free Software Foundation, Inc.
bash-completion 2.1	GPL-2.0	
bc 1.06.95	GPL-2.0	Copyright (c) 1998, 2001, 2003, 2014 Free Software Foundation, Inc.
binutils 2.23.52.0.1	GPL-3.0	Copyright (c) 1991, 1992, 1993, 1994, 1995, 1996, 1997, 1998, 1999, 2000, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009 Free Software Foundation, Inc.
biosdevname 0.6.2	GPL-2.0	Copyright (c) 2006 Dell, Inc. by Matt Domsch <Matt_Domsch@dell.com>
blktrace 1.0.5	GPL-2.0	Copyright (c) 2005 Jens Axboe <axboe@suse.de> Copyright (c) 2006 Jens Axboe <axboe@kernel.dk>
bridge-utils 1.5	GPL-2.0	Copyright (c) 2000 Lennert Buytenhek
btrfs-progs 3.19.1	GPL-2.0	Copyright (c) 2007 Oracle
ca-certificates 2015.2.6	GPL-2.0	Copyright (c) 2003 Fumitoshi UKAI <ukai@debian.or.jp> Copyright (c) 2009 Philipp Kern <pkern@debian.org> Copyright (c) 2011 Michael Shuler <michael@pbandjelly.org> Copyright (c) Various Debian Contributors </michael@pbandjelly.org> </pkern@debian.org> </ukai@debian.or.jp>
cairo 1.14.2	LGPL-2.1	Copyright (c) 2010 Chris Wilson <chris@chris-wilson.co.uk>
CgosDrv	GPL-2.0	
chkconfig 1.3.61	GPL-2.0	
chkconfig-ntsysv 1.3.61	GPL-2.0	
chrony 2.1.1	GPL-2.0	Copyright (c) Richard P. Curnow 1997-2003 Copyright (c) John G. Hasler 2009 Copyright (c) Miroslav Lichvar 2012-2015
coreutils 8.22	GPL-3.0	
cpio 2.11	GPL-3.0	Copyright (c) 2001, 2004, 2005, 2006 Free Software Foundation, Inc.
cracklib 2.9.0	LGPL-2.1	Copyright (c) 1993 Alec Muffett <alecm@crypto.dircon.co.uk> Original CrackLib author for releases up to v2.7 Copyright (c) Nathan Neulinger <nneul@neulinger.org> version 3.0 modifications and new release
crontabs 1.11	GPL-2.0	
cryptsetup 1.6.7	GPL-2.0	Copyright (c) 2004 Jana Saout <jana@saout.de> Copyright (c) 2004-2007 Clemens Fruhwirth <clemens@endorphin.org> Copyright (c) 2009-2012 Red Hat, Inc. Copyright (c) 2009-2014 Milan Broz
dbus 1.6.12	GPL-2.0	
dbus-glib 0.1	GPL-2.0	
desktop-file-utils 0.22	GPL-2.0	Copyright (c) 2007-2009 Vincent Untz <vuntz@gnome.org>
device-mapper 1.02.107	GPL-2.0, LGPL-2.1	

Open Source	License	Copyright
device-mapper-persistent-data 0.5.5	GPL-3.0	
diffutils 3.3	GPL-3.0	Copyright (c) 1992, 1993, 1994, 1995, 1996, 1998, 2001, 2002 Free Software Foundation, Inc.
dmidecode 2.12	GPL-2.0	
dmraid 1.0.0.rc16	GPL-2.0	
dnsmasq 2.66	GPL-2.0	
dosfstools 3.0.20	GPL-3.0	Copyright (c) 2004-2015 Canonical Ltd
dracut 33	GPL-2.0	
dyninst 8.2.0	LGPL-2.1	
e2fsprogs 1.42.9	GPL-2.0	Copyright 1995, 1996, 1997, 1998, 1999, 2000, 2001, 2002, 2003, 2004, 2005, 2006, 2007, 2008, 2009, 2010 by Theodore Ts'o
ebtables 2.0.10-4	GPL-2.0	Copyright (c) 1999 Paul 'Rusty' Russell & Michael J. Neuling Copyright (c) 2001-2002 Bart De Schuymer
ed 1.9	GPL-3.0	
elfutils 0.163	GPL-2.0, GPL-3.0	
emacs 24.3	GPL-3.0	Copyright (c) 2015 Free Software Foundation, Inc.
ethtool 3.15	GPL-2.0	Copyright (c) 1998 David S. Miller (davem@dm.cobaltmicro.com) Portions Copyright 2001 Sun Microsystems Kernel 2.4 update Copyright 2001 Jeff Garzik <jgarzik@mandrakesoft.com> Wake-on-LAN,natsemi,misc support by Tim Hockin <thockin@sun.com> Portions Copyright 2002 Intel Portions Copyright (c) Sun Microsystems 2008 do_test support by Eli Kupermann <eli.kupermann@intel.com> ETHTOOL_PHYS_ID support by Chris Leech <christopher.leech@intel.com> e1000 support by Scott Feldman <scott.feldman@intel.com> e100 support by Wen Tao <wen-hwa.tao@intel.com> ixgb support by Nicholas Nunley <Nicholas.d.nunley@intel.com> amd8111e support by Reeja John <reeja.john@amd.com> long arguments by Andi Kleen SMSC LAN911x support by Steve Glendinning <steve.glendinning@smc.com> Rx Network Flow Control configuration support <santwona.behera@sun.com> Various features by Ben Hutchings <bhutchings@solarflare.com>; Copyright (c) 2009, 2010 Solarflare Communications MDI-X set support by Jesse Brandeburg <jesse.brandeburg@intel.com> Copyright (c) 2012 Intel Corporation
findutils 4.5.11	GPL-3.0	
firewalld 0.3.9	GPL-2.0	

Open Source	License	Copyright
flac 1.3.0	GPL-2.0	Copyright (c) 2002-2009 Josh Coalson Copyright (c) 2011-2013 Xiph.Org Foundation Copyright (c) 2001 Edmund Grimley Evans <edmund@rano.org> Copyright (c) 2003 Philip Jägenstedt Copyright (c) 2001 David Robinson and Glen Sawyer Copyright (c) 1998-2000 Peter Alm, Mikael Alm, Olle Hallnas, Thomas Nilsson and 4Front Technologies
fontpackages 1.44	LGPL-3.0	
fprintd 0.5.0	GPL-2.0	
fxload 2002_04_11	GPL-2.0	
gawk 4.0.2	GPL-2.0	Copyright (c) 2008 Free Software Foundation, Inc.
gconf 3.2.6	LGPL-2.1	Copyright (c) 1999, 2000 Red Hat, Inc.
gdb 7.6.1	GPL-3.0	Copyright (c) 1996, 1998, 1999, 2000, 2002, 2003, 2005, 2006, 2007, 2008, 2009 Free Software Foundation, Inc.
gdbm 1.1	GPL-2.0	Copyright (c) 1990, 1991, 1993 Free Software Foundation, Inc.
gdk-pixbuf 2.31.6	LGPL-2.1	Copyright (c) 2005-2014 The GNOME Project Copyright (c) 1999 The Free Software Foundation Copyright (c) 2000 Red Hat, Inc. Copyright (c) 2008 Dominic Lachowicz Copyright (c) 2008 Alberto Ruiz Copyright (c) 1999 Mark Crichton Copyright (c) 1999, 2001 Tim Janik
gettext 0.18.2.1	GPL-3.0, LGPL-2.1	Copyright (c) 1998, 2010, 2013 Free Software Foundation, Inc.
GLib 2.42.2	LGPL-2.1	
glib-networking 2.42.0	LGPL-2.1	Copyright (c) 2011 Collabora, Ltd Copyright (c) 2011-2013 Red Hat, Inc.
glibc 2.17	LGPL-2.1	
gmp 6.0.0	LGPL-3.0	
GNU nano - an enhanced clone of the Pico text editor 2.3.1	GPL-3.0	
GnuPG 2.0.22	GPL-3.0	
gnutls 3.3.8	LGPL-2.1	
gobject-introspection 1.42.0	LGPL-2.1	Copyright (c) 2005 - 2015 The GNOME Project
gpgme 1.3.2	LGPL-2.1	Copyright (c) 2000 Werner Koch (dd9jn) Copyright (c) 2001, 2002, 2003, 2004, 2005, 2007, 2012, 2014, 2015 g10 Code GmbH
gpm 1.20.7	GPL-2.0	
graphite2 1.3.6	LGPL-2.1	
grep 2.2	GPL-3.0	Copyright (c) 1996-2014 Free Software Foundation, Inc.
grub2 2.02	GPL-3.0	
grubby 8.28	GPL-2.0	
gsettings-desktop-schemas 3.14.2	LGPL-2.1	

Open Source	License	Copyright
GTK+ 2.24.28	LGPL-2.1	Copyright (c) 2003-2011 by the gtk2-perl team
gzip 1.5	GPL-3.0	Copyright (c) 1999, 2001-2002, 2006-2007, 2009-2016 Free Software Foundation, Inc. Copyright (c) 1992-1993 Jean-loup Gailly
hardlink 1	GPL-2.0	
hicolor-icon-theme 0.12	GPL-2.0	
hostname 3.13	GPL-2.0	Copyright (c) 1994-1997 Peter Tobias <tobias@et-inf.fho-emden.de> 2009- Michael Meskes <meskes@debian.org>
hunspell 1.3.2	LGPL-2.1	
hunspell 0.20121024	LGPL-2.1	
hwdata 0.252	GPL-2.0	
initscripts 9.49.30	GPL-2.0	
iproute2 3.10.0	GPL-2.0	Copyright (c) 2009 Alexey Kuznetsov
iprutils 2.4.8	CPL-1.0	Copyright (c) 2000, 2004 International Business Machines Corporation and others
iptables 1.4.21	GPL-2.0	
iputils 2	GPL-2.0	
irqbalance 1.0.7	GPL-2.0	
jbigkit-libs 2	GPL-2.0	
kbd 1.15.5	GPL-2.0	
kexec-tools 2.0.7	GPL-2.0	
keyutils 1.5.8	LGPL-2.1	
kmod 20	GPL-2.0, LGPL-2.1	
kpatch 0.1.10	GPL-2.0	
langtable 0.0.31	GPL-3.0	
ledmon 0.79	GPL-2.0	
libaio 0.3.109	LGPL-2.1	Copyright (c) 2002 Red Hat, Inc. Copyright (c) 2001-2005 Russell King
libassuan 2.1.0	GPL-3.0	
libasyns 0.8	LGPL-2.1	
libblkid 2.23.2	LGPL-2.1	Copyright (c) 2009-2013 Karel Zak <kzak@redhat.com>
libcap-ng 0.7.5	LGPL-2.1	
libconfig 1.4.9	LGPL-2.1	
libcroc 0.6.8	LGPL-2.1	
libdaemon 0.14	LGPL-2.1	
libdwarf 2	LGPL-2.1	
libestr 0.1.9	LGPL-2.1	
libfprint 0.5.0	LGPL-2.1	
libgcrypt 1.5.3	LGPL-2.1	Copyright (c) 1998, 1999, 2000, 2001, 2002, 2003, 2004, 2006, 2007, 2008, 2009, 2010, 2011, 2012 Free Software Foundation, Inc. Copyright (c) 2012, 2013 g10 Code GmbH

Open Source	License	Copyright
libpgp-error 1.12	LGPL-2.1	Copyright (c) 2003, 2004 g10 Code GmbH Copyright (c) 1995, 1996, 1997, 1999, 2005, 2007, 2008, 2010 Free Software Foundation, Inc.
libidn 1.28	GPL-3.0	
libmnl 1.0.3	LGPL-2.1	Copyright (c) 1999-2014 Harald Welte, Pablo Neira Ayuso
libmodman 2.0.1	LGPL-2.1	
libmount 2.23.2	LGPL-2.1	
libndp 1.2	LGPL-2.1	Copyright (c) 2013-2015 Jiri Pirkko <jiri@resnulli.us>
libnetfilter-contrack 1.0.4	GPL-2.0	Copyright (c) 1999-2014 Harald Welte, Pablo Neira Ayuso
libnftnl 1.0.1	GPL-2.0	Copyright (c) 2001-2005 Netfilter Core Team <coreteam@netfilter.org>
libnl 3.2.21	LGPL-2.1	Copyright (c) 2003-2013 Thomas Graf <tgraf@suug.ch> Copyright (c) 2007 Secure Computing Corporation Copyright (c) 2007 Philip Craig <philipc@snapgear.com> Copyright (c) 1992-2013 Free Software Foundation, Inc. Copyright (c) 2013 Sassano Systems LLC <joe@sassanosystems.com> Copyright (c) 2013 Cong Wang <xiyou.wangcong@gmail.com> Copyright (c) 2014 Susant Sahani <susant@redhat.com> Copyright (c) 2012 Rich Fought <rich.fought@watchguard.com> Copyright (c) 2007, 2008 Patrick McHardy <kaber@trash.net>
libnl 1.1.4	LGPL-2.1	
libpipeline 1.2.3	GPL-3.0	
libproxy 0.4.11	LGPL-2.1	
libpwquality 1.2.3	GPL-2.0	
libreport 2.1.11	GPL-2.0	
librsvg2 2.39.0	LGPL-2.1	
libsemanage 2.1.10	LGPL-2.1	
libsepol 2.1.9	LGPL-2.1	
libsndfile 1.0.25	LGPL-2.1	Copyright (c) 1999-2011 Erik de Castro Lopo
libsoup 2.48.1	LGPL-2.1	Copyright (c) 2007 Red Hat, Inc. Copyright (c) 2000-2003, Ximian, Inc. Copyright (c) 2007 Novell, Inc. Copyright (c) 2009, 2010 Igalia S.L.
libstoragemgmt 1.2.3	LGPL-2.1	Copyright (c) Tony Asleson <tasleson@redhat.com>
libsyfs 2.1.0	LGPL-2.1	
libtasn1 3.8	LGPL-2.1	Copyright (c) 2002-2014 Free Software Foundation, Inc.
libteam 1.17	LGPL-2.1	Copyright (c) 2011-2015 Jiri Pirkko jiri@resnulli.us
libthai 0.1.14	LGPL-2.1	
libtool 2.4.2	LGPL-2.1	
libunistring 0.9.3	LGPL-3.0	
libusb 0.1.4	LGPL-2.1	Copyright (c) 2008 Daniel Drake <dsd@gentoo.org> Copyright (c) 2000-2003 Johannes Erdfelt <johannes@erdfelt.com>

Open Source	License	Copyright
libusb 1.0.15	LGPL-2.1	
libuser 0.60	LGPL-2.1	Copyright (c) 2000-2002, 2007, 2008 Red Hat, Inc.
libutempter 1.1.6	LGPL-2.1	
libwmf 0.2.8.4	GPL-2.0	
Linux Kernel 3.10.0	GPL-2.0	
lksctp-tools 1.0.13	GPL-2.0	
Imsensors 3.3.4	LGPL-2.1	Copyright (c) Frodo Looijaard Copyright (c) Merlin Hughes Copyright (c) Bob Schlaermann Copyright (c) Mark M. Hoffman Copyright (c) Jean Delvare
logrotate 3.8.6	GPL-2.0	
lsscsi 0.27	GPL-2.0	Copyright (c) 2002-2004 D. Gilbert
lvm2 2.02.130	GPL-2.0	Copyright (c) 2008,2009 Red Hat, Inc.
lvm2 2.02.171	LGPL-2.1	
LZMA Utils 5.1.2	LGPL-2.1	
lzo 2.06	GPL-2.0	
make 3.82	GPL-3.0	
man-db 2.6.3	GPL-2.0	
mariadb 5.5.44	GPL-2.0	Copyright (c) 2017 MariaDB
mariadb 10.1.13	GPL-2.0	Copyright (c) 2017 MariaDB
mariadb 10.0.24	GPL-2.0	Copyright (c) 2017 MariaDB
mariadb-galera 25.3.15	GPL-2.0	
mdadm 3.3.2	GPL-2.0	
microcode_ctl 2.1	GPL-2.0	
mjet.ko 3.2	GPL-2.0	Copyright (c) 2012, 2013 Zenith/LG Electronics
mlocate 0.26	GPL-2.0	
mozjs 17.0.0	MPL-2.0	
mtr 0.85	GPL-2.0	
multipath-tools 0.4.9	GPL-2.0	
net-tools 1.6	GPL-2.0	Copyright (c) 1997,1999, 2000 Andi Kleen Copyright (c) 1994 John Paul Morrison (VE7JPM)
nettle 2.7.1	LGPL-2.1	
NetworkManager 1.0.6	GPL-2.0	
newt 0.52.15	LGPL-2.1	
newt-python 0.52.15	LGPL-2.1	
nspr 4.11	MPL-2.0	
nss 3.21.0	MPL-2.0	
nss 3.19.1	MPL-2.0	
nss 3.16.2.3	MPL-2.0	

Open Source	License	Copyright
numactl-libs 2.0.9	LGPL-2.1	
openvpn 2.3.10	GPL-2.0	Copyright (c) 2013 by the Open-Source OpenVPN development community OpenVPN is distributed under the GPL license version 2 (see below). In addition, as a special exception, OpenVPN Technologies, Inc. gives permission to link the code of this program with the OpenSSL library (or with modified versions of OpenSSL that use the same license as OpenSSL), and distribute linked combinations including the two. You must obey the GNU General Public License in all respects for all of the code used other than OpenSSL. If you modify this file, you may extend this exception to your version of the file, but you are not obligated to do so. If you do not wish to do so, delete this exception statement from your version.
os-prober 1.58	GPL-2.0	
pango 1.36.8	LGPL-2.1	Copyright (c) 1999 Red Hat Software
parted 3.1	GPL-3.0	
pciutils 3.2.1	GPL-2.0	Copyright (c) 1997-2013 Martin Mares <mj@ucw.cz>
php56u-pear 1.10.1	LGPL-3.0	
pinentry 0.8.1	GPL-2.0	Copyright (c) 2002 g10 Code GmbH Copyright (c) 2001 Free Software Foundation, Inc. Copyright (c) 1992-2002 Trolltech AS. Copyright (c) 2003 g10 Code GmbH Copyright (c) 2008 Klarälvdalens Datakonsult AB (KDAB) Copyright (c) 2008 Nokia Corporation and/or its subsidiary(-ies). Copyright (c) 1999 Robert Bihlmeyer <robbe@orcus.priv.at> Copyright (c) 1995-1997 Peter Mattis, Spencer Kimball and Josh MacDonald Copyright (c) 1992-2008 Trolltech ASA
pininfo 0.6.10	GPL-2.0	
pkcs11-helper 1.11	GPL-2.0	
pkgconfig 0.27.1	GPL-2.0	
plymouth 0.8.9	GPL-2.0	
plymouth-core-libs 0.8.9	GPL-2.0	
plymouth-scripts 0.8.9	GPL-2.0	
pm-utils 1.4.1	GPL-2.0	
policycoreutils 2.2.5	GPL-2.0	
polkit 0.112	LGPL-2.1	
polkit-pkla-compat 0.1	LGPL-2.1	
postfix 2.10.1	GPL-2.0	
ppp 2.4.5	GPL-2.0	Copyright (c) 2000 by Roaring Penguin Software Inc. Copyright (c) 2006, 2007, 2008 Katalix Systems Ltd
procps-ng 3.3.10	GPL-2.0	
psacct 6.6.1	GPL-3.0	
psmisc 22.20	GPL-2.0	
pth 2.0.7	LGPL-2.1	
pulseaudio 6	LGPL-2.1	

Open Source	License	Copyright
pygobject2 2.28.6	LGPL-2.1	
pygobject3-base 3.14.0	LGPL-2.1	
pygpgme 0.3	LGPL-2.1	
pyliblzma 0.5.3	LGPL-3.0	
python-augeas 0.5.0	LGPL-2.1	
python-chardet 2.2.1	LGPL-2.1	
python-dmidecode 3.10.13	GPL-2.0	
python-kitchen 1.1.1	LGPL-2.1	
python-perf 3.10.0	GPL-2.0	
python-pycurl 7.19.0	LGPL-2.1	
python-pyudev 0.15	LGPL-2.1	
python-slip 0.4.0	GPL-2.0	
python-systemd 219	LGPL-2.1	
python-urlgrabber 3.1	LGPL-2.1	
pyxattr 0.5.1	LGPL-2.1	
qrencode 3.4.1	LGPL-2.1	
rdate 1.4	GPL-2.0	
rdma 7.2_4.1_rc6	GPL-2.0	
readline 6.2	GPL-3.0	
rng-tools 5	GPL-2.0	
rpm 4.11.3	GPL-2.0	
rpm-build-libs 4.11.3	GPL-2.0	
rpm-libs 4.11.3	GPL-2.0	
rpm-python 4.11.3	GPL-2.0	
rsync 3.1.2	GPL-3.0	Copyright (c) 1996 Andrew Tridgell Copyright (c) 1996 Paul Mackerras Copyright (c) 2003-2015 Wayne Davison
rsync 3.0.9	GPL-3.0	
rsyslog 7.4.7	GPL-3.0	
satyr 0.13	GPL-2.0	
scl-utils 2.0	GPL-2.0	
sed 4.2.2	GPL-3.0	
selinux-policy 3.13.1	GPL-2.0	
selinux-policy-targeted 3.13.1	GPL-2.0	
setserial 2.17	GPL-2.0	Copyright (c) 1994 by Theodore Ts'o <tytso@mit.edu>
setuptools 1.19.11	GPL-2.0	
sgpio 1.2.0.10	GPL-2.0	
shadow-utils 4.1.5.1	GPL-2.0	
shared-mime-info 1.1	GPL-2.0	
slang 2.2.4	GPL-2.0	
smartmontools 6.2	GPL-2.0	

Open Source	License	Copyright
sos 3.2	GPL-2.0	
sssd 1.13.0	GPL-3.0	
SwingX 1.6	LGPL-2.1	Copyright (c) 2005-2006 Sun Microsystems, Inc.
sysstat 10.1.5	GPL-2.0	
systemd 219	LGPL-2.1	
systemd	LGPL-2.1	
systemtap 2.8	GPL-2.0	Copyright (c) 2011 Red Hat, Inc. Copyright (c) IBM Corporation, 2006
sysvinit-tools 2.88	GPL-2.0	
t1lib 5.1.2	GPL-2.0	
tar 1.26	GPL-3.0	
textinfo 5.1	GPL-3.0	
time 1.7	GPL-2.0	
traceroute 2.0.19	GPL-2.0	
ttmkfdir 3.0.9	LGPL-2.1	
tuned 2.5.1	GPL-2.0	
urw-fonts 2.4	GPL-2.0	
usbutils 007	GPL-2.0	
usb_modeswitch 2	GPL-2.0	
usb_modeswitch 1.2.7	GPL-2.0	
usermode 1.111	GPL-2.0	
util-linux 2.23.2	GPL-2.0	
virt-what 1.13	GPL-2.0	
wget 1.14	GPL-3.0	
which 2.2	GPL-3.0	Copyright (c) 2017 Free Software Foundation, Inc.
xfsdump 3.1.4	GPL-2.0	
xfspgrog 3.2.2	GPL-2.0	
xgbeth.ko 1.00a	GPL-2.0	Copyright (c) 2007-2010 Xilinx Inc.
XZ Utils 5.1.2	LGPL-2.1	
yum 3.4.3	GPL-2.0	
yum-langpacks 0.4.2	GPL-2.0	
yum-metadata-parser 1.1.4	GPL-2.0	
yum-utils 1.1.31	GPL-2.0	

To obtain the source code under GPL, LGPL, MPL, and other open source licenses, that is contained in this product, please visit <http://opensource.lge.com>. In addition to the source code, all referred license terms, warranty disclaimers and copyright notices are available for download.

LG Electronics will also provide open source code to you on CD-ROM for a charge covering the cost of performing such distribution (such as the cost of media, shipping, and handling) upon email request to opensource@lge.com.

This offer is valid for a period of three years after our last shipment of this product. This offer is valid to anyone in receipt of this information.

Please be informed that LG Electronics products may contain open source software listed in the table below.

Open Source	License	Copyright
Apache Ant	Apache-2.0	Copyright (c) 1999-2012 The Apache Software Foundation
Apache Commons EL	Apache-1.1	
Apache Commons FileUpload	Apache-2.0	Copyright (c) 2002-2014 The Apache Software Foundation. All Rights Reserved.
Apache Commons IO	Apache-2.0	
Apache Commons Logging	Apache-2.0	Copyright (c) 2015 The Apache Software Foundation. All Rights Reserved.
Apache Commons Modeler	Apache-2.0	Copyright (c) 2001-2007 The Apache Software Foundation
Apache Commons Net	Apache-2.0	Copyright (c) 2001-2013 The Apache Software Foundation
Apache Derby	Apache-2.0	
Apache HttpComponents	Apache-2.0	
Apache Jakarta ORO 2.0.8	Apache-1.1	
Apache James	Apache-2.0	Copyright (c) 2006-2017 The Apache Software Foundation
Apache Tomcat 6	Apache-2.0	
apr 1.5.4	Apache-2.0	Copyright (c) 2008-2016 The Apache Software Foundation
apr 1.5.2	Apache-2.0	
apr 1.4.8	Apache-2.0	Copyright (c) 2008-2016 The Apache Software Foundation
apr-util 1.5.2	Apache-2.0	
BIND 9.9.4	ISC	Copyright (c) 2017 Internet Systems Consortium
Boost 1.53.0	BSL-1.0	Copyright (c) Beman Dawes, David Abrahams, 1998-2005 Copyright (c) Rene Rivera 2004-2007
bzip2 1.0.6	bzip2-1.0.6	
concrete5	MIT	Copyright (c) 2011 Concrete CMS inc.
crda 1.1.3	ISC	Copyright (c) 2008 Luis R. Rodriguez <mcgrof@gmail.com> Copyright (c) 2008 Johannes Berg <johannes@sipsolutions.net> Copyright (c) 2008 Michael Green <Michael.Green@Atheros.com>
cronie 1.4.11	BSD-3-Clause	Copyright (c) 1989, 1993 The Regents of the University of California
curl 7.29.0	curl	
cyrus-sasl 2.1.26	BSD-like License (cyrus-sasl)	Copyright (c) 1998-2003 Carnegie Mellon University
dbus 1.6.12	AFL-2.1	
dbus-python 1.1.1	MIT	
dhcp 4.2.5	ISC	
expat 2.1.0	MIT	Copyright (c) 1998, 1999, 2000 Thai Open Source Software Center Ltd and Clark Cooper Copyright (c) 2001, 2002, 2003, 2004, 2005, 2006 Expat maintainers
file 5.11	BSD-2-Clause	Copyright (c) Ian F. Darwin 1986, 1987, 1989, 1990, 1991, 1992, 1994, 1995 Software written by Ian F. Darwin and others; maintained 1994- Christos Zoulas
fipscheck 1.4.1	BSD-2-Clause-FreeBSD	Copyright (c) 2008-2012 Red Hat, Inc.

Open Source	License	Copyright
fontconfig 2.10.95	MIT-like License (fontconfig)	Copyright (c) 2000, 2001, 2002, 2003, 2004, 2006, 2007 Keith Packard Copyright (c) 2005 Patrick Lam Copyright (c) 2009 Roozbeh Pournader Copyright (c) 2008, 2009 Red Hat, Inc. Copyright (c) 2008 Danilo Šegan Copyright (c) 2012 Google, Inc.
freetype 2.4.11	FTL	Copyright (c) 2006–2015 by David Turner, Robert Wilhelm, and Werner Lemberg
glib 4.1.6	MIT	Copyright (c) 1997 Eric S. Raymond
gsm 1.0.13	MIT	
harfbuzz 0.9.36	MIT-like License (HarfBuzz)	
httpd 2.4.6	Apache-2.0	Copyright (c) 1997–2015 The Apache Software Foundation
httpd 2.4.20	Apache-2.0	Copyright (c) 1997–2015 The Apache Software Foundation
httpd 2.4.18	Apache-2.0	Copyright (c) 1997–2015 The Apache Software Foundation
icu 50.1.2	ICU	Copyright (c) 1995–2010 International Business Machines Corporation and others
ilmbase 1.0.3	BSD-3-Clause	Copyright (c) 2002–2011, Industrial Light & Magic, a division of Lucasfilm Entertainment Company Ltd.
ImageMagick 6.7.8.9	ImageMagick	
iw 3.1	ISC	Copyright (c) 2007, 2008 Johannes Berg Copyright (c) 2007 Andy Lutomirski Copyright (c) 2007 Mike Kershaw Copyright (c) 2008–2009 Luis R. Rodriguez
jansson 2.4	MIT	Copyright (c) 2009–2014 Petri Lehtinen <petri@digip.org>
jasper 1.900.1	JasPer-2.0	
javapackages 3.4.1	BSD-3-Clause	
jemalloc 3.6.0	BSD-2-Clause	Copyright (c) 2002–2016 Jason Evans <jasone@canonware.com> Copyright (c) 2007–2012 Mozilla Foundation Copyright (c) 2009–2016 Facebook, Inc.
json-c 0.11	MIT	Copyright (c) 2009–2012 Eric Haszlakiewicz
krb5 1.13.2	MIT-like License (krb5)	
lcms2 2.6	MIT	
less 458	Less	Copyright (c) 1984–2015 Mark Nudelman
libcap 2.22	BSD-3-Clause	
libcom_err 1.42.9	MIT	
libdrm 2.4.60	MIT	Copyright (c) 1999 Precision Insight, Inc., Cedar Park, Texas Copyright (c) 2000 VA Linux Systems, Inc., Sunnyvale, California
libedit 3	BSD-3-Clause	Copyright (c) 1999 Precision Insight, Inc., Cedar Park, Texas Copyright (c) 2000 VA Linux Systems, Inc., Sunnyvale, California
libffi 3.0.13	MIT	Copyright (c) 1996–2012 Anthony Green, Red Hat, Inc and others

Open Source	License	Copyright
libfontenc 1.1.2	MIT	Copyright (c) 1998-2001 by Juliusz Chroboczek
libjpeg-turbo 1.2.90	IJG	Copyright (c) 2009-2016 D. R. Commander
libnghttp2 1.7.1	MIT	
libogg 1.3.0	BSD-3-Clause	Copyright (c) 2002, Xiph.Org.
libpcap 1.5.3	BSD-3-Clause	Copyright (c) 1993, 1994, 1995, 1996, 1997, 1998 The Regents of the University of California
libpng 1.5.13	Zlib	Copyright (c) 1998-2014 Glenn Randers-Pehrson (Version 0.96 Copyright (c) 1996, 1997 Andreas Dilger) (Version 0.88 Copyright (c) 1995, 1996 Guy Eric Schalnat, Group 42, Inc.)
libss 1.42.9	MIT-like License (libss)	Copyright (c) 1987, 1988 MIT Student Information Processing Board
libssh2 1.4.3	BSD-3-Clause	Copyright (c) 2004-2007 Sara Golemon <sarag@libssh2.org> Copyright (c) 2005, 2006 Mikhail Gusarov <dottedmag@dottedmag.net> Copyright (c) 2006-2007 The Written Word, Inc. Copyright (c) 2007 Eli Fant <elifantu@mail.ru> Copyright (c) 2009 Daniel Stenberg Copyright (c) 2008, 2009 Simon Josefsson
libtar 1.2.11	NCSA	Copyright (c) 1998-2003 University of Illinois Board of Trustees Copyright (c) 1998-2003 Mark D. Roth
libuuid 2.23.2	BSD-3-Clause	Copyright (c) 1996, 1997 Theodore Ts'o
libveto 0.2.5	MIT	
libvorbis 1.3.3	BSD-3-Clause	Copyright (c) 2002-2008 Xiph.org Foundation
libvpx 1.3.0	BSD-3-Clause	Copyright (c) 2010 The WebM Project authors
libX11 1.6.3	X11	Copyright (c) 1985, 1986, 1987, 1988, 1989, 1990, 1991, 1994, 1996, 2002 The Open Group
libxml2 2.9.1	MIT	Copyright (c) 1998-2003 Daniel Veillard.
libxslt 1.1.28	MIT-like License (libxslt)	Copyright (c) 2001-2002 Thomas Broyer, Charlie Bozeman and Daniel Veillard
Linux-PAM 1.1.8	BSD-3-Clause	Copyright (c) YEAR Linux-PAM Project Copyright (c) Andrew G. Morgan 1997 <morgan@parc.power.net>
Isof 4.87	MIT-like License (Isof)	Copyright (c) 2002 Purdue Research Foundation.
lua 5.1.4	MIT	Copyright (c) 1994-2008 Lua.org, PUC-Rio
mailx 12.5	BSD-4-Clause	
Mesa3D 10.6.5	MIT	
ncurses 5.9	MIT-like License (ncurses)	Copyright (c) 1998-2004, 2006 Free Software Foundation, Inc.
ntp 4.2.6p5	NTP	Copyright (c) University of Delaware 1992-2011
ntpdate 4.2.6p5	NTP	
OpenEXR 1.7.1	BSD-3-Clause	Copyright (c) 2002-2011 Industrial Light & Magic, a division of Lucasfilm Entertainment Company Ltd.
openssh 6.6.1p1	OpenSSH License	
openssl 1.0.1e	OpenSSL	Copyright (c) 2015 OpenSSL Software Foundation

Open Source	License	Copyright
p11-kit 0.20.7	BSD-3-Clause	Copyright (c) 2011 Collabora Ltd.
passwd 0.79	BSD-3-Clause	Copyright (c) 1998, 1999, 2001, 2002 Red Hat, Inc.
pcre 8.32	BSD-3-Clause	Copyright (c) University of Cambridge Computing Service, Cambridge, England Copyright (c) 1997-2012 University of Cambridge Copyright (c) 2009-2012 Zoltan Herczeg Copyright (c) 2007-2012 Google Inc.
pccs-lite 1.8.8	BSD-3-Clause	Copyright (c) 1999-2003 David Corcoran <corcoran@musclecard.com> Copyright (c) 2001-2011 Ludovic Rousseau <ludovic.rousseau@free.fr>
perl 5.16.3	Artistic-1.0-Perl	Copyright (c) 1993-2017 by Larry Wall and others
perl-Carp 1.26	Artistic-1.0-Perl	
perl-Compress-Raw-Bzip2 2.061	Artistic-1.0-Perl	
perl-Compress-Raw-Zlib 2.061	Artistic-1.0-Perl	
perl-constant 1.27	Artistic-1.0-Perl	
perl-Data-Dumper 2.145	Artistic-1.0-Perl	
perl-DBD-MySQL 4.023	Artistic-1.0-Perl	
perl-DBI 1.627	Artistic-1.0-Perl	
perl-Encode 2.51	Artistic-1.0-Perl	
perl-Exporter 5.68	Artistic-1.0-Perl	
perl-File-Path 2.09	Artistic-1.0-Perl	
perl-File-Temp 0.23.01	Artistic-1.0-Perl	
perl-Filter 1.49	Artistic-1.0-Perl	
perl-Getopt-Long 2.4	Artistic-1.0-Perl	
perl-HTTP-Tiny 0.033	Artistic-1.0-Perl	
perl-IO-Compress 2.061	Artistic-1.0-Perl	
perl-Net-Daemon 0.48	Artistic-1.0-Perl	
perl-parent 0.225	Artistic-1.0-Perl	
perl-PathTools 3.4	Artistic-1.0-Perl	
perl-PIRPC 0.202	Artistic-1.0-Perl	
perl-Pod-Escapes 1.04	Artistic-1.0-Perl	
perl-Pod-Perldoc 3.2	Artistic-1.0-Perl	
perl-Pod-Simple 3.28	Artistic-1.0-Perl	
perl-Pod-Usage 1.63	Artistic-1.0-Perl	
perl-podlators 2.5.1	Artistic-1.0-Perl	
perl-Scalar-List-Utils 1.27	Artistic-1.0-Perl	
perl-Socket 2.01	Artistic-1.0-Perl	
perl-Storable 2.45	Artistic-1.0-Perl	
perl-Text-ParseWords 3.29	Artistic-1.0-Perl	

Open Source	License	Copyright
perl-threads 1.87	Artistic-1.0-Perl	
perl-threads-shared 1.43	Artistic-1.0-Perl	
perl-Time-HiRes 1.9725	Artistic-1.0-Perl	
perl-Time-Local 1.23	Artistic-1.0-Perl	
php56u 5.6.21	PHP-3.01	
php56u-cli 5.6.21	PHP-3.01	
php56u-common 5.6.21	PHP-3.01	
php56u-fpm 5.6.21	PHP-3.01	
php56u-gd 5.6.21	PHP-3.01	
php56u-intl 5.6.21	PHP-3.0	
php56u-mysqlnd 5.6.21	PHP-3.0	
php56u-pdo 5.6.21	PHP-3.0	
php56u-pecl-jsonc 1.3.9	PHP-3.0	
php56u-process 5.6.21	PHP-3.0	
php56u-xml 5.6.21	PHP-3.0	
pixman 0.32.6	MIT	Copyright (c) 2012 Hannes Flicka
poppler-data 0.4.6	MIT	
popt 1.13	X11	Copyright (c) 1998 Red Hat Software
python 2.7.5	Python-2.0	
python-configobj 4.7.2	BSD-3-Clause	
python-decorator 3.4.0	BSD-3-Clause	
python-iniparse 0.4	MIT	
python-libs 2.7.5	Python-2.0	
python-lxml 3.2.1	BSD-3-Clause	
python-six 1.9.0	MIT	
quota 4.01	BSD-4-Clause	Copyright (c) 1980, 1990 Regents of the University of California Copyright (c) 2000, 2001 Silicon Graphics, Inc. [SGI]
rkill 0.4	ISC	
sg3_utils-libs 1.37	BSD-3-Clause	Copyright (c) 1999-2010 Douglas Gilbert
snappy 1.1.0	BSD-3-Clause	Copyright 2011, Google Inc.
strace 4.8	BSD-3-Clause	Copyright (c) 1991, 1992 Paul Kranenburg <pk@cs.few.eur.nl> Copyright (c) 1993 Branko Lankester <branko@hacktic.nl> Copyright (c) 1993 Ulrich Pegelow <pegelow@moorea.uni-muenster.de> Copyright (c) 1995, 1996 Michael Elizabeth Chastain <mec@duracef.shout.net> Copyright (c) 1993, 1994, 1995, 1996 Rick Sladkey <jrs@world.std.com>

Open Source	License	Copyright
sudo 1.8.6p7	MIT-like License (sudo)	
tcp-wrappers 7.6	BSD-like License (tcp-wrappers)	Copyright 1995 by Wietse Venema. Some individual files may be covered by other copyrights.
tcpdump 4.5.1	BSD-3-Clause	Copyright (c) 2005 The Tcpdump Group
tcsh 6.18.01	BSD-3-Clause	Copyright (c) 1980, 1991 The Regents of the University of California
tiff 4.0.3	libtiff	Copyright (c) 1988-1997 Sam Leffler Copyright (c) 1991-1997 Silicon Graphics, Inc.
trousers 0.3.13	BSD-3-Clause	Copyright (c) 2013, TrouSerS Project
unzip 6.00	Info-ZIP	Copyright (c) 1990-2009 Info-ZIP
ustr 1.0.4	MIT	Copyright (c) 2007 James Antill
wpa_supplicant 2.0	BSD-3-Clause	Copyright (c) 2002-2015 Jouni Malinen <j@w1.fi> and contributors
XCB 1.11	MIT	Copyright (c) 2001-2006 Bart Massey, Jamey Sharp, and Josh Triplett
xdg-utils 1.1.0	MIT	
xorg-app-bdftopcf 1.0.5	X11	Copyright (c) 1991, 1993, 1998 The Open Group
xorg-lib-libICE 1.0.9	MIT-like License (libICE)	Copyright (c) 1993, 1998 The Open Group
xorg-lib-libpciaccess 0.13.4	ISC, MIT, X11	Copyright (c) 2008 Juan Romero Pardines Copyright (c) 2008 2011 Mark Kettenis Copyright (c) 2009 Michael Lorenz Copyright (c) 2009 2012 Samuel Thibault Copyright (c) IBM Corporation 2006, 2007 Copyright (c) Eric Anholt 2006 Copyright (c) Mark Kettenis 2011 Copyright (c) Robert Millan 2012 Copyright (c) 2007, 2008, 2009, 2011, 2012, 2013 Oracle and/or its affiliates Copyright (c) 2009, 2012 Red Hat, Inc. Copyright (c) 2007 Paulo R. Zanoni, Tiago Vignatti Copyright (c) 2009 Tiago Vignatti Copyright (c) 2000 The XFree86 Project, Inc.
xorg-lib-libSM 1.2.2	MIT, X11	Copyright (c) 2002 Oracle and/or its affiliates Copyright (c) 1993, 1998 The Open Group
xorg-lib-libXau 1.0.8	X11	Copyright 1988, 1993, 1994, 1998 The Open Group
xorg-lib-libXcomposite 0.4.4	HPND, MIT	Copyright (c) 2001, 2003 Keith Packard Copyright (c) 2006, 2007 Oracle and/or its affiliates
xorg-lib-libXcursor 1.1.14	HPND	Copyright (c) 2002 Keith Packard
xorg-lib-libXdamage 1.1.14	HPND	Copyright (c) 2001, 2003 Keith Packard Copyright (c) 2007 Eric Anholt

Open Source	License	Copyright
xorg-lib-libXext 1.3.3	X11	Copyright (c) 1986, 1987, 1988, 1989, 1994, 1998 The Open Group
xorg-lib-libXfixes 5.0.1	HPND, MIT	Copyright (c) 2001, 2003 Keith Packard Copyright (c) 2006 Oracle and/or its affiliates
xorg-lib-libXfont 1.5.1	X11	Copyright (c) 1990, 1998 The Open Group
xorg-lib-libXft 2.3.2	HPND	Copyright (c) 2001, 2003 Keith Packard
xorg-lib-libXi 1.7.4	X11	Copyright (c) 1989, 1998 The Open Group Copyright (c) 2008 Peter Hutterer
xorg-lib-libXinerama 1.1.3	X11	Copyright (c) 2003 The Open Group Copyright (c) 1991, 1997 Digital Equipment Corporation, Maynard, Massachusetts
xorg-lib-libXpm 3.5.11	X11	Copyright (c) 1989-95 GROUPE BULL
xorg-lib-libXrandr 1.4.2	HPND	Copyright (c) 2000 Compaq Computer Corporation Copyright (c) 2002 Hewlett Packard, Inc. Copyright (c) 2006 Intel Corporation Copyright (c) 2008 Red Hat, Inc. Copyright (c) 2011 Dave Airlie Copyright (c) 2006 Keith Packard
xorg-lib-libXrender 0.9.8	HPND	Copyright (c) 2001, 2003 Keith Packard Copyright (c) 2000 SuSE, Inc.
xorg-lib-libxshmfence 1.2	HPND	Copyright (c) 2013 Keith Packard
xorg-lib-libXt 1.1.4	HPND	Copyright (c) 2001, 2003 Keith Packard Copyright (c) 1987, 1988 by Digital Equipment Corporation, Maynard, Massachusetts
xorg-lib-libXtst 1.2.2	X11	Copyright (c) 1990, 1991 by UniSoft Group Limited Copyright (c) 1992, 1993, 1995, 1998 The Open Group Copyright (c) 1992, 1994, 1995 X Consortium
xorg-lib-libXxf86vm 1.1.3	X11	Copyright (c) 1995 Kaleb S. KEITHLEY
yajl 2.0.4	ISC	Copyright (c) 2007-2009 Lloyd Hilaiel
zip 3.0	Info-ZIP	
zlib 1.2.7	Zlib	Copyright (c) 1995-2013 Jean-loup Gailly and Mark Adler

This software is based in part on the work of the Independent JPEG Group.

This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (<http://www.openssl.org/>).

LG PCS400R Pro:Centric Server Warranty

Broadcast Products	Welcome to the LG family! We believe that you will be pleased with your new PCS400R Pro: Centric Server. Please read this warranty carefully, it is a "LIMITED WARRANTY". This warranty gives you specific legal rights.
---------------------------	---

LG's RESPONSIBILITY

Warranty Term	1 year parts and labour from date of purchase or delivery date.
Parts	New or remanufactured replacements for factory-defective parts may be used. Such replacement parts have a warranty for the remaining portion of the original warranty period.
Warranty Service	Warranty service is provided by LG. Customer pays for shipping charges to LG; LG pays for return shipping Charge's to return PCS400R Pro: Centric Server to customer. Call 0844 248 6655 for further information.

WARRANTY SPECIFICS

Not Covered	This warranty covers manufacturing defects and does not cover installation, adjustment of customer controls, Installation or repair of antenna systems, cable converters or cable company-supplied equipment; it also does not cover damage due to misuse, abuse, negligence, acts of God or other causes beyond the control of LG. Any alteration of the product after manufacture voids this warranty in its entirety. THIS WARRANTY IS IN LIEU OF ANY OTHER WARRANTY, EXPRESSED OR IMPLIED, INCLUDING WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, AND LG SHALL NOT BE LIABLE FOR ANY CONSEQUENTIAL, INDIRECT, OR INCIDENTAL DAMAGES OF ANY KIND, INCLUDING LOST REVENUES OR PROFITS IN CONNECTION WITH THIS PRODUCT.
--------------------	---

OWNER'S RESPONSIBILITY

Effective Warranty Date	Warranty begins on the date of delivery of the PCS400R Pro: Centric Server. For your convenience, keep the dealer's dated bill of sale or delivery ticket, as evidence of the purchase date.
Installation Guide	Read the Installation & Setup Guide carefully so that you will understand the operation of the PCS400R Pro: Centric Server along with how to adjust the settings.
Warranty Service	For warranty service information, call 0844 248 6655. Parts and labour for service work carried out are LG's responsibility (See above) will be provided without charge. Other service is at the owner's expense. If you have any problem in obtaining satisfactory warranty service, call 0844 248 6655 . You must provide the model number, serial number and date of purchase or date of original installation.

For Customer Support/Service, please call:

0844 248 6655

www.lg.com



Pro:Centric®



Pro:Centric, the "Pro:Centric" logo, and the "LG" logo are registered trademarks of LG Electronics Inc. Java and the "Java Powered" logo are trademarks of Oracle. All other trademarks or registered trademarks are the property of their respective owners.

