



LG Twin Tower, 20, Yoido-Dong, Youngdungpo-Gu, Seoul, 150-721, Korea. http://www.lge.co.kr

P/No. 3828JD8565S

Printed in Korea



FRIDGE-FREEZER

User's Guide

Please read this User's Guide carefully before operating and keep it handy for reference at all times.

FRIGORÍFICO CONGELADOR

Guía del usuario

Lea esta guía del usuario con atención antes de utilizar la unidad y manténgala a mano para consultas posteriores.

FRIGORÍFICO -CONGELADOR

Manual do Utilizador

Por favor leia cuidadosamente este Manual do Utilizador antes da primeira utilização e mantenha-o à mão para poder consultilo sempre que necessário.

Lea detenidamente el contenido de esta tarjeta de Garantia

Table of Contents

Introduction	Registration	
	Important Safety Instruction	4
	Identification of Parts	
Installation	Installation	
	Starting	
Operation	Temperature Control	
·	Miracle Zone	
	Super Freezer	
	Vacation	1
	Self Test	
	Lock	
	Moving Basket	
	Door Alarm	•
	Ice Making	
	Defrosting	
	Water Dispenser	-
	Folding Shelf	
	Wine Rack	
Suggestion On Food storage	Storing Food ——————————————————————————————————	20
Care and	General Information	2
Maintenance	Lamp Replacement	
	To Reverse the Doors	23
	Cleaning	24
Trouble Shooting	Trouble Shooting	26

Introduction

Introduction

The model and serial number are found on the rear of this unit. This number is unique to this unit and not available to others. You should record requested information here and retain this guide as a permanent record of your purchase. Staple your receipt here.

Registration

Date of Purcha	ase :_		
Dealer Purcha	sed From	:_	
Dealer Addres	s :_		
Dealer Phone	No. :_		
Model No. :			
Serial No. :			

Important Safety Instruction

To avoid any risk of personal injury, material damage or incorrect use of the appliance, be sure to observe the following safety precautions. (After reading these owner's instructions, please keep them in a safe place for reference). Remember to hand them over to any subsequent owner.



Indicates that a danger of death or serious injury exists



Indicates that a risk of personal injury or material damage exists

Introduction

Important Safety Instruction

A Warning

Precaution

- This fridge-freezer must be properly installed and located in accordance with the Installation Instruction before it is used.
 - Never unplug your fridge-freezer by pulling on the power cord. Always grip plug firmly and pull straight out from the outlet.
 - When moving your appliance away from the wall, be careful not to roll over or damage the power cord.
 - After your fridge-freezer is in operation, do not touch the cold surfaces in the freezer compartment, particularly when hands are damp or wet. Skin may adhere to these extremely cold surfaces.
 - Pull out the power plug prior to cleaning the fridge-freezer.

Never damage, serverely bend, pull out, or twist the power cord because power cord damage may cause a fire or electronic shock.

Never place glass products in the freezer because they may be broken when their inner contents are frozen.

• Do not directly spray water inside or outside the fridge/freezer.

There is a risk of explosion or fire.

- Do not insert the power plug with wet hands. You may receive an electric shock.
- Do not put a container filled with water on top of the appliance.

If the water spills on to any electrical parts, it may lead to fire or electric shock.

• Do not install the fridge/freezer in a damp place, where it could be splashed with water. Incorrect insulation of the electrical parts may cause an electric shock or file.

Introduction	
	Important Safety Instruction
	 Do not disassemble, repair or alter the appliance. It may cause fire or abnormal operations, which may lead to injury.
	 Pull the power plug out of the socket before replacing the interior light in the refrigerator. Otherwise, there is a risk of electric shock.
	 If possible, connect the fridge-freezer to its own individual electrical outlet to prevent it and other appliances or household lights from causing an overload.
Accessibility of Supply Plug	The supply plug of the refrigerator-freezer should be placed in easy accessible position for quick disconnection in emergency.
Supply Cord Replacement	If the supply cord is damaged, it must be replaced by the manufacturer or its service agent or a similarly qualified person in order to avoid a hazard.
Danger	Risk of child entrapment. Before you throw away your old refrigerator or freezer: Take off the doors. Leave the shelves in place so that children may not easily climb inside.
Don't store	Don't store or use gasoline or other flammable vapors and liquids in the vicinity of this or any other appliance.
Grounding (Earthing)	In the event of an electric short circuit, grounding (earthing) reduces the risk of electric shock by providing an escape wire for the electric current. In order to prevent possible electric shock, this appliance must be grounded. Improper use of the grounding plug can result in an electric shock. Consult a qualified electrician or service person if the grounding instructions are not completely understood, or if you have doubts on whether the appliance is properly grounded.

Introduction

Important Safety Instruction

🛦 Warning

- Keep ventilation openings, in the appliance enclosure or in the built-in structure, clear of obstruction.
- ▲ Do not use mechanical devices or other means to accelerate the defrosting process, other than those recommended by the manufacturer.
- Do not damage the refrigerant circuit.
- ▲ Do not use electrical appliances inside the food storage compartments of the appliance, unless they are of the type recommended by the manufacturer.
- ▲ The refrigerant and insulation blowing gas used in the appliance require special disposal procedures. When disposal, please consult with service agent or a similarly qualified person.


This appliance contains a small amount of isobutane refrigerant (R600a), natural gas with high environmental compatibility, but it is also combustible. When transporting and installing the appliance, care should be taken to ensure that no parts of the refrigerating circuit are damaged. Refrigerant squirting out of the pipes could ignite or cause an eye injury. If a leak is detected, avoid any naked flames or potential sources of ignition and air the room in which the appliance is standing for several minutes.

In order to avoid the creation of a flammable gas air mixture if a leak in the refrigerating circuit occurs, the size of the room in which the appliance may be sited depends on the amount of refrigerant used. The room must be $1m^2$ in size for every 8g of R600a refrigerant inside the appliance. The amount of refrigerant in your particular appliance is shown on the identification plate inside the appliance.


Never start up an appliance showing any signs of damage. If in doubt, consult your dealer.

3828,085655(0M)영어3~28 2004.2.25 10:56 AM 페이지용

Introduction		-
	Important Safety Instruction	
▲ Caution	 If the wall socket is loose, do not insert the power plug. It may cause electric shock or fire. 	
	 Never unplug your refrigerator by pulling on the power cord. Always grip plug firmly and pull it straight out from the outlet. You may disconnect a wire and cause a short circuit. 	
	 Do not use a wet or damp cloth when cleaning the plug. Remove any foreign matter from the power plug pins. Otherwise, there is a risk of fire. 	
	• Do not put your hands into the bottom area of the appliance. Any Sharp edges may cause personal injury	
	 After unplugging the appliance, wait for at least five minutes before plugging it again to the wall socket. Abnormal operation of the freezer may cause material damage. 	
	 If the appliance is not to be used for a long time, pull out the power plug. Any deterioration in the insulation may cause fire. 	
	 Do not let children touch or play with the control panel on the front of the appliance. 	
	• The refrigerant used in fridge/freezer and the gases in the insulation material require special disposal procedures. Ensure that none of the pipes on the back of the appliances are damaged prior to disposal.	
		_

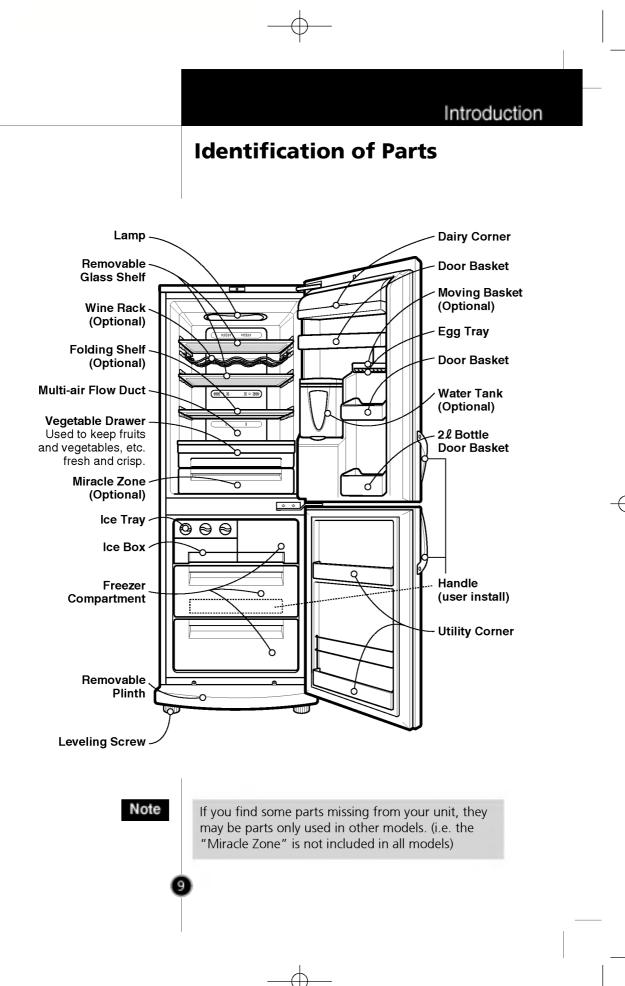


 Select a good location. Place your fridge-freezer where it is easy to use. 	
Avoid placing the unit near heat sources, direct sunlight or moisture.	
 There must be proper air circulation around your fridge-freezer to keep it operating efficiently. If your fridge-freezer is placed in a recessed area in the wall, allow at least 2 inches(5 cm) above. 	
 4. To avoid vibration, the unit must be leveled. If required, adjust the leveling screws to compensate for the uneven floor. The front should be slightly higher than the rear to aid in door closing. Leveling screws can be turned easily by tipping the cabinet slightly. Turn the leveling screws counterclockwise(→) to raise the unit, clockwise(→) to lower it. 	
 Clean your fridge-freezer thoroughly and wipe off all dust accumulated during shipping. 	\neg
 Install accessories such as ice cube box, etc., in their proper places. They are packed together to prevent possible damage during shipment. 	
 Connect the power supply cord (or plug) to the outlet. Don't double up with other appliances on the same outlet. 	
When your fridge-freezer is installed, allow it 2-3 hours to stabilize at normal operating temperature prior to filling it with fresh or frozen foods. If power plug is disconnected, allow 5 minutes delay before restarting. Your fridge-freezer is now ready for use.	
0	
	 Place your fridge-freezer where it is easy to use. Avoid placing the unit near heat sources, direct sunlight or moisture. There must be proper air circulation around your fridge-freezer to keep it operating efficiently. If your fridge-freezer is placed in a recessed area in the wall, allow at least 2 inches(5 cm) above. To avoid vibration, the unit must be leveled. If required, adjust the leveling screws to compensate for the uneven floor. The front should be slightly higher than the rear to aid in door closing. Leveling screws can be turned easily by tipping the cabinet slightly. Turn the leveling screws counterclockwise() to raise the unit, clockwise() to lower it. Clean your fridge-freezer thoroughly and wipe off all dust accumulated during shipping. Install accessories such as ice cube box, etc., in their proper places. They are packed together to prevent possible damage during shipment. Connect the power supply cord (or plug) to the outlet. Don't double up with other appliances on the same outlet. When your fridge-freezer is installed, allow it 2-3 hours to stabilize at normal operating temperature prior to filling it with fresh or frozen foods. If power plug is disconnected, allow 5 minutes delay before restarting.

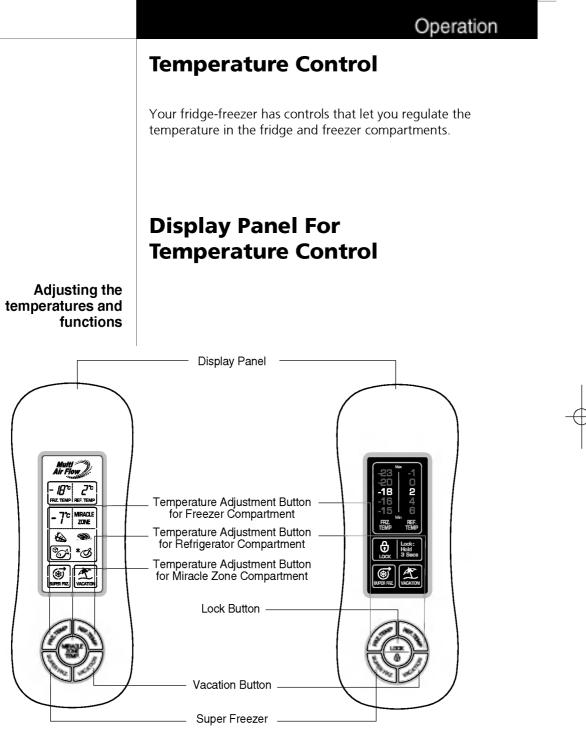

LCD Model

LED Model

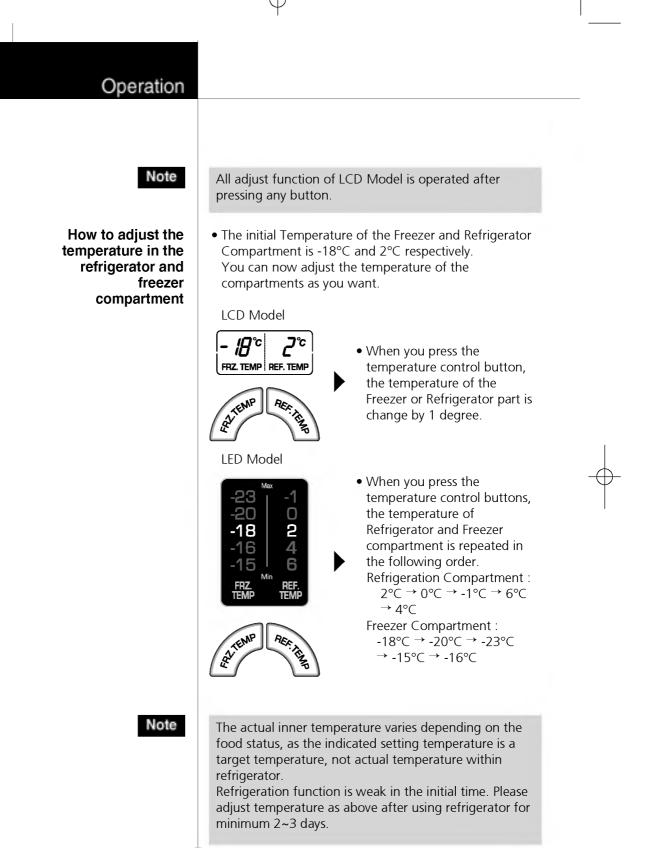


Miracle Zone Temperature Transition Corner (Optional)

• By pressing the button, store vegetables, fruits (at relatively low conservation temperature) or other types of food such as meat to be defrosted, raw fish, etc.

Method to Use

13

• You can select optimum temperature range depending on types of food stored.



- 4 step of temperature selection including 2°C, -1°C, -3°C, and -7°C is available.
 - Vegetables/fruits and cold storage foods requiring humidity maintenance and meats/fishes can be more freshly stored depending on type of foods stored.

Operation

	Operation		
	Super Feezer	 Please select this function for prompt freezer. This function is used when you want to freeze the foods quickly. Press the SUPER FRZ (Super Freezer) button once, and then the quick freeze operation starts with the lamp it. The Super Freeze operation takes about 3 hours. When its operation ends, it automatically returns to the previous temperature setting. If you want to stop the quick freeze operation, press the SUPER FRZ button once more, the lamp goes out, and the Super Freeze 	
\rightarrow	Vacation	 operation stops and the refrigerator returns to the previous temperature setting. In selecting In selecting In selecting "Off" The arrow mark graphic remains at the On status after flickering for 4times when selecting Super Freezer is turned "On". This function makes the fridge-freezer work in a power 	
		saving mode which is useful for when you are away on holiday, by reducing energy consumption as much as possible. Pressing 'VACATION' starts operation with lamp ON and pressing it again stops the operation.	
	Note 14	When the Vacation mode is "ON", the other buttons will not operate. When you come back from vacations, press the vacation mode off so that other buttons work and the refrigerator returns to previous temperature setting.	
		$-\phi$	

 $-\phi$

		$-\phi$	
		Operation	
	Self Test	 This function automatically detects failure when failure is found in product during the use of refrigerator. If the failure occurs at product and it does not operate by pressing any button and normal indication is not done, do not turn the power off and immediately contact with the local service center. A lot of time is needed for service engineer to detect the failed part by turning it off. 	
	Lock	 For LED Model Pressing this button stops operation of other buttons. "Locking" or "Un-Locking" is repeated whenever pressing the LOCK button. (For "Locking" or "Un-Locking" press the "LOCK" button for 3 secs.) When 'LOCK' is activated, pressing the other buttons would not work. 	+
Ν	loving Basket (Optional) Note	<text><list-item></list-item></text>	
		$-\phi$	


-

	$-\phi$	
Operation		
Door Alarm	 When the door of the fridge is left opened for a while, the alarm sounds. Please contact with the local service center if warning continue to sound even after closing the door. 	
Ice Making	 Fill water in ice making box of the ice making corner. If water is fully filled the ice will not be separated well and water can be dropped to make ice lumped. Ice will be dropped into the ice storage bin by rotating ice separation handle of ice making compartment. 	
Note	• Rotating the ice separation handle before ice is fully frozen may cause the remaining water drop into the ice storage bin to lump the ice together.	
+		+
Тір	• To remove ice cubes easily, run water on the tray before twisting.	
Defrosting	 Defrosting takes place automatically. The defrosting water flows down to the evaporating tray and is evaporated automatically. 	
	3	
	$-\phi$	





Features

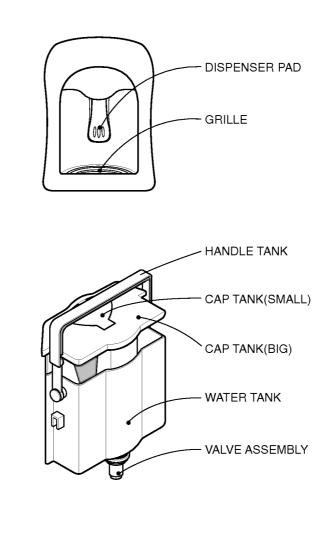

Install

• Please assemble the VALVE ASSEMBLY after correctly adjusting it with a DOOR HOLE.

3828JD85655(OM)영어3~28 2004.2.25 10:56 AM 페이지18

 After turning the HANDLE Tank backward with the WATER TANK installed at the DOOR, Open the CAP TANK (SMALL) and then fill water using a kettle etc. * Fill water while watching a sight glass on the front of the WATER TANK. * Water up to 4.5¢ can be filled. Press and fix the CAP TANK(SMALL). After filling spring water, fix the HANDLE TANK at a proper position. 	
 Press the Dispenser Pad with a cup. If pressing the Pad, water inside of the Dispenser is supplied. If slowly removing a cup from the Pad, water will not fall down 	
Do not use other beverage (milk, juice, carbonated beverage etc) than spring water. Especially beverage including grain must not be used (may result in failure).	_
	 WATER TANK installed at the DOOR, Open the CAP TANK (SMALL) and then fill water using a kettle etc. * Fill water while watching a sight glass on the front of the WATER TANK. * Water up to 4.5¢ can be filled. 2. Press and fix the CAP TANK(SMALL). 3. After filling spring water, fix the HANDLE TANK at a proper position. 1. Press the Dispenser Pad with a cup. 2. If pressing the Pad, water inside of the Dispenser is supplied. 3. If slowly removing a cup from the Pad, water will not fall down. Do not use other beverage (milk, juice, carbonated beverage etc) than spring water. Especially beverage

Folding Shelf (Optional)

• You can store taller items such as a gallon or bottles by simply pushing in front half of shelf underneath back half of shelf.

X 0 388

Operation


Pull toward you to return to a full shelf.

(*** ° *

(**** •

Wine Rack (Optional) • Bottles can be stored laterally with this wine corner. Then you can invert the wine rack and place it on the shelf.

This will enable more shelf-place.

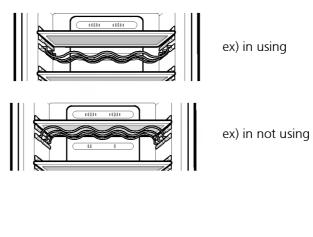

Suggestions on food storage

Storing Food

- Do not store food which goes bad easily at low temperature, such as banana, and melon.
 - Allow hot food to cool prior to storing. Placing hot food in the fridge-freezer could spoil other food, and lead to higher electric bills.
 - When storing the food, use a container with a lid. This prevents moisture from evaporating, and helps food to keep its taste and nutrients.
 - Do not block air vents with food. Smooth circulation of cold air keeps fridge-freezer temperature even.
 - Do not open the door frequently. Opening the door lets warm air enter the fridge-freezer, and cause temperature to rise.
 - Never keep too many foods in door rack, as this may stop the door from fully closing.
 - Do not store bottles in the freezer compartment they may break when frozen.
 - Do not refreeze food that has been thawed. This causes loss of taste and nutrition.
 - Do not store pharmaceutical products, scientific materials or other temperature sensitive products in the refrigerator.

Products that require strict temperature controls must not be stored in the refrigerator.

Suggestions on food storage

- Freezer Door Basket, marked $(\star \star)$ is -12°C compartment, that is suitable for sort term storage of frozen food.
- If you want to quick freeze new food, you put it middle drawer of freezer compartment, and then press the Super Freezer button.

Note

If you keep the fridge-freezer in a hot, and humid place, frequently open its door or put a lot of vegetables in it, dew may form in it, which has no effect on its performance. Remove the dew with dust cloth free from care. 3828JD85655(0M)영어3~28 2004.2.25 10:56 AM 페이지22

Care and Maintenance		
	General Information	
Power Failure	 1~2 hour power failure does no harm to the foods stores. Try to avoid opening and closing the door too frequently. 	
lf You Move	 Take out foods from the fridge-freezer and firmly fix the loose items with tape. Turn the leveling screws until they stop before moving the fridge-freezer. Otherwise the screw may scratch the floor or the fridge-freezer cannot move. 	
<section-header> Anti Condensation Pipe</section-header>	<text></text>	
	$-\phi$	

	Care and Maintenance	
Lamp Replacement	1. Unplug the power cord	
	 from the outlet. 2. Remove the room lamp lid by taking down while pulling its back projection. 3. Remove the lamp by turning it counterclockwise and replace new one. 4. Assemble in reverse order of disassembly. Replacement bulb must be the same specification as original. 	
A Caution	 You must check the O-RING, which is made by rubber and prevent electric spark. Don't touch the lamp, in case of light on the long time. Because it can be very hot. 	
Note	 Lamp capacity is MAX 30W. The lamp will remain "ON" for 7minutes if the door is left open and then it is "OFF" for safety. (If you reopen the door, the lamp is "On".) 	-(
To Reverse the Doors	• Your fridge-freezer is designed with reversible doors, do that they may open from either the left of right hand side to suit your kitchen design.	
A Caution	However, When you want to reverse the doors, you must be calling to service agent.	
٩	3	

3828JD8565S(OM)영어3~28 2004.2.25 10:56 AM 페이지24

Care and Maintenance

Cleaning **Before Cleaning** Be sure to unplug the power. Exterior Clean the outside of the fridge-freezer with a soft cloth soaked with hot water or liquid detergent. If you use a detergent, be sure to wipe it with a clean wet cloth. Interior As above. Check that the power cord is not damaged, power plug After Cleaning has not overheated, and that the power plug is tightly inserted into the outlet. A Warning Be sure to dry the appliance with a cloth after washing it with water. Do not use abrasive, petroleum, benzene, thinner, hydrochloride acid, boiling water, rough brush, etc, as they may damage parts of the fridge-freezer.

Care and Maintenance

GRILLE and DRIP TRAY	 Remove the HOLE part of the GRILLE with the finger. Wipe moisture out around the DOOR part and the DRIP TRAY using a clean cloth. 	
Exterior Dispenser	Wipe moisture etc out outside of Dispenser and on the Dispenser Pad using a cloth.	
Water Tank	 Lift the WATER TANK up by pressing the fixing LEVER on the bottom of WATER TANK and then remove it. After removing the CAP TANK (BIG), clean and fully rinse the inside/outside part of the WATER TANK by using neutral cleansing agent. 	
Cap Tank(Big & Small)	Clean and fully rinse the Cap Tank (Big & Small) by using neutral cleansing agent. Especially for the groove part of the CAP TANK, it is convenient to cleanse it by using a small brush.	
Valve Assembly	Clean and fully rinse the VALVE ASSEMBLY by using a small brush. Rinse it while operating the bottom part of the valve assembly. Always fix the Sealing Rubber separated for cleansing at the existing position (may result in water leakage).	

Trouble Shooting		
	Before calling for service, check this list. It may save you both time and expense. This list includes common occurrences that are not the result of defective workmanship or materials in this appliance.	
Problem	Possible Causes	
Fridge-Freezer does not operate	 Power plug may be unplugged from the electric outlet. Plug it in securely. House fuse has blown or circuit breaker has tripped. Check and/or replace fuse and reset circuit breaker. Power cut. Check house lights. 	
Fridge or Freezer Compartment Temperature too warm	 Temperature control not set on proper position. Refer to Temperature Control section. Appliance is placed close to heat source. Warm weather-frequent door openings. Door left open for a long time. Package holding door open or blocking air duct in freezer compartment. 	-
Vibration or Rattling or Abnormal Noise	 The floor on which the fridge-freezer is installed may be uneven or the fridge-freezer may be unstable. Make it even by rotating the leveling screw. Unnecessary objects placed in the back side of the fridge-freezer. 	
Frost or Ice Crystals on frozen Food	 Door may have been left ajar or package holding door open. Too frequent or too long door openings. Frost within package is normal. 	
Moisture forms on Cabinet Surface	 This phenomenon is likely to occur in a wet space. Wipe it with a dry towel. 	
4	6	

3828JD85655(0M)영어3~28 2004.2.25 10:56 AM 페이지27

Trouble Shooting

Problem	Possible Causes	
Moisture collects inside	 Too frequent or too long door openings. In humid weather, air carries moisture into fridge when doors are opened. 	
Fridge has odor	 Foods with strong odors should be tightly covered or wrapped. Check for spoiled food. Interior needs cleaning. Refer to CLEANING section 	
Door not closing properly	 Food package is keeping door open. Move packages that keep door from closing. Fridge-freezer is not level. Adjust the leveling screws. The floor on which the fridge-freezer is installed may be uneven or the fridge-freezer may be unstable. Slightly raise the front side with the leveling screw. 	_
Interior light does not work	 No power at outlet. Light lamp needs replacing. Refer to the Lamp Replacement section 	

Memo

28