

KF300 | USER GUIDE |

www.lgmobile.com

P/N : MMBB022285(1.1)

|KF300| USER GUIDE

LG Electronics Inc.



ENGLISH



|KF300| USER GUIDE

CE 0168

Bluetooth QD ID B013568

KF300 USER GUIDE

- English

Some of the contents in this manual may differ from your phone depending on the software of the phone or your service provider.



Table of Contents

Introduction	6	Applications	39
For Your Safety	7	Network profiles	
Guidelines for safe and efficient use	8		
KF300 features	13	Call history	40
Parts of the phone		All calls	
		Missed calls	
		Dialed calls	
		Received calls	
		Call duration	
		Call costs	41
		Data information	
Getting started	19	Organizer	42
Inserting the SIM card and the handset battery		Calendar	
Charging the Battery	20	Memo	
Disconnecting the adapter	21	To do	43
How to use a microSD memory card	22		
		Multimedia	44
General Functions	26	MP3 player	
Making and answering calls		All songs	45
Entering text	28	My playlist	
		Settings	
		Camera	46
		Video camera	48
		FM Radio	49
		Voice recorder	50
Selecting functions and options	32		
In-call menu	33		
Menu Tree	36		
Games & Apps	38		
Games			

Messaging	51	Others	66
New Message		External memory	
Message			
Inbox	53	Profiles	67
E-mail box	54	Activate	
Drafts		Personalize	
Outbox	55		
Sent		Contacts	69
Listen to voicemail		Search	
Info message	56	New contact	70
Read		Speed dials	
Topics	57	Groups	71
Templates		Copy all	
Text templates		Delete all	
Multimedia templates	58	Settings	72
Settings		View options	
Text message		Backup Contacts	
Multimedia message	59	Restore Contacts	
Email	60	Information	
Voicemail number	62	Service dial number	
Service message		Own number	
Info message		My business card	
My stuff	63	Tools	73
Images		Alarm clock	
Sounds	64	Calculator	
Videos	65		

Table of Contents

Stopwatch	74
Unit converter	
World clock	
WINE+	
SIM services	75

Browser 76

Home	77
------	----

Yahoo!

NDTV Active

Bookmarks

Enter address	78
---------------	----

History

Saved pages

Settings

Network profiles

Rendering mode	79
----------------	----

Cache

Cookies

Security certificates

Show image	80
------------	----

Java script

Information

Connectivity 81

Bluetooth

Network	82
---------	----

Network selection

GPRS attach	83
-------------	----

Access Point

USB connection mode	85
---------------------	----

Settings 87

Date & Time

Set date

Date format

Set time

Time format

Auto update

Languages

Display

Wallpaper

Clock

Backlight timer

Brightness	88
------------	----

Home screen shortcut

Font size

Theme

Menu style

Dialing

Standby text

Network name

Shortcut

Call

Call divert	89
Call barring	90
Fixed dial number	91
Answer mode	
Send my number	
Call waiting	92
Minute minder	
Auto redial	
Select line	
Send DTMF tones	
Security	93
PIN code request	
Phone lock	
Anti Theft Mobile Tracker	
Fixed dial number	94
Change codes	
Flight mode	
Power save	95
Reset	
Memory status	
Accessories	96
Technical data	97

Introduction

Congratulations on your purchase of the advanced and compact KF300 mobile phone, designed to operate with the latest digital mobile communication technology.

This user's guide contains important information on the use and operation of this phone. Please read all the information carefully for optimal performance and to prevent any damage or misuse of the phone. Any changes or modifications not expressly approved in this user's guide could void your warranty for this equipment.

Some of the contents in this manual may differ from your phone depending on the software of the phone or your service provider.



For Your Safety

WARNING!

- *Mobile Phones must be switched off at all times in aircrafts.*
- *Do not hold the phone in your hand while driving.*
- *Do not use your phone near petroleum stations, fuel depots, chemical plants or blasting operations.*
- *For your safety, use ONLY specified ORIGINAL batteries and chargers.*
- *Do not handle the phone with wet hands while it is being charged. It may cause an electric shock or seriously damage your phone.*
- *Keep the phone in a safe place out of small children's reach. It includes small parts which, if detached, may cause a choking hazard.*
- *Don't charge a handset near flammable material as the handset can become hot and create a fire hazard.*
- *Do not charge the phone when it is on soft furnishings. The phone should be charged in a well ventilated area.*

CAUTION!

- *Switch off the phone in any area where required by special regulations. For example, do not use your phone in hospitals or it may affect sensitive medical equipment.*
- *Emergency calls may not be available under all mobile networks. Therefore, you should never depend solely on your mobile phone for emergency calls.*
- *Only use ORIGINAL accessories to avoid damage to your phone.*
- *All radio transmitters carry risks of interference with electronics in close proximity. Minor interference may affect TVs, radios, PCs, etc.*
- *Batteries should be disposed "off" in accordance with relevant legislation.*
- *Do not dismantle the phone or battery.*
- *Risk of explosion if battery is replaced by an incorrect type.*

Guidelines for safe and efficient use

Please read these simple guidelines. Not following these guidelines may be dangerous or illegal.

Exposure to radio frequency energy

Radio wave exposure and Specific Absorption Rate (SAR) information

This mobile phone model KF300 has been designed to comply with applicable safety requirements for exposure to radio waves. These requirements are based on scientific guidelines that include safety margins designed to assure the safety of all persons, regardless of age and health.

- ▶ The radio wave exposure guidelines employ a unit of measurement known as the Specific Absorption Rate, or SAR. Tests for SAR are conducted using standardized method with the phone transmitting at its highest certified power level in all used frequency bands.
- ▶ While there may be differences between the SAR levels of various LG phone models, they are all designed to meet the relevant guidelines for exposure to radio waves.

- ▶ The SAR limit recommended by the International Commission on Non-Ionizing Radiation Protection (ICNIRP) is 2W/kg averaged over 10g of tissue.
- ▶ The highest SAR value for this model phone tested by DASy4 for use at the ear is 0.833 W/kg (10g) and when worn on the body is 0.594 W/kg (10g).
- ▶ SAR data information for residents in countries/regions that have adopted the SAR limit recommended by the Institute of Electrical and Electronics Engineers (IEEE), which is 1.6 W/kg averaged over 1g of tissue.

Product care and maintenance

WARNING

Only use batteries, chargers and accessories approved for use with this particular phone model. The use of any other types may invalidate any approval or warranty applying to the phone, and may be dangerous.

- ▶ Do not disassemble this unit. Take it to a qualified service technician when repair work is required.
- ▶ Keep away from electrical appliances such as TVs, radios, and personal computers.
- ▶ The unit should be kept away from heat sources such as radiators or cookers.
- ▶ Do not drop.
- ▶ Do not subject this unit to mechanical vibration or shock.
- ▶ Switch off the phone in any area where you are required by special regulations. For example, do not use your phone in hospitals as it may affect sensitive medical equipment.
- ▶ Do not handle the phone with wet hands while it is being charged. It may cause an electric shock and can seriously damage your phone.
- ▶ Do not charge the handset near flammable material as the handset can become hot and create a fire hazard.
- ▶ Use a dry cloth to clean the exterior of the unit (do not use solvents such as benzene, thinner or alcohol).
- ▶ Do not charge the phone when it is on soft furnishings.
- ▶ The phone should be charged in a well ventilated area.
- ▶ Do not subject this unit to excessive smoke or dust.
- ▶ Do not keep the phone next to credit cards or transport tickets; it can affect the information on the magnetic strips.
- ▶ Do not tap the screen with a sharp object as it may damage the phone.
- ▶ Do not expose the phone to liquid or moisture.
- ▶ Use the accessories like earphones cautiously. Do not press the antenna unnecessarily.

Efficient phone operation

Electronics devices

All mobile phones may get interference, which could affect performance.

- ▶ Do not use your mobile phone near medical equipment without requesting permission.

Guidelines for safe and efficient use

Avoid placing the phone over pacemakers, for example in your breast pocket.

- ▶ Some hearing aids might be disturbed by mobile phones.
- ▶ Minor interference may affect TVs, radios, PCs, etc.

Road safety

Check the laws and regulations on the use of mobile phones in the areas when you drive.

- ▶ Do not use a hand-held phone while driving.
- ▶ Give full attention to driving.
- ▶ Use a hands-free kit, if available.
- ▶ Pull off the road and park before making or answering a call if driving conditions so require.
- ▶ RF energy may affect some electronic systems in your vehicle such as car stereos and safety equipment.

- ▶ When your vehicle is equipped with an air bag, do not obstruct with installed or portable wireless equipment. It can cause the airbag to fail or cause serious injury due to improper performance.
- ▶ If you are listening to music whilst out and about, please ensure that the volume is at a reasonable level so that you are aware of your surroundings. This is particularly imperative when near roads.

Avoid damage to your hearing

Damage to your hearing can occur if you are exposed to loud sound for long periods of time. We therefore recommend that you do not turn on or off the handset close to your ear. We also recommend that music and call volumes are set to a reasonable level.

Blasting area

Do not use the phone where blasting is in progress. Observe restrictions, and follow any regulations or rules.

Potentially explosive atmospheres

- ▶ Do not use the phone at a refueling point.
- ▶ Do not use near fuel or chemicals.
- ▶ Do not transport or store flammable gas, liquid, or explosives in the same compartment of your vehicle as your mobile phone and accessories.

In aircraft

Wireless devices can cause interference in aircraft.

- ▶ Turn your mobile phone off before boarding any aircraft.
- ▶ Do not use it on the ground without permission from the crew.

Children

Keep the phone in a safe place out of the reach of small children. It includes small parts which may cause a choking hazard if detached.

Emergency calls

Emergency calls may not be available under all mobile networks. Therefore, you should never depend solely on the phone for emergency calls. Check with your local service provider.

Battery information and care

- ▶ You do not need to completely discharge the battery before recharging. Unlike other battery systems, there is no memory effect that could compromise the battery's performance.
- ▶ Use only LG batteries and chargers. LG chargers are designed to maximize the battery life.

Guidelines for safe and efficient use

- ▶ Do not disassemble or short-circuit the battery pack.
- ▶ Keep the metal contacts of the battery pack clean.
- ▶ Replace the battery when it no longer provides acceptable performance. The battery pack maybe recharged hundreds of times until it needs replacing.
- ▶ Recharge the battery if it has not been used for a long time to maximize usability.
- ▶ Do not expose the battery charger to direct sunlight or use it in high humidity, such as the bathroom.
- ▶ Do not leave the battery in hot or cold places, this may deteriorate the battery performance.
- ▶ There is risk of explosion if the battery is replaced by an incorrect type.
- ▶ Dispose of used batteries according to the manufacturer's instructions. Please recycle when possible. Do not dispose as household waste.
- ▶ If you need to replace the battery, take it to the nearest authorized LG Electronics service point or dealer for assistance.
- ▶ Always unplug the charger from the wall socket after the phone is fully charged to save unnecessary power consumption of the charger.

KF300 features

Parts of the phone

1. Earpiece

2. Main LCD

3. Send key

- ▶ Dials a phone number and answers a call.
- ▶ **In standby mode:** Shows a history of calls.

4. Alpha numeric keys

- ▶ **In standby mode:**
Input numbers to dial
- Hold down**
 - 0** – International calls
 - 1** – Activate Voice mail centre menu
 - 2** to **9** – Speed dials
 - #** – Vibration profile mode when you press and hold **#**.

▶ In editing mode:

Enter numbers & characters

5. Clear key

- ▶ Clears a character with each press. Hold down the key to clear all input.

6. End key

- ▶ switch on/off (hold down)
- ▶ End or reject a call.

7. Microphone



KF300 features



1. Alarm Hot key

- ▶ Go to Alarm Menu

2. Schedule Hot key


- ▶ Go to Schedule Menu

3. Message Hotkey

- ▶ Go to Message menu

4. Wine+ Hot key

- ▶ Go to Wine+ Menu



5. Navigation key

- ▶ In standby mode:

-  Briefly: View images
-  Briefly: Go to Contacts list
-  Briefly: Go to Profiles Menu
-  Briefly: Go to MP3 Player Menu

- ▶ In menu: Scroll up & down

6. Soft keys

(Left soft key / Right soft key)

- ▶ These keys perform the function Indicated in the bottom of the display.

7. Camera hot key

- ▶ Go to Camera preview.

8. Confirm key / OK key

- ▶ Selects menu options and confirms actions.



1. Side keys

- ▶ **In standby mode (opened):**
Keypad tones volume adjustment
- ▶ **In standby mode (closed):**
Shows Date & Time by each press
- ▶ **During a call:** Earpiece volume adjustment
- ▶ **During playing MP3 music:**
Audio volume adjustment

2. Headset/Charger/USB cable connector

Note

Please ensure phone is powered on in idle mode before connecting the USB cable.




3. Camera lens

4. Sub LCD

KF300 features

KF300 features

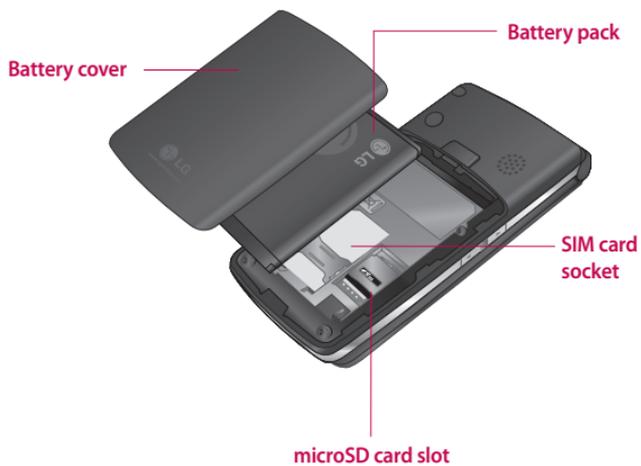

Display Information



Area	Description
First line	Displays various icons.
Middle lines	Displays messages, instructions and any information that you enter, such as number to be dialled.
Last line	Shows the functions currently assigned to the two soft keys.

On-Screen Icons

The screen displays several icons. There are described below.

Icon	Description
	Indicates the strength of the network signal.*

Note

* The quality of the conversation may change depending on network coverage. When the signal strength is below 2 bars, you may experience muting, call drop and bad audio. Please take the network bars as indicator for your calls. When there are no bars, that means that there is no network coverage: in this case, you won't be able to access the network for any service (call, messages and so on).

KF300 features

Icon	Description
	Indicates that GPRS service is available.
	Indicates that flight mode has been activated.
	Indicates that a call is in progress.
	All calls are diverted.
	Indicates that the phone is accessing the Browser.
	Indicates that you are using GPRS.
	Shows that you are using a roaming service.
	The alarm has been set and is on.
	Indicates that you have a schedule.

Icon	Description
	Indicates that external memory is installed.
	You have received a message.
	You have received a voice mail.
	General menu in profile.
	Silent menu in profile.
	Vibrate only menu in profile.
	Outdoor menu in profile.
	Headset menu in profile.
	Indicates the status of the battery.
	Indicates that external memory is unformatted or is unsupported by the phone.

Getting started

Inserting the SIM card and the handset battery

Make sure the power is off before you remove the battery.

1. Remove the battery cover.

Press the battery release latch and slide the battery cover toward the bottom of the phone. And remove the battery cover.



Note

Removing the battery from the phone when the power is on may cause the phone to malfunction.

2. Remove the battery.

Hold the top edge of the battery and lift the battery from the battery compartment.



3. Inserting the SIM card.

Inserting the SIM card into the holder. Slide the SIM card into the SIM card holder. Make sure that the SIM card is inserted properly and that the golden contact area on the card is facing downwards. To remove the SIM card, press down lightly and pull it in the reverse direction.



Inserting the SIM card



Remove the SIM card

Getting started

Caution!

Golden contact area or Metal contact area can be easily damaged by scratches. Pay special attention to the SIM card while handling. Follow the instructions supplied with the SIM card.

4. Inserting the battery.

Inserting the bottom of the battery first into the bottom edge of the battery compartment. Push down the top of the battery until it snaps into space.



5. Replace the battery cover.

Lay the battery cover in place of the phone and slide it until the latch clicks.



Charging the Battery

To connect the main adapter to the phone, you must have installed the battery.



1. With the battery in position in the phone, connect the lead from the Right side of the phone the arrow on the lead connector is facing towards the front of the phone.

2. Connect the other end of the main adapter to the main socket. Use only the included packing charger or packed charger.
3. The moving bars of battery icon will stop after charging is complete.

Caution!

- *Do not force the connector as this may damage the phone and/or the travel adapter.*
- *Installing the battery pack charger or packed charger vertically to wall power outlet.*
- *If you use the battery pack charger or packed charger out of your own country, use an attachment plug adapter for the proper configuration.*
- *Do not remove your battery or the SIM card while charging.*

WARNING!

- *Unplug the power cord and charger during lightning storms to avoid electric shock or fire.*
- *Make sure that no sharp-edged items such as animal teeth, nails, come into contact with the battery. There is a risk of this causing a fire.*
- *Do not place or answer calls while charging the phone as it may short-circuit the phone and/or cause electric shock or fire.*

Disconnecting the adapter

1. When charging is finished, the moving bars of the battery icon stop and 'Battery Full unplug the charger' is displayed on the screen.
2. Unplug the adapter from the power outlet.



Getting started

Note

- ▶ Ensure the battery is fully charged before using the phone for the first time.
- ▶ Do not remove the battery or SIM card while charging.
- ▶ In case the battery is not properly charged, please turn the phone off by using power key, then recharge the battery. After detaching and reattaching the battery, please recharge the battery.

How to use a microSD memory card



<microSD memory card>

< How to install a microSD memory card >

1. Turn the phone off. Inserting or removing the memory card when the phone is on may damage the files stored in the memory card.
2. Open the slot protection.



3. Install the memory card into the slot. Install the Memory card into the slot. The Golden contact area facing downwards. If the memory card doesn't go into the slot easily, you may be trying to install it in the wrong way or there could be a foreign object in the slot.



4. Close the slot protection.
5. To remove the memory card, turn the phone off. Open the slot protection and carefully extract the memory card.

Note

- ▶ Avoid using the memory card when the battery is low.
- ▶ When writing to the card, wait for the operation to complete before removing the card.
- ▶ The card is designed to fit easily into the system one way only.

Note

- ▶ Do not bend the card or force it into the slot.
- ▶ Do not insert any memory cards other than those made by microSD.
- ▶ If the microSD has been formatted using FAT32, format the microSD using FAT16 again.
- ▶ After you insert microSD card into your phone, please check the icon area on your screen.
- ▶ If the memory error icon  is displayed, your memory card is not formatted or is unsupported by the phone.
- ▶ In this case, you have to try to format your memory card.
- ▶ If the memory error icon is still displayed on icon area, please contact service center.

For more information on the microSD, please refer to the memory card instruction manual.

Getting started

Memory card formatting

Before you start to use the memory card you have to format it. After you insert the memory card, select **Menu** → **Settings** → **Memory status** → **External memory**, then press the OK key.

This operation should only be done when you insert the memory card for the first time. During formatting various folders will be created for different data types.

Turning your handset on

Ensure that your SIM card is in your handset and the battery is charged. Press and hold the end key until the power comes on. Enter the SIM PIN code that was supplied with your SIM card if the PIN code request is set to On. After a few seconds you will be registered on the network.

Turning your handset off

Press and hold the end key until the power goes off. There may be a few seconds delay while the handset powers down. Do not turn the handset on again during this time.

Access Codes

You can use the access codes described in this section to avoid unauthorized use of your phone. The access codes (except PUK and PUK2 codes) can be changed by using Change codes feature of Settings menu.

PIN code (4 to 8 digits)

The PIN (Personal Identification Number) code protects your SIM card against unauthorized use. The PIN code is usually supplied with the SIM card. When the PIN code request is set to Enable, your phone will request the PIN code every time the phone is switched on. When the PIN code request is set to Disable, your phone connects to the network directly without the PIN code.

PIN2 code (4 to 8 digits)

The PIN2 code, supplied with some SIM cards, is required to access functions such as advice of **Call costs** and **Fixed dial number**.

These functions are only available if supported by your SIM card. Check with your network for further information.

PUK code (4 to 8 digits)

The PUK (PIN Unblocking Key) code is required to change a blocked PIN code. The PUK code may be supplied with the SIM card. If not, contact your network operator for the code. If you lose the code, also contact your network operator.

PUK2 code (4 to 8 digits)

The PUK2 code, supplied with some SIM cards, is required to change a blocked PIN2 code. If you lose the code, also contact your network operator.

Security code (4 to 8 digits)

The security code protects the unauthorized use of your phone. The default security code is set to '0000' and the security code is required to delete all phone entries and to activate the Reset settings menu. Also, the security code is required to enable or disable the phone lock function to prevent unauthorized use of the phone. The security code default setting can be modified from the Security menu.

General Functions

Making and answering calls

Making a call

1. Make sure your phone is powered on.
2. Enter a phone number including the area code.
 - ▶ Press and hold the  key to erase the entire number.
3. Press the  key to make the call.
4. To end the call, press the  key.

Making a call from the call history list

1. In standby mode, press the  key, and the latest incoming, outgoing and missed phone numbers will be displayed.
2. Select the desired number by using the up/down navigation key.
3. Press the  key.

Making an international call

1. Press and hold the  key for the international prefix. The '+' character automatically selects the international access code.
2. Enter the country code, area code, and the phone number.
3. Press the  key.

Ending a call

When you have finished your call, press the  key.

Making a call from the Contacts

You can save the names and phone numbers dialled frequently in the SIM card as well as the phone memory known as the contacts list. You can dial a number by simply looking up the desired name in the contacts.

Answering a call

When you receive a call, the phone rings and the flashing phone icon appears on the screen. If the caller can be identified, the caller's phone number (or name if saved in the contacts) is displayed.

1. To answer an incoming call, open the phone when Flip open has been set as the answer mode. You can change the answer mode what you want by using the Answer mode feature.

Note

If the **Any key** has been set as the answer mode, any key press will answer a call except for the  key, right soft key and side volume key.

- ▶ To reject an incoming call, press and hold side down key on the left side of the phone without opening the phone.
 - ▶ You can answer a call while using the Contacts or other menu features.
2. To end the call, close the flip or press the  key.

Signal strength

You can check the strength of your signal by the signal indicator () on the LCD screen of your phone.

Signal strength can vary, particularly inside buildings. Moving near to a window may improve reception.

General Functions

Entering text

You can enter alphanumeric characters by using the phone's keypad. For example, storing names in the contacts, writing a message, creating a personal greeting. The following text input methods are available in the phone.

T9 (T9 Abc) mode

This mode lets you enter words with only one keystroke per letter. Each key on the keypad has more than one letter. The T9 mode automatically compares your keystrokes with an internal dictionary to determine the correct word, thus requiring far fewer keystrokes than the traditional ABC mode. This is sometimes known as predictive text.

ABC mode

This mode lets you enter letters by pressing the key labelled with the required letter once, twice, three or four times until the letter is displayed.

123 mode (Number mode)

Type numbers using one keystroke per number. To change to 123 mode in a text entry field, press the  key until 123 Mode is displayed.

Changing the text input mode

1. When you are in a field that allows characters to be entered, you will notice the text input mode indicator in the upper right corner of the LCD screen.
2. Change the text input mode by pressing the **☰** key. You can check the current text input mode in the upper right corner of the LCD screen.

Using the T9 mode

The T9 predictive text input mode lets you enter words easily with a minimum number of key presses. As you press each key, the phone begins to display the characters that it thinks you are typing based on the built-in dictionary. You can also add new words in the dictionary. As new words are added, the word changes to reflect the most likely candidate from the dictionary.

1. When you are in the T9 predictive text input mode, start entering a word by pressing keys **2-9** to **9-0**. Press one key per letter.
 - ▶ The word changes as letters are typed. Ignore what's on the screen until the word is typed completely.
 - ▶ If the word is still incorrect after typing completely, press the down navigation key or **↵** key once or more to cycle through the other word options.
 - ▶ If Spell is displayed in the bottom left corner of screen during you key in character, you can add new word in the built-in dictionary using Spell function.

General Functions

Example

Press 4663 to type **Good**

- ▶ If the desired word is missing from the word choice list, add it using the ABC mode.
 - ▶ You can also turn off the T9 mode by selecting **T9 off**. The default setting on the phone is T9 enabled mode.
2. Enter the whole word before editing or deleting any keystrokes.
 3. Complete each word with a space by pressing the key **0=**.
To delete letters, press **⌫**. Press and hold down **⌫** to erase the letters continuously.

Using the ABC mode

Use the **2=** to **9=** keys to enter your text.

1. Press the key labelled with the required letter:
 - ▶ Once for the first letter
 - ▶ Twice for the second letter
 - ▶ And so on
2. To insert a space, press the right navigation key **↩** or **0=** key once.
To delete letters, press the **⌫** key. Press and hold down the **⌫** key to clear the whole text.

Using the 123 (Number) mode

The 123 mode enables you to enter numbers in a text message (a telephone number, for example). Press the keys corresponding to the required digits before manually switching back to the appropriate text entry mode.

Using the symbol mode

The symbol mode enables you to enter various symbols or special characters. To enter a symbol, select **Options** → **Insert** → **Symbol** or press  key. Use the navigation and numeric keys to select the desired symbol and press the OK key.

Selecting functions and options

Your phone offers a set of functions that allow you to customise the phone. These functions are arranged in menus and sub-menus, accessed via the two soft keys marked. Each menu and sub-menu lets you view and alter the settings of a particular function.

The roles of the soft keys vary according to the current context; the label on the bottom line of the screen just above each key indicates its current role.



Press the left soft key to access the available Menu.

Press the right soft key to access the Contacts.

Your phone provides a number of control functions that you can use during a call. To access these functions during a call, press the left soft key [Options].

During a call

The menu displayed on the handset screen during a call is different than the default main menu displayed when in idle screen, and the options are described below.

Making a Second Call

(Network Dependent)

You can search and dial the number from **Contacts** to make a second call.

Swapping Between Two Calls

To switch between two calls, press the  key or the left soft key, and then select **Swap Call**.

In-call menu

Answering an Incoming Call

To answer an incoming call when the handset is ringing, simply press the  key. The handset is also able to warn you of an incoming call while you are already on a call.

A tone sounds in the earpiece, and the display will show that a second call is waiting.

This feature, known as **Call waiting**, is only available if your network supports it. For details on how to activate and deactivate it see Call waiting feature.

If **Call waiting** is on, you can put the first call on hold and answer the second, by pressing the left soft key or the send key.

Rejecting an Incoming Call

You can reject an incoming call without answering by simply pressing the  key.

During a call, you can reject an incoming call by pressing the  key.

In-call menu

Muting the Microphone

You can mute the microphone during a call by pressing the right soft key [Mute]. The handset can be unmuted by pressing the right soft key [Unmute]. When the handset is muted, the caller cannot hear you, but you can still hear them.

DTMF tones while calling

To switch on DTMF tones while calling (e.g. to use the phone with an automatic switchboard) press the left soft key [Options] followed by Enable DTMF. Select Disable DTMF to disable DTMF tones. DTMF tones are normally on.

Conference Calls

The conference service provides you with the ability to have a simultaneous conversation with more than one caller, if your network service provider supports this feature.

A conference call can only be set up when you have one active call and one call on hold, both calls having been answered.

Once a conference call is set up, calls may be added, disconnected or separated (that is, removed from the conference call but still connected to you) by the person who set up the conference call. These options are all available from the In-Call menu. The maximum callers in a conference call are five. Once started, you are in control of the conference call, and only you can add calls to the conference call.

Making a Second Call

You can make a second call while currently in call. Enter the second number and press the  key.

When the second call is connected, the first call is automatically placed on hold. You can swap between calls, by pressing the  key.

Setting Up a Conference Call

To set up a conference call, place one call on hold and while the active call is on, press the left soft key and then select the Join menu of Conference call.

Activate the Conference Call on Hold

To activate a conference call on hold, press the  key. Alternatively press the left soft key [Options] and select Join all/Hold all calls. Other users on hold will stay connected. To return to conference call mode, press the left soft key [Options] followed by Conference call.

Adding Calls to the Conference Call

To add a call to an existing conference call, press the left soft key, and then select the Join menu of Conference call.

Private Call in a Conference Call

To have a private call with one caller from a conference call, display the number of the caller you wish to talk to on the screen, then press the left soft key. Select the Private menu of Conference call to put all the other callers on hold.

Ending a Conference Call

Currently displayed caller from a conference call can be disconnected by pressing the  key.

Menu Tree

The menu in this phone can be displayed in 2 ways. The menu in this phone can be displayed in either Grid view or List View.

Please note that menu number options are different in each view.

The default setting on the phone is set to show the menu in grid view, so therefore all the menu number selections throughout the manual are shown according to that setting.

You can go to the desired menu using the left soft key [Menu], navigation keys and the OK key. And you can also take a shortcut by pressing the corresponding number key of desired menu after pressing the left soft key [Menu].

1. Games & Apps	3. Organizer	5. Messaging
1.1 Games	3.1 Calendar	5.1 New message
1.2 Applications	3.2 Memo	5.2 Inbox
1.3 Network profiles	3.3 To do	5.3 E-mail box
2. Call history	4. Multimedia	5.4 Drafts
2.1 All calls	4.1 MP3 player	5.5 Outbox
2.2 Missed calls	4.2 Camera	5.6 Sent
2.3 Dialed calls	4.3 Video camera	5.7 Listen to voicemail
2.4 Received calls	4.4 FM Radio	5.8 Info message
2.5 Call duration	4.5 Voice recorder	5.9 Templates
2.6 Call costs		5.0 Settings
2.7 Data information		

6. My stuff	9. Tools	0. Connectivity
6.1 Images	9.1 Alarm clock	0.1 Bluetooth
6.2 Sounds	9.2 Calculator	0.2 Network
6.3 Videos	9.3 Stopwatch	0.3 USB connection mode
6.4 Others	9.4 Unit converter	
6.5 External memory	9.5 World clock	
	9.6 WINE+	
7. Profiles	9.7 SIM services	
7.1 General		#. Settings
7.2 Silent	*. Browser	#.1 Date & Time
7.3 Vibrate only	*.1 Home	#.2 Languages
7.4 Outdoor	*.2 Yahoo!	#.3 Display
7.5 Headset	*.3 NDTV Active	#.4 Shortcut
8. Contacts	*.4 Bookmarks	#.5 Call
8.1 Search	*.5 Enter address	#.6 Security
8.2 New contact	*.6 History	#.7 Flight mode
8.3 Speed dials	*.7 Saved pages	#.8 Power save
8.4 Groups	*.8 Settings	#.9 Reset
8.5 Copy all	*.9 Information	#.0 Memory status
8.6 Delete all		
8.7 Settings		
8.8 Information		

Games & Apps

Games

Menu 1.1

You can access a great selection of games on your phone.

Your KF300 comes with preloaded games to keep you amused when you have time to spare. The below games are offered in your KF300. Airmen, Backgammon, BrekBrik, BugsBin, E2E4Chess.

Note

Java™ is a technology developed by Sun Microsystems. There are two methods to install Java Applet. The first method, Similar to the way you would download the Java Applet using the standard MS Internet Explorer browsers, Java MIDlet can be downloaded using the WAP enabled phone. Depending on the service provider, all Java based programs such as Java games can be downloaded and run on a phone. Once downloaded, the Java program can be viewed in the Games or Applications menu where you can select, execute, or delete. The Java program files saved in the phone are in JAD or JAR format.

Note

The JAR file is a compressed format of the Java program and the JAD file is a description file that includes all detailed information. From the network, prior to download, you can view all detailed file descriptions from the JAD file.

The another method, You can use the Java Applet existed in External memory.

Go to My stuff -> External memory -> Others, and then select either.jad or .jar file of Java Applet you want to install in your phone.

Caution

Only J2ME (Java 2 Micro Edition) based programs will run in a phone environment. The J2SE (Java 2 Standard Edition) based programs will only run in a PC environment.

Network profiles Menu 1.3

Network profiles menu allows you to see the network information used to connect to the Internet. You can activate or add new profiles.

Applications Menu 1.2

When Applications menu is selected, Java loading screen is displayed.

Your KF300 comes with preloaded applications :

CocktailsMocktails, DataWallet, E2EDictionary, LG HelpDesk, MLearning.

You can select and easily access other applications in this menu. For further details, please contact your service provider.

Call history

You can check the record of missed, received, and Last dialled calls only if the network supports the Calling Line Identification (CLI) within the service area.

The number and name (if available) are displayed together with the date and time at which the call was made. You can also view the number of times you have called.

All calls Menu 2.1

You can view all lists of outgoing or incoming calls.

Missed calls Menu 2.2

Allows you to view missed call records, make a call, send a message, and save the number in the contacts.

Dialed calls Menu 2.3

Allows you to view dialed call records, make a call, send a message, and save the number in the contacts.

Received calls Menu 2.4

Allows you to view received call records, make a call, send a message, and save the number in the contacts.

Call duration Menu 2.5

Allows you to view the duration of your incoming and outgoing calls. You can also reset the call timers.

The following timers are available:

- ▶ **Last call:** Length of the last call.
- ▶ **All calls:** Total length of all calls made and incoming calls since the timer was last reset.
- ▶ **Dialed calls:** Length of the outgoing calls.
- ▶ **Received calls:** Length of the incoming calls.

Call costs

Menu 2.6

Allows you to check the cost of your last call and all calls.

To check Cost settings, you should check the following menus.

- ▶ **Set credit:** This network service allows you to limit the cost of your calls by selected charging units. If you select Read, the number of remaining unit is shown. If you select Change, you can change your change limit.
- ▶ **Set tariff:** You can set the currency type and the unit price. Contact your service providers to obtain your service providers to obtain charging unit prices. To select the currency or unit in this menu, you need the PIN2 code.
- ▶ **Auto display:** This network service allows you to see automatically the cost of your last calls. If set to On, you can see the last cost when the call is released.

Data information

Menu 2.7

You can check the amount of data transferred over the network through the GPRS information option. In addition, you can also view how much time you are online.

Organizer

Calendar

Menu 3.1

You can refer to your schedule by months. The cursor is on the current date, and the registered date is marked.

Each press of		skips back a year.
		skips forward a year.
		moves to today.
		skips back a month.
		skips forward a month.

You can view the schedule note or memo for the chosen day by pressing the OK key.

- ▶ **View:** You can view the schedule note or memo for the chosen day.
- ▶ **New schedule:** Select this to enter a new schedule or memo.
- ▶ **Schedule SMS:** Using this menu, You can send message at scheduled time. Allow to set the time and date when you want to send a message.

- ▶ **Scheduler tone:** You can set the scheduler tone.
- ▶ **All schedules:** You can display all schedules.
- ▶ **Go to date:** You can go the chosen date directly.
- ▶ **Delete old:** Select this to delete the expired schedule notes that you have already been notified of.
- ▶ **Delete all:** Select this to delete all the schedule notes and memos.

Memo

Menu 3.2

You can add new memo, view and manage saved memos.

1. If the entry is empty, press the left soft key [New] and enter the contents of the memo. You can save the memo to the list by the left soft key [Options] then choose [Save].
2. If you have saved memos, you can access following options with the left soft key [Options] : **View, Delete, New memo, Send via, Edit, Multi delete, Delete all.**

Note

If you want to change the text input mode, press the  key.

To do

Menu 3.3

You can view, edit and add tasks to do. Tasks are displayed in time order. Tasks that have been completed or not completed are displayed in different ways.

1. If the entry is empty, press the left soft key [New].
2. Input the **Due date**, **Note**, **Priority**, and **Status**.
3. When you have finished entering the data, press the left soft key [Save].
4. You can manage saved to do notes by pressing the left soft key [Options].

Multimedia

MP3 player

Menu 4.1

The KF300 has an integrated MP3 player built-in. You can enjoy listening to MP3 music files on your phone using a compatible headset or via the internal loudspeaker.

Note

Because of the small dimension of the speaker, in some cases the audio could be distorted, especially at maximum volume and when there are lots of bass sounds. Therefore, we recommend you to use the stereo headset in order to appreciate the high quality of your music.

The music player supports:

- **MPEG-2 Layer III, MPEG-2.5 Layer III:** Sampling frequency up from 8KHz to 48KHz. Bit rate up to 320Kbps, stereo.

- **AAC:** ADIF, ADTS formats (Sampling frequency from 8KHz to 48KHz)

Note

KF300 doesn't support the variable bit rate of all mentioned file types. Therefore, you can't change the file from MP3 format to AAC.

You can transfer MP3 files from a compatible PC to the memory in your phone using the **Mass Storage** or by **PC sync**.

When you connect the phone to a PC using the USB cable and then you can show removable disk through windows explorer. After you copy songs in removable disk, you should execute safe remove from your system.

Note

- ▶ You should copy MP3 to Sounds/MP3 folder. If you copy another folder, you can't see MP3 files.
- ▶ The PC should run Windows 98 SE, Windows ME, Windows 2000, Windows XP operating system.

All songs (Menu 4.1.1)

You can see the all of music files.

My playlist (Menu 4.1.2)

You can set the music files of your taste.

Settings (Menu 4.1.3)

- ▶ **Shuffle:** If you select **On**, you can listen to the music randomly.
- ▶ **Repeat:** This menu allows to set the play mode: **Off, One, All**.

- ▶ **Equalizer:** This menu helps you to adjust various of environment on listening to the music.

- ▶ **Player skin:** This menu allows to change the background of main LCD on playing MP3 file.

Note

Music is copyright protected in international treaties and national copyright laws. It may be necessary to obtain permission or a license to reproduce or copy music. In some countries national law prohibits private copying of copyrighted material. Please check the national legislation of the applicable country concerning the use of such material.

Multimedia

Camera

Menu 4.2

Using the camera module built in your phone, you can take pictures of people. Additionally, you can send photos to other people and select photos as wallpaper.

Note

When using the camera, power consumption increases. If the battery is too low, you may not be able to use the **Camera** feature, please recharge the battery before use.

• To take a picture

- To take clear pictures, press the camera  key while holding the camera without any movement.
- Appropriately adjust distance to the object that you want take a picture of (more than 50 cm).
- Handle carefully since the camera is vulnerable to shock and use a soft cloth when cleaning the camera lens.

- Do not disassemble or modify the camera as this may lead to fire or malfunctioning.

1. Press the camera  key in standby mode.
2. Focus on the subject to capture the image, and then press the camera  key or the OK key.
3. The photo you have taken is automatically saved in the **Images** folder of **My stuff**. After taking a photo, you can select the submenus by pressing the left soft key [Options].

Before taking a photo, you can set the following options by pressing the left soft key [Options].

- ▶ **Resolution:** Allows you to set the image size. (320*240/640*480/1280*1024/1600*1200)
- ▶ **Quality:** Allows you to set the image quality from **Normal**, **Fine** and **Super fine**.

- ▶ **Self timer:** Allows you to select the delay time (Off/3 Secs/5 Secs/10 Secs). Then the phone takes a photo after the specified time.
- ▶ **View option:** You can set the view mode. (Full image/Full screen)
- ▶ **Save to:** You can set the save option for a picture. (Phone/External)
- ▶ **Multi shot:** allows you to take multishot-photos successively.
- ▶ **Effects:** 4 settings are available. (Off/Sepia/Mono/Negative)
- ▶ **White balance:** Allows you to change the settings according to the enviroment. (Auto/Daylight/Incandescent/Cloudy/Fluorescent/Nightmode)
- ▶ **Shutter tone:** You can set the sound when taking a picture.
- ▶ **Reset settings:** Allows you to reset the settings.

Note

- ▶ You can adjust the brightness by using the .
- ▶ The zoom function varies according to the resolution the camera is set to. You can change the zoom level by using up & down navigation keys. For example, if the camera resolution is set to the highest setting you can't zoom.

3. the photo you have taken is automatically saved in the Images folder of My stuff. After taking a photo, you can select the submenus by pressing the left soft key [Options].
- ▶ **New photo:** You can take a new photo.
 - ▶ **Set as:** You can set the taken photo as a **Wallpaper/ Picture ID**.
 - ▶ **Send via:** You can send the photo via **Message/ Bluetooth/ Email**.
 - ▶ **Album:** You can access the **Images** folder of **My stuff**.

Multimedia

Video camera Menu 4.3

You can record and save a video clip.

1. To start recording press the OK key.

As soon as it starts to record a timer will be displayed.

before recording a video clip, you can set the following options by pressing the left soft key [Options].

- ▶ **Video mode:** Allows you to send video file through **MMS** or **General**.
- ▶ **Resolution:** Allows you to set the size. (176x144/320x240)
- ▶ **Quality:** Allows you to set the image quality from **Normal**, **Fine** and **Super fine**.
- ▶ **Save to:** You can set the save option for a video clip. (Phone/External)
- ▶ **Effects:** 4 settings are available. (Off/Sepia/Mono/Negative)

- ▶ **White balance:** Allows you to change the settings according to the environment. (Auto/Daylight/Incandescent/Cloudy/Fluorescent)
 - ▶ **Reset settings:** Allows you to reset the settings.
2. Press the left soft key[Stop]/confirm key/ camera hot key to end the recording.
 3. The video clip you recorded is automatically saved in the **Videos** folder of **My stuff**. After recording a video, you can select the submenus by pressing the left soft key [Options].

- ▶ **New video:** You can record a new video.
- ▶ **Play:** You can play the recorded video clip.
- ▶ **Send via:** You can send the photo via **Message/ Bluetooth/ Email**.
- ▶ **Album:** You can access the **Videos** folder of **My stuff**.
- ▶ **Edit channel:** You can adjust frequency and change the radio station in the selected channel. You can change the frequency with Left/Right navigation keys and number keys.
- ▶ **Auto scan:** If you select "Auto scan Now?" On, automatically set the radio channel. And When "Save this station" message will be popped up, if you select Yes, the selected frequency will be stored.
- ▶ **Reset all channels:** You can delete all channels you saved.
- ▶ **Listen via:** Select this to listen to the radio through Speaker/Wired headset/Bluetooth in the [Options].

FM Radio

Menu 4.4

1. Connect the headset with your phone.
2. After presetting radio channels, you can listen to other channel by pressing the corresponding number key (short press).
3. You can access the following option menus by pressing the left soft key [Options].

Multimedia

Voice recorder Menu 4.5

You can record a voice memo.

1. Press the OK key to start recording. Once recording is started, the message "REC" and the recording time are displayed, talk into the microphone.
2. If you want to finish recording, press the right soft key [Stop]. The recorded file is automatically saved in **Sounds** folder of **My stuff**.
3. If you press the left soft key [Options], you can select the submenus as follow:

- ▶ **New voice record:** You can start a new voice recording.
- ▶ **Play:** You can play the recorded voice memo.
- ▶ **Send via:** You can send the photo via Message/ Bluetooth/ Email.
- ▶ **Album:** You can access the **Sounds** folder of **My stuff**.

Messaging

New Message Menu 5.1

This menu includes functions related to SMS (Short Message Service), MMS (Multimedia Message Service), Email as well as the network's service messages.

Message (Menu 5.1.1)

You can write and edit a message.

1. Enter the New message menu by pressing the left soft key [OK].
2. If you want to write a new message, select Message.
3. To make text input easier, use T9.
4. Press the left soft key [Options] to access the following options.

Options

▶ **Send to:** Sends messages.

1. Enter numbers of recipient.
2. Press the down navigation key to add more recipients.
3. You can add phone numbers in the contacts.

4. Press the left soft key [Options] and then select **Send** after entering numbers. The message will automatically be saved in the **Sent** folder. If the message has not been sent, it will remain in the **Outbox** with a failed status.

▶ **Send to Group:** Send message to all Group members.

▶ **Send To many:** Send a message to many peoples at the same time. You can select recipients from one up to 100.

▶ **Flash SMS:** These messages appear on the screen immediately upon arrival, without the need to press any buttons on the phone

▶ **Insert**

- **Image:** You can insert Images that are available for messages.

- **Sound:** You can insert sounds that are available for messages.

- **Video:** You can insert Video that are available for message.

- **Symbol:** You can add special characters.

Messaging

- **Text template:** You can use **Text templates** already set in the phone.
- **Emoticon:** You can insert emoticon.
- **Name& Number:** You can add phone numbers or email addresses in the contacts.
- **New slide:** Select this to add a new slide
- **Subject:** Select this to insert a subject.
- ▶ **More:** Select this to add a Contact, a My Business card, Schedule, and Memo
- ▶ **Save to**
 - **Draft:** Stores Messages in Drafts.
 - **Multimedia template:** Stores Message in Multimedia template.
- ▶ **Preview:** (Dynamic menu) You can preview multimedia messages you have created.
- ▶ **View attachment:** (Dynamic menu) you can see attachment lists.
- ▶ **Slide duration:** (Dynamic menu) You can set the duration of slide of multimedia message.
- ▶ **Remove:** (Dynamic menu) You can delete slide, subject, and attached media (image, video, sound, and attachment)
- ▶ **Set T9:** Activate/Deactivate T9 input mode by selecting ON/OFF.
- ▶ **Writing language:** Select the language for T9 input mode.
- ▶ **New T9 word:** Select the New T9 word to enter a new word into your dictionary.
- ▶ **Clear text:** You can clear text while writing SMS.
- ▶ **Exit:** If you select **Exit** while writing a message, you can end the writing message and back to the New message menu. The message you have written is not saved.

Note

If you select the picture (200K) on writing multimedia message, loading duration will take around 3 seconds at least. Furthermore, you can't activate any key during loading time. After 3 seconds, it is available to write multimedia message.

Inbox

Menu 5.2

You will be alerted when you have received messages. They will be stored in Inbox.

If the phone shows '**No space for SIM message**', you have to delete only SIM messages from Inbox.

*** SIM message**

SIM message means the message exceptionally stored in SIM card.

For notified multimedia message, you have to wait for downloading and processing of the message.

To read a message, select one of the messages by pressing the left soft key [Options].

The following options are available.

- ▶ **View:** You can view the received messages.
- ▶ **Reply:** You can reply to the sender.
- ▶ **Delete:** You can delete the current message.
- ▶ **Forward:** You can forward the selected message to another party.
- ▶ **Return call:** You can call back to the sender.
- ▶ **Save number:** You can save the sender's phone number in the contacts.
- ▶ **Information:** You can view information about received messages.
- ▶ **Multi delete:** After selecting the messages you want to remove, you can delete the selected messages.
- ▶ **Delete all read:** You can delete all messages read.

Messaging

- ▶ **Delete all:** You can delete all messages.

E-mail box

Menu 5.3

From this menu you can either connect to your remote mailbox to retrieve your new mail messages, or you can view your previously retrieved email messages without logging in to the email server.

Drafts

Menu 5.4

Using this menu, you can preset messages that you use most frequently. This menu shows the preset message list.

The following options are available.

- ▶ **View:** You can see the messages.
- ▶ **Edit:** Modifies the message you choose.
- ▶ **Delete:** Deletes the message you choose.
- ▶ **Information:** You can view information about the message you choose.
- ▶ **Multi delete:** After selecting the messages you want to remove, press the OK key and you can delete the selected messages.
- ▶ **Delete all:** Deletes all of the messages in the folder.

Outbox

Menu 5.5

You can view the list and contents of sending/resending/waiting/send fail in this menu and can also verify if the transmission was successful.

After sending the message successfully, the message will be moved to sent box.

The following options are available.

- ▶ **View:** You can view the message.
- ▶ **Delete:** You can delete the message.
- ▶ **Resend:** You can resend the selected message.
- ▶ **Edit:** Modifies the message you choose.
- ▶ **Information:** You can check information of each message.
- ▶ **Multi delete:** Select and delete the selected messages.
- ▶ **Delete all:** You can delete all messages in the folder.

Sent

Menu 5.6

This menu allows you to view the messages which are already sent. You can check the time and the contents of message.

Listen to voicemail

Menu 5.7

This menu provides you with a quick way of accessing your voice mailbox (if provided by your network). Before using this feature, you must enter the voice server number obtained from your network operator.

Once this menu has been selected, simply press the left soft key [OK] to listen to voice mail. You can also hold down the **1** key in standby mode to listen to voicemail.

Messaging

Note

When you receive a voicemail, your phone displays the icon and you hear an alert. Please check with your network provider for details of their service in order to configure the handset correctly.

Info message Menu 5.8 (Dependent to network and subscription)

Info service messages are text messages delivered by the network to GSM. They provide general information such as weather reports, traffic news, taxis, pharmacies, and stock prices.

each type of Info message has a number; therefore, you can contact service provider as long as you have input the certain number for the information.

When you have received an info service message, you can see the popup message to show you that you have received a message or the info service message is directly displayed. To view the message again or not in standby mode, follow the sequence shown below;

Read (Menu 5.8.1)

1. When you have received an info service message and select **Read** to view the message, it will be displayed on the screen. You can read another message by scrolling the left or right navigation key.
2. The message will be shown until another message is reached.

Topics (Menu 5.8.2) (Dependent to network and subscription)

You can see info service message numbers which you added. If you press the left soft key [Options], you can edit and delete info message category which you added.

You can select info service message numbers in the active list. if you activate an info service number, you can receive messages sent from the number.

Templates Menu 5.9

Text templates (Menu 5.9.1)

You have 6 text templates as below;

- Please, call me back .
- I'm late. I will be there at
- Where are you now?
- I am on the way.
- Urgent! Please, contact.
- I love you!

The following options are available.

- ▶ **View:** You can see selected templates.
- ▶ **Edit:** Use this to write a new message or edit the selected template message from the text template list.
- ▶ **Send via**
 - **Message:** Use this to send the selected template message by Message.
 - **E-mail:** Use this to send the selected template message by E-mail.

Messaging

- ▶ **Delete:** Deletes the template.
- ▶ **New template:** Use this to create a new template.
- ▶ **Delete all:** Allows you to delete all template messages.

Multimedia templates

(Menu 5.9.2)

You can save a new multimedia template and edit the saved multimedia templates.

After saving new template, you can use the following options.

- ▶ **View:** You can see multimedia templates.
- ▶ **Edit:** Use this to write a new message or edit the selected multimedia template message from the multimedia template list.
- ▶ **Send:** Use this to send the multimedia template message by Message.

- ▶ **Delete:** Deletes the multimedia template.
- ▶ **New template:** Use this to create a new template.
- ▶ **Delete all:** Allows you to delete all multimedia messages.

Settings

Menu 5.0

Text message (Menu 5.0.1)

- ▶ **Message types:**
Text, Voice, Fax, Paging, X.400, Email, ERMES
Usually, the type of message is set to Text. You can convert your text into alternative formats. Contact your service provider for the availability of this function.
- ▶ **Validity period:** This network service allows you to set how long your messages will be stored at the message centre.
- ▶ **Delivery report:** Choose to receive confirmation that your message was delivered.

▶ **Reply charging:** When a message is sent, it allows the recipients to reply and charge the cost of the reply to your telephone bill.

▶ **Message center number:** you should enter the SMS Centre number. Normally the SMS Centre number is read from the SIM card.

▶ **Character encoding:** Full support/
Reduced support

- **Full support:** A message with single byte character is normally encoded in Default alphabet(GSM7). A message with double-byte character is automatically encoded in unicode(UCS2).

- **Reduced support:** A message with double byte characters is encoded in single byte. Please note that double byte characters with accents may be converted into single byte characters without accents

Multimedia message

(Menu 5.0.2)

▶ **Slide duration:** Displays the duration of each page when writing the message.

▶ **Delivery time:** Deliver your message at a specific time.

▶ **Priority:** You can set the priority of the message you choose.

▶ **Validity period:** This network service allows you to set how long your messages will be stored at the message centre.

▶ **Delivery reports:** You can set ON/OFF in these menus.

- **Request report:** Request reports to check out whether your messages are sent to the recipients successfully.

- **Allow report:** When the senders request delivery reports, you can decide the report to be delivered or not.

Messaging

▶ **Read report:** You can set ON/OFF in these menus.

- **Request report:** Request reports to check out whether your messages are read by the recipients

- **Allow report:** When the senders request read reports, you can decide the report to be delivered or not.

▶ **Auto download:** You can receive multimedia messages automatically from Home network / Roaming network when you select 'Automatic' in this menu. But when you select 'Manual', you receive only notification messages in the inbox and then you can decide to receive multimedia messages in the option menu of Notifications.

▶ **Network profiles:** If you select multimedia message server, you can set URL for multimedia message server.

▶ **Permitted message types**

- **Personal:** Personal message.
- **Advertisements:** Commercial message.
- **Information:** Necessary information.

Email (Menu 5.0.3)

Here you can configure your settings for receiving and transmitting emails.

Email accounts (Menu 5.0.3.1)

1. Select New from the Email account menu options.
2. The following items need to be configured.
 - **Account name:** You can edit the email account name.
 - **Email address:** Enter the email address given to you by your service provider.
 - **My name:** Enter your user name.
 - **Incoming mail server:** Enter the POP3 or IMAP4 address that receives your email.

- **User name:** Enter the user ID of the POP3 or IMAP4 server.
- **Password:** Enter your user password for the POP3 or IMAP4 server.
- **Outgoing mail server:** Enter the SMTP address.
- **Outgoing mail authentication:** To send mail, you may need to set up authentication.
- **Outgoing server ID:** Enter the user ID of your SMTP server.
- **Outgoing server password:** Enter the user password of your SMTP server. Using the left soft key [Options], you can set the advanced settings.
- **Reply email address:** You can set up your reply email address.
- **Advanced settings:** Choose whether to use the advanced settings.
- **Incoming port number:** Enter the POP3 or IMAP4 port number that receives your email.
- **Outgoing port number:** Enter the Port number of the server that sends your email.
- **Protocol type:** Choose your protocol type.(POP3/IMAP4)
- **APOP secure login:** Decide whether to activate APOP secure login or not. When the mailbox type is IMAP4, APOP secure login is always set to OFF.
- **Maximum receive size:** Decide the biggest file size you wish to receive. (50KB/100KB/200KB/300KB)
- **Save to server:** Select On to save emails on the server.
- **Insert signature:** Select On to automatically add your signature to your email messages.
- **Retrieve download:** You can select your preferred download option.(All/ Headers only)
- **Auto retrieving:** Choose whether to fetch you new emails automatically.

Messaging

Access point (Menu 5.0.3.2)

You can select a configured access point to connect to the Internet

Retrieve interval (Menu 5.0.3.3)

Select the time between auto retrieves.

Signature (Menu 5.0.3.4)

You can create your signature.

Voicemail number (Menu 5.0.4)

You can receive voicemail if your network service provider supports this feature. When a new voicemail is arrived, the symbol will be displayed on the screen. Please check with your network service provider for details of their service in order to configure the phone accordingly.

Service message (Menu 5.0.5)

You can set the option whether you will receive the service message or not.

Info message (Menu 5.0.6)

▶ Receive

- **On:** If you select this menu, your phone will receive Info service messages.
- **Off:** If you select this menu, your phone will not receive Info service messages any more.

▶ Alerts

- **On:** Your phone will beep when you have received Info service message numbers.
- **Off:** Your phone will not beep even though you have received info service messages.

▶ Languages

You can select the language you want by pressing the OK key. Then, the info service message will be shown in the language that you selected.

My stuff

Images

Menu 6.1

When a file is selected, the following options will be displayed by pressing the left soft key [Options].

- ▶ **View:** You can see the selected file.
- ▶ **Delete:** Delete a selected file.
- ▶ **Set as**
 - **Wallpaper:** Currently selected image can be set as a **Wallpaper**.
 - **Picture ID:** Currently selected image can be set as a **Picture ID**.
- ▶ **Send via:** Send the selected file to another device via **Message**, **Bluetooth** and **E-mail**.

▶ File

- **Rename:** Change the file name of selected file. You cannot change the extension of file.
- **Move to folder:** Move the selected file to the folder.
- **Move to external memory / Move to phone memory:** Move the selected file to the external memory (if inserted) or multimedia memory in your phone.
- **Copy to external memory / Copy to phone memory:** Copy the selected file to the external memory (if inserted) or multimedia memory in your phone.
- **Information:** Show the file information.

My stuff

- ▶ **Print via Bluetooth:** Most pictures that you have taken in the camera mode and downloaded through WAP can be transmitted via Bluetooth to a printer.
- ▶ **Slide show:** You can view a slide show of the files you stored.
- ▶ **New folder:** You can create a new folder.
- ▶ **Multi delete:** You can remove a number of files you selected.
- ▶ **Delete all:** Delete all files in the list.
- ▶ **Sort by:** You can arrange the files by as **Date, Type and Name**.
- ▶ **Thumbnail view/List view:** Allows you to set the view type.

Sounds

Menu 6.2

When a file is selected, the following options will be displayed by pressing the left soft key [Options].

- ▶ **Play:** You can play the selected file.
- ▶ **Delete:** Delete a selected file.
- ▶ **Set as:** Currently selected sound can be set as a **Ringtone/ Ringtone ID/Message tones**.
- ▶ **Send via:** Send the selected file to another device via **Message, Bluetooth and E-mail**.
- ▶ **File**
 - **Rename:** Changes the file name of the selected file.
 - **Move to folder:** Move the selected file to the folder.
 - **Move to external memory / Move to phone memory:** Move the selected file to the external memory (if inserted) or multimedia memory in your phone.

- Copy to external memory**/ Copy to phone memory:**

Copy the selected file to the external memory (if inserted) or multimedia memory in your phone.

- **Information:** Show the selected file information.

- ▶ **New folder:** You can create a new folder.
- ▶ **Multi delete:** You can remove a number of files you selected.
- ▶ **Delete all:** Delete all files in the list.
- ▶ **Sort by:** You can arrange the files as **Date**, **Type** and **Name**.

Videos

Menu 6.3

Show the list of 3GP, 3G2 files at My media/Videos in Multimedia memory. Supported only .3gp files, that are encoded with MPEG4 and h.263 codecs and AMR audio-codec.

Here you can manage or send saved video clips. When a file is selected, the following options will be displayed by pressing the left soft key [Options].

- ▶ **Open:** You can open the selected file.
- ▶ **Delete:** Delete a selected file.
- ▶ **Send via:** Send the selected file to another device via **Message**, **Bluetooth** and **E-mail**.
- ▶ **File**

- **Rename:** Change the file name of selected file. The maximum length of characters is 59.

Warning!

You can't use the following characters: \/:? <> |*

- **Move to folder:** Move the selected file to the folder.

My stuff

- **Move to external memory / Move to phone memory:** Move the selected file to the external memory (if inserted) or multimedia memory in your phone.

- **Copy to external memory / Copy to phone memory:** Copy the selected file to the external memory (if inserted) or multimedia memory in your phone.

- **Information:** Show the file information.

- ▶ **New folder:** You can create a new folder.
- ▶ **Multi delete:** You can remove a number of files you selected.
- ▶ **Delete all:** Delete all files in the list.
- ▶ **Sort by:** You can arrange the files as **Date, Type and Name** .

Others

Menu 6.4

Other files except images, sounds, videos are stored in this folder.

External memory

Menu 6.5

If you purchase an optional external microSD memory card, you can manage more content.

Profiles

In Profiles, you can adjust and customize the phone tones for different events, environments, or caller groups.

There are five preset profiles: **General**, **Silent**, **Vibrate only**, **Outdoor** and **Headset**.

Press the left soft key [Menu] and select Profiles using up/down navigation keys.

Activate (Menu 7.X.1)

1. A list of profiles is displayed.
2. In the Profiles list, scroll to the profile you want to activate and press the left soft key [OK] or the OK key.
3. Then, select **Activate**.

Personalize (Menu 7.X.2)

Scroll to the desired profile in the Profiles list. After pressing the left soft key or the OK key, select **Personalize**.

The profile setting option opens. Set the option as required.

- ▶ **Call alert type:** Set the alert type for incoming calls.
- ▶ **Ring tones:** Set the desired ring tone from the list.
- ▶ **Ring volume:** Set the volume of the ringing tone.
- ▶ **Message alert type:** Set the alert type for messages.
- ▶ **Message tones:** Select the alert tone for messages.
- ▶ **Message volume:** Set the volume of Message tone.
- ▶ **Keypad tones:** Select the desired keypad tone.
- ▶ **Keypad volume:** Set the volume of keypad tone.

Profiles

- ▶ **Flip tones:** Allows to set the flip tone for adjusting environment.
- ▶ **Effect sound volume:** Set the volume of effect sound.
- ▶ **Power on/off volume:** Set the volume of switching the phone on/off.

Note

All profiles cannot be renamed.

Contacts

Search

Menu 8.1

1. Select **Search** and enter the name that you want to search.

Note

- ▶ You can access the Contacts directly by pressing the right soft key [Contacts] in standby mode.
- ▶ Instant searching is available by inputting the initial letter of the name.

2. After finding the desired contact, you can make a call to the number by pressing the send key.
3. If you want to edit, delete, copy an entry select the left soft key [Options].

The following menu will be displayed.

- ▶ **View:** You can view each entry in details.
- ▶ **Edit:** You can edit the selected contact.

- ▶ **New message:** After you have found the number you want, you can send a **Message** to the selected number.
- ▶ **Send via:** You can send the data of the contacts via text **Message/ multimedia Message/ Bluetooth/ E-mail**.
- ▶ **Delete:** You can delete an entry.
- ▶ **New Contact:** After selecting the place (SIM/Phone) you want to save, you can add to the contacts.
- ▶ **Add to speed dial:** Allows you to set the selected number to add a speed dial list.
- ▶ **Multi delete:** Allows you to remove a number of files selected.
- ▶ **Copy to SIM / Copy to phone:** You can copy an entry from phone to SIM or from SIM to phone.
- ▶ **Main number:** If a contact has more than one number stored, select the one that you use most often. This main number will be displayed first.

Contacts

New contact

Menu 8.2

You can add or save a new contact. You can enter the name, different phone numbers and email addresses of a new contact. You can also assign the contact to groups, include a picture, assign a specific ringtone and enter the anniversary for the contact. You can enter and manage contact addresses depending on the memory usage.

Note

- ▶ The contact entry fields may differ when you add or save a contact in the SIM address in the SIM.
- ▶ Maximum stored name and number length depends on SIM card type.

Speed dials

Menu 8.3

Using this menu you can manage speed dials.

You can assign any of the keys **2-9** to **9-2** with a name list entry. You can call directly by pressing this key.

1. Open the **Contacts** first by pressing the right soft key [Contacts] in standby mode.
2. Scroll to **Speed dial**, then press the left soft key [OK].
3. If you want to add speed dial, select <Empty> by pressing the left soft key [Assign]. Then, you can search the name in the contacts.
4. After assigning the number as speed dial, you can change and delete the entry. You can also make a call or send a message by this number.

Groups

Menu 8.4

You can list up to the members per each group. In the handset memory, there are 7 default groups: **Family**, **Friends**, **Colleagues**, **VIP**, **Group 1**, **Group 2**, and **Group 3**.

Select the group name that you want to manage by pressing the left soft key [Option]. The following submenus will be displayed.

- ▶ **View members:** Shows the group members you have selected.
- ▶ **Group ringtone:** Allows you to specify ring tone for the group members call.
- ▶ **Group icon:** Allows you to select the icon dependent on group.
- ▶ **Add member:** You can add group members.
- ▶ **Remove member:** You can remove the member from the group member list. But the name and the number will be remained in the **Contacts**.

- ▶ **Rename:** You can change a group name.
- ▶ **Reset all:** Allows you to reset all contacts.

Copy all

Menu 8.5

You can copy all entries from SIM card memory to phone memory and vice versa.

- ▶ **SIM to phone:** You can copy all entries from SIM card to phone memory.
- ▶ **Phone to SIM:** You can copy all entries from phone memory to SIM card.

Delete all

Menu 8.6

You can delete all entries from SIM card or phone memory. This function requires the security code.

Contacts

Settings

Menu 8.7

View options (Menu 8.7.1)

You can set the contact display option.

- ▶ **Name only:** Set the contact information with only name.
- ▶ **Name & Number:** Set the contact information with name and number.
- ▶ **With picture:** Set the contact information with picture.

Backup Contacts (Menu 8.7.2)

(External Memory dependent)

You can save Contacts data to the others folder in external memory.

Restore Contacts (Menu 8.7.3)

(External Memory dependent)

You can save Vcard format (*.vcf) existing in My stuff → External memory → Others to the Contacts.

Information

Menu 8.8

Service dial number (Menu 8.8.1)

You can view the list of Service Dialing Numbers (SDN) assigned by your service provider (if supported by the SIM card).

Own number (Menu 8.8.2) (SIM dependent)

You can save and check your own number in SIM card.

My business card (Menu 8.8.3)

This option allows you to create your own business card featuring name, any numbers and email. To create a new business card, press the left soft key [New] and enter the information into the fields. If you want to edit, delete or to send a business card, select the left soft key [Options].

Alarm clock

Menu 9.1

You can set the alarm clock to go on at a specified time.

1. If there is no alarm, press the left soft key [New] to add a new alarm.
2. Set or cancel the alarm using the options for specifying whether the alarm is on or by choosing the alarm time.
3. Select the repeat period: **Once**, **Daily**, **Mon~Fri**, **Mon~Sat**, **Sat~Sun**.
4. Select the alarm tone by using **Options** → **Sounds**. You can press the up/down navigation keys and select the sound you want, then press the left soft key [OK].
5. Edit the title and press the left soft key [Save].

Calculator

Menu 9.2

The calculator module allows you to perform basic arithmetic functions such as addition, subtraction, multiplication, and division as well as some scientific functions.

1. You can enter numbers by using the number keys, and the operators by using navigation key.

Note

- ▶ To erase any mistake or clear the display, use the  key.
- ▶ To include a decimal point, press the  key.
- ▶ To include parentheses, press the  key.

2. To calculate the result, press the OK key.
3. After calculation, press the right soft key to return to the initial state.

Tools

Stopwatch

Menu 9.3

This menu allows you to record the elapsed time of an event.

1. Press the left soft key [Start] to take time and record the lap time by pressing the right soft key [Lap].
2. Press the left soft key [Stop] to ascertain the record of lap time.
3. Press the right soft key [Reset] to default condition.

Unit converter

Menu 9.4

This converts any measurement into a unit you want. There are 7 types that can be converted into units: **Currency, Area, Length, Weight, Temperature, Volume and Velocity.**

World clock

Menu 9.5

The World clock function provides time information on major cities worldwide.

You can select the following options by pressing the left soft key [Options].

- ▶ **Change time zone:** You can change the time zone by selecting city.
- ▶ **New city:** You can add a desired city.
- ▶ **Daylight saving:** You can set on/off the daylight saving

WINE+

Menu 9.6

Using the wine function built in your phone, you can search for information about wine .

Note

- ▶ When playing the BGM in your phone, you will not be able to use Wine function.

WINE SEARCH

To search Type , Flavor, Region, Cost and Food which is related to Wine, Select the desired function with  /  and confirm the selection with .

WINE DICTIONARY

Using Wine dictionary module, you can search for Wine terms.

WINE MAP

Using WINE MAP module, you can get information about Wine producer and learn how to read the wine label.

SIM services Menu 9.7

(SIM dependent)

With the SIM services menu your phone is future-proof and will support additions to your service provider's service. For more information contact your service provider.

Browser

You can access various WAP (Wireless Application Protocol) services such as banking, news, weather reports and flight information. These services are specially designed for mobile phones and they are maintained by WAP service providers.

Check the availability of WAP services, pricing and tariffs with your network operator or the service provider whose service you wish to use. Service providers will also give you instructions on how to use their services.

Once connected, the homepage is displayed. The content depends on the service provider. To exit the browser at any time, press the  key. The phone will return to the idle menu.

Navigating with the WAP browser

You can surf the Internet using either the phone keys or the WAP browser menu.

Using the phone keys

When surfing the Internet, the phone keys function differently to phone mode.

Icon	Description
	Scrolls each line of the content area
	Returns to the previous page
	Select options and confirm actions

Using the WAP browser menu

There are various menu options available when surfing the Mobile Web.

Note

The WAP browser menus may vary, depending on your browser version.

Home

Menu *.1

Connects to a homepage. The homepage will be the site which is defined in the activated profile. It will be defined by the service provider if you have not defined it in the activated profile.

Yahoo!

Menu *.2

You can access Yahoo Mobile Internet Service.

- ▶ **oneSearch:** You can search for instant answers.

Note

Some of countries are unable to access Yahoo! service because of network service.

NDTV Active

Menu *.3

NDTV Active is a Java application that will launch the NDTV Website

Bookmarks

Menu *.4

This menu allows you to store the URL of favourite web pages for easy access at a later time.

To create a bookmark

1. Press the left soft key [Options].
2. Select **New bookmark** and press the OK key.
3. After entering the desired name and URL, press the OK key.

After selecting a desired bookmark, the following options are available.

- ▶ **Connect:** Connects to the selected bookmark.
- ▶ **View:** You can see the selected bookmark.
- ▶ **Edit:** You can edit the selected bookmark.
- ▶ **Delete:** You can delete the selected Saved bookmark.
- ▶ **New bookmark:** Select this to create a new bookmark.

Browser

- ▶ **New folder:** Select this to create a new folder.
- ▶ **Move:** You can move the selected bookmark to sub folder.
- ▶ **Copy:** You can copy the selected bookmark.
- ▶ **Send URL via:** Sends the selected bookmark via **Message**.
- ▶ **Multi delete:** Allows you to select and delete saved bookmarks.
- ▶ **Delete all:** Deletes all the bookmarks.

Enter address Menu *.5

You can connect directly to the site you want. After entering a specific URL, press the left soft key [Options] and select the **Connect**.

History Menu *.6

This menu shows the recently browsed pages.

Saved pages Menu *.7

The phone can save the page on display as an offline file.

Settings Menu *.8

You can set the profile, cache and security related to internet service.

Network profiles (Menu *.8.1)

A profile is the network information used to connect to the Internet.

There are default profiles for some operators, stored in phone memory. It's impossible to rename default profiles.

Each profile has submenus as follows:

- ▶ **Activate:** Activates the selected profile.
- ▶ **View:** You can see the selected profile.
- ▶ **Edit:** You can edit the selected profile.
- ▶ **New profile:** You can add a new profile.
- ▶ **Delete:** Deletes the selected profile from the list.

Rendering mode (Menu *.8.2)

You can adjust the size of URL page when the page is larger than phone screen.

Cache (Menu *.8.3)

The information or services you have accessed are saved in the cache memory of the phone.

Note

A cache is a buffer memory, which is used to save data temporarily.

Cookies (Menu *.8.4)

Enabling cookies allows you to store cookies sent from the server. Disabling this function will prevent cookies from being stored on your phone.

Security certificates (Menu *.8.5)

You can see the list of personal certificates that have been stored in your phone.

Browser

Show image (Menu *.8.6)

You can select to display image or not during WAP browsing.

Java script (Menu *.8.7)

Select whether to turn Java script on or off.

Information

Menu *.9

You can view the information of WAP browser version.

Connectivity

Bluetooth

Menu 0.1

Bluetooth enables compatible mobile devices, peripherals and computers that are in close proximity to communicate directly with each other without wires.

This handset supports built-in Bluetooth connectivity, which makes it possible to connect it. With compatible Bluetooth headsets, computer applications and so on.

▶ **Bluetooth on/off**

You can activate or cancel the Bluetooth function.

▶ **Device list**

You can view all devices which your KF300 is already paired to. If you enter Paired devices, you access the options

- **Connect /Disconnect:** After pairing with headset or stereo headset, you should connect with those devices. Then you can use those devices.

When you have finished using the Bluetooth connectivity, you should disconnect those connection.

- **New:** Allows to search new Bluetooth devices and add them to your phone's list of paired devices. When you select New your handset will start to search for Bluetooth devices within range. Once the device you wish to pair appears on the list press the Right soft key [Stop]. Scroll to the desired device and press the left soft key [ok]. You will then be asked to enter a passcode.

The passcode can be any code you wish to use (the same passcode must be used by both devices) or is one that is pre-determined by the manufacturer of the device you are trying to pair with. Please check the User Manual of the device you are initiating the pair with to see if it already has a predetermined passcode in place.

Connectivity

- **Set as authorized /Set as unauthorized:** Allows you to set an unauthorized connection between each Bluetooth device. For example if you regularly use a Bluetooth headset with your phone then setting the connection as unauthorized will mean the headset will automatically connect to the handset each time the headset is powered on.
- **All services:** Allows to view all services which are supported by Bluetooth device.
- **Delete:** Allows to delete a paired Bluetooth device.
- **Rename:** Allows you to change the name of the paired Bluetooth device and how it is displayed on the handset.
- **Delete all:** Allows to delete all the paired Bluetooth devices.

▶ **Bluetooth settings**

- **My visibility:** You can choose the your device to be visible or hidden.
- **My name:** You can set the name of Bluetooth device. The default name is LG KF300.
- **My address:** You can view the address of your Bluetooth device.

Network

Menu 0.2

You can select a network which will be registered either automatically or manually.

Network selection (Menu 0.2.1)

Usually, the network selection is set to **Automatic**.

- ▶ **Automatic:** If you select **Automatic** mode, the phone will automatically search for and select a network for you. Once you have selected **Automatic**, the phone will be set to **Automatic** even though the power is off and on.
- ▶ **Manual:** The phone will find the list of available networks and show

you them. Then you can select the network which you want to use if this network has a roaming agreement with your home network operator. The phone lets you select another network if the phone fails to access the selected network.

- ▶ **Preferred:** You can set a list of preferred networks and the phone attempts to register with first, before attempting to register to any other networks. This list is set from the phone's predefined list of known networks.

GPRS attach (Menu 0.2.2)

You can set GPRS service depending on various situations.

▶ **Power on**

If you select this menu, the phone is automatically registered to a GPRS network when you switch the phone on. Starting a WAP or PC dial-up application created the connection between phone and network and data transfer is possible. When you end the application, GPRS connection is ended but the registration to the GPRS network remains.

▶ **When needed**

If you select this menu, the GPRS connection is established when you connect a WAP or application service and closed when you end the WAP or applicaion connection.

Access Point (Menu 0.2.3)

- ▶ **View:** You can see the selected profile.
- ▶ **Edit:** You can edit the selected profile.

Connectivity

▶ New access point

- **Name:** You can type the network name.
- **Bearer setting:** You can set the bearer data service. Data/GPRS.

<Data settings>

Appears only if you select Data Settings as a Bearer/service.

- **Dial number:** Enter the telephone number to dial to access your WAP gateway.
- **User ID:** The users identify for your dial-up server (and NOT the WAP gateway).
- **Password:** The password required by your dial-up server (and NOT the WAP gateway) to identify you.
- **Call type:** Select the type of data call; Analogue or Digital (ISDN).
- **Linger time:** You need to enter timeout period.

After entering that, the WAP navigation service will be unavailable if any data is not input or transferred.

- **Primary server:** Input the IP address of the primary DNS server you access.
- **Secondary Server:** Input the IP address of the secondary DNS server you access.

The service settings are only available when GPRS is chosen as a bearer service.

- **APN:** Input the APN of the GPRS.
- **User ID:** The users identify for your APN server.
- **Password:** The password required by your APN server.
- **Primary Server:** Input the IP address of the primary DNS server you access.
- **Secondary:** Input the IP address of the secondary DNS server you access.

USB connection mode

Menu 0.3

You can choose one mode of Data service and USB Mass storage.

► Mass storage

You can connect your phone to your PC, as a USB storage device, using the cable in three ways.

1. Connect the phone to the PC when the idle screen is displayed.
2. Connect the phone while it is performing an operation or menu function, and then move to the idle screen.
3. Connect the phone while it is performing an operation or menu function, and then select the **USB Mass Storage** menu.

When you have finished using the microSD memory, click Exit and take the following steps.

Caution!

Before you remove the cable, it is necessary that you click Exit. Or, the integrity of transferred data is not guaranteed.

1. Click on the notification area.
[Unplug or Eject Hardware]
2. Select **USB mass Storage Device**, click on **Stop**. The following message will appear: The **USB mass Storage Device** can now be safely removed from the system.
3. Then remove the cable.

Connectivity

Note

- ▶ If you use LG PC Sync via Bluetooth, you can exchange the data only within phonebook
- ▶ When you receive data from another Bluetooth device, the phone requests confirmation. After confirming the transfer, the file will be copied on to your phone.
- ▶ Depending on the file type, it will be stored in the following folders:
 - **Video (.3gp, mp4):** Videos folder
 - **Image (.bmp, gif, jpg, png):** Images folder
 - **Sound (.amr, wav, aac):** Sounds folder
 - **MP3 (.mp3):** Sounds/MP3 folder
 - **Other files :** Others folder

▶ Data service

Select the **Data service** menu to use the LG Mobile Sync program.

Settings

Date & Time

Menu #.1

You can set functions relating to the date and time.

Set date (Menu #.1.1)

You can enter the current date.

Date format (Menu #.1.2)

You can set the Date format such as YYYY/MM/DD, DD/MM/YYYY, MM/DD/YYYY. (D: Day / M: Month / Y: Year)

Set time (Menu #.1.3)

You can enter the current time.

Time format (Menu #.1.4)

You can set the time format between 24 hours and 12 hours.

Auto update (Menu #.1.5)

Select **On**, the phone will automatically update the date and time.

Languages

Menu #.2

You can change the language for the display texts in your phone. This change will also affect the language Input mode.

Display

Menu #.3

Wallpaper (Menu #.3.1)

You can select the background pictures in standby mode.

Clock (Menu #.3.2)

You can select the clock format to display the clock on the Internal/ External Phone screen.

Backlight timer (Menu #.3.3)

You can set the light-up duration of the display.

Settings

Brightness (Menu #.3.4)

You can set the brightness of LCD.

Home screen shortcut

(Menu #.3.5)

If you select On, you can edit the text which will be displayed in standby mode.

Font size (Menu #.3.6)

You can change the font size for display text in your phone.

Theme (Menu #.3.7)

You can set the screen theme to be displayed on the main screen.

Menu style (Menu #.3.8)

Your phone provides you with **Grid view** and **List view** menu themes. Set the menu style by scrolling and pressing the left soft key [OK].

Dialing (Menu #.3.9)

You can set the font style/font size of the numbers which appear in the home screen when you make a call.

Standby text (Menu #.3.0)

If you select **On**, you can edit the text which is displayed in standby mode.

Network name (Menu #.3.*)

If this function is activated, network name will be displayed on LCD.

Shortcut

Menu #.4

You can set the functions of 4 navigation keys for using shortcut in the idle mode.

Call

Menu #.5

You can set the menu relevant to a call by pressing the left soft key [Select] in the **Setting** menu.

Call divert (Menu #.5.1)

The **Call divert** service allows you to divert incoming voice calls, fax calls, and data calls to another number. For details, contact your service provider.

- ▶ **All voice calls:** Diverts voice calls unconditionally.
- ▶ **If busy:** Diverts voice calls when the phone is in use.
- ▶ **If no reply:** Diverts voice calls which you do not answer.
- ▶ **If out of reach:** Diverts voice calls when the phone is switched off or out of coverage.
- ▶ **All data calls:** Diverts to a number with a PC connection unconditionally.
- ▶ **All fax calls:** Diverts to a number with a fax connection unconditionally.
- ▶ **Cancel all:** Cancels all call divert service.

The submenus

Call divert menus have the submenu shown below.

- **Activate:** Activate the corresponding service.

To voicemail number: Forwards to message centre. This function is not shown at **All data calls** and **All fax calls** menus.

To other number: Inputs the number for diverting.

To favourite number: You can check recent 5 diverted numbers.

- **Cancel:** Deactivate the corresponding service.

- **View status:** View the status of the corresponding service.

Settings

Call barring (Menu #.5.2)

The Call barring service prevents your phone from making or receiving certain category of calls. This function requires the call barring password. You can view the following submenus.

▶ All outgoing

The barring service for all outgoing calls.

▶ Outgoing international

The barring service for all outgoing international calls.

▶ O/G international expect home country

The barring service for all international outgoing calls when roaming

▶ All incoming

The barring service for all incoming calls.

▶ Incoming when abroad

The barring service for all incoming calls when roaming.

▶ Cancel all barrings

You can cancel all barring services.

▶ Change password

You can change the password for Call Barring Service.

The submenus:

- Activate

Allows to request the network to set call restriction on.

- Cancel

Set the selected call restriction off.

- View status

View the status whether the calls are barred or not.

Fixed dial number (Menu #.5.3) (SIM dependent)

- ▶ You can restrict your outgoing calls to selected phone numbers. The numbers are protected by your PIN2 code.
- ▶ **On**
You can restrict your outgoing calls to selected phone numbers.
- ▶ **Off**
You can cancel fixed dialing function.
- ▶ **Number list**
You can view the number list saved as Fixed dial number

Answer mode (Menu #.5.4)

- ▶ **Flip open:** If you select this menu, you can receive an incoming call when you open the flip.
- ▶ **Any key:** If you select this menu, you can receive a call by pressing any key except the end key and the right soft key.
- ▶ **Send key only:** If you select this menu, you can receive a call by only pressing the send key.

Send my number (Menu #.5.5) (network and subscription dependent)

- ▶ **Set by network:** If you select this, you can send your phone number depending on two line service such as line 1 or line 2.
- ▶ **On:** You can send your phone number to another party. Your phone number will be shown on the receiver's phone.

Settings

- ▶ **Off:** Your phone number will not be shown.

Call waiting (Menu #.5.6) (network dependent)

- ▶ **Activate:** If you select **Activate**, you can accept a waiting (receiving) call.
- ▶ **Cancel:** If you select **Cancel**, you cannot recognize the waiting (receiving) call.
- ▶ **View status:** Shows the status of **Call waiting**.

Minute minder (Menu #.5.7)

If you select **On**, you can check the call duration by a beep sound given every minute during a call.

Auto redial (Menu #.5.8)

- ▶ **On:** When this function is activated, the phone will automatically try to redial in the case of failure to connect a call.
- ▶ **Off:** Your phone will not make any attempts to redial when the original call has not connected.

Select line (Menu #.5.9) (SIM dependent)

Depending on the support or not of 2 line services on your SIM card, you can select the line you wants.

Send DTMF tones (Menu #.5.0)

You can send touch tones during an active call to control your voice mailbox or other automated phone services.

Security

Menu #.6

PIN code request (Menu #.6.1)

In this menu, you can set the phone to ask for the PIN code of your SIM card when the phone is switched on.

If this function is activated, you'll be requested to enter the PIN code.

1. Select PIN code request in the security settings menu, and then press the left soft key [OK].
2. Set **On/Off**.
3. If you want to change the setting, you need to enter PIN code when you switch on the phone.
4. If you enter wrong PIN code more than 3 times, the phone will lock out. If the PIN is blocked, you will need to key in PUK code.
5. You can enter your PUK code up to 10 times. If you put wrong PUK code more than 10 times, you can not unlock your phone. You will need to contact your service provider.

Phone lock (Menu #.6.2)

You can use a security code to avoid unauthorized use of the phone.

Whenever you switch on the phone, the phone will request security code if you set phone lock to **When switch on**.

If you set phone lock to **When SIM changed**, your phone will request security code only when you change your SIM card.

Anti Theft Mobile Tracker

(Menu #.6.3)

The ATMT feature of this phone provides you with the ability to have a tracking system in place for your mobile in case you loose or misplace it. The moment an unauthorized user uses your phone, a SMS is triggered from your phone and the message is send to your pre-defined number. The SMS will be sent to your predefined numbers without the notice of the un-authorized user.

Settings

When you try to use this function, you will be requested to key in the ATMT code. The default ATMT code is "0000".

Fixed dial number (Menu #.6.4) (SIM dependent)

You can restrict your outgoing calls to selected phone numbers. The numbers are protected by your PIN2 code.

- ▶ **On:** You can restrict your outgoing calls to selected phone numbers.
- ▶ **Off:** You can cancel fixed dialing function.
- ▶ **Number list:** You can view the number list saved as Fixed dial number.

Change codes (Menu #.6.5)

PIN is an abbreviation of Personal Identification Number to prevent use by unauthorized person.

You can change the access codes: **Security code, PIN2 code.**

1. If you want to change the **Security code/PIN2 code** input your original code, and then press the left soft key [OK].
2. Input new Security code/PIN2 code and verify them.

Flight mode Menu #.7

This allows you to use only the phone features that do not require the use of the wireless network when you are in an airplane or in places where the wireless network is prevented.

If you set the flight mode on, the icon will be displayed on the screen instead of the network signal icon.

- ▶ **On:** You cannot make (or receive) any calls, including emergency calls, or use other features that require network coverage.
- ▶ **Off:** You can deactivate the flight mode and restart your handset to access the network.

Power save Menu #.8

Choose to switch the factory set power saving settings on or off.

Reset Menu #.9

You can initialize all factory defaults. You need **Security code** to activate this function.

Memory status Menu #.0

You can check free space and memory usage of phone, SIM card and external memory (if inserted).

Accessories

There are various accessories for your mobile phone. You can select these options according to your personal communication requirements.

Standard Battery



Hands free Ear microphone



Travel Adapter

This charger allows you to charge the battery.



Note

- ▶ Always use genuine LG accessories.
- ▶ Failure to do so may invalidate your warranty.
- ▶ Accessories may vary in different regions; please check with our regional service company or agent for further information.

Technical data

General

Product name: KF300

System: GSM 900/DCS 1800/ PCS 1900

Ambient Temperatures

Max: +55°C (discharging)
+45°C (charging)

Min: -10°C

Battery Specification

Battery: 800mAh Li-Ion / Li-Polymer

Talk time: 5.0 hours@ EGSM,TX Level : 10

Standby time: 400 hours@ Paging period : 9

Note

Variation in operation time may occur depending on SIM card, network condition, usage style, usage setting and environment.

Declaration of Conformity



LG Electronics

Suppliers Details

Name

LG Electronics Inc

Address

: LG Twin Tower 20, Yeouido-dong, Yeongdeungpo-gu Seoul, Korea 150-721

Product Details

Product Name

E-GSM 900 / DCS 1800 / PCS 1900 Tri Band Terminal Equipment

Model Name

KF300

Trade Name

LG

CE 0168

Applicable Standards Details

R&TTE Directive 1999/5/EC

EN 301 489-01 v1,6,1 / EN 301 489-07 v1,3,1 / EN 301 489-17 v1,2,1
EN 60950-1 : 2001
EN 50360/EN 50361 : 2001
EN 301 511 V9,0,2
EN 300 328 V1,6,1

Supplementary Information

The conformity to above standards is verified by BABT.

Declaration

I hereby declare under our sole responsibility that the product mentioned above to which this declaration relates complies with the above mentioned standards and Directives

European Standard Center
LG Electronics Logistics and Services B.V.
Veluwezoom 15, 1327 AE Almere, The Netherlands
Tel : +31 - 36- 547 - 8940, Fax : +31 - 36 - 547 - 8794
e-mail : jacob@lge.com

Name

Issued Date

Seung Hyoun, Ji / Director

11, January, 2008

Signature of representative

LG Mobile



WARRANTY CARD

This LG handset and charger comes with a 12-month warranty from date of purchase or 15 months from manufacturing date of corresponding IMEI No. Of the unit whichever is earlier, against defect in material or workmanship. In case of a defect, LG Electronics India Pvt. Ltd. undertakes to get the set repaired free of charge through its authorised service centre (ASC) or service dealer subject to following conditions:

Terms and Conditions

1. This warranty is applicable to the first purchase and in no case it can be transferred or extended.
2. Repair of this product will be carried out on a carry in basis to the nearest ASC.
3. While the company will make every effort to carry out repairs at the earliest, it however is made explicitly clear that the company is under no obligation to do so in a specified period of time.
4. The company or its authorised ASC/ service dealer reserves the right to retain any parts of the component/s replaced at its discretion. In the event of a defect being noticed in the equipment during the warranty period.
5. This warranty entitles the purchaser to free of cost repairs of the unit within warranty period and does not entitle for replacement or refund of entire unit. Claims, if any, to this warranty shall in no case exceed the purchase price of the unit.
6. In case of any software upgradation of the phone, no warranty is provided on phone memory or phone book.
7. The warranty is void in case the serial no./IMEI no. is tampered / disfigured or details in the warranty card are not properly filled up at the time of purchase.
8. This warranty is not valid for damages resulting due to negligence, mishandling, improper use, tampering, breakage, soaking, fire, unauthorised repair and failure due to network upgrades.
9. Batteries are covered under warranty for a period of 6 months from date of purchase or 9 months from date of corresponding IMEI no. of the unit whichever is earlier
10. Warranty does not cover accessories external to the equipment supplied by the dealer.
11. The Delhi / New Delhi courts shall have the jurisdiction to try any dispute and /or suits related to or arising out of this agreement.

Customer Information Center/ Call Center Number

For any query related to the after sales service and customer support please contact us at the numbers listed below.

	SERVICE
	1800-180-9999*
<small>*MTNL / BSNL</small>	39-01-0909**
<small>**Prefix STD Code</small>	

BRANCH ADDRESSES

S.No.	Branch	Branch Office Address	STD Code	Phone No.
1	Ahmedabad	LGSR, 235-236 Platinum Plaza, Judges Bungalow Road, Bopal Road, Ahmedabad - 37	079	43600131, 14
2	Aizawl	LGSR, Block-4, 8th Floor, P.O. Christmas Market, Baramondu, Tolo, GT Road, P.O. Aizawl - 715003	0361	2352039, 2352010
3	Aurangabad	LGSR, 302 QDCO No.3, Opp Hind Ranganji, Jaiya Road, Aurangabad - 431003	0240	3474955, 32056436, 32056437, 32056438
4	Bangalore	LGSR, No. 914, 2nd Floor, Sri Venkateshwara Complex, Cps, BP Petrol Bunk, 6th Block, Komsangur - Bangalore - 560095	080	4145445, 41446750, 41446751, 41446752, 33051754, 33051753
5	Bhopal	13A Virgas Warehousing Corporation Sector-G Goudpurda Industrial Area 2 K Road Bhopal	0756	4062000, 2362268, 3956994
6	Bhubaneswar	LGSR, Plot No.22, 1st Fl., Sector Nagar, Gulshanwadi - 751020	0674	2534387, 2534203, 3966515, 3966620
7	Chandigarh	LGSR, 3620 No. 142-143, 3rd Floor Sector-34A Chandigarh - 160002	0172	5582390, 91, 5589107, 3296001, 3296003
8	Chennai	LGSR, AA11, 2nd Avenue, Felma Tower, Anna Nagar West, Chennai - 600040	044	6551091, 04
9	Cochin	LGSR, 401270, Vaidurika Buildings, T.D. Road, Ernakulam Cochin - 682011	0484	2369745, 2372744, 2370484, 4827444, 4827555
10	Coimbatore	LGSR, 259, Sangaraj Main Road, Kannappa Nagar, Coimbatore - 641027	0422	2323291, 2323295, 2326296, 3394613, 3394572
11	Delhi	LGSR, 1A-12, Mubbaraka, Vya Commercial Compound, Dismant Saharganj Road, Dismant	011	3944713, 293
12	Delhi	LGSR, A-29, Mohan Co-operative, Industrial Estate, New Delhi	011	3696411, 121, 153
13	Ghaziabad	LGSR, s-10, HDC Rajnagar Ghaziabad - 201001	0120	881354152, 3, 164, 65
14	Goa	LGSR, Plot No-4-30/4-3 Pingo Bldg, Alto Santaruz, Bambolim, Goa - 40	0832	3294955, 3294956, 3294957
15	Gurgaon	LGSR, 4th Fl, 4 Block, Centre Point Bldg, Sector-14, P.O. Gurgaon - 122001	0124	4847461, 61, 161, 4272667, 4267469
16	Gwalior	LGSR, Shanivihar Bypass, C K Aggarwal Path, Chankhuria, Gwalior - 471003	0861	3633995, 2989981, 2989983, 2989984
17	Haldwari	LGSR, 605/18, Ravi Nagar Road, Behind Ranuka Petrol Pump, Gola Road, Haldwari - 500000	0836	4530051, 02, 2327251, 152
18	Hyderabad	LGSR, 1st Floor, Survey No.54, P.O. Reddy Building, Vikramapuram Main Road Khairatabad, Secunderabad - 500004	040	2781732, 131, 34
19	Jaipur	LGSR, 3rd, 2nd, 1st Floor, Trade Centre SE-15, 16/G Road Jaipur - 452003	0791	4665203, 241, 4482210
20	Jaipur	LGSR, B-71, Sahakar Marg, Lal Kothi Scheme, Jaipur - 302015	0141	5191, 18, 5191029, 5191030
21	Jalandhar	LGSR, Village Khajuri, Near Hawari Restaurant, Jalandhar, Phagwara Highway, G.T. Road, Jalandhar	0164	502627, 503025, 502628
22	Jammu	LGSR, Plot No.-62, Yard No. 6, Transport Nagar, Nawal, Jammu - 180005	0191	2474203, 2477419, 2474396, 2474396
23	Jodhpur	LGSR, 221-A/221-B/2, MIDC Heav Industrial area, Jodhpur - 342003	0291	2742284, 392
24	Kolkata	LGSR, 1, No-Chand-Bazaar, 6th Floor, Main Towers, Kolkata - 700071	033	2386500, 51, 03
25	Kurud	LGSR, Sunshine Enterprises, Sunder Coll' Storage, Gt Kamal Road, Kurud - Sonapat	0522	2415001, 02, 03
26	Ludhnow	LGSR, B-537, Han Kum, Keshar Nagar, Sitapur Road Ludhnow - 226020	0153	2275758, 19, 2799121
27	Ludhiana	LGSR, Village Phanda Near Badwal Railway Station Opp Hinzar Road Ludhiana	0161	2844131, 19
28	Mumbai	LGSR, Trade Star 4th Floor, 23 Nagar Anand Kulk Road, Kothar, E-Mumbai - 400056	022	2835382, 2627
29	Nagpur	LGSR, 5A, Road No.13, Behind Mittal Workshop, MIDC Hingra, Nagpur - 440016	0714	2035, 12, 295122
30	Patina	LGSR, 2nd Floor, Anil Chandra Deep Complex, Bandar Bagecha, Near Sarwat Hotel, Patna - 800001	0612	2399556
31	Pune	LGSR, 105/105, Premium Point, GRI Road, Opp Modern High School, Bhi Floor Shriyaji Marg, Pune - 411005	020	3865010, 732
32	Rajpur	LGSR, Nandan Compound, Shyam Nagar, Katura, Main, Rajpur (C.S.)	0771	4652711, 4632470, 4484745
33	Ranchi	LGSR, 410, Commerce Tower, Opp. Gull Durgah Complex, Main Road, Ranchi	0659	2364208, 2310455, 2304428
34	Surat	LGSR, 1001-1004, Acon Plaza, Bldg. Fr. Anand Mahal Road, Behind Shikha Bhawan School Adajan Surat - 395009	0601	2320821, 03, 04
35	Thane	LGSR, Gift Shop No - 209, 2nd, 2nd Floor, Sai Plaza, Above Vajra Sales Opp. Cine Wonder Mall, Ghodbunder Road, Thane(West) - 400607	022	2847303, 2637
36	Varanasi	LGSR, Panna Complex, D.V. L Parvati Road Shivdurga Manduath, Varanasi UP - 221002	0542	2173621, 26, 37
37	Vijayawada	LGSR, Door No 24-2-1, Ramamamba Street, Prasad Nagar, Vijayawada - 520010, Andhra Pradesh	0866	4487203, 07
38	Warangal	LGSR, HOUSE NO. 14-680/1 FIRST FLOOR, BESIDE HEFC BANK NAKKALGUTTA, HANAMAKONDA-509001 (WARANGAL)	0970	3351403

Dealer name with Stamp Dealer address
 IMEI No. Date of sale Serial no.

LG Electronics India Pvt. Ltd., Plot No. 51, Udyog Vihar Surajpur Kasna Road, Greater Noida, U.P.

SERVICE CENTER LIST



SERVICE



*TMTN / BSNL
**Tata STD Code

1800-180-9999*

39-01-0909**

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Adhoni	RS CDMA	21/490, Arts & Science College Road, Near Devi Nursing home, Adhoni-518301	9346490905	McMohan
Andhra Pradesh	Adilabad	Kiran Mobile World	7-14-78/A, Near Nethaji Choul, Cinema Road, Adilabad-504001	9346358181	McKiran Kumar
Andhra Pradesh	Amalapuram	Sandesh Cellular	D.No-4-2-14, Opp: S.K.B.R Collage AMLAPURAM-533201	9346398838	McRavi Kumar
Andhra Pradesh	Ananthapur	RK LG CDMA	Shop No 3, Celluar; Pallavi Towers, Opp to Canara Bank, Subash Road, Ananthpur-515001	241450,	Mc Sridhar
Andhra Pradesh	Armoor	Sai Sri Electronics	Shop.no.2, mahalakshmi road, Armoor - 503224	9392622038	McSrinivas
Andhra Pradesh	Bapatla	Vijaya Communications	Opp: Old Indian Gas Company, Sikaram Vari Street, G.B.C.Road, Bapatla	9346206305	McB.Siva
Andhra Pradesh	Bhimavaram	Gopi Krishna Communications	JP Road Near Mohan Service Center Bhimavaram Pin-534202	9394071036	Mc.Siva
Andhra Pradesh	Chirala	Lakshmi Infocomm	Shop No.17&18 Baram Plaza, Munthavari Center, Chirala-523155	326000	Ms.Shakeema
Andhra Pradesh	Chittoor	CMT Computer Services	18-162, High Road Opp.Bishnu Bhavan Hotel, Chittoor	222733	McGopi
Andhra Pradesh	Cuddapah	Srinivasa Communication	Shop No.4, Siddapriya Complex, Opp. HP Petrol Pumping Point, Cuddapah	9346350224	McSahadeva Reddy
Andhra Pradesh	Dharmavaram	Siddhartha Communications	Opp to Satya Lodge, NFR Circle, Dharmavaram	9347064101	McShiva Ramkrishna
Andhra Pradesh	Eluru	S.S.Computers	Door.No:238-4-8/3, Ayappa Complex, Beside Kanuri Madhavi Hospital, Subbama Devi School Road, R.R.Pet, Eluru-534002.	329294	McDiwaker
Andhra Pradesh	Gudivada	Kanakadurga-communications	Opp: Alankar Family Restaurant, Eluru Road, Nehru Chowk Center Gudivada	9394220688	McKumar
Andhra Pradesh	Gudur	Srinivasa Electronics	1st floor, Airtel Building, Kummari Veedhi, Gudur - 524101, Nellore (Dt).	645644	McSuman
Andhra Pradesh	Guntur	Vasavi Associates	Door No.6-7-36, V.S.N.Complex, 8th Line, Arundelpet, Guntur-522 002.	3257789	McSatyam

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Hazarnagar/ Kodad	Sri Pavan Electronics	Malika Towers, Besides Reliance Web World, Kodad - 508206	9346901519	Mr Narasimha Rao
Andhra Pradesh	Hindupuram	S.V.A Cellular	Shop.no:3, Vinayaka Lodge, Railway Road, Hindupur - 515201	320777	McD.B.Ravindra Nath
Andhra Pradesh	Huzurabad	Bhargavi Communications	Shp No E-2, DCMs Complex, Near Bus Stand, Main Road, Huzurabad-505122	9391755619	McT.Vishnu Vardhan
Andhra Pradesh	Hyderabad	Bhagya Communications	Shop no:109, Upper Ground Floor, # 12-2-825, S.G.M. Mall, Mehdiapatnam, Hyderabad-500028.	32972308 / 32001406	McSuresh
Andhra Pradesh	Hyderabad	JVR Communication	Shop No.8, Vanija Vihar, Nalanda Building, Dilkskh Nagar Main Road, Hyderabad- 5000060	66109604	McA.Venket nariyan reddy
Andhra Pradesh	Hyderabad	Primus Infomatic & Software Pvt Ltd	# 18/A, Methodist Complex, 5-9-190, Lane Opp to Chermas, Abids, Hyderabad	66755111	McGovind Kabra
Andhra Pradesh	Hyderabad	LG Direct Service Centre	MCH No 6-3-852/3/A Ground floor, Vishwa Central, Nizamia Observatory Road, Ameerpet Hyderabad	40033769 / 70	McTarun Dandavate
Andhra Pradesh	Hyderabad	Reliable Communication	G-8, 3-6-561, AALTO'S A & M Trade Centre, HIMAYATNAGAR, HYDERABAD - 500029	9346320705	McSandeep Soni
Andhra Pradesh	Hyderabad	S V Electronics	Shop No. 41, Nilagiri Block, Aditya Enclave, Ameerpet Main Road, Hyderabad-500038	9346449323	MrPradeep
Andhra Pradesh	Hyderabad	Shweta Communications	Shop No.9, Ground Floor, Pavani Ansysa Complex, Opp. Huda Complex, Tamaka, Hyderabad	32968162	Mr Sandeep Heda
Andhra Pradesh	Hyderabad	Shweta Computers	# 1-7-69/1 & 2, OPP Aditya Delux Hotel, Near Paradise circle, Sarojini Devi Road, Secunderabad - 500003	27721076 / 32977548	McSandeep
Andhra Pradesh	Hyderabad	Sreenivasa Technologies	SAI VIKRAM TOWERS, SHOP NO-4, RELIANCE WEB WORLD BUILDING, Balaji Nagar Kakatpally	32961479	MrPraveen
Andhra Pradesh	Hyderabad	Sri Surya Communications	#Madhu Enclave, Street no 06, Shyamal Buildings, Begumpet, Hyderabad	32961127	McNageswara Rao
Andhra Pradesh	Hyderabad	Sri Varun Electronics	DNo 5-8-344/1, * DHAN BHAGYA ESTATE : Chirag Ali Lane, Abids, Next to Raghava Ratna Towers, Hyderabad - 500 001	32909099 / 55781999	McAloksh Mohan
Andhra Pradesh	Hyderabad	Sunbeam Technologies	120, Cheney Trade Centre, Parklane, Near Paradise, Secunderabad -500003	40200193 / 66383193	McSuresh
Andhra Pradesh	Jagtyal	SS Communications	Opp Kanté Bhavan Lane, Duwarka Nagar, Jagtial	9391533535	McHari
Andhra Pradesh	Jangaon	Sky Win Communications	#2-7-134, Beside Bharat Gas, Bus stand Road, Jangaon-506167.	9390102839	Mc Varun

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Jangareddygudem	Sri Devi Communication	Near Gangallama Temple, Opp. Andhra Bank, Jangareddygudem	227297	Mr Prasanna Lakshmi
Andhra Pradesh	Kakinada	Delta Infotech	Door No. 6-1-29, Opp. Swami Vivekananda Park, Jawahar Street, Surya Rao Pet, Kakinada - 533001	5593533	Mr Shivanand
Andhra Pradesh	Kamareddy	Pager King Communication	Sircilla Road, Kamareddy, Dist. Nizamabad - 503 111.	9397366633	Mr. Moizuddin
Andhra Pradesh	Karimnagar	SS Marketers	2-8-40, Mukampura, Near Circus Grounds, Karimnagar	9391552223	Mr.Cheekrathar
Andhra Pradesh	Kavali	Sree Balaji Infotech	Prasad Complex Trunk Road, Near Ongole Bus Stand, Kavali	6329567	Mr. G. Sri Sai Charan
Andhra Pradesh	Khammam	Sriven Technologies	D.No:11-2-37, Shop No.3, D.V.Krishna Complex, Beside Baburao Petrol Bunk, Balaji Nagar, Wyrta Road, Khammam-507002	9396698866	MrBhaskar Reddy
Andhra Pradesh	Kothagudem	S.Swathi CDMA Service Center	9-3-3, Above Sindhura Electronics, Near RTC BUS Stand, Kothagudem-507101	9391552228	MrNiaz Ahmed
Andhra Pradesh	Kuppam	Sagar Computer Services	14-204, PALACE ROAD, KUPPAM-517425	9391862436	MrSagar
Andhra Pradesh	Kurnool	R K LG CDMA	Shop no:26, 27, First floor, UCON Plaza, Kurnool-518001	220201	MrG Rama Krishna
Andhra Pradesh	Machilipatnam	Om Sree Sai Communications	25/276, Kota Yari Tulla Center, Jaganadhapuram, Machilipatnam	9347741777	MrRafee
Andhra Pradesh	Madanapalle	Sri Balaji Computers	Shop No:2, 1st floor, Sri sai Complex, CTM Road, Madanapally - 517325	9390025204	MrManohar
Andhra Pradesh	Mahabubnagar	Sri Chakra Mobile Care Centre	Shop.no:15, Shareef Complex, Near Bus stand, Mahbubnagar - 509002	9396348999	MrAnil
Andhra Pradesh	Mancherial	SS CDMA Service Centre	Shop no.7, Mounika Complex, BPL Chourasta, Mancherial-504208	9394552223	MrRajesh
Andhra Pradesh	Medak	Balaji Communications	Door.no:1-3-77j, Opp to State bank of Hyderabad, Main Branch, Main road, Medak	9346439961	MrSudhakar
Andhra Pradesh	Medchal	Khan Electronics	Sanjeeva Reddy Complex, Besides RTC Bus Depot, Medchal - 501 401	9347222088	Mr Jaleel Khan
Andhra Pradesh	Miryalguda	Needs Electronics	Jagannath Complex, Opp Bus Stand, Miryalguda - 508207	9394645696	Mr Ravi Kumar
Andhra Pradesh	Nalgonda	Quintessence Electronics	Shop No-5, Srinivasa complex, Opp to market office, HYD road, Nalgonda - 508001	9396610220	Mr Venkateswar Rao
Andhra Pradesh	Nandyal	Dhanush Systems	Dno:25/165 B, Sanjeev Nagar, Near Ramalayam, Nandyal	9392236699	MrRamesh
Andhra Pradesh	Narasaraopet	Rajendra Infotech	D.No -90-11-10/7, Saradhamba Complex, Arundelpet,Near S.B.I ATM Narasaraopet	224136	MrSasi Bhushan

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Nellore	Balaji Watch & Electronics	16/249, Trunk Road, Nellore- 524001	2339999	McRajesh
Andhra Pradesh	Nellore	Tirumala Electronics	Shop No. 26, 1st Floor, Co-Operative Bank Complex, Near Gandhi Statue, G.N.T., Road, Nellore	3290339	McPratap
Andhra Pradesh	Nirmal	Om Sai Electronics	Shop.no:1, Kala Nagar road, Beside 2 town Police station, Nirmal - 504106	9390000024	McMahendar
Andhra Pradesh	Nizambad	Satya Electronics	# 7-10-65, Shop no 1, 1 st Floor, H.M.H.V Complex, Beside Bus Stand, Nizambad-503001	326000	McVenu gopal
Andhra Pradesh	Ongole	Tejasri Communications	37-1-107, Opp: Kerala Bakery, Near Mastan Darga Center, Trunk Road, Ongole	9393026115	McSasi Bhusan
Andhra Pradesh	Peddapalli (Ramagundam)	Abhi Marketers	Shop No:19/8/291, MRK Plaza, Lakshmi Nagar, Godhavari Khari - 505209	9399987773	McNagaraj
Andhra Pradesh	Peddapuram	Devi Infotech	Opp. Veterinary Hospital, Shop No. 1, Santa Market Road, Peddapuram	6593533	McSiva Kumar
Andhra Pradesh	Prodattur	SV Technologies	4-625-3, Gandhi Road, Opp Karur Vyaya Bank, Prodattur	9347251806	McRavi Kumar
Andhra Pradesh	Rajamundhary	Siri Infotech	Police Welfare Complex, City Hospitals Junction, Damai Pet Main Road, Rajahmundry	9397925799	Mr Raghvendra
Andhra Pradesh	Raychoti	Raju Computer World	Room No 3 Up Stairs Syyeda complex, bustand road, Rayachoty	9346209881	McRaju
Andhra Pradesh	Repalle	Sri Satya Solutions	D.no- 10.14.125 (UP Staires) Municipal Office Road, Railpet, Repalle-522265	9396222993	McSridhar
Andhra Pradesh	Sangareddy	Sri Technologies	Srimaan Complex, Beside Inspection Bungalow, Main Road, Sangareddy, 502001, Medak Dist	9391216573	McAjaz Ahmed
Andhra Pradesh	Sattenapalli	S.S.Communications	Opp.Telephone Exchange, Sattenapalli	9397610550	McSai
Andhra Pradesh	Shad Nagar	Sri Gana Electronics	Shop No : 2, Khajia Veeresam Complex, College Road, Shadnagar - 509216	9392633111	McVigneswar
Andhra Pradesh	Siddipet	Gopala Krishna Communications	SHOP NO:13, FIRST FLOOR, MACCA COMPLEX, OPP:CITIZEN'S CLUB, M.G ROAD, SIDDIPET - 502103. (A.P)	9392511064	Mc Nagaraj
Andhra Pradesh	Srikakulam	Venkateshwara Infotech	Raja Commercial Complex, Opp/Electrical Office, Ground Floor, Shop No.10 & 11, GT Road, Srikakulam	324577	McKiran Kumar
Andhra Pradesh	Sikalahasti	KSV Computer Services	NNR Buildings, d.no:16-582, Panagal road, Sikalahasti 517644	9390044399	McSahadeva Reddy
Andhra Pradesh	Sullurpet	Sai Baba Electronics	S.V.T Street, Opp: Reliance Office, Sullurpet	9346920527	Mc S. Venkata Krishna

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Tadepalligudem	Sri Harijaya Infotech	Thota Gopi Complex, Police Quarters Lane, Beside Zp High School, Tadepalligudem	9346445720, 08818-210565	Mr.Suresh
Andhra Pradesh	Tanuku	Shivanand Enterprises	Door No. 34-3-3, Main Road, Gamini Compound, Tanuku	9346408640	McSrinivas
Andhra Pradesh	Tenali	Vaishnavi Infotech	D.No:22/11/114, Opp. Kanikacharla Kalyanamandapam, Bose Road, Tenali.	9347651330	McMunili
Andhra Pradesh	Tirupati	CMT Communication	13-7-796/14/3, TUDA OFFICE ROAD, Tirupathi-517501	3296979	McK Vasu Naidu
Andhra Pradesh	Vijayawada	K I Computer House	39-9-46, Svs Temple Street, Labbiget, Vijayawada	6520461	McKartik
Andhra Pradesh	Vijayawada	V V Communications	28-23-31/32, Opp.Swarugha Foods, Vijay Talks Center, Vijayawada	320866-320988	McRahul
Andhra Pradesh	Vishakapatnam	Jai Bharani Communications	Door No:52-11-7/7, Sapthagiri Plaza, Old Resuvanipallem, Vishakapatnam-13	6634666	McPYenkatapathi Raju
Andhra Pradesh	Vishakapatnam	Sri Sai Ganesh Infotech	G5, Ground Floor, Backside of Sangam-Sarat Theatre, 1st Lane, Dwarka Nagar, Vishakapatnam - 530 016.	3258777	McChandra Shekar
Andhra Pradesh	Vizayanagaram	S R Technologies	D.No:1-9-1/44, Opp: Z P Office, Railway Station Road, Vizayanagaram.	9346418791	McBalakrishna
Andhra Pradesh	Vuyyuru	Sugreeva Communications	Behind Datta Automobiles, Katturu Road, Vuyyuru	9393033555	McPhani
Andhra Pradesh	Wanaparthy	Sri Ganesh Electronics	Shop No : 16-63, Opp R R Complex, Wanaparthy - 509103, Dist Mahabubnagar	9396800275	Mr Deva Raj
Andhra Pradesh	Warangal	S S Marketers	6-1-73/1, Sai Bhawan, Sidevi Theatre Road, Hanamkonda, Warangal-506001	2552223	McL.Srinivas Rao
Andhra Pradesh	Zaheerabad	Renuka Technologies	Shop no:123/1, First Floor, Alipur, Zaheerabad.Pin-502220	316143	McAbhiram Joshi
ASSAM	Gwahati	PRAGATI SERVICES	2nd Floor, Kiranhangsha Commercial Complex, Dr J.C. Das Road, Harsabha, Panbazar, Gowahati, Assam	2733501	Mc Pradeep Khaitan
Assam	Silchar	IT ONLINE	N.S.Avenue, Rangirikhari, Silchar, Cachar, Assam	221260	McSharma
Bihar	Arrah	Surya Services	Sushila Bhawan, Suryapuri colony, By pass road, Arrah	9334538845	McSanjay Kumar
Bihar	Begusarai	Krishna Communication	Eashwari Complex, Dak Bangla Chowk, Bishnupur, Begusarai, Bihar-851101.	9334341700	McDinkar Kumar
Bihar	Bhagalpur	Printronix Infosolutions	Ganpati Complex, 1st floor, Patel babu road	9934605864	McHimansu Shekhar
Bihar	Bhagalpur	S.K.Communication	NEAR RAILWAY STATION, Super Market Complex, Patel Babu Road, BHAGALPUR-812002	9334255275	McKundan Kumar
Bihar	Biharsharif	Shanya Infotech	Magdha Commercial Complex, 1st.Floor, Shop.No.5, MG Road, Bharasopar, Bihar Sharif, Nalanda Dist. Bihar.	9334048037	McAmrit Kanchan

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Bihar	Chapra	Ambey Associates	D-23, Hathwa Market, Chapra, Dist. Saran-841413 Bihar.	9334295605	MrJayant Kumar
Bihar	Darbanga	Prime Computer	Hanuman Nagar, Doner Road, Darbanga.	9334934065	MrAbhinav Kumar Verma
Bihar	Gaya	Louts Enterprises	Opp.Awiva Life Insurance, Kanya High School Road, Ramna, Gaya.	9334492033	MrPankaj Ranjan
Bihar	Muzafarpur	Krish Enterprises	NcKanhoulak.no.2, Kachisarai Road, Muzafarpur.	9304410745	MrSanjeev Kumar
Bihar	Patna	Competent Mobile Service	Shop 1, Hotel Lalitha Complex, East Bowling Canal Road, Patna	9334027706	MrMohit Ahluwalia
Bihar	Patna	Infotek Trading Company	1st floor, City Palace, New Dak Bunglow Road, Patna-800001	9334116145	MrSanjay Choubey
Bihar	Patna	Micro Zone-Patna	AH Complex, # G26, Near Kotak Mahindra Bank, Exhibition Road, Patna	3294696	MrMithlesh Kumar
Bihar	Patna	Synergy Trading Company	G-01, Chanakya Plaza Complex, Main Road, Kankarabagh, Patna.8000020	2356900	MrVikas Chandra
Bihar	Purnea	Micro Zone-Purnea	Narottam Hata, Opp.Dr.PC.JHA, NH-31, Purnea-854526	9304166633	MrAmit Kumar
Bihar	Sasaram	Nandika Enterprises	Hari Complex, Panjab National Bank, Sasaram, Rohtas-821115 (Bihar)	4222008	MrAbhinav Gupta
Chattisgarh	Ambikapur	Neha Communication	Ramanuj Ganj road, Opp. Kosa Form, Ambikapur Sarguja, Pin-497001	240427	MrRishi Dubey
Chattisgarh	Bhilai	A B Automation	Shop no. 242, 1st floor Chouhan Plaza, GE Road, Supela Bhilai, Chhatisgarh- 490023	2295989	Mr Satish Singh
Chattisgarh	Bhilai	Sai Ram Electronics	SHOP-NO-52/90, HIMALAY COMPLEX, AKASH GANGA, SUPELA, BHILAI	4038917	Mr. Balan
Chattisgarh	Bilaspur	Mahamaya Infotech	Shop No 203, Jain Plaza, Ground floor, Link Road, Bilaspur	2433865	Mr. Pawan Kumar
Chattisgarh	Korba	Star Mobile Services	SS PLAZA, FD-13 POWERHOUSE ROAD, KORBA-495678	9300401485	Mr. Anish Menon
Chattisgarh	Raigarh	Blue Chip Computer	Purana Sadar Bazaar, Raigarh, Chhatisgarh.	9972127776	Mr. Ashok Agrawal
Chattisgarh	Raipur	Cybernet Systems	B-2, 1st floor, Garchaz Complex, Jail Road, Raipur - 492001	406771	Mr Anand Singh
Chattisgarh	Rajnandgaon	Bhavye Services	SHOP NO 5, BELOW SBI, STATE BANK OF INDIA, KAMPTTEE LINE, RAJNANDGAON.	324200	Mr. Manish Golcha
Delhi	New Delhi	Aegiss Infotech	UG-25, Ansal Chamber -2, 6, Bhikaji Cama Place, New Delhi-110066	65477740	Mr. Atul Gupta
Delhi	New Delhi	Arham Infotech Services	4737/A 23, Ansari Road, Daryaganj, Delhi-110002	41501124	Mr. Anil Surana

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Delhi	New Delhi	Comhard Systems	D-30, 31, First floor, Near Hotel Shipra, Main Vikas Marg, Lakshmi Nagar	32955887	Mr Ravi Kant Gupta
Delhi	New Delhi	Comhard Systems	B-120, Hardev Puri, 100 Feet Main Road, Near MTNL Office, Nathu Colony Chowk, Shahdraz, New Delhi - 110 093.	32575507	Mr Ravi Kant Gupta
Delhi	New Delhi	Connexions And Communications	183, Avtar Enclave, Opposite Nirula's, Pashchim vihar, New Delhi-110063	32451431	Mr Bhupinder Agrawal
Delhi	New Delhi	Cube Engineers And Consultants Pvt Ltd	A-65, Naraina Industrial Area, Phase-1, New Delhi	65450272 / 4141620	Mr Arvinder
Delhi	New Delhi	Elcom Trading Company Pvt. Ltd.	G-1, Govardhan Building, 53-54, Nehru Place, New Delhi -110019.	64582709	Mr Somesh Narang
Delhi	New Delhi	Innovative Telecom	304, GDITL Northex Towers, A-09, 3rd Floor, Northex Tower, Netaji Subhash Place, Pitampara, New Delhi-110 088.	32925753 / 65154340	Mr Manoj Garg
Delhi	New Delhi	Nice Telecom	15/19 & 15/21, DDA Complex, Nangal raya, Near D Block, Janakpuri, Delhi - 110046	9350863630	Mr Ripul Garg
Delhi	New Delhi	Sukriti Communication	101 Patparganj- Mayur Vihar phase -1 - New Delhi -110091	32498011	Mr Dipendra kumar chaturvedi
Delhi	New Delhi	Teletak	C-21, First Floor, Near Bus Stand, Bhajan pura, Delhi-11053	9818400551	Mr B.C.Yashist
Delhi	New Delhi	Touch Tone Telecom	B-52, First Floor, Kalkaji, New Delhi	32939031	Mr Ashish Dey
Delhi	New Delhi	Ucom Technologies Pvt Ltd.	45, 1st Flr, Corner Mkrt, Mahiya Nagar, New Delhi - 110017	41745469	Mr Neeraj
Goa	Margoa	SKY LARK	SHOP NO 05.CARVALHO APPTS, NEAR RAILWAY CROSSING, COMBA,	2736100	Mr CHRIS
Goa	Panjim	Mandovi Mobiles	Mohidin Towers Do. No. A53 Opp to Hotel Manashanti Dadavaiydra rd Panjim-403001	6452949	Mr Prakash
Gujarat	Ahmedabad	A Com Technologies	Shop No-37, 1st Floor, Shubh Complex, Near Rajasthan Hospital, Camp Road, Shahbaug, Ahmedabad-380004	32940560	Mr Vijay.S.Cohel
Gujarat	Ahmedabad	Mishree Communication	FF-17, RUDRA SQUARE, OPP, JUDGES BUNGALOW, POLICE STATION, BODAKDEV, AHMEDABAD-54.	32508491	Mr Mitesh Patel
Gujarat	Ahmedabad	Silicon Valley	9, Gokul Palace, Maninagar Cross Road, Maninagar Ahmedabad-380008	30225430	Mr Rajesh Patel
Gujarat	Ahmedabad	Vision Communication	33, 1st Floor, Sukh Sagar Complex, Opp, Dinesh Chamber, Bapunagar, Ahmedabad -380024	65122322	Mr Ajay Kachhadia
Gujarat	Amreli	Precision Telecom	32, 33 Opera House, Station Road, Amreli	230940	Mr Kamlesh Tank

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Gujarat	Ankleshwar	Akshar Telecom	C/1 Keval Shopping Centre, old National Highway No.8, CIDC, Ankleshwar-393001	250860	Mrs. Anita Amin
Gujarat	Bharuch	Akshar Telecom	Pramukh Swami Complex, Panch Batti, Bharuch	2241027	Mr. Hanif Patel
Gujarat	Bhavnagar	Shivshruti Services	981/B, Makvana Building, Down Chowk, Bhavnagar .364001	3296222	Mr P D Jala/ Sandeep patel
Gujarat	Bhuj	Infotech Computer	2nd Floor, Nar Narayan Chambers, Opp Indian Airlines Office, Station Road, Bhuj	324295	Mr Vasant Mepani
Gujarat	Gandhidham	Varsh Electronics	Shop No. 35, Swami Vivekanand Complex, Near Oslo Circle, Gandhidham	252739	Mr Siddarth Gajjar
Gujarat	Gandhinagar	Creative Communications	Shop No 102, Suman City, Sector 11, Gandhinagar-382011	23226241	Mr K.J.Barot
Gujarat	Himmatnagar	Jay Telecommunications	B-F 105, 1st floor, Durga Complex, Near Railway Station, Himmatnagar	329532	Mr. Manibhai Patel / Neeraj patel
Gujarat	Jamnagar	Sudarshan Infoys	"Shradha", Park Colony, Motor House, Near axis Bank, PNMarg, Jamnagar 361008	2552696	Mr. Amit Unadkat
Gujarat	Junagadh	KJ,Traders	29/30, Danapiith, Junagadh	2627320	Mr. Paresb Rughani
Gujarat	Kalol	Maitree Communication	B/93, Yogi Complex, opp. Mahendra Mill Road, Kalol	325288	Mr Jignesh Shah
Gujarat	Mehsana	Prime Computer Consumables	15-B, Vimal Super Market, B K Road, S.T.Workshop Road, Mehsana-384002	2325123	Mr Suketu Patel
Gujarat	Morvi	Pulse Sales And Services	SHOP NO 6 MADHAV MARKET FIRST FLOOR NEAR NEW S.T.STAND SANADA ROAD Morvi-383641	9428565667	Mr Natubhai Patel
Gujarat	Navsari	Deep Enterprise	10, Upper Level, Diamond Palace, Sayaji Road Sattapic Navsari-396445	324095	Mr Vinod Kasundra
Gujarat	Palanpur	Shree Manibhadra Mobile	21- First Floor, aroma arcade, opp jilla panchayat, near kozil tower, Palanpur-385001	300001	Mr. Panchal Sunil D
Gujarat	Patan	Able Infotech	9, Palika Bazar Complex, Rajmahel Road, Near Santokba Hall, Patan	9924256068	Mr. Rakesh Bhai
Gujarat	Porbandar	Varun Infotech	1ST Floor, Garden Cafe Building, Opp>New Fountain, Ncold R.T.O Office, Porbandar - 360575	3290285	Mr. Mitesh Changela
Gujarat	Rajkot	Joshi Telecom	Shop No.8, Kuber Complex, Opp Chandubhai Bhelwala, Dr Yagnik Road, Rajkot	6530707	Mr Jiten Dave
Gujarat	Rajkot	Roopang Infocare	Vinod Nivas, 4, Sardarnagar(West), Nr Astron Cinema, Rajkot-360001	2464485	Mr. Kishore Patel

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Gujarat	Surat	Excel Solutions	H-3, Ruchi Flats, Near Iqara Building, Adajan Hazira Road. Surat-395009	6544500	Mr Virender Jain
Gujarat	Surat	Om Sai Services	39, Golden Point, Near Science Laboratory, Ring Road, Surat	3231233	Mr Dharmesh Patel
Gujarat	Surendranagar	Nhaal Computer Services	94 Old Housing Bord Opp Muri. Scool No.13, Surendranagar.	320375	Mr Sikandar
Gujarat	Vadodara	Shreeji Telecom	5B-10, Windsor Plaza, R.C.Dutt Road, Allapuri, Vadodara - 390002	9328093424	Mr Jignesh Gohel
Gujarat	Valasad	Klassik Stationo Products	10, Jethalal Muji Market, Halar Road. Valsad -396001	329363	Mr Darshan Panchal
Gujarat	Vapi	Klassik Stationo Products	116, Bhanudarshan Co-Op Society, Koparli Road, Near Gunjan Cinema, GIDC, Vapi	3292363	Mr Avishek Suhasaria
Gujrat	Anand	Zainee Mobile	2nd floor, Limbuwala Complex, Nr. CPO, Opp. Kavita Shopping Centre, Anand	9375960954	Mr A. J. Raja
Haryana	Ambala	Bee Ess Air Communication	26 First floor MC Market Behind Negar Cinema Ambala Cantt-133001	4006229	Mr Rajiv Gupta
Haryana	Bahadurgarh	Unique Telecom	Shop No.5, Rajaram Market, Main Najafgarh Road, Bahadurgarh, Near Bajaj Showroom	9315873676	Mr Harinder
Haryana	Bhiwani	Sandeep Electronics	10 th Plot, First Floor, Circular road, Mahem Gate Chowk, Near Kaja's Nursing Home, Near Vodafone Office, Bhiwani, Haryana - 127021	252000	MrSukhveer Saini
Haryana	Faridabad	Comsoft Computers	601/1 Gopi Colony Chowk- Sector-19, Near Prem Prakash Ashram, OLD Faridabad-121002	4104252	Mr Ashwani Jindal
Haryana	Faridabad	VR Infocomm	Shop No.44, Neelam Fly Over, Neelam Chowk, NIT Faridabad.	4031959	Mr Vinod Kumar Gupta.
Haryana	Fatehabad	Sky Lark Mobile Point	4, C.T.Road, Near Bus Stand, Marla Colony, Fatehabad	989655244	MrPankaj
Haryana	Gurgaon	Signature Communications	B-100 A, South City -1, Opposite - Huda Gymkhana Club Near Signature Tower - Gurgaon 122001	4102709	Mr Raj Kumar Garg
Haryana	Gurgaon	Lalji Communication	SCO-31, - First Floor, Above MTNL Sanchar Haat, Main Market, Opp. BSNL Exchange, Sector-12A, OLD Gurgaon -122001.	3200900	MrBharat Bhushan
Haryana	Gurgaon	LG Direct Service Centre	B-36, 37 & 38, Industrial Area, Mehrauli Gurgaon Road, Near Bata Chowk, Gurgaon - 122 001.	3027300	MrDeepak
Haryana	Hissar	Pannami Communication	32, Red square Market, Near Dena Bank, Hissar, Haryana-125001	9354332000	MrPradeep Garg
Haryana	Jind	Gaurav Telecom	Shop No.19 Near Rani Talab, Near Bharat Electronics, Jind	325400	Mr Deepak Garg
Haryana	Kaithal	Mahesh Communication	Shop no.22, Bajrang Ball Market, Near Randhir cinema- Kaithal	9315146000	MrMahesh

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Haryana	Karnal	Mass Communication	Shop No.68, Main Market, Ground Floor, Moughal Canal, Karnal - 132001	3290717	McDavender Yadav
Haryana	Kurukshetra	Bharti Communication	3, Krishna Market, Opp.Purohit Sweet House, Pipli Road, Kurukshetra, Haryana-	9354165077	McVijay
Haryana	Narnaul	Prime Communication	Shop no.8, 1st Floor Taneja complex, near Nirula Hotel, RewariRoad Narnaul	9355375351	McNaveen
Haryana	Palwal	Shree Ganesh Communications	Basant Apts, Shop No.5, Kithwari Chowk, Mathura Road, Near Saraswathi School, Palwal	321028	McHarish Chandra
Haryana	Panipat	INS Telecom	2, Bishan Sarup Colony, Opp Bus Stand, Near Hotel Deep, Panipat	9354917110	McPankaj kumar
Haryana	Rewari	Mahak Tele Services	53-A, Model Town, Near Shreeji restaurant, Rewari	329222	McGaurave Yadve
Haryana	Rohtak	Telecentre	13, Apna Bazar, Civil Hospital Road, Near Chhotu Ram Chowk, Rohtak-124001	247242	McMrMadaan
Haryana	Sirsa	Sirsa Communication	168, Huda Complex, Old Bus Stand, Sirsa	329591	McRajinder
Haryana	Sonapat	Teleworld	Shop No 20, 1st Floor, M.C.Market, Subhash Chowk, Sonipat, Haryana-138001	3290889	McVipin Dua
Haryana	Yamuna Nagar	Krishna Communication	Shop No.-24/75, Thapar Colony, OPPOSITE SWANTANTAR FANCY LADIES SUITS, NEAR FOUNTAIN CHOWK, YAMMUNAGAR HARYANA-135001	200610	Mc Harsh/Mr. Pradeep
Himachal Pradesh	Dharamshala	Deepsun	Near Sharma Studio, opp Mickey tour and travel, kotwali bazar Dharamshala, 176215	9318679122	McDeepak
Himachal Pradesh	Mandi	VM.Communication	NEAR PNB MOTI BAZAAR, MANDI-175001	9318666005	McM Mahender Singh Thakur
Himachal Pradesh	Palampur	Electronic Home	Kallu Di Hatti, PO Maranda Thasil, Palampur, Distt-Kangra-176102	238463	McRavi Kumar
Himachal Pradesh	Poanta Sahib	Singal Marketing	Badri Nagar, Near LIC Office, Poanta Sahib	9318785134	McRajesh Singal
Himachal Pradesh	Shimla	Hanu Computers	76/ 9, 2nd floor Lower Bazar Shimla	2650560	McSandeep Patial
Himachal Pradesh	Solan	Vikas Mobile Repair Center	MOHAN COMPLEX, First Floor Upper Bazar-173212	9816277183	McVikas
Jammu & Kashmir	Jammu	Mobile Care	608-A Gandhi Nagar Behind Laami Narayan Mandir	24356814	McDivit Gupta
Jammu & Kashmir	Srinagar	The Net Surfer	2nd Floor Mohi-ud-Din Building, Poloviev, srinagar	2459549	McWasim
Jammu & Kashmir	Udhampur	Service Solutions	Ward No. 15 Shaikti Nagar Opp. Old ITI Udhampur	276724	McRakesh

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Jharkhand	Bokaro	Digital Equipment Centre	GB-11, City Palace, Opp.Indian Bank, Bokaro.	9334072270	McDeweshish Ojha
Jharkhand	Daltonganj	Maa Mobiles	Jail Road, Jail Heta, Dalton Ganj-822101	9304285663	McNavin Kc Kashyap
Jharkhand	Deoghar	Kanan Electronics	Hotel Relax Complex, BLC Road, Deogarh-814112	9304059528	McMahesh Sharma
Jharkhand	Dhanbad	Nirmala Entreprises	Ground Floor, Muskan Complex, NrSubhash Chowk, Dhanbad.	9334027583	McNiraj Sinha
Jharkhand	Godda	Karan Mobilink	Maa Kalyani, Katra, Main Market, Godda, Jharkhand-814133	9334449900	McSaroj Kumar Jha
Jharkhand	Hazaribagh	Digital Services	Plaza Mkt, pugmill road, NrKallu Chowk, Hazaribagh.	9334599570	McShish Alam
Jharkhand	Jamshedpur	Prasad Electronics	NrBus stand, Community Center, Kagal Nagar, Jamshedpur.	2226077	McRaju/ Saritha
Jharkhand	Jamshedpur	Tirupati Teletech	Chakravarti Compound, Near Hotel Castel, Contractors area, Bistupur, Jamshedpur-831001	3293331	McAbhijeet Mukherjee
Jharkhand	Ramgarh	Shreyas Empaire	Bus Stand Complex, Ramgarh-829122	9334085642	McPiyush
Jharkhand	Ranchi	Balaji Infotech	Near DcKashyap Eyecinicr, Purulia Road, Ranchi.	3205400	McSanjeev, McSunil Kedia
Jharkhand	Ranchi	Satya Systems & Solutions	158, Opp Hotel Palace, Kadru, Ranchi-834002	3291019	McAmit Rastogi
Karnataka	Anekal	Sri Venkateshwara Communications	# 37, KSRTC COLONY, HOSUR MAIN ROAD, ANEKAL TALLUK, BANGALORE - 562106	320078	McR,Jaganath
Karnataka	Bailhongal	3G Communication	Shop No 459/2 Near Inchal Cross Belgaum Road Bailhongal-591102	9343815097	McVishwanath
Karnataka	Bangalore	Ascent Communication	No:113, St Johns Church road, Bangalore - 560005	32914856	McKumaresan
Karnataka	Bangalore	CRYSTAL INFOCOM	SRI LAKSHMI VENKATESHWARA COMPLEX, SHOP No. B-5, 33RD Cross, 11th Main, 4th Block Jayanagar, Bangalore-560010	32710202	McPrasad
Karnataka	Bangalore	LG Direct Service Centre	No: 93, TKN Mansion, KH Road (Double Road), Bangalore	41145145 / 9739983435	McRaju Naik
Karnataka	Bangalore	Optima Mobile Services	24/2, Dr.Rajkumar Road, Near Subramanyanagar Police Station, 2nd Block, Rajajinagar, Bangalore - 560 010	23131953 / 65722205	McUnni Krishnan
Karnataka	Belgaum	Hello India Telecom	G-4, Maratha Mandir Complex, Khanapur Road, Near Railway Flyover, Belgaum - 590 001 .	4211329 / 2420533	McMohan
Karnataka	Bellary	MAKAM ELECTRONICS	# 90 C/16 HIMALAYA BUILDNG K.C.COLONY BELLARY 583101	655043	McKrisna Murthy Makam

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Karnataka	BhadraVati	Digital Communication	SR Complex 4th cross B H Road Bhadravathi-577301	9341081291	McNagabushan
Karnataka	Bhatkal	Vijay Communication	Hussian Complex Bunder road Bhatkal - 581320	300027	McVittal H.Naik
Karnataka	Bidar	Majuri Infotech	Ravi complex, shop no: 4, Udgir road, Bidar-585401	225544	MrRavi Halhalli
Karnataka	Bijapur	Turning Point Computers	Khed building, opp Vijaya college, Sholapur road, Bijapur-586103	329318 / 300005	McS.M.Hiremath
Karnataka	Channapatna	C&C Technology	"Ramanujan Nilaya" No.2104, 11th Cross, Kuvempunagar B M Road, Channapatna - 571501	7251716	McCharan
Karnataka	Chikaballpur	Sri Ram Prasad Enterprises	1st Floor: BB Road, Beside State Bank of Mysore, Chikballapur-562101	325567	McVardharaj
Karnataka	Chikmagalur	Cell Tec Electronics	Ragavendra complex, NMC circle, Neharu road, Chikmagalur - 577101	9341013183	McPrem Kumar
Karnataka	Chintamani	Amrutha Mobiles	# 5, Venkatadri Complex, M.G. Road, Opp to Adarsha Theater, Chintamani - 563125	9342262811	McSudarshan Reddy
Karnataka	Davangere	Kruthika Communication	Shop No: 6, Park View Plaza, (Income Tax Office's Ground Floor), 4th Main, Near Vishweshwariah Park, P.J. Extension, Davangere-577002	325444	McSujay
Karnataka	Golak	Cell World	Banshankri Complex, Basaweshwara circle, opp to court Golak - 591307	9343441777	McShivanand / Chougala
Karnataka	Gulbarga	Aishwarya Communication	C-9, Asian Plaza S.V.Pchowk Main road Gulbarga-585102	329447	McMallikarjun
Karnataka	Hassan	Sree Digital Solutions	1380 Mission Hospital road opp Hindibed college - 573201	9343566658	McVidya Shankar
Karnataka	Hosakote	Exposys Communication	Shop no 1, Mahalatha Devi Complex M V Badavane, College Road, Hosikote-562114	7931229	McRaghunandan
Karnataka	Hubli	Shruti Services	A-115, (Lower Ground Floor), IT PARK, Opp. Glass House, Hubli - 580029.	3290671	McMahendar
Karnataka	Hunsur	Sriram Infocom	No.6, Municipal complex, H.D.Kote road circle - 571105	253699	MrH.H.Pradeep
Karnataka	Kadur	Asha Tele Mobiles	Opp. Basaweshwara Hospital, T.B Road Kadur	9341033310	McR.Ananda Murthy
Karnataka	Kankapura	Sumukh Communications	Harshitha Complex, Budikere, Bangalore main rd, Near KSTC Bus stand Kanakapura-562117	9342743344	McR.C.Harish
Karnataka	KGF	Global Net Communications	Opp. King George Hall, Geetha road Robertson pet, KGF - 563122	329559	McShiva Kumar
Karnataka	Kolar	Seanmatrix	No.384, Suguna complex, Near KSRTC bus stand, Anthargange road, Kolar 560101	2228714	McNithyanada Shetty
Karnataka	Kumta	Krishna Mobiles	938, College road, NH 17, opp RWW, Kumta - 581343	329607	McD.V.Prabhu

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Karnataka	Madikeri	C.M.Communications	Shop no. 8, First Floor, M A Complex, Kohinoor Road, Madikeri	9348837555	McMohamad Shafie
Karnataka	Mandya	C & C Technology	2068, First Cross, Subshah Nage, Krishna Krupa Nilaya, Mandya-571401	402007	McCharan
Karnataka	Mangalore	Innovative Infocom	15-10-537/11, Jayavarma Centre, Mallikatte Circle, Kadri, Mangalore - 575002.	6563244	McSebastian Fernandes
Karnataka	Moodabidri	Media Guard Technologies	Rajeev Gandhi complex main road Moodabidri - 574227	325909	McYishwas Kumar
Karnataka	Mysore	KK.Marketing	1432/9, Tribhuvan Towers, opp Veterinary Hospital, Dewan's Road, Dhanwantri Road Cross, Mysore - 570001	4258613	McKaranakaran.
Karnataka	Nipani	Manusoft Computers	Dumale Complex Chikodi road Nipani - 591237	222005 / 9448148005	Mc Pavan / Mahesh Dumale
Karnataka	Raichur	Akshay Electronics	Shop No.2 Ground Floor, Hotel UMA Complex, Station Road, Raichur - 584101	225300	McNarasimhlu
Karnataka	Ranibensur	Kruthika Communication	OLD LIC Building, Opp Gupta Petrol Bank, PB Road, Ranebennur-581115	321444	McSujoy
Karnataka	Shimoga	Chetan Electronics	C-5, Kenchappa complex, Durgigudi main road, Shimoga-577201	401889	McPanduranga Rao
Karnataka	Tiptur	Shree Digital Solutions	Nanjappa complex, opp city union bank, BH road, Tiptur - 572201	9343813731	McRavi
Karnataka	Tumkur	Durga Communication	No.14 CM Complex, Near Gayatri Theater, Below Navratna Silks & Sarees, B.H.Road Tumkur - 572101	2256184	McNaveen Kumar
Karnataka	Udupi	Sanman Mobile Services	Shop No: 15, Simaz complex, Diana circle, Court road, Udupi- 576101.	3255770	McPrakash
Kerala	Alappuzha	Getronics	FIRST FLOOR, KARTHIKA BUILDING, OPP SDV BOYS HIGH SCHOOL, COURT ROAD, ALLEPPY.	3290446	McOmprakash
Kerala	Alathur	Marstek	12/950, Ground Floor, AR Complex, Opp. Munsiff's Court, Alathur, Palakkad Dt. - 678 541	521511	Mc Rajesh. V.
Kerala	Aluva	Sed Infosys	BUILDING NO 12/57 DOOR NO 8, FIRST FLOOR, POOTHULLIL BUILDING, ALUVA - 683 101.	3235599	McSudheesh
Kerala	Attingal	AM Technologies	Mamam, Near Dreams Theater, Attingal	3290301	McSaji
Kerala	Badagara	Amarkish Communications	1st floor, Sarala Complex, Near KVR Motors, N.H. Bypass Road, Nut Street, Vadakara-673101.	3255756	McJeju / Mr. Baiju
Kerala	Cherthala	Cheruattu Phones	Krishna Building, Opp govt boys high school, AC road, Chertalli	9388910703	McMahesh C D

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Kerala	Ernakulam	Guidelines	CC28/902, Ground Floor, Mundukottackal Estates, S A Road, Kadavanthara, Cochin-682020	4000113	MrManoj G
Kerala	Ernakulam	Teletech Systems	20, First Floor, Penta Estate, above Airtel office, Janatha Junction, Palaivattom, Cochin-25	3207554	MrSony Thomas
Kerala	Ernakulam	Zenicon Infocom(P) Limited	Above Syndicate Bank, Opp Cochin Shipyard, M.G.Road, Cochin-15	2559511	MrJaimon Joseph
Kerala	Irinjalakuda	Nice Mobiles	NICE BUILDING, ST. JOSEPH'S COLLEGE JUNCTION, IRINJALAKUDA - 680121	3291515	MrSebastian
Kerala	Kalpetta	Mobi Care	Ground Floor, Rawuthar Building, Opp. Vijaya Bank, Chungam, Kalpetta.	329366	MrThanseer
Kerala	Kanhangad	XN Computers & Datacare	1st Floor, BENGACHERY COMPLEX, OPPVYAPARA BHAVAN, T B ROAD JN, KANHANGAD.	3259755	MrSandeep
Kerala	Kannur	Sahar Communications	5B-666-C & D, PRESTIGE CENTRE, GROUND FLOOR, SUB REGISTER OFFICE ROAD, KANNUR.	3258585	MrAjai Abhiram
Kerala	Karunagapally	Supreme Enterprises	Opp to KSRTC Bus stand, Karunagapally-690518	2620282	MrRatish / Premkumar
Kerala	Kasargode	XN Computers & Datacare	BENDICHAL COMMERCIAL COMPLEX, PRESS CLUB JN, MG ROAD, KASARGOD.	324755	MrMs.Sandeep
Kerala	Kollam	Digital Infosystems	MC-3087, New Block, Bishop Jeromi Nagar, Chinnakada, Kollem-691001	2760647	MrJohnson Lawrence
Kerala	Kottarakkara	Sivashakthi Communications	KP-II/1574, Valiyavla Building, Near Marthoma Girls High School, Pulamon PO, Kottarakkara	3298191	MrSuresh
Kerala	Kottayam	Svm Technologies	M.F.M COMPLEX, Near Popular Maruti Show Room, M.C ROAD, S.H MOUNT, KOTTAYAM, KERALA- 686 006	2565303	MrRajesh K S
Kerala	Kozhikode	Domain Systems & Services	17/1178E, 1st floor AL FAHAD, SABA school cross road, Puttiyara, Kozhikkode	2722222 / 3243745	MrMukundan
Kerala	Kunnankulam	V Star Mobiles	ROOM NO 4/289/B2 2nd floor; City complex, Opp Tempo Park, Town Hall road, Kunnankulam.	320009	MrVijayom.K.V.
Kerala	Manjeri	Integrated Computer Systems	Royal Tower, TB Road, Manjeri - 676121	3299686	MrThomason Chacko
Kerala	Mavelikara	Ettutharayil Agencies	GROUND FLOOR, KOIPPALLIL ROYAL ARCADE, PUTHIYAKAVU, MAVELIKARA-690101	3293340	MrBiji
Kerala	Palai	Cyriac TV Plaza	Vypana Building, Petta Road, Palai.	329746	MrTom Cyriac
Kerala	Palakkad	Orion Techno Solutions	12/310/15, FIRST FLOOR, METRO COMPLEX, HEAD POST OFFICE ROAD, PALAKKAD-678001	3200255	MrKhaja Hussain

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Kerala	Pathanamthitta	Melamparambil Agencies	10/264, Main Road, Town, Pathanamthitta - 689645	2223332	McM.VFrancis Oommen
Kerala	Thalassery	Sahar Communication	44-1929, 1st Floor, MACKSON MONOR, OPP: PARIS RESIDENCY, LOGANS ROAD, THALASSERY	3208585	MrAjai
Kerala	Thiruvalla	Sangeetha Electronics	524/17, Central Tower, Cross Junction, Thiruvalla	3203000	MrRanjeev Kumar
Kerala	Thiruvananthapuram	Appolo Systems	Thelungu Chetty Complex, Shop No 23-24, Kalpalayam JN Karamana, Thiruvananthapuram 695 002.	2340523	McSantosh
Kerala	Thiruvananthapuram	Smart Mobile	TC 2/3554(5), First Floor, Opp. Petrol Pump, Kesavadasapuram, Trivandrum-695004	3200105	McKrishnakumar P B
Kerala	Thodupuzha	National Electronics	Shop No 5, Aswathy Shopping Complex, Temple Junction, Thodupuzha	220320	MrAneesh M A
Kerala	Thirupryar	Nice Mobiles	382], 1st Floor, Century Plaza, N.H.17, Near Bus Stand, Thirupryar	3240400	Mr.T.PSebastian
Kerala	Tirur	Telit Telecom Shop	GROUND FLOOR, AL AMAL COMPLEX, PAN BAZAR, TIRUR	3295623	MrVasan.K.Nair
Kerala	Trichur	Cell Tech	Shop No 5/2, TC23/326, N.P:Tower Guruvayoor Road, Near Bindu Theatre, West Fort, Thrissur.	2387386	McSantom Kallour
Kerala	Vaikom	Vaikundam Electronics	II/ 214C, Mannamkerial Complex, Bus stand Road, Vallyakavala, Vaikom	326616	McSreekumar.G
Madhya Pradesh	Balaghat	Shri Computers	Keshar Plaza Complex, Hanuman Chowk, Balaghat	9300632132	McDeepak Bajaj
Madhya Pradesh	Betul	Shivam Electronics	Jiaprakash Chowk, Kothi Bazar, Auto Stand, Betul - 460001	9329099071	McVikram Motwani
Madhya Pradesh	Bhopal	Akansa Enterprises	25-26, CENTRAL MARKET, ROSHANPURA SQUARE, BHOPAL MP	7553201626	Mc Dinesh Asja
Madhya Pradesh	Bhopal	GSM Solution	M-2 CHETAK COMPLEX, ZONE -2 M.P NAGAR	4229213	McNeeraj
Madhya Pradesh	Bhopal	Music Mahal Bhopal	SHOPNO.1 NEW MARKET NEAR HANUMAN MANDIR, BHOPAL	5220725 / 2579178	McShinu
Madhya Pradesh	Chindwara	Bunty Photoelectronics	Shop No.33, Jij Bai Complex, Parasra Road, Chindwara	230358	MrRitesh Shukla
Madhya Pradesh	Dewas	New Taj Electronics	4, New Market, Moti Bungalow Main Road, Dewas	220005	McShabbir Shaikh
Madhya Pradesh	Guna	Mobile Junction	Jai Stambh Chauraha, Nr:Central Bank, Guna-473001	329277	McDeepak Arya
Madhya Pradesh	Gwalior	Galax Computers	Ground floor, Ganpati Plaza, City Centre, Gwalior	4013311	McPradeep Dixit
Madhya Pradesh	Gwalior	Versha Sales & Service-Asp	GROUND FLOOR SARAFI BAZAR LASHKAR, GWALIOR	4060444	MrAjit Kumar
Madhya Pradesh	Indore	Ayushi Electronics	UG-10, Ratnamani Complex, 7/1, New Palasia, Indore-452001	3251284	McSantosh Dwivedi

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Madhya Pradesh	Indore	IT Customer Care	UG- 11, B. M TOWER, OPP: LOTUS, SAPNA SANGITA ROAD, INDORE	3207283	Mr Sanjay Dhankar
Madhya Pradesh	Indore	Pioneer Marketing	Prem Trade center Opp.Gujarati Girls collage, Indore	4006503	MrRitesh
Madhya Pradesh	Itarsi	S.S. Telecommunications	Vijayshree Complex 5, Line Sarafa Bazar, Itarsi - 461111	9300272505	MrAkilesh Saxena
Madhya Pradesh	Jabalpur	Sri Sai Communication	C/O MUSKAN CARD GALLERY, 766, SHAHD SMARK MARG, NEAR RANITAL SQUARE, JABALPUR-482001	4046831	MrMohit Sareen
Madhya Pradesh	Jabalpur	I T Solution	Opp Dr.Grover Hospital, Gate No-3, Wright Town, Jabalpur	4014064 / 4064370	MrSanjeev Choubey
Madhya Pradesh	Katni	Excellent Infosys	20/306, Gurunanak Road, Katni	406047	MrPrafull Agrawal
Madhya Pradesh	Khandwa	Naman Refrigeration	TAPAL CHALL, KHANDWA	2230089	MrYashwant Mali
Madhya Pradesh	Mandsaur	Sky Link Mobile Services	Piyas Ice Cream Parlour; 16, Opium Godown Road, Nai Abadi, Mandsaur 458001 (M.P)	243978	MrGaurav B. Mittal
Madhya Pradesh	Morena	Mobile Plaza	M S ROAD, JIWAJI GUNJ, OPP BANK OF INDIA, MORENA	400886	MrT C Shivhare
Madhya Pradesh	Neemuch	Shree Balaji Mobiles	Jain Bhavan Road, Near Ganganagar Off, NEEMUCH (M.P)	320033	Mr.Savesh Goyal
Madhya Pradesh	Ratlam	Kirti Telecom	124 Station road Opp.Raj Tower, Ratlam - 457001	239346	MrKirti Jain
Madhya Pradesh	Sagar	Neeta Computers	Hanuman Mandir Gali 5, Civil Lines, Sagar -470001	329951	MrRamesh Gupta
Madhya Pradesh	Satna	Akashwani Agencies	OPPCMA SCHOOL, SHOP NO.2, ANNAM CHHYA, REWA ROAD	416455	MrAjay Sukhramani
Madhya Pradesh	Satna	Maa Sharda Communication	Gali No1, C/o Shri Gopal Sharan Singh, Pushp Raj Colony, Satna	7672320797	MrPrashant Singh
Madhya Pradesh	Shivpuri	Ocean Computer Corporation	1st Floor, Vishnu Mandir Market, Near Panipat Handloom, Shivpuri	225505	MrSameer Saxena
Madhya Pradesh	Ujjain	Galaxy Computers & Communication	43/2, Yarnuchi Marg, Opp Madhav Nagar Police Station, Freeranj, Ujjain	2515995 / 253999	MrAnurag Chhajlani
Maharashtra	Ahmednagar	T V Spot	B-3, ADARSH SAMRUDHI, NR. CHOLUPATI, KARANJA-414001	2326267	Mr Anil Apte
Maharashtra	Akola	Supra Computers	Ushakiran Complex, Shastri Nagar, Opp. Hotel Surya, Akola.	9328666469	MrPrashant
Maharashtra	Amravati	Scorpio Services	Shop No. 84, Ground Floor, GulshanTowers, Nr. Panchsheel Cinema, Amravati, Pin-444601	2567302	Mr Pramod
Maharashtra	Aurangabad	Electronics World	Sahyadri Building, opp. To Shivaji School, Khokadpura, Aurangabad-431001	6454532	Mr Rauf

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Aurangabad	Unique Telematics	SHOP NO. 108A, FIRST FLOOR, 'TAPADIYA SUPAR' MARKET, NR.RALA BAZAR, AURANGABAD -	2356447	Mr.Mahesh
Maharashtra	Beed	Shree Enterprises	Behind Raj Hotel, A H Wadia vacnalay rd, Beed	9373701010	Mr. Rajiv Joshi
Maharashtra	Chalisgaon	Mobile Point	SHOP-22, MOMAYA COMPLEX, NEAR BUS STAND, CHALISGAON	9372712777	Mr. Dashtraath Vaishnav
Maharashtra	Chandrapur	Shiv Communications	Ramnagar, Near Durga Mata Mandir, Sindhi Colony, Chandrapur-442 401	329546	Mr.Mahesh
Maharashtra	Chinchwad (Pimpri)	Ritz Communication	Shop No 10, 'A' wing, Jai Ganesh Vision, Next to Hotel Neelkanth, Near Fam Multiplex, Akurdi, Pune-411033	27485613 / 32661900	Ms Nikita
Maharashtra	Dhule	Pearl Communications	Shop no 3, CKB arcade, Near Despur Bus stand, Agra rd, Dhule	324666	Mrs. Sonu Atul Bang
Maharashtra	Gondia	M/S V2 Care	Opp. Cofee house, Railtoil, Gondia 441614	329322	Mr. Krishna Sargam
Maharashtra	Hatkangale (Ichalkaranji)	Sai Vision Services	11/236 MOHAN ARCADE SHOP NO B14, STATION ROAD, TAL- HATKANGALE, CITY:ICHALKARANJI-416115	2439989	Mr Sameer Bhonsale
Maharashtra	Islampur	Solar Shoppay	Kachare Lane Islampur, Distl Sangli	9326777603	Mr. D.H.Patil
Maharashtra	Jalgaon	TelUs Associates	Shop No 16, 'G' Wing 1st Floor Near Tarun Bharat Office, Golani Market, Jalgaon Maharashtra.	9370164545	Mr. Shaikh
Maharashtra	Jalna	Megha Multi Serices	Shop no 04, A wing, Udhan complex, Jalna	9326201408	Mr. Narendra Kulkarni
Maharashtra	Kolhapur	Sms Services	S5, Diwan Tower, Opp. Nutan Marathi School, Near Mirajkar Tikdy, Kolhapur, Pin -416005.	2541120	Mr. Prakash Patil
Maharashtra	Kopergaon	Om Sai Mobile	Opp. ST Bus Stand, Daharangaon Road, Kopergaon, Dist Ahmednagar.	9373295009	Mr.Mahendra Devkar
Maharashtra	Latur	Hindustan Mobiles Services	Side no. III, Shop 59, 49 Gandhi Market, Near Bhalkhandra Blood Bank, Latur-413512	641111 / 982345500	Mr. Sandeep Panande
Maharashtra	Malegaon	Cell Care	Shop no 59, SR no 57, New Islampur, Malegaon	9326211996	Mr Ansari Mohd Israfil
Maharashtra	Mumbai	Cyber-Gyan Convergence & Services (India) Pvt. Ltd.	43/44, Gold Filled Plaza, Sion Bandra Link Road, Sion, Mumbai-400017	24075939	Mr. Jatin Parekh
Maharashtra	Mumbai	G.P.Electronic	Shop No 6 Ambika Cooperative Housing Society, Jawahar Nagar Road No 2, Near Railway Crossing, Goregaon West, Mumbai 400062	2232633960	Mr.Mayur

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Mumbai	Grace Tele Services	Shop no 3, C/1, Manik Nagar Soc, Punjabi lane, Borivali (W). Mumbai 400092	32455033	Mr Daniel
Maharashtra	Mumbai	Komplex Telecom Corporation	Shop no.A/19, Noorfan Nagar Premises Co. Op. Htg. Society Near Bandra Rly. Stn., Towards Bandra Talav, Turner Road, Bandra (West) Mumbai 400050	64147153	Mr. Sutar
Maharashtra	Mumbai	LG Service Centre	Shop No.1, 2, 3 Ground Floor, Rajakamal Bldg, Opp.Ram Mandir, Subhash Road, Vile Parle(E) Mumbai 400 057	26134917	Mr Rakesh / Omkar
Maharashtra	Mumbai	Paras Telecom	2nd floor, Rear Side Capital Cinema Building, Wauddy Road, Opp. Mumbai CST Railway Station, Mumbai	65279042	Mr Ravindra
Maharashtra	Mumbai	Sai Tele Services	A-110, Satyam Commercial Complex, M.G.Road, Chalkoper (E), Mumbai - 400 077.	40111264	Ms. Isha
Maharashtra	Mumbai	Sierra Mobiles	Opp Prabhu Darshan, L.J.Road, Shivaji Park, Near Shiv Sena Bhavan, Mumbai 400016	24382200	Mr Anurag
Maharashtra	Mumbai	Trident Communications	8-A, Vasant Smruti, Dadasaheb Phalke Road, Beside "BharatKshetra Building", Near Dadar station(E), Dadar -East, Mumbai - 400 014.	65047270	Mr Kalpesh
Maharashtra	Mumbai	Yash Telecom	Dadarkar Tower, Shop no.1, Opp.Film Centre, Near Crossroads, Tardao, Mumbai - 400 034	23522702	Mr.Girish
Maharashtra	Mumbai	KBs Communications	Shop No.2A, Maharashtra Seva Sangh, Near Apra Bazar Nehru Road, Mulund (West), Mumbai-400080.	32107410	Ms. Harsha
Maharashtra	Nagpur	Epoch Services	Shope No. UG-9, Bhakati Vihar Complex, Chapru Nagar Square, Lakadganj, Nagpur -440008	3246777	Mr. Girish
Maharashtra	Nagpur	Shivatronics	B-31 Sai Regency Complex Ravi Nagar Square Nagpur Maharashtra 440044	9300892579	Mr. Ravi Gupta
Maharashtra	Nagpur	Spectrum Marketing	Shop No.2, Dharampeth Towers, West High Court (WHC) Road, Dharampeth, Nagpur - 440010	22527823	Ms. Sonali
Maharashtra	Nanded	Devansh Microtronics	Beside Forest office Nc Ranbidkar Resi.Nanded	249789	Mr Prashant Pakhate
Maharashtra	Nasik	Mobs Associates	SHOP NO. 8A, FIRST FLOOR, 'KAPOTE-MEHER MARKET, RENUKA NAGAR, WADALA NAKA, DAWRKA, NASIK	6523613	Mr. Alim Kazi
Maharashtra	New Mumbai	Beekeyen Enterprises	Block No 1, Shop No. 17, Mahaveer Milan, Sector 28, Near Blue Diamond, Hotel, Vashi, New Mumbai	65114304	Mr. Shailesh
Maharashtra	New Mumbai	LG Service Centre- Dak	H Block, Ground Floor, Dhirubhai Ambani Knowledge City, Navi Mumbai-400709	30386032	Mr. Sachin

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Panel	Oceanic Tele System	Shop No. 3, Sai Arcade, Sector 15, New Panel (E), Dist. Raigad.	9322127221	Mr Chetan
Maharashtra	Pen	Skyphone Enterprises	SHOP NO 3, SHREE COMPLEX, OPP UNIQUE BAZAR, PEN KHOPOLI ROAD, PEN, DIST RAIGAD-402107	9373455000	Mr Kuldeep
Maharashtra	Pune	Horizon	32A, Lotus Court, Near Hotel Panchami, Pune Satara Road, Pune.	32501222	Mr Nilesh Pundye
Maharashtra	Pune	Microchip Solutions	Akshay Chambers 216 Naryan Peth, Near Bhide Bridge, N C Kelkar Rd, Pune-411030	24471155	Mr Mahyesh Bhosale
Maharashtra	Pune	Mobile World	G-25, AKSHAY COMPLEX, DHOLE PATIL ROAD, PUNE-411 001	30942268	MrPawan Mantri
Maharashtra	Pune	Vii Info Technologies	Shop No-4, Amit Complex, 474, Sadashiv Peth, Opp New English School, Tilak Road Pune Maharashtra	24434134 / 9322206000	MrVivek Surve
Maharashtra	Ratnagiri	S P Electronics-Pune	shop no-19, Parasmani Complex, K C Jain Nagar, Nr Maruthi Mandir, Ratnagiri-415612	329556 / 221982	MrSantosh Prabhu
Maharashtra	Sangamner	Rajpal Telecom	Yashodhan complex, New Nagar Rd, Near hotel Chaitali, Sangamner	320888	Mr Harish Rajpal
Maharashtra	Sangli	Ramesh Electronics	Dr G. S. Joshi Banglow, Opp. B.Ed Collage, Rajwada, Sangli, Tq. Miraj, Dist- Sangli.	2327601 / 09372407601	Mr Suresh Shegane
Maharashtra	Satara	Shivkal Mobilink	173/6/7 Raviwarpath shop no-11, Vithal Lila Complex, Powai Naka, opp Janta Bank, Satara-415002	325212	Mr Mahesh Shinde
Maharashtra	Shrirampur	Siddharth Infocom	Shop No 1, Hotel Sidhartha Building, Sidhartha Stop, Sagamaner Road, Shirampur-413709	9326611445	Mr Kedar Fargade
Maharashtra	Solapur	Athava Electronics Pun	940/2 NORTH SADAR BAZAR, GARUD BUNGLOW, SOLAPUR-415003	2317595	Mr Umesh Kamalapurkar
Maharashtra	Solapur	Jawaharalal Radio Service	184, Gold Finch Peth, nr Hotel Ritesh, Solapur - 413007.	2725030	Mr Prasanna J Chavan
Maharashtra	Thane	Ekadant Corporation	Shop No 1, Ground Floor, Laxmi Smruti CHS, Opp Bal Ganesh Temple, Near Makhamli Talao, Eduji Road, Charai, Thane (W) 400602.	32150222	Mr Pansh
Maharashtra	Thane	E-Link Solutions	Shop No.5, Type C, Bldg no.5/6, Shanti Vihar, Mira Road -E	9322839386	MrOmkar
Maharashtra	Kalyan	Sky Lark Associates	Shop:1, 'X' Wing, Suresh Tower Co-op. Hsg. Soc. Opp. Municipal Vegetable Market, Santoshi Mata Road, Kalyan (W)	3209899	Mr Pravin
Maharashtra	Bhivandi	Varad Electronics	SHOP NO2, PRABHU CHAYA BLDG, PRABHU ALL NEAR OLD GOVT. HOSPITAL, MANDAJ, BHIVANDI, DIST THANE	222653	Ms. Swati
Maharashtra	Vashi	Beekeyen Enterprises	Block No 1, Shop No. 17, Mahaveer Milan, Sector 28, Near Blue Diamond, Hotel, Vashi, New Mumbai	65114304	Mrs. Kartiki

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Yarar	Siddhivinayak Tele Services	Shop no 5&6, Vishnu Prasad Complex, Opp Utkarsha School, Near S.T. Bus stand, PP Marg, Yarar (West)	32538111	Mrs. Vaishali
Maharashtra	Wardha	Libra Electronics	C/o Anand Optical, Soshalst Chowk, Main Road Wardha Maharashtra-442001	2242109	Ms.Marjusha
Maharashtra	Yavatmal	Combine Electronics & Services	Shop No 13, 1st floor, Old Indira Gandhi Market, Azad Maidan Road, Yavatmal-445001	9822200166	Mr. Ajay Shukla
Maharashtra	Yavatmal	I T Services	Nr datay college, C/o Yahoo cyber cafe, Yavatmal 445001	9372610121	Mr.Umesh Gadwe
Maharashtra	Yavatmal	Star Electronics	Near Shyam Talkies Ram Mandir Road Yavatmal Maharashtra 445001	2324106	McSnajay Chabda
Meghalaya	Shillong	Rhapsody Care	E N COMPLEX, G.S. ROAD, Below Town Pharmacy	2547946	Mr.R.R Wazi
Orissa	Anugul	Creative Solution	Hanuman Bazar, Near gundicha mandir, Angul-759122	329207	Mr Tapas Sahu
Orissa	Balasore	Raghnath It Solutions	Azimabad, Proof Road, Balasore-756001	329267	McSujit Kr Sen
Orissa	Berhampur	Rashmi Electronics & Computers	Shop No.19, Sai Complex, Main Road, Gandhi Nagar, Berhampur, Orissa	3290409	Mrs. Rashmi Ranjan Sharma
Orissa	Bhadrak	A B Associates	NrReliance Web World Express, Bypass Road, BHADRAK-756100	9337040450	Mr. Kartik Chandra Rout
Orissa	Bhubaneswar	Miracle Services It Extn.	Plot No. 136, Ft. Lane of Vigilance Office, Beh. Passport Office, Surya Nagar, BBSR.	2532383	MrChaco/ Suprava
Orissa	Bhubaneswar	S.A.Infosys	291.Bomkhal, Opp.Akamra cinema hall, Bhubaneswar-751010	2573114	Mr. Ashwini K Sahoo
Orissa	Cuttack	O.A.Infotech	Behind Govt Bus Stand, Badambadi, Cuttack -753012	9358912613	Mr Arabind Rout Ray
Orissa	Puri	Bajinath Infocomm	At Municipal Mkt, Grand Road, Puri-752001	9337032005	MrAjay/ Sandeep Agrawal
Orissa	Rourkela	Infosys	13, Biera Road, subhadra complex Opp.Choudhary Petrol Pump, Rourkela	9337403999	Mr. Arun Ghosh
Orissa	Sambalpur	A.N.Communication	Inf. Of Zilla School, Pensionpara, Sambalpur-768001	9337660919	Mr. Md. Abdul Aziz
Punjab	Amritsar	Bajji Telecommunication	87, G Floor, Nehru Complex, Lawrence Road, Amritsar-143001	3258599	Mrs.Suman Bajaj
Punjab	Barnala	Unique Infotech	Mittal Street, Near M C Office, Barnala-148101	238007	MrPankaj Goyal

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Punjab	Batala	Dream Services	Shop No 111 Opp Improvement trust office, Dharamsingh Market, Batala.	9316676018	Sandeep Singh
Punjab	Bhatinda	Lalli's Electronic Gallery	1139-A, First Floor, Amrik Singh Road, Nr Cole Digg, Bhatinda-151005	2239500	MrAshok Kakria
Punjab	Chandigarh	New Tech	SCO 495/496 SEC 35C First floor	9814244862	MrPawan
Punjab	Chandigarh	Vignesh Services	S.CO- 189-90, Sec- 34, Chandigarh	3018028	MrMukesh Arya
Punjab	Hoshiarpur	Kuldip's Mobile Care	Dhobian Wall Gali, Phagwara Road, Hoshiarpur-146001	226906/ 2232906	MrKuldip
Punjab	Jalandhar	Mobile Center	235/1, Saheed Udhm Singh Nagar, Backside Hotel Preet, Nakodar Road, Jalandhar-144001.	3292666	MrVikas Sangar
Punjab	Kapurthala	Arun Electronics	217, C Block, Jama Masjid, Shopping Complex-144601	329254	MrArun Khosla
Punjab	Kotkapura	Om Mobile Service Centre	1ST FLOOR DHANU RAM PANSARI, Railway Road-151204	223069 / 9815759239	MrRohit Mittal
Punjab	Ludhiana	Anant Shree Comp	19K Opp PAU Gate no 1 Ferozpur Road	3245386	Ms Moria chaudhary
Punjab	Ludhiana	Shahi Communication	Shop No.5, Revolving Restaurent 4X International, 583 L, Model Town, Ludhiana	3244190	MrAmit Shahi and mevinal
Punjab	Malaut	Khurana Mobile Solution	SHOP NO 7 OPP NEW TELEPHONE EXCHANGE G T ROAD MALLUAT PIN NO = 152107	9316940003	MrRamesh Khurana
Punjab	Malerkotla	Prime Infocomm	Opp. Main gate, Govt College, Malerkotla-148023	253899	MrRohit Bansal/ Raj Verma
Punjab	Mandi Gobindgarh	Aditya Infocom	Main Iron Market, custom and esise office Mandi Gobindgarh	326896	MrNaresh Aggarwal
Punjab	Mansa	Sharma Telecom	Cinema Road NAGINA MARKET OPPPARKASH BOOK DEPOT, Mansa	9316173009	MrUdesh Kumar Sharma
Punjab	Moga	Rashpal Telecom	6, Red Cross Road, Court Road, Near Old Court, Moga-142001	222468	Mr Rashpal Singh
Punjab	Nabha	Echo Telecom	Opp. Milan Palace Circular Road, NABHA 147201	504501	MrGirish Garg
Punjab	Nawashar	Kapoor Electronics	Kothi Road, Opp Kumar Hotel, Nawashahr-144514	508085	MrNarender Pal
Punjab	Pathankot	Leo Comp	Near Tourist hotel, military ground, Pathankot	9814586406	MrMr Kamal
Punjab	Pathankot	Touch Infosys	189 Opp. Guru Nanak Park, Model Town, Pathankot.	3290300	MrNavdeep Singh Bedi

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Punjab	Patiala	Image Services	Shop No.84, First Floor, Leela Bhawan Opp Punjab National Bank, Patiala-147001	2222796 / 9872281524	McRohit Bansal
Punjab	Phagwara	Bansal Telecom	G T Road, Railway Road Chowk Near Connect Office, Phagwara-144401	461321 / 9888005339	McMangalesh
Punjab	Rajpura	M K Enterprises	Shop no.6, Gurudwara Singh Sabha Market, Rajpura Town-140401	2652569	McJohny
Punjab	Ropar	Arora Communication	Shop No.1, Lehari Shah Mandir Road, Ropar	987263032	McAmit Arora
Punjab	Samana	Sangam Mobile Care	Tehsil Road, Near Garg Laboutry	505648	McVaneet Kumar
Punjab	Sangrur	National Computers	SUNAMI GATE, Near Guru Nanak School, SANGRUR PIN NO = 148001	233335 / 9814586196	Mc.Sarabjit Singh
Punjab	Sarhind	A.S. Infocom	Grain Market, Cinema Road Sirhind City-140406	500726	McJaspreet Singh
Rajasthan	Ajmer	Nehal Infotech	F-3, FIRST FLOOR, AMAR PLAZA, Opp. DAULAT BAGH, AJMER-305001	3291404	McSuresh Sharma
Rajasthan	Ajmer	Prangan	112/10, Civil lines, Ajmer	9828503092	McPareek
Rajasthan	Alwar	R.K. Telecom	SHOP NO.112, FIRST FLOOR, GANPATI TOWER NEAR NANGLI CIRCLE, Alwar	9351390057	Umesh sharma
Rajasthan	Beawar	Srikrishna Infocom	Chaoni Road, Bhagat Chauraha, Near Roadways Bus Terminus, Beawar	329675	Mc Dheerendra Agrawal
Rajasthan	Bhilwara	Ajanta Communications	No3, Bapna Complex, Pur Road, Bhilwara	329549	Rafiq
Rajasthan	Bikaner	Tech Solutions	1st Floor, 222 & 223, Ganpati Plaza, KEM Road, Bikaner	3292423	McAziz/Vika
Rajasthan	Chittorgarh	Arihant Infotech	A46, Meera Market, Near Rajasthan Patrika Office, Chittorgarh-312001	325935	McAbhishek
Rajasthan	Chomu	Tambi Telelink	Kotwali chabutra, dhan ji ki gali, Sadar Bazar Chomu-303702	9314090400	McAnup Tambi/ Dp Saini
Rajasthan	Dholpur	Tirupati Telecom	14, Bhagwati Market, Near Jagan Cinema hall, Jagan Tiraha, Dholpur	9314014093	McMoshin/ Devender
Rajasthan	Jaipur	Alpha Infotech Systems	F-1, First Floor, Krishna Mall, Lakshmi Mandir Crossing, Tonk Road, Jaipur-302015	3299724	Shatrugan mangal
Rajasthan	Jaipur	Alliance Communication	C6, City plaza, Space Cinema Hall, Jhotwara Road, Jaipur-16	9351371549	Amit/Bhushan
Rajasthan	Jaipur	Solution Computers	Plot No.4 Krishna Nagar StationJanpath Near Hotel Paradise Jaipur	5106388	McDhreej Mathur
Rajasthan	Jhunjunu	M S Mobile Point	Kaswan Complex, Opp Roadways Bus Stand, Jhunjunu	931401951	McAbhishek / McSunil
Rajasthan	Jodhpur	Omega Electronics	Plot No.196 SS Tower, AkhaliyaChowaha Jodhpur-342003	3291214	McPratap Singh

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Rajasthan	Kishangarh	Capital Enterprises	5, Radha Krishan market, Opp. Sardul school, Kishangarh-305801	326550	McShatrughan
Rajasthan	Kota	Cyber Infosystems	26, Ground floor, Kalawati Palivali market, Gumanpara, Kota-324007	2392153	Mr Rajish
Rajasthan	Kota	Saya Electronics	1-TA-16, Vignyan Nagar, Kota	9828503246	MrLalit
Rajasthan	Kotputli	Isha Communications	T1, ground floor, Govardhan plaza, Nehru Bazar, Kotputli	9314140001	MrVijender
Rajasthan	Nagaur	Jam Appex	Shop num.7, Opp. Old power house Ram Poll, Station road, Nagaur	329595	MrAmit
Rajasthan	Nathdwara	Geniune Infotech	Shop num.10, Suriya apartments, Opp.Vandana talkies, Bus stand, Nathdwara.	329208	McGajender/Mr Ashwini Purohit
Rajasthan	Pali	Mansi Mobile	9, Vasant Vihar, Opp. Bangur college, Pali-306401	9352766555	MrAbhishek
Rajasthan	ShrigangaNagar	Telecare Servecies	33, J Block, Near Birbal Circle, SriGanga nagar	3207687	Abhishek
Rajasthan	Sikar	Rita Computers	Shop No.4, Kabra Market, Shramdan Marg, Sikar-332001	329320	McSaurav Chakravarthy
Rajasthan	Udaipur	Shree Telelink	31, First floor, Indra prasth complex, Delhi gate, Udaipur-313001	3261777	Tarunjay Jain
Tamilnadu	Ambasamudram	A to Z Communications	63-D, KNY Complex, Santhai Bazaar, Ambasamudram-627401	251143	Mr Raja Selvakumar
Tamilnadu	Arkonam	G.M. Marketing	NO.3/4, SUBURAYAN STREET, ARAKKONAM-631001	231595	McMrP.Gajapathi
Tamilnadu	Arni	Digitech Computers	Shop No. 201/82- B1, SM Road, Arani - 623101	223929	McD.Mohan Ram
Tamilnadu	Aruppukottai	The Mercury Computers	607, MADURAI ROAD, NEAR NEW BUS STAND, ARUPPUKOTTAI-626101	222552	Mc R. Boominathan
Tamilnadu	Attur	VR. Net	VR.Net, DtArumugam complex, salem main road, ATTUR	243585	McSenthil Kumar
Tamilnadu	Batlagundu	Karthik Communications	No 221, Main Road, Batlagundu- 624202	9360019090	Mr Lakshmanan
Tamilnadu	Bhavani	Sri Abrami Electronics	2E, Pavadi Street, Anthyur Corner, Bhavani-638301	230919	Mr Balamurugan
Tamilnadu	Chegalapatu	SKB Electronics	No-42 Devarajanan pillai Street, Vedachalam Nagar, Chengalpet	37406080	McBalaji
Tamilnadu	Chennai	Genesis Communication	63/3, First main road, Gandhi Nagar, Adyar, Chennai-600020	24401188	Mr Suresh
Tamilnadu	Chennai	CS Systems	547/352, F M Towers, Mount Road, Nandanam, Chennai-6000035	24330889	MrNicholus
Tamilnadu	Chennai	Sabisu	B2, Golden Enclave, New 275, Old 184, Poonamallee High Road, Kilpauk, CHENNAI 600 010.	26612347	MrPalani
Tamilnadu	Chennai	Unicare Infocomm Services	No.293, Arcot Road, Next to Indian Overseas Bank, Kodambakkam Chennai - 24	24724666 / 52047059	McKartik
Tamilnadu	Chennai	Garage De Telecom	OLD No:30- NEW No:10, KMBF BUILDING, 1ST FLOOR, DURAISAMY ROAD, NEAR POTHYS, TNAGAR, CHENNAI 600017	28143454	

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Chidambaram	Future Tech	Hasan Towers, 1st Floor, No. 14, V.G.P Street, Near Hotel Ritz, Chidambaram	222150	Mr.Shaker
Tamilnadu	Coimbatore	Classic Electronics	No 1/1, Alagappa Road, 6th St, Tatabad, Coimbatore - 640012	4374875	Mr Aniradhagan
Tamilnadu	Coimbatore	Fast Track	138-C, TV Swamy Road (West), RS Puram, Coimbatore - 641002	2551155	Mr Anand
Tamilnadu	Coimbatore	Nucom Services	3/61, Master Building, Kattoor Road, Pappa Naicken, Palayam, Coimbatore - 641037.	4351569	McUthaman
Tamilnadu	Cuddalore	Kasturi Cellular Service	NO. 37 (2C) BHARATHI ROAD, CUDDALORE. 607 001, CUDDALORE DISTRICT, TAMIL NADU.	220183	Mr Raghupati
Tamilnadu	Cumbum	LG Mobile Service Gallery	No 52, Gandhiji Street, CUMBUM-625516	320800	McSenthil Kumar
Tamilnadu	Dharapuram	IT Zone	40-A-1, Bye Pass Corner, Dharapuram-624202	329293	Mr Ramakrishnan
Tamilnadu	Dharmapuri	Calrity Digital Photo&Audio	98/29C KANDASAMY VADTIAR STREET, DHARMAPURI, 636701	329707	MrRaj Murugesan
Tamilnadu	Dindigul	Padma Electronics	15, Dudley high School, Dindigul	9367927080	Mc Murali Chandra
Tamilnadu	Erode	Jans Electronics	29, Sathy Road, Near Hotel Oasis, Erode - 638004	3258526	Mr Kannan
Tamilnadu	Gobichettipalayam	Best Electronics	47a/1, kms complex kachery medu, gobichettipalam	225598	MrG.Ajayakumar
Tamilnadu	Hosur	Suryas Will Of People	R S Towers, Opp Traffic Police Station, Bangalore By Pass Road, Hosur-635109	246687	McShanmugam
Tamilnadu	Kalluruchi	New Magestic Cell Sales&Service	OPP TO TELEPHONE EXCHANGE, GANDHI ROAD KALLAKURICHI	228270	Mr. Murugesan
Tamilnadu	Kanchipuram	Classic Mobile Care Centre	Door No.67-A, (Shop No.5), P.S.K. Street, Kancheepuram-631 501	9345636900	McDamodaran
Tamilnadu	Karaikal	Shree Hari Cellular Service	OPP. TO NEW BUS STAND, BHARATHI MAIN ROAD, KARAIKAL-609602	320544	Mr. K. Selvagnapathy
Tamilnadu	Karaikudi	Sitiyes Electronics	10 A / 3, Muthalakashmi Complex, Opp to Income Tax Office, Sekkalai, Karaikudi - 630002	9362611455	Mr. S. Veerapandian
Tamilnadu	Karur	Aswathi Electronics	No 90 / 102, Old Bye pass Road, Karur-639001	9843045555	Mr Satish Kumar
Tamilnadu	Kovilpatti	St.Marys Cellphones	No.6, Rajakumari Towers, AKS Theater Road, Kovilpatti	9360533649	MrJyappan
Tamilnadu	Krishnagiri	Madura Care Centre	No 361, Crown Complex, Bangalore Main Road, Krishnagiri-635001	9364258223	Mr Suresh Kumar
Tamilnadu	Kumbakonam	Fargan Electronics	NO.5 VRS COMPLEX, HAJAR STREET, KUMBakonAM- 612001,	2401123 / 3290303	Mc Surbudeen

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Kuzhithurai	Mobile Care	Shop no 211, SM Arcade, Main Road, Marthandam, Kuzhithurai - 629165	270587	Mr Surendra Kumar
Tamilnadu	Madurai	Devaa Electronics	No.4, Thirumakulam North Street, Near Ayyappan kol, Thilhalakulam, Madurai-625002	4360995	Mc Guna
Tamilnadu	Mayiladuthurai	Nrs Mobile City	NO-28 - C/14, R.R.COMPLEX, MAILADUTHURAI	223277	Mr Abdul Rahim
Tamilnadu	Nagercoil	Redeemer Electronics	Shop no 2, Pillars Gate, Balamore Road, Nagercoil-629001	527788	McDinkar
Tamilnadu	Namakkal	VR Care	77/2, Veera Vilas, Trichy Main Road, Namakkal - 637001	329304	Mr. R. Vijayalakshmi
Tamilnadu	Ooty	Mountain Cell Com	NO:302, Band lane, Commercial road, Near Liberty Theatre, Ooty-643001.	2443787	McSujith & Miss Geetha
Tamilnadu	Palani	Hi-Tech Electronics	No.76, New Dharapuram Road, Opp. ICICI Bank, Palani - 624601	320264	Mc. R. Ramachandran
Tamilnadu	Paramathy Velur	Vishwak Mobiles	No 5, KK High School Building, 98, High school road, Paramathy Velur - 638182	224348	Mr Mohan
Tamilnadu	Pattukottai	Mobile Care	127, BIG STREET, PATTUKOTTAI	9842653921	McArul Alagan
Tamilnadu	Perambalur	The Best	Vivkanand st., M.P. office opp., Perambalur	275717	McPKamar
Tamilnadu	Perundurai	Sree Baby Electronic	483 mainroad, perundurai	221800	McShiva Balan
Tamilnadu	Pollachi	Star Mobiles	SHOP NO. 5 Ground Floor, Vasanth Complex, Innamkan Street, POLLACHI.	222230	McSenthil Kumar
Tamilnadu	Pondicherry	Digital Logistics	126/2, Perumal Koil Street (Bharathi Street Cutting), Pondicherry-605001	4210148 / 9843093348	McC Singaravelu
Tamilnadu	Pondicherry	Balaji Electronics	No:21, 3rd CROSS STREET, Annanagar, PONDICHERRY.	3090414	
Tamilnadu	Ponneri	Sri Balaji Mobile Care Center	NO. 26, THALUKKA OFFICE ROAD, PONNERI, THIRUVALLUR DIST-601204	27973381	McBalaji
Tamilnadu	Port Blair	Universal Service Care	R.G.T. ROAD, PORT BLAIR, ANDAMAN-744101	329588	McNaveen
Tamilnadu	Pudukottai	Yem Kay Electronics	2, Subabharathi complex, 5378, 79, Alangudi Road, Pudukottai-622001.	9344038441	McRajesh Kannan
Tamilnadu	Rajapalayam	Sri Vignesh Mobiles	292/1, TENKASI ROAD, OPP BOMBAY LODGE, RAJAPALAYAM-626117	220398	McKu.G.Muthiah
Tamilnadu	Ramanathapuram	Zeenath Telecom	13-B/23, PAL LUCKY PLAZA, RAMANATHAPURAM-623501	226750	McM.S.Jahir Hussain

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Ranipet	Unicare Infocom Services	No.36, opp.Gangadhara Muddaliar Middle School, MBT Road, Novelput, ranipet, Vellore Dist.	270806	McBasker/ McKarthik
Tamilnadu	Rasipuram	Sms Care Service	No 179 / 1, Anna Salai, Ground Floor, Rasipuram-637208	9345052553	Mr Manikavasagam
Tamilnadu	Salem	Vishwesh Mobiles	Siner Complex, 121/19A, Sarada College Road, Next to Abi Medical Centre, Salem - 636007	3290535	McVasudev Nayak
Tamilnadu	Sivakasi	Tele World	78, PARSN PLAZA, OPPTO.WATER TANK, SIVAKASI-626123	223283	McB.Mathan Kumar
Tamilnadu	Tambaram	Saravanas Infocom Services Pvt Ltd	New No-43, Old No:3A, Mudichur road, Tambaram west, chennai 600045	32915599	McPalari/ McRanjith
Tamilnadu	Tenkasi	Airtone	1/ 17, KMSS complex, west masi street, Tenkasi. 627811	227980	McM.Nagaraja Sankar
Tamilnadu	Thanjavur	Z M Electronics	1006/1007, South East Rampart, Opp to Municipal Higher Sec School Tanjore - 613001	272595 / 329554	McZiauddin
Tamilnadu	Tindivanam	Reva Communications	Old No. 117/1, New No. 205/1, Nehru Street, Tindivanam - 604001	225250	McLakshmi Narayanan
Tamilnadu	Tiruchendur	Ark Mobile Solutions	ARK DTP centre, No. 1 a 7 North car street, Rayan Complex, Tiruchendur. 628215	329380	McMahesh
Tamilnadu	Tiruchengode	Balaji Electronics	108 s s d road, near lorry stand tiruchengode	325430	McSekar
Tamilnadu	Tirunelveli	Classic Electronic	39, Trivendrum Road, Opposite Kalimark, Welcome Complex, Palayamkottai, Tirunilveli-627002	2575801 / 3290339	McErkins
Tamilnadu	Tirupattur	Acal Computer Systems	52/1, M.c complex, krishnagiri road, tirupattur	325385	McSunder
Tamilnadu	Tirupur	Shri Vasavi Electronics	# 155-303, Mangalam Road, Karuvam palayam, Tirupur -641604	4244009	McU.B. Bala Marali
Tamilnadu	Tiruvavur	Softel Teleservices	No 21, Municipal Complex, Ground Floor, Panagal Road, Tiruvavur-610001.	22110	Mr Ravi
Tamilnadu	Tiruvellore	Yamkarna Computer	38/186 JAWAHARLAL NEHRU ROAD, OPP TO SBI MAIN BRANCH, THIRUVALLUR - 602 001	37600329	Mc Saravana
Tamilnadu	Trichy	S K Electronics	Raj Complex, 9/A EYR Road, Puthur, Trichy- 620017	277194	McKrishnan
Tamilnadu	Tuticorin	Snows Cell Care	Kala Complex, No 20, B-1, W G C Road, Tuticorin-628002	2334043	McKennedy
Tamilnadu	Udumalpet	Alwa Electronics	5 Thukova vellar shopping complex, V.O.C. street, UDUMALPET.642126	223047	Mr Sentamarai Kaman

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Vaniambadi	Reva Communications	No.848/3, CL Road, Vaniyambadi - 635 751	395023	McLakshmi Narayanan
Tamilnadu	Vellore	Matha Communication	4, S.LN Plaza, Opposite Odai Pillar Koi, Gandhinagar, Vellore - 632006	2240800	McCunaa Shekhar
Tamilnadu	Villupuram	Broad Band	No 642, Nehruji Road, VILLUPURAM	222936	McPragasam
Tamilnadu	Virudhunagar	RBG Electronics	76/9, Lakshmi Complex, Pullalakkottai Road, (Opposite Uzhavar sandhal), Virudhunagar-626001.	420160	Mr Karpuswamy
Tripura	Agartala	VIDEO S R	7Melarmath, H.G. Basak Road, Agartala, West Tripura, Pin:799001	2328539	Arunabha Saha
Uttar Pradesh	Agra	Ankur Care Centre	27-G/111, Hotel Panchratna Building, Opp. Income Tax Building, Sarjany Place, Agra-282002	9412254152	McAnkur Coyal
Uttar Pradesh	Aligarh	A.V.Computer Services	City Enclave opp. Kumar Nursing Home Ramghat Road	3200900	McVaibhav Gupta
Uttar Pradesh	Aligarh	Infocare	17, Vikram Arcade, Railway Road, Aligarh -202001	3258080	Mc Prabal Bansal
Uttar Pradesh	Allahabad	Micronet Solution	B 38/1, SHOP NO. FF3 VASHITSTHA VINAYAK TOWER, TASHKAND MARG, CIVIL LINES, ALLAHABAD	9335395183, 3250231	Mc Hashmi
Uttar Pradesh	Allahabad	Radio Centre	SHOP NO-3 1ST FLOOR MEENA BAZAR, Allahabad	3292488	Mc Manish Khanna
Uttar Pradesh	Amroha	Shree Jee Traders	Bazar Zatt, Near Tehsil Moc. JPNagar AMROHA-244221	9319075289	McArun bhargav
Uttar Pradesh	Azamgarh	Rajasthan	ASIF GANJ, CHOWK, AZAMGARH-276001	223644	Mc Triloki Nath Jalaan
Uttar Pradesh	Badyun	Customer Care Services	Plaza Market 1st floor Near Chantaghar sirroad Badyun.	9319697938	Mc Nazim
Uttar Pradesh	Baila	Sankatha Communications	Mall Godam road Ds.S. N.pandey Clinic Chowk Baila-277001, UP	9307637850	Mc Manish
Uttar Pradesh	Barabanki	Yash Enterprises	Rashid Enclave, Mugal Darbar, First Floor, Nagar Palika Road, Barabanki	9336323714	Mc Ajay Srivastava
Uttar Pradesh	Bareilly	Jai Infotech	SA-24 DEENDAYAL PURAM BAREILLY	3208484	Mr Rohit Tandon
Uttar Pradesh	Bareilly	Sapan Infotech	G - 64 A Kumar Complex, Near Gupta Watch Co. 116 Civil Lines, Bareilly	3299933	Mc Dhendra Negi
Uttar Pradesh	Basti	Royal Enterprises	near ses agency, janta hotel, gandhi nagar, basti	9336784054	Mc Deepak shrivastav
Uttar Pradesh	Bhadoi	Kislay Communication	Station Road, Near Narmada Girls Inter College, Bhadohi-221401	9235506029	McKislay
Uttar Pradesh	Bijnor	Konark Service Centre	Shop No.7, 1st Floor, Near Ajaz Ali Hall, Nagar Palika Complex, Bijnor-246701	9358364067	McPratyush Gupta

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Uttar Pradesh	Bulandshahr	MN Telecom	Shop No-1 BHARAMAPUTRA COMPLEX, KALA AAM, Bulandshahr	935801688	Mr Tausir Khan
Uttar Pradesh	Chandousi	Om Technologies	697, SITA ROAD, NEAR GANESH MANDIR, CHANDOUSI - 202412	9359986766	Mr.Sachin Gupta
Uttar Pradesh	Deoria	Atharav Communication	SHOP NO 5, SHANTI COMPLEX, HANUMAN MANDIR ROAD	9355226799	Mr.K.N.Gupta
Uttar Pradesh	Etah	Triveni Computer Service	688/1 Vijay Nagar, Infront of Shradha Cinema, Thandi Sadak, Etah-207001	9719398761	MrVinod Kumar
Uttar Pradesh	Etawah	Frontline Computer	132, Civil Lines, Pakka Talab X-ing, Opp. HeroHonda Showroom, Etawah-206001	9219404194	MrPuneet Kaushik
Uttar Pradesh	Faizabad	Microworld Computer Hardware Lab	1st floor, Baldev Plaza, Rekhaganj, Faizabad	395744	MrKapil/Sunil
Uttar Pradesh	Farrukhabad	Wave Technologies	2 B /122 AVAS VIKAS, LOHA PURAM, FARRUKHABAD-209625	9335921175	Mr.Dharambeer
Uttar Pradesh	Fatehpur	Trimurti Telecom Services	230, SHADIPUR CHAURAHA, NASEPEER ROAD, FATEHPUR-212601	9336223093	Mr.Sanjay Sachan
Uttar Pradesh	Chaziabad	Azure Systems	F-28 Konark Building, RDC, Raj nagar GZB	2700717	MrAseem Saraswat
Uttar Pradesh	Chaziabad	Concessionair Documentation India Pvt Ltd (Cdl)	C-83, Rajnagar District Center (RDC), Chaziabad	3292011	MrAnil Tiwari
Uttar Pradesh	Gonda	Digitech Services	Sunaj Complex Malviya Nagar, Ground Floor, In front of Distt. Mahila Hospital, Gonda	9356695719	MrAtul Singh Chauhan
Uttar Pradesh	Gorakhpur	Eternal Electronics	Shop No.11, Pandey Complex, 33, Kanya Road, Opp DIG Bunglow, Gorakhpur -275001	9336410222	Mr Ajith
Uttar Pradesh	Gorakhpur	MM Communication	Udai Trade Centre, Opp Dr H.N.Singh Medical College road, Basharatpur, Gorakhpur	3250395	Mr.Ashwani
Uttar Pradesh	Hapur	Smart Solutions	10, 1st Floor, City Plaza, Hapur, Chaziabad - 388001	9219659957	MrRajkumar Karnaaja
Uttar Pradesh	Hardoi	Shipra Electricals & Appliances	SHOP No.7 RD PLAZA, INFRONT OF VADK VIDHYA MANDIR, NEAR AGARWAL DHRAMSALA & HOTEL UTSAV, CIRCULAR ROAD, HARDOI-241001	222384	MrGaurav
Uttar Pradesh	Hathras	Arya Electricals	Bldg No.2206, Near Mayfair Hotel, Kamla Bazar, Hathras-204101	9319338655	MrSumeet Arya
Uttar Pradesh	Jaunpur	Shubham Pustakalya	Mandi Naseeb Khan, Near Siya College, Jaunpur	9336510130	MrSudhir/Sanjay
Uttar Pradesh	Jaunpur	Supreme Communication	J.P. Complex, Oland Ganj, Jaunpur	9235407278	MrMahatab Raja Beg
Uttar Pradesh	Jhansi	Krishna Enterprises	372/A CIVIL LINES, GWALAR ROAD, JHANSI-284001	9335090997	Mr.Sujeet

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Uttar Pradesh	Kannoj	Dixit Mobile Lab	SHOP NO. A1 WARSI COMPLEX, LAKHAN TIRAHA, KANNOJ	9335042373	McSunil Dixit
Uttar Pradesh	Kanpur	Aakash Electronics	63/2 C(9)BALAJI COMPLEX, THE MALL, KANPUR	9335360303	McRaman
Uttar Pradesh	Kanpur	LB Infotech	111A/409 1st floor, 80-ft road, ashok nagar, kanpur	3207303	MrDeepak Bhatia
Uttar Pradesh	Kasganj	Prem Computer Services	Roop Complex, Nadrai Gate, Kasganj-207123	9837403904	McVinay Agrawal
Uttar Pradesh	Khatauli	Sigma Systems	A-6, Shivlok Market, Near Indra Murti, G.T.Road, Khatauli-388001	9319666000	McAlok Kumar
Uttar Pradesh	Lakhimpur	S S Electronics	GURDARSHAN BUILDING, KACHEHRI ROAD, LAKHIMPUR KHERI, LAKHIMPUR -262701	9335038258	McSaurabh Sinha
Uttar Pradesh	Lucknow	Alfa Electronics	Shop No.GF20 ABC Complex, Kanpur Road, Lucknow	3248730	McHarjinder Singh
Uttar Pradesh	Lucknow	Hitech Communication	SS 205, Cross road Plaza, Badshah Nagar Crossing, Lucknow.	9335088061	MrRavi Prakash
Uttar Pradesh	Lucknow	Mobile Dot Com	shop no. 111, 1st floor, Shri Ram Towers, Ashok Marg, Lucknow	9335819202	Mr Anand Jhouri/ Archana
Uttar Pradesh	Lucknow	Net Com	3 way road, City Point, Opp Krishi Bhawan, Lucknow-226024	3294222	McVinod Sharma
Uttar Pradesh	Lucknow	RR Enterprises	Shop No.3, first floor: Deewan Chand Complex, 292/11 Chowk, Lucknow	3262263	McRohan/Yogesh
Uttar Pradesh	Mainpuri	Raj Communication	1002, Sadar Bazar, Near PNB, Mainpuri-205001 (U.P)	9358090251	McRishabh Khirbat
Uttar Pradesh	Mathura	R K Infocare	G-1, Atithya Palace, Sonkh Adda, Junction Road, Mathura-281001	3292274	McAlok Gupta
Uttar Pradesh	Meerut	Care Centre	G-19, Vardaman Plaza, Garh Road, Meerut-250005	3258427 / 4005019	McAjay Mittal
Uttar Pradesh	Meerut	Coincap Services	Labour Compound, Above Allahabad Bank, Near Akash Ganga Jewellers, Begum Bridge, Meerut	2667942	McAtul Mittal
Uttar Pradesh	Meerut	Essar Services	F-132-1333, 1st Floor, Ganga Plaza, Begum Bridge Road, Meerut-250001.	4025863 / 9837067894	McRajiv Gupta
Uttar Pradesh	MIRZAPUR	Singh Cyber	IMARTI ROAD, OPP. LIC OFFICE, MIRJAPUR-231001	9335205600	MR.Anup Singh
Uttar Pradesh	Modinagar	Ananya Communications	24, K.N.MODI COMPLEX, Modinagar-201204	325424	McNitin
Uttar Pradesh	Moradabad	Bhavya Technologies	A12, 1st Floor, Rampur Road, Gandhi Nagar, Moradabad	3292318	McVivek Kumar Singh
Uttar Pradesh	Mugalzarai	Sky Mobile World	SUPER MARKET, MUGALSARAI	9335251754	McVibhuti Jaiswal
Uttar Pradesh	Muzaffarnagar	Advance Series	Shop No-15 prakash chowk Muzaifarnagar-251001	9412210142	Mc Rajiv

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Uttar Pradesh	Muzaffarnagar	Jai Computers	Shop No. 4, 1st Floor, Roorkee road, Near Shiv Chowk, Central Bank Mkt. Muzaffarnagar-251001	3294447	McManohar Singh
Uttar Pradesh	Noida	M R. Telecom	D-329, Sector 10, Noida, (Corner Building, Noida Stadium - Jhundpura Main Road)	4312715	McKailash Aggarwal
Uttar Pradesh	Pilibhit	Kamal Electronics	Station Road, Pilibhit	9319911226	Mc M A Jillani
Uttar Pradesh	Pratapgarh	Chandra Pratap Veer & Co	KATCHERY ROAD, CHOWK BAZAR, PRATAPGARH -230001	9335050301	McRajesh Agarwal
Uttar Pradesh	Rai Bareilly	Karuna Enterprises	Shop No.6 & 7, City Complex, Kachary Road, Raeberilly	9336005741	McVikas
Uttar Pradesh	Rampur	Mamta Technologies	3fs Shopping Complex, Rahe Murtaza Road, Civil Lines, Rampur-244901	3294923	McRajeev Yadav
Uttar Pradesh	Saharanpur	Maharaj Communications	1st Floor, Pradeep Hotel Compound, Court Road, Near Indiam bank,Saharanpur-247001	3250239	McPankaj Malhotra
Uttar Pradesh	Shahjahanpur	Sunny Mobile Point	258 B TARIN BAHADURGANJI, SHAHJAHANPUR	9335019616	McRajaram Maurya
Uttar Pradesh	Sitapur	Higrade Computers	7, Municipal Market, Sitapur	9936819899	McSanjeev Goel
Uttar Pradesh	Sultanpur	S S Infocom	SHOP NO. 14&15 NANDINI COMPLEX NEAR SUPER MARKET SULTANPUR-228001	9335055217	McSachin Dawedi/Abhinav
Uttar Pradesh	Unnao	Avijit Infocom	251 Opp Collector Ganj, Unnao-209801	6820020	McVishnu Pandey
Uttar Pradesh	Varanasi	Jaiswal Electronics	SIDDHARTH COMPLEX, C-2/10-A, Ramkatora, Near Petrol Pump Lahurabic, Varanasi-221001	9335407000	McSujeet
Uttar Pradesh	Varanasi	Shivam Mobile Distributers	Shop No.5, B37/115-B-1 Baradari Complex, Rathayatra Crossing, Varansi Pin 221010	9335418998	McRakesh kumar singh
Uttaranchal	Almora	Kumar Telecommunications	Paltan Bazaar, Almora	9411525789	Mc S Kumar
Uttaranchal	Dehradun	Krishna Communication	Shop No 15A, Meedo Plaza, Rajpur Road, Dehradun, Uttaranchal-248001	0935812922 / 09358119696	McVinod
Uttaranchal	Haldwani	Fairdeal Agencies	1st Floor, Naainital Road, Uttaranchal Trade Centre, Tikonia Chouraha, Tikonia, Haldwani	282116	McAjay Gupta
Uttaranchal	Haridwar	Maharaj Computer Services	B-7 Royal Plaza, Ranipur Mod, Haridwar	9359209901	Mc Kamal Sachdeva
Uttaranchal	Kashipur	Tirpti Communications	Station Road, Main Market, Udamsingh Nagar	935900000	McAjay Gupta
Uttaranchal	Roorkee	Ceetanjali Telecom	Shop No.6, Shyam Market, BSM Tiraha, NehruNagar, Dehradun Road, Roorkee-247667.	326510	Mc Manish Kumar

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
West Bengal	Asansol	Sky Computer & Telecom	Islam Market, Nuruddin Road, Assansol-713301	2207719	McSyed Arshad Ali
West Bengal	Behrampur	Chaitanya Enterprise	152, B B Sen Road, Sadar bazar, PO Behrampur, Distt Murshidabad, pin-742101	9333310161	McSubhas Chandra Basak
West Bengal	Bolpur	Cyber World	59, SUPER MARKET, SANTINIKETAN ROAD, BOLPUR - 731204	252542	McKishor Kumar Mukherjee
West Bengal	Burdwan	San Infosys	27/1 G.T Road, East End, Burdwan -713103.	3290265	McSanjit Debnath
West Bengal	Durgapur	Digitech Service	Ashok Bhawan J.K.Pal Lane .Benachity , Durgapur -713213	3293600	McPintu Chatterjee
West Bengal	Haldia	Digitronix	Holding no -25, PO Khanjanchak, PS Durgachak, Haldia, Dist- East Medinapur-721602	277277 / 9332987527	McSuman Jana
West Bengal	Howrah	Joyram Infotech	51, Jessore Road, Habra Bazar, Das Market, Dist- 24th Pargana(North), PIN-743263	302399 / 329677	Mc Malay Das
West Bengal	Katwa	Devarshi Mobile Communication	Bhadrath Tala, Besides Ram Bhawan, Post - Katwa, Burdwan - 713130	9333611904	Mc Devananda Dutta
West Bengal	Kharagpur	S. J. Communication	Inda Main Road, Khudiram Ram Market, Kharagpur .Shop No-53. Pin -721305	324056	McMr.Suman Jana
West Bengal	Kolkata	Berna Infosol Pvt Ltd.	P-168/1 CIT Road, Scheme VJIM, KOLKATA 700 067	32943176	McArun Surana
West Bengal	Kolkata	Friends Communication	32(8) Barasat Road, N/L 15 no railgate, PO-nonachandankpur, PS-Titagarh, Barrackpore, Dist- North 24PGS, PIN-743102	25921263	McAnup Sarkar & Tarasankar Mukherjee
West Bengal	Kolkata	Jaksom Engineering Pvt Ltd	Block-A, Shop-1, Ambika Vihar, 1/1 Harduttrai Chamania Road, Howrah- 711001	32950383	McPmMukherjee
West Bengal	Kolkata	JP Computers	5B Eldalia Place, Kolkata - 700019	24401923	McSomim Kabir
West Bengal	Kolkata	Skylink	8/1A, Little Russel Street, Calcutta-700071	32903814	McH R Molla
West Bengal	Kolkata	Sun Mobile Service	15 B.T. Road, N/L Peikpara Bus Stop, Kolkata -700002	32505444	McVivek Kumar Gupta
West Bengal	Krishnanagar	Addya Electronics	Rajani mukharjee Lane, krishna Nagar, Nadia-741101	2329355	Mr Anjit Sen
West Bengal	Maldá	Deb Infotech	PIROJPUR, WOMENS COLLEGE ROAD, MALDA-732101	9434345486	McUTPAL DEY(DEBASIS)

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
West Bengal	Midnapore	Zerobit	Vill- Parbatipur, P.O.-Tamluk, Dist- Purba Midnapur, PIN-721636	267476 / 9434110802	Mr.Chanakya Sengupta
West Bengal	Nadia	Prayash	30 SWAMI VIVAKNANDA SARANI, RANAGHAT, DIST-NADIA,	9333515949	Mr. Amar Nath Malick
West Bengal	North 24 Parganas	M/s Telelink	Bashirhat Old Market(Bowbazar) ,Bashirhat Dist. North 24pgs. Pin-743411	325499	Mr. Sukanta Debnath.
West Bengal	North 24 Parganas	Molina Traders	Jessore Road, Bongoan, Dist- North 24 th Pargana, PIN-743235	325433	Mr. Subir Dutta
West Bengal	Purulia	IT POINT	N.C DAS CLUPTA ROAD, 2ND FLOOR, SONARTARI APPT(NAMO PARA), PURULIJA -723101	9333441065	Mr.Pinaki Roy Choudhary
West Bengal	Serampore	Sri Guru Mobile Service	87 B/15 G.T.Road (West), Hooghly Pin-712203	32528581	Mr.Shyamal Kumar Das
West Bengal	Siliguri	Care	sumantra bhawan,S.B.I hakim para building, 160/1030 Haren Mukharsjee Road, siliguri-734001	6450515	Mr.Srijoy Dutta

 LG	SERVICE
 *MTNL / BSNL **Prefix STD Code	1800-180-9999* 39-01-0909**

