


## CONTENTS

|  |           |                                   |           |
|--|-----------|-----------------------------------|-----------|
| <b>PHONE COMPONENTS</b>                  | <b>2</b>  | To Edit in Hindi Mode             | 13        |
| <b>ONSCREEN ICONS</b>                    | <b>4</b>  | <b>MESSAGES</b>                   | <b>14</b> |
| <b>USING THE BATTERY AND CHARGER</b>     | <b>5</b>  | Write Text                        | 14        |
| Installing and Removing the Battery      | 5         | Write E-mail                      | 16        |
| Charging the Battery                     | 6         | 1234 Services                     | 17        |
| Battery Charge Level                     | 6         | <b>INTRODUCTION</b>               | <b>19</b> |
| <b>BASIC FUNCTIONS</b>                   | <b>7</b>  | <b>MENU FEATURES</b>              | <b>20</b> |
| Turning the Phone On and Off             | 7         | <b>SAFETY INFORMATION</b>         | <b>30</b> |
| Changing the display language            | 7         | Charger and Adapter Safety        | 30        |
| Airplane Mode                            | 8         | Battery Information and Care      | 30        |
| Making a Call                            | 8         | General Notice                    | 30        |
| Receiving Calls                          | 9         | <b>LIMITED WARRANTY STATEMENT</b> | <b>32</b> |
| <b>MENU TREE</b>                         | <b>10</b> | <b>SERVICE CENTER LIST</b>        | <b>34</b> |
| <b>ENTERING AND EDITING INFORMATION</b>  | <b>11</b> |                                   |           |
| Entering Information Using T9 Text Input | 11        |                                   |           |

## PHONE COMPONENTS

The following shows key components of your mobile phone.

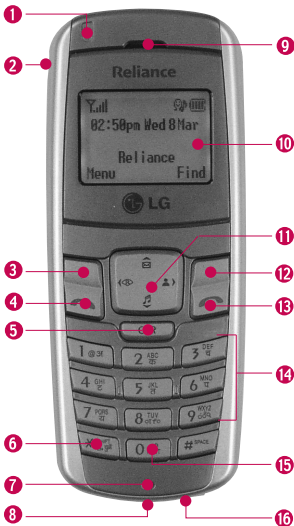

1. Service LED
2. Headset Jack
3. Soft Key1
4. CALL Key
5. Clear Key
6. Vibrate Mode Key
7. Microphone
8. Data Port
9. Earpiece
10. LCD Screen
11. 4 Way Navigation Key
12. Soft Key2
13. END/PWR Key
14. Alphanumeric Keypad
15. Key Pad Lock Key
16. Charger Port

**LCD Screen** Displays messages & indicator icons.

**Soft Keys** The names of the functions of these keys appear at the bottom of the screen

- **Soft Key 1** 

Used to display the function setting menu. Accepts the highlighted choice when navigating through a menu.





- **Soft Key 2** 

Press this key once in a menu, to go back one level.

**CALL Key** Allows user to place or answer calls, See and redial from call history.

**END/PWR Key** Used to turn power On/Off and to end a call. Using this key, you can return to the main menu display screen. When you press once, when a call is received, the phone stops ringing or vibrating depending on the mode it is in. Press twice to reject the call.

**Alphanumeric Keypad** These keys enable you to enter numbers and characters and choose menu items.

**Navigation Key** This Navigation key allows quick access  Messages and Voice Mail notification messages.  Ring Tone,  R World,  Profiles.

**Vibrate Mode Key** In standby mode, set the vibrate mode by pressing and holding the key  about 2 seconds.

**Clear Key** Press to delete a single space or character. Press and hold to delete entire words. You can access "My Menu" by Clear Key.

## ONSCREEN ICONS

The phone screen displays several onscreen icons which appear when the phone is powered on.



Displays the strength of the signal received by the phone and current signal strength is indicated by the number of bars displayed on the screen.



In General mode



In Silent mode



No service  
The phone is not receiving a system signal.



In Alarm mode



In use. A call is in progress.  
\* No icon indicates the phone is in standby mode.



In Vibrate mode



In Outdoor mode



Charge level. Indicates battery charge level.


## USING THE BATTERY AND CHARGER

### **Charge the battery fully before the initial use of the phone.**

The phone comes with a rechargeable battery. Keep the battery charged while not in use in order to maximize talk and standby time when using the phone.



### **Installing and Removing the Battery**

- To install, insert the battery into the opening on the back of the phone, and insert the bottom of battery into groove at the bottom of the handset. Gently press down the cover until the latch snaps into place.
- To remove, push the back cover down. Push the tab with one hand and lift the top of the battery to separate.



## Charging the Battery

To use the AC adapter charger provided with your phone:

1. Plug the AC adapter into the electrical outlet.
2. Insert the round end of the adapter into the AC adapter jack on the bottom of the phone. (Make sure the battery is installed.)
  - As the phone charges, the battery icon continually displays a progression from empty (  ) to full (  ).

It takes about three hours to fully recharge a completely rundown battery. When fully charged, battery icon indicates charging by twinkling.

## Battery Charge Level


The battery charge level is shown at the top right of the LCD screen.



When the battery charge level becomes low, the low battery sensor will alert you in three ways: sounding an audible tone, blinking the battery icon outline, and displaying **Recharge the battery**. If the battery charge level becomes exceedingly low, the phone will automatically switch off and any function in progress will not be saved.





## BASIC FUNCTIONS

### Turning the Phone On and Off

1. Install a charged battery pack or connect the phone to an external power source such as the cigarette lighter charger, car kit or AC adaptor.
2. Hold down the Key  for 2 seconds until the LCD screen flashes.




**Note** As any other communication device, avoid any unnecessary contact with the antenna while your phone is turned on.

### Changing the display language

1. In standby mode, press Soft Key 1 **Menu**.
2. Press , .
3. Set **English**  with  and then press Soft Key 1.




## Airplane Mode

When your phone is in Airplane Mode, it cannot send or receive any calls or access online information. You may use the phone's other features, such as Game, Scheduler, Memo, etc. When Airplane Mode is enabled, a message "Airplane Mode On" is displayed on the screen.

1. In standby mode, press Soft Key 1 **Menu**, , , .
2. Select **On** or **Off** and press Soft Key 1.






## Making a Call

Every time you make a call, follow these steps:

1. Make sure that the phone is turned on. If not, hold down  for 2 seconds.
2. Type the phone number and then press .
  - If the phone is locked, type the lock code.
3. To end the call press .



## Receiving Calls

1. When the phone rings or vibrates (if the Vibrate Mode is enabled), press any key (except ) or  depending on the Call setting.
  - When you press  once, when a call is received, the phone stops ringing or vibrating depending on the mode it is in. Press  twice to disconnect.
2. To end an answered call, press .

## MENU TREE

### 1. Names

- 1. Add Name
- 2. Find
- 3. Groups
- 4. Speed Dial
- 5. Memory Status
- 6. Help

### 2. Messages

- 1. Write
- 2. Inbox
- 3. 1234 Services
- 4. Outbox
- 5. Voice Mail
- 6. Archive
- 7. Drafts
- 8. Templates
- 9. Msg Groups
- 0. Erase Msgs
- \*. Message Settings
- #. Help

### 3. Call History

- 1. Missed
- 2. Received

- 3. Dialed
- 4. In Call Memo
- 5. Call Duration
- 6. Erase History
- 7. Help

### 4. Profiles

- 1. Vibrate Only
- 2. Silent
- 3. General
- 4. Outdoor
- 5. Headset
- 6. Carkit
- 7. Help

### 5. Display

- 1. Language
- 2. Service Area
- 3. Clock
- 4. Wallpaper
- 5. Screensaver
- 6. Menu Style
- 7. Rhythmic Lighting
- 8. Backlight
- 9. Contrast
- 0. Help

### 6. Settings

- 1. My Menu
- 2. Call
- 3. Phone
- 4. Security

### 7. Organiser


- 1. Scheduler
- 2. Memo
- 3. Alarm
- 4. Reserved Call
- 5. Stopwatch
- 6. Calculator
- 7. Currency Converter
- 8. World Clock
- 9. Help

### 8. R World

- 1. R-Menu
- 2. Dial 1234
- 3. Games
- 4. Reset R-Menu
















## ENTERING AND EDITING INFORMATION

### Entering Information Using T9 Text Input

In the text input field, you can scroll through the modes using Soft Key 2 in the following order: T9En, Abc, 123, Symbol, :-), Hindi.  
 - Shift Key : Used to change the letter case.






#### Typing In T9 Mode

For example, to write “**Call the office**”, follow these steps:

1. Press: Soft Key 2 to change letter case to T9En mode.
2. Press:    .
3. Press:  to complete the word and add a space.
4. Press:          .
5. Display: **Call the office.**

### Typing In ABC (Multi-tap) Mode

For example, to type “LG”, follow these steps:

1. Press: Soft Key 2 to change letter case to Abc mode.
2. Press:  to change to **ABC** Caps Lock mode.
3. Press:    .
4. Display: **LG**.


### 123 (Numbers) Mode

Type numbers using one keystroke per number.

To change to 123 mode in a text entry field, press Soft Key 2 until 123 mode is displayed.

### Symbol/Smileys Mode

To change to Symbol/Smileys mode in a text entry field, press right Soft Key until Symbol/Smileys mode is displayed.

Press  to cycle through the desired items. To select item, Press the assigned number key.

## To Edit in Hindi Mode

Press Soft Key 2, until the soft menu changes to Hindi mode.

For E.g., To type "हिन्दी"





1. Press  2 times.
2. Press  8 times.
3. Press  5 times.
4. Press  3 times.
5. Press  3 times.
6. Press  3 times.

## MESSAGES

### Write Text

LMS(Long Message Service) allows you to send a message up to 462 characters at a time. Before sending LMS message, total number of SMS packets formed are intimated to the user and confirmation is taken to send.





Maximum 3 packets for English and 4 for Hindi messages can be sent. Each LMS packet is received as individual message. Every LMS message shows the packet sequence number in the message for ex: In case of 3 packets, <1/3>, <2/3>, <3/3>.

1. Press Soft Key 1 **Menu**,  or .
2. Select  **Write**.
3. Select  **Write Text**.
4. After entering a message to be sent by selecting **Send**, press Soft Key 1 **Options**.
  - ▶ **Send** Use to send the message.
  - ▶ **Save** Save to Draft message.
  - ▶ **Templates** Select a sample message.

- ▶ **Help** You can get information about Hindi writing.
5. After entering the phone number where the message is to be sent, press Soft Key 1 **Options**.
- ▶ **Send** Use to send the message.
  - ▶ **NextRecipient** Enter the next recipients address you can add up to 10 recipients.
  - ▶ **Priority** Allows you to give the priority to message. Normal or Urgent.
  - ▶ **Delivery Ack** This function allows you to know whether the message is successfully transmitted to other party or not when the transmitted message is received in other party's phone. If you want to activate this function, set to On.
  - ▶ **Save Sent Msg** You can save this message in Outbox.
6. If you select **Send**, it notifies you whether the message was sent successfully.
- ▶ **Send** Use to send the message.
  - ▶ **Last** Select a recent sent number.
  - ▶ **SMS Groups** Select SMS Group.
  - ▶ **Names** Select a phonebook entry.

## Write E-mail

Send message to an E-mail ID with Write E-mail.

1. Press Soft Key 1 **Menu**,  or .
2. Select  **Write**.
3. Select  **Write E-mail**.

There are four optional menus of **Send, Last, E-mail Groups** and **Names**.

- ▶ **Send** Use to send the message.
  - ▶ **Last** Select a recent sent E-mail.
  - ▶ **E-mail Groups** Select E-mail Group.
  - ▶ **Names** Select a phonebook entry.
4. After entering the e-mail address where the message is to be sent, enter the next recipients address in the Soft Key 1. You can add up to 10 recipients. Press Soft Key 1 **Options**.
    - ▶ **Send** Use to send the message.
    - ▶ **Domains** Select a domain.
    - ▶ **NextRecipient** Select a next recipient. (up to 10)
  5. After entering a subject, press Soft Key 1 **Next**.






6. After entering a message to be sent by selecting Send, press Soft Key 1 **Options**.

- ▶ **Send** Use to send the message.
- ▶ **Save** Save to Drafts message.
- ▶ **Templates** Select a Templates message.
- ▶ **Priority** Allows you to give the priority to message.  
Normal or Urgent.
- ▶ **Delivery Ack** This function allows you to know whether the message is successfully transmitted to other party or not when the transmitted message is received in other party's phone. If you want to activate this function, set to **On**.
- ▶ **Save Sent Msg** You can save this message in **Outbox**.

## 1234 Services

Exciting SMS-based Infotainment services such as News, Joke, Horoscope etc are available to Reliance subscribers. Using the SMS 1234 services, the user will be able to access interesting information on common subjects through SMS. User needs to select the Menu corresponding to the Service Keyword.

1. Press Soft Key 1 **Menu**,  or .
2. Select  **1234 Services..**
3. Place the cursor on the item that you wants to be served, and then press Soft key 1 **Select**. You may select from eleven items. (1.News 2. Cricket 3.Joke of The Day 4.Thought of The Day 5.Contest 6. Beauty Tips 7.Health 8.Horoscope 9.Bill Info 0.Unbilled Info \*.Help)  
You may select the keyword that you want to send in subsequent-Menu.

### Example

For example, to receive the "sports news" you can operate the phone as follow;

1. Press Menu +2(Messages) + 3(1234 Services) + 1(News) + 6(NEWS SPORTS)
2. Press Soft Key 1 **Send**.
3. Display: Sending...(1/1) To:1234

## INTRODUCTION

Congratulations on your purchase of the LG-RD2690 cellular phone that has been designed to operate with the latest digital mobile communication technology, Code Division Multiple Access (CDMA). The CDMA system has greatly enhanced voice clarity and can provide various types of advanced features.

This is an advanced and compact phone which has diverse features as follows:

- Large, easy-to-read, 2 lines display + 1 Icon Line + 1 Menu Line.
- Paging, Messaging, Voice Mail, and Caller ID.
- 18-key keypad (10 number keys / 2 function keys / 2 Soft keys / 1 Clear key / 4 way navigation 1 key / 1 Call key / 1 End key).
- Long battery stand-by and talk time.
- Choice of 19 Ring sounds + 3 downloadable Ring tones by SMS + 50KB R World downloadable Ring tones.
- Choice of 3 Wallpapers + 3 downloadable by SMS.
- Menu-driven interface with prompt for easy operation and configuration.
- Voice Privacy inherent with CDMA encoding.
- Any Key Answer, Auto Redial, Speed Dial up to 99 memory locations.
- Optional accessories with greater convenience and enhanced functionality.
- In Call Memo, 1234 Services, R World, Games
- Airplane Mode, Rhythmic Lighting.
- SMS, LMS, SMS to E-mail, Group SMS.

## MENU FEATURES

### Names

#### Add Name Menu 1.1

Store up to 600 contacts, adding 4 phone numbers + E-mail + Memo with each entry and assign Group + Ring Tone + Message Alert Tone to each entry.

#### Find Menu 1.2

To find phone numbers you have stored in the Phone Book.

#### Groups Menu 1.3

This is a function for changing Group Name and setting Ring tones by Group.

#### Speed Dial Menu 1.4

Speed Dial allows you to make a call faster by just pressing a corresponding number.

#### Memory Status Menu 1.5

This feature allows user to view number of records occupied in phonebook and percentage of occupied space in Phonebook Memory. Memory status is indicated by progress bar.

---

### Messages

#### Write Menu 2.1

(Refer to 12~15 page)

Write and send Message and

E-Mail. Allows you to send a message up to 462 characters at a time.

**Inbox** **Menu 2.2**

Received Text messages, Page, E-mail messages, Delivery ack, lists may be searched, and the contents may be viewed. Up to 30 can be stored.

**1234 Services** **Menu 2.3**

(Refer to 16 page)

Exciting SMS-based Infotainment services such as News, Joke, Horoscope etc are available to Reliance subscribers.

**Outbox** **Menu 2.4**

Up to 30 sent messages can be stored in the Outbox.

**Voice Mail** **Menu 2.5**

Allows you to view the new voice messages recorded in the voice mail box.

**Archive** **Menu 2.6**

Archive stores what is preferred to save among messages received. Up to 30 can be stored.

**Drafts** **Menu 2.7**

When a user is interrupted by a call while composing a message, messages automatically get saved. Up to 30 can be stored.

**Templates** **Menu 2.8**

There are 10 predefined phrases included in the Templates. You can add up to 20 templates more.

### **Msg Groups** Menu 2.9

Msg Groups consists of 5 SMS/E-mail Groups with each group consisting of maximum 10 members.

### **Erase Msgs** Menu 2.0

Allows you to erase messages in each message box.

### **Message Settings** Menu 2.\*

Message Settings can be configured for receiving new messages.

---

## **Call History**

### **Missed** Menu 3.1

Allows you to view list of all Missed Calls. (Maximum 60

numbers are possible including Missed, Received, Dialed and In Call Memo)

### **Received** Menu 3.2

Allows you to view list of all Received Calls. (Maximum 60 numbers are possible including Missed, Received, Dialed and In Call Memo)

### **Dialed** Menu 3.3

Allows you to view list of all Dialed Calls. (Maximum 60 numbers are possible including Missed, Received, Dialed and In Call Memo)

### **In Call Memo** Menu 3.4

Save the phone numbers taken while talking and can view the list

of numbers present in In Call Memo. (Maximum 5 numbers are possible)

### **Call Duration** Menu 3.5

View the duration and number of recent calls you have dialled and received. Also reset the time counter.

### **Erase History** Menu 3.6

Erase the contents of each of the three call histories.

---

### **Profiles** Menu 4

1. Vibrate Only / 2. Silent / 3. General / 4. Outdoor / 5. Headset / 6. Carkit

Profiles let you set your phone's sound settings to your environment. Each profile

contains settings for your phone's Ring Type, Ring Tone, Ringer Volume, Earpiece Volume, Key Volume and Message Alert.

---

## **Display**

### **Language** Menu 5.1

Set the Bilingual feature according to your preference, choose between English and हिन्दी.

### **Service Area** Menu 5.2

This menu displays the current SDCA/calling area the user is in.

### **Clock** Menu 5.3

Allows you to select a clock on your mobile phone display.

## Wallpaper

Menu 5.4

Enter the string of characters you want to be displayed. You can set up the screen displayed on the LCD screen in the standby mode.(Up to three images)

## Screensaver

Menu 5.5

The screensaver is activated when no function of the phone is used after a preset period of time. Press any key to deactivate the screensaver.

## Menu Style

Menu 5.6

Allows you to select the menu style.

## Rhythmic Lighting

Menu 5.7

User can set rhythmic lighting as "On" or "Off" for an incoming call and alarms(scheduler, reserved call and alarm).

## Backlight

Menu 5.8

Choose the settings of the LCD and keypad backlight.

## Contrast

Menu 5.9

Using the Navigation Key, select the contrast setting using the scale of lightest to darkest.

---

## Settings

### My Menu

Menu 6.1

Lets you access to favorite menu quickly by customising my menu.

### Call Forward

Menu 6.2.1


Call forward lets you forward all your incoming calls to another number or Voice Mail connection.



**Call Waiting** Menu 6.2.2

While a call is in progress, you may hear two beeps indicating another incoming call. When call waiting is enabled, you may put the active call on hold while you answer the other incoming call.

**Any Key Answer** Menu 6.2.3

When your phone rings, press any key to answer except .

**Auto Redial** Menu 6.2.4

Set the length of time the phone waits before automatically redialing a number when the attempted call fails.

**Voice Privacy** Menu 6.2.5

Set the voice privacy feature for CDMA calls as Standard or Enhanced.

**Clear Voice** Menu 6.2.6

On/Off the function of Audio AGC(Auto Gain Control) system.

**Call Timer** Menu 6.2.7

You can set your phone to display the running elapsed time while a call is active.

**Call Connect Alert** Menu 6.2.8

This is a function to alert you that the call connection has been established.

**Edit SMS on Call Reject**  
Menu 6.2.9

User can reject a call and send pre composed SMS, by selecting right soft key when an incoming call is received.

**Auto Keypad Lock** Menu 6.3.1

Auto Keypad Lock feature locks the keypad automatically after some specified seconds as selected by the user. The auto keypad lock can be set from the phone settings menu item.

Different Options provided are "Off", "15 Secs", "30 Secs", "1 Min", "5 Mins". Default option is "Off".

**Airplane Mode** Menu 6.3.2

When your phone is in Airplane Mode, it cannot send or receive any calls or access online information.

**Set NAM** Menu 6.3.3

Select the phone's NAM (Number Assignment Module).

**Service Alert** Menu 6.3.4

Alerts you when service changes.

**Version** Menu 6.3.5

View the S/W and PRL version.

**Lock Mode** Menu 6.4.1

Keeps your phone from unauthorized use. (Default Lock Code is **0000**)

**Emergency Numbers** Menu 6.4.2

You can call these numbers 100, 101, 102 even when the phone is locked or restricted.

**Change Lock Code** Menu 6.4.3

New Lock Code allows you to enter a new four-digit lock code number.

**Clear Memory** Menu 6.4.4

Deletes all information saved in Phone Book or all data saved in phone and go back to default value.

**Reset Default** Menu 6.4.5

You can reset some of the menu settings to their original values.

---

**Organiser****Scheduler** Menu 7.1

Simply store your appointments and your phone alerts you with a reminder of your appointment. Up to 160, can be saved.

**Memo** Menu 7.2

Write memos. Up to 40, can be saved.

**Alarm** Menu 7.3

To change an event alarm time.

**Reserved Call** Menu 7.4

Reserved call feature provides the user to set an alert for a phone number at a particular date and time. At the time of alert set, reserved call will remind the user to make a call to that number. User can store a maximum of two reserved calls.

**Stopwatch** Menu 7.5

Allows you to take an accurate measurement of time.

**Calculator** Menu 7.6

Calculate simple mathematical computations.

### Currency Converter Menu 7.7

Before you can make currency conversions, you need to choose a base currency (usually your domestic currency) and add exchange rates.

### World Clock Menu 7.8

Is useful if you need to make a call to another country, and you are not sure about the time difference.

---

## R World

### R-Menu Menu 8.1

This connects you to R World Data Services like Ringtones, Cricket, Dating, News, Astro, City & TV Guides, and more provided by your service provider.

### Dial 1234 Menu 8.2

This feature provides the user Auto-dial to 1234 service.

### Tizzy Jump Menu 8.3.1

It's like a rope skipping which jumps without touching the rope, refer to key Info.

### Stone Axe Menu 8.3.2

It is a game that hits the enemy with attack the enemy, refer to key Info..

### Game Settings Menu 8.3.3

You can set sound volume of the game and backlight to On or Off.

### Reset R-Menu Menu 8.4

You can reset R-Menu.

## Functions Used During a Call

### In Call Memo

During a Call : Menu 1

It allows you to note a phone number that the other person provides you during a call. Maximun 5 numbers are possible.

### Mute/Unmute

During a Call : Menu 2

This function locks the microphone of your telephone and prevent sounds from your end being heard by the person at the other end.

### Call Volume

During a Call : Menu 3

You may adjust the earpiece volume during a call.

### Voice Privacy On/Off

During a Call : Menu 4

Set the privacy feature for CDMA calls as Enhanced or Standard. CDMA offers inherent voice privacy.

## SAFETY INFORMATION

Please read and observe the following information for safe and proper use of your phone and to prevent damage. Also, keep the user guide in an accessible place at all the times after reading it.

### Charger and Adapter Safety

- The charger and adapter are intended for indoor use only.

### Battery Information and Care

- Please dispose of your battery properly.
- Use only LG-approved chargers specific to your phone model since they are designed to maximize battery life.
- Do not disassemble or short-circuit the battery.
- Keep the battery's metal contacts clean.

- Recharge the battery after long periods of non-use to maximize battery life.
- Battery life will vary due to usage patterns and environmental conditions.
- The self-protection function of the battery cuts the power of the phone when its operation is in an abnormal state. In this case, remove the battery from the phone, reinstall it, and turn the phone on.

### General Notice

- Using a damaged battery or placing a battery in your mouth may cause serious injury.
- Do not place items containing magnetic components such as a credit card, phone card, bank book or subway ticket near your phone. The magnetism of the phone may damage the data stored in the magnetic strip.

- Talking on your phone for a long period of time may reduce call quality due to heat generated during use.
- When the phone is not used for a long period time, store it in a safe place with the power cord unplugged.
- Using the phone in proximity to receiving equipment (i.e., TV or radio) may cause interference to the phone.
- Do not use the phone if the antenna is damaged. If a damaged antenna contacts skin, it may cause a slight burn. Please contact an LG Authorized Service Center to replace the damaged antenna.
- Do not immerse your phone in water. If this happens, turn it off immediately and remove the battery. If the phone does not work, take it to an LG Authorized Service Center.
- The power cord on this product will expose you to lead, a chemical known to the State of California to cause (cancer) birth defects or other reproductive harm. Wash hands after handling.
- Do not paint your phone.
- The data saved in your phone might be deleted due to careless use, repair of the phone, or upgrade of the software. Please backup your important phone numbers. (Ring tones, text messages, voice messages, pictures, and videos could also be deleted.) The manufacturer is not liable for damage due to the loss of data.
- Do not turn your phone on or off when putting it in your ear.

## LIMITED WARRANTY STATEMENT

LG ELECTRONICS Inc. represents and warrants that this subscriber unit and its accessories ("PRODUCT") is free from defects in material and workmanship.

This warranty is subject to the following terms and conditions;

1. This warranty of the PRODUCT extends for a period of 12 months commencing from the date of the activation or 16 months from the date of manufacture whichever is less, except for the battery, for which the warranty is 9 months from the date of activation or 12 months from the date of manufacture whichever is less.
2. During the warranty period, LG ELECTRONICS Inc. or its authorized service network will repair or replace, at LG ELECTRONICS Inc.'s option, the PRODUCT or any relevant parts thereof in the event that the PRODUCT is found to be defective. The repaired PRODUCT or the Product/part provided as a replacement for a defective PRODUCT/part, shall be free from defects. The END USER/consumer purchaser of the PRODUCT or his/her assignee ("CONSUMER") shall not be charged (whether for parts, labour or otherwise) for the repair or replacement of a defective PRODUCT during the warranty period. All replaced parts, boards or equipment shall become the property of LG ELECTRONICS Inc.
3. The warranty in respect of a repaired or replaced PRODUCT/part shall extend for the remaining warranty period of the repaired PRODUCT or replacement thereof to the CONSUMER.
4. Upon request from LG ELECTRONICS Inc., the CONSUMER may be required to provide the purchase receipt or other documentation or information in respect of the date and place of purchase.
5. The CONSUMER shall have no coverage or benefits under this warranty in the event that any of the following conditions are applicable:
  - (a) The PRODUCT has been subject to abnormal use or conditions, improper storage, exposure to excessive moisture or dampness, exposure to excessive temperatures, unauthorized modifications, unauthorized repair (including but not limited to use of unauthorized spare parts in repairs), abuse, accident, Acts of God, spills of food or liquids, improper installation and breakage or damage to antennae (otherwise than by reason of any defects in material or workmanship).
  - (b) LG ELECTRONICS Inc. has not been notified by the CONSUMER of the defects of the PRODUCT during the applicable warranty period.



- (c) The PRODUCT serial number code or the accessory date code has been removed, defaced or altered.
  - (d) The PRODUCT has been used with or connected to an accessory (i) not supplied by LG ELECTRONICS Inc. or its affiliates, (ii) not fit for use with the PRODUCT or (iii) used otherwise than in the manner intended.
  - (e) The seals of the PRODUCT'S battery enclosure have been broken or show evidence of tampering or the PRODUCT'S battery has been used in equipment other than that for which it has been specified usable by LG ELECTRONICS Inc.
  - (f) All plastic surfaces and all other externally exposed parts that are scratched or damages due to normal customer use.
  - (g) Breakage or damage to antenna unless caused by defects in material or workmanship.
6. In order to derive the benefits of this warranty in respect of any defects in the PRODUCT, the CONSUMER shall ship the PRODUCTS or part thereof at its cost to the authorized service center of LG ELECTRONICS Inc. LG ELECTRONICS Inc. shall bear the cost of shipping the PRODUCT or part thereof back to the CONSUMER after the completion of the service under this limited warranty.

NO OTHER EXPRESS WARRANTY IS APPLICABLE TO THIS PRODUCT. THE DURATION OF ANY IMPLIED WARRANTIES,

INCLUDING THE IMPLIED WARRANTY OF MARKETABILITY OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR USE IS LIMITED TO THE DURATION OF THE EXPRESS WARRANTY HEREIN. LG ELECTRONICS Inc. SHALL NOT BE LIABLE FOR THE LOSS OF USE OF THE PRODUCT, INCONVENIENCE, LOSS OR ANY OTHER CONSEQUENTIAL DAMAGE, ARISING OUT OF THE USE OF, OR INABILITY OF USE, OF THIS PRODUCT OR FOR BREACH OF ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING THE IMPLIED WARRANTY OF MARKETABILITY OR MERCHANTABILITY OR FITNESS APPLICABLE TO THIS PRODUCT. THE CONSUMER UNDERSTANDS THAT LG ELECTRONICS INC. HAS EMBEDDED RELIANCE SOFTWARE AND ITS NETWORK PARAMETERS IN THE PRODUCT. IN CASE THE CONSUMER DELETES, REMOVES, ALTERS OR MODIFIES SUCH SOFTWARE AND THE PARAMETERS AND/OR INSTALLS ANY THIRD PARTY SOFTWARE, THE WARRANTY AND REMEDIES HEREUNDER SHALL NOT BE AVAILABLE TO THE CONSUMER.

7. It is hereby expressly clarified that all warranties (express or implied) in respect of the PRODUCT are provided by LG ELECTRONICS Inc. alone.

## SERVICE CENTER LIST

|    | Circle         | City              | ASCs Name              | Address   | Contact Person     | Phone   | Status |
|----|----------------|-------------------|------------------------|---|--------------------|---|--------|
| 1  | Andhra Pradesh | Guntur            | Vasavi Associates      | Door no 6-20-4, Swamalak complex, 4/1 Arandal Pet, Guntur-522003  | MR.Satyam          | 0863-2233678, 9848105789, 09394155554                               |        |
| 2  | Andhra Pradesh | Hyderabad         | Sri Varun Electronics  | D.No 5-8-344/1, " DHAN BHAGYA ESTATE ", Chirag Ali Lane, Abids, Next to Raghava Ratna Towers, Hyderabad - 500 001                 | Mr.Raghavendra     | 040-55781999, 040-55253888, 040-56878822, 09391001463               |        |
| 3  | Andhra Pradesh | Hyderabad         | JVR Infotech Pvt Ltd   | Shop No 8 ,Vaniya Vihar,Nalanda Building, Dilukh Nagar Main Road,Hydrabad-500060  | EV Ramakanth       | 040-24161848, 040-55109604, 040-56524157, 09391131067, 040-36060606 |        |
| 4  | Andhra Pradesh | Hyderabad         | S V Electronics        | Shop No. 41, Nilagiri Block, Aditya Enclave, Ameerpet Main Road, Hyderabad-500038   | Mr.Vanktेशwara Rao | 040-55754477/55343030   |        |
| 5  | Andhra Pradesh | Hyderabad         | Reliable Communication | G-8, 3-6-561, AALTO'S A & M Trade Centre, HIMAYATNAGAR, HYDERABAD -500029   | Mr Mahesh Heda     | 04030913251, 09346320705, 09849251173                               |        |
| 6  | Andhra Pradesh | Hyderabad         | Shweta Communications  | Shop No.9, Ground Floor, Pavani Anusuya Complex, Opp. Huda Complex,Tamaka, Hyderabad  | Mr. Sandeep Heda   | 040-55918841, 55918842, 05346698606                                 |        |
| 7  | Andhra Pradesh | Kurnool           | R K LG CDMA            | #40-37-J1, Gandhi Bhavan, Shop No:13, UCUN PLAZA,Opp: Indian Bank,Beside ICICI Bank, Ballary Road, Old Navarang Theatre, KURNOL-2 | Mr.G Rama Krishna  | 08518-220201, 09393810688   |        |
| 8  | Andhra Pradesh | Nellore           | Siri Enterprises       | Opp.Archana Theater,A C Centre,Nellore PIN-524001   | Mr.Paraveen        | 939, 830, 957, 109, 347, 000, 000                                   |        |
| 9  | Andhra Pradesh | Rajamahendravaram | Siri Infotech          | Police Welfare Complex,City Hospitals Junction,Danavi Pet MainRoad,Rajamahendravaram-533103                                       | Mr Raghvendra      | 0883-2421567, 09397925799   |        |
| 10 | Andhra Pradesh | Secunderabad      | Shweta Computers       | # 1-7-69/1 & 2, OPP Aditya Delux Hotel,Near Paradeise circle SarojiniDevi Road, Secunderabad - 500003                             | Mr.Jagdish         | 040-55334180, 040-27721076, 09396532358, 09391041673                |        |
| 11 | Andhra Pradesh | Tirupathi         | CMT Computer Services  | 18-1-624 W Mahal Road,OPP HDFC BANK, Tirupathi,PIN-517501   | Mr.K Vasu Naidu    | 0877-5561979, 0939320209  |        |
| 12 | Andhra Pradesh | Vijaywada         | K L Computer House     | 39-9-46 SVS Temple Street,Labbipet,Vijaywada PIN- 520 010   | Mr.Karik           | 0866-5520461/ 5671461, 09392105222                                  |        |
| 13 | Andhra Pradesh | Visakhapatnam     | GVS Enterprises        | G5, Ground Floor, Backside of Sangam-Sarat Theatre, 1st Lane, Dwarka Nagar,Visakhapatnam - 530 016.                               | Mr. Satish Kumar   | 0891-2598610, 9394206074  |        |
| 14 | Andhra Pradesh | Warangal          | S S S Marketers        | 6-1-73/1,Sai Bhavan, Sridevi Theatre Road, Hanamkonda,Warangal-506001   | Mr.L.Srinivas Rao  | 0870-2552223, 09390100708   |        |
| 15 | Andhra Pradesh | Kakinada          | Delta Infotech         | Door No. 6-1-29, Opp. Swami Vivekananda Park, Jawahar Street, Surya RaoPet, Kakinada - 533001                                     | Mr. Shivanand      | 0884-5593533 9346846009   |        |

|    |         |            |  |  |                      |   |  |
|----|---------|------------|--|--|----------------------|---|--|
| 16 | Bihar   | Patna      | Infotek Trading Company                | 1st floor, City Palace, New Dak Bungalow Road, Patna-800001  | Sanjay Chowbey       | 0612-2227166                                      |  |
| 17 | Bihar   | Patna      | Competent Mobile Service               | Shop 1, Hotel Lalitha Complex, East Bowring Canal Road, Patna  | Mohit Ahluwalia      | 9334022706  |  |
| 18 | Delhi   | Delhi      | Comhard Systems                        | D-30/31, First floor, Near Hotel Shipra, Main Vikas Marg, Lakshmi Nagar                                    | Mr Ravi Kant Gupta   | 011-30955887, 9818867678                          |  |
| 19 | Delhi   | Delhi      | Innovative Telecom                     | 305, Aggarwal Millenium Tower, Netaji Subash Place, Ptam Pura, Delhi-110088                                | Mr Manoj Garg        | 011-55154343, 9811682453, 1130925753              |  |
| 20 | Delhi   | Delhi      | Sagar Technologies                     | W-8, First Floor, Main Patel Road, West Patel Nagar, New Delhi-110008                                      | Mr Deepak/ Mr Amit   | 9810320170, 011 55433100                          |  |
| 21 | Delhi   | Delhi      | Sagar Technologies                     | J-39, Central Mkt, Lajpat Nagar-II, New Delhi-110024   | Mr Prabhat           | 011-55425644, 011-55425645                        |  |
| 22 | Delhi   | Delhi      | Ucom Technologies Pvt Ltd.             | 45, 1st Flr, Corner Mrkt, Mahiya Nagar, New Delhi - 110017   | Bhuwan Chandra       | 011-26675900, 55655382, 09313088818, 011-30977000 |  |
| 23 | Delhi   | Delhi      | Nice Telecommunication                 | 15/23, First Floor, DDA Complex, Nangal raya, D Block, Janakpuri, Delhi - 110046                           | Ripul Garg           | 011-28521044, 9810778310                          |  |
| 24 | Delhi   | Delhi      | Touch Tone Telecom                     | B-52, First Floor, Kalkaji, New Delhi  | Ashish Dey           | 11 30939031                                       |  |
| 25 | Delhi   | Delhi      | Cube Engineers and Consultants Pvt Ltd | A-65, Naraina Industrial Area, Phase-1, New Delhi  | Atul Gupta           | 09312224103, 011-55450272, 51411623               |  |
| 26 | Delhi   | Delhi      | Comhard Systems                        | B-120, Hardev Puri, 100 Feet Main Road, Near MTNL Office, Nathu Colony, Chowk, Shadha, New Delhi - 110 093 | Mr. Ravi Kant Gupta  | 011-39572430, 011-39572427                        |  |
| 27 | Delhi   | Delhi      | R K Communications                     | 2516 Hudson Lines, Kingsway Camp-Nr. Kamlia Nagar, New Delhi   | Mr. Pradeep Aggarwal | 011-39508861                                      |  |
| 28 | Delhi   | Delhi      | Arham Infotech Services                | 1/1, Regal Building, Near Malik Sweets, Connaught Place New Delhi - 110 001.                               | Mr. Anil Surana      | 9350286361  |  |
| 29 | Gujarat | Ahmed abad | Visual Enterprises                     | 104, Saarthak Complex, behind Urja House, Swastik Char Rasta, Navrangpura, Ahmedabad-380009                | Vallabh Patel        | 079-26463305, 9376171851                          |  |
| 30 | Gujarat | Ahmed abad | Silicon Valley                         | F/6, Silver lake, Jagabhai Park, Rambaug Road, Maninagar, Ahmedabad-380008                                 | Rajesh Patel         | 079-25430634, 9824025430                          |  |
| 31 | Gujarat | Ahmed abad | Mishree Communication                  | 75, Management Enclave, Opp. Indraprastha Bungalows, Vastrapur, Ahmedabad.                                 | Mitesh Patel         | 09327037582, 079-55314224, 9327800611             |  |
| 32 | Gujarat | Ahmed abad | A Com Technologies                     | Shop No-40, 1st Floor, Shubh Complex, Near Rajasthan Hospital, Camp Road, Shahibaug, Ahmedabad-380004      | Vijay.S.Gohel        | 9824544230, 079-30940560                          |  |
| 33 | Gujarat | Bhavnagar  | Teletext Gold                          | G/R, Radheshyam Complex, Radha Mandir, Vaghavadi Road, Bhavnagar-364001                                    | Nilesh Bagadia       | 0278-2415545, 9824497766                          |  |

| Circle | City      | ASCs Name   | Address                   | Contact Person  | Phone              | Status   |  |
|--------|-----------|-------------|---------------------------|---|--------------------|--|--|
| 34     | Gujarat   | Gandhinagar | Creative Communications   | Shop No 102,Suman City,Sector 11,Gandhinagar-382011                                     | K.J.Barot          | 079-23226241,<br>9825059590                      |  |
| 35     | Gujarat   | Jamnagar    | Sudarshan Infosys         | 3, Prerna Building, Cricket Bunglow-3, Indira Nagar, Jamnagar                           | Amit Unadkat       | 0288-2552696,<br>9824478203                      |  |
| 36     | Gujarat   | Rajkot      | Roopang infocare          | Vinod Nivas,4,Sardarnagar(West),Nr Astron Cinema,Rajkot-360001                          | Kalpesh Rugani     | 0281-2464485,<br>9824068880                      |  |
| 37     | Gujarat   | Surat       | Excel Solutions           | G-48, Asccon Plaza, Anand Mahal Road, Adajan Surat-395009                               | Nitesh Jain        | 0261-5544500,<br>09327344500                     |  |
| 38     | Gujarat   | Surat       | Omsai Services            | 37,Golden Point,Near Science Laboratory, Ring Road, Surat -3940003                      | Dharmesh Patel     | 0261-5593716, 9374710610,<br>9825406129          |  |
| 39     | Gujarat   | Vadodra     | Aashnik Infotech          | F 50,National Plaza,R.C.Dutt Road,Alkapuri, Vadodara-390005                             | Aashish Parmar     | 0265-3112123, 3090969,<br>9327230793             |  |
| 40     | Gujarat   | Vapi        | Klassik Statino Products  | 116,Bhanudarshan Co-Op Society, Koparji Road, Near Gunjan Cinema, GIDC,Vapi             | Avishek Suhasaria  | 0260-3092363,<br>9377000911                      |  |
| 41     | Haryana   | Ambala      | Bee Ess Aar Communication | 92-93, Gandhi market, Ambala Cantt-133001   | Rajiv Gupta        | 0171-2641234,<br>9416021234                      |  |
| 42     | Haryana   | Faridabad   | Hi - Tech Communication   | 105, Sector 10, Faridabad-121006  | Rahul Jindal       | 0129-2223422,<br>9810456663                      |  |
| 43     | Haryana   | Gurgaon     | Signature Communications  | B-100 A , South City -1 , Opposite - Huda Gymkhana Club - Gurgaon 122001                | Raj Kumar Garg     | 0124-3956565,<br>0124-5102709                    |  |
| 44     | Haryana   | Karnal      | Mass Communication        | 7, Dayal Singh Colony, Kunj Pura Road, Karnal-132001                                    | Ms.Veena           | 0184-3090717,<br>9354761148                      |  |
| 45     | Haryana   | Panipat     | INS Telecom               | 2,Bishan Sarup Colony, Opp Bus Stand, Near Hotel Deep, Panipat                          | Jagdeep Shukdeva   | 0180-3091860,<br>5005360                         |  |
| 46     | Haryana   | Rohtak      | Telecentre                | Shakti Market, Civil Hospital Road, Near Chhotu Ram Chowk, Rohtak-124001                | Mr.Madaan          | 01262-247242, 9896243092,<br>09355671666         |  |
| 47     | Haryana   | Sonipat     | Teleworld                 | Ground Floor, Main Market, Main Railway Road, Opp. Old Civil Hospital, Sonipat- 138001. | Vipin Dua          | 1303090899,<br>9896052888                        |  |
| 48     | Haryana   | Yamunanagar | Manish Communications     | Shop No.3, Sharma Colony, Near Mahindra Petrol Bunk, Yamunanagar - 135005               | Vinod Kumar Mittal | 9355327374                                       |  |
| 49     | Jharkhand | Jamshedpur  | Tirupati Teletech         | Chakravarti Compound,Near Hotel Castel,Contractors Area,Bistupur,Jamshedpur-831001      | Abhijeet Mukherjee | 9334800350                                       |  |
| 50     | Jharkhand | Ranchi      | Satya Systems & Solutions | 158, Opp Hotel Palace, Kadru, Ranchi-834002   | Amit Rastogi       | 0651-2341361, 9835167667                         |  |
| 51     | Karnataka | Bangalore   | Meenakshi Electronics     | #129,Lalbagh Main Road, Bangalore-560027  | Mr. Ramesh.        | 080-56992943/ 30617345,<br>09341210375, 51146822 |  |

|    |           |               |                             |   |                     |   |
|----|-----------|---------------|-----------------------------|---|---------------------|---|
| 52 | Karnataka | Bangalore     | Optima Mobile Services      | 24/2, Rajkumar Road, Near Subramanyanagar Police Station, 1st Block, Rajajinagar, Bangalore - 560 010 | Unni Krishnan       | 080-23131953, 080-57722205, 09341266856 |
| 53 | Karnataka | Bangalore     | Optima Mobile Services      | B-3, Mallikarjun Complex, Opp R T Nagar Police Station, 80 Feet Road, RT Nagar, Bangalore-560032      | Prasad              | 8030610202                              |
| 54 | Karnataka | Bangalore     | Pranav infocom              | 91/92 , Hemachandra complex, Near VGP Show room, 4th block, jayanagar, Bangalore-560011               | S.V.Sirish          | 080-56697937, 26552551                  |
| 55 | Karnataka | Bangalore     | Pranav infocom              | 267/1, 1st Main Road, 6th Cross, Behind Shanti Sagar, Domlur Layout, Bangalore-560071                 | S.V.Sirish          | 80-56699937, 51256309                   |
| 56 | Karnataka | Bangalore     | Ascent Communication        | No:113, St Johns Church road, Bangalore - 5   | Naveen              | 080-30914856                            |
| 57 | Karnataka | Belgaum       | Hello India Telecom         | G-4, Maratha Mandir Complex, Khanapur Road, Near Railway Flyover, Belgaum -590 001.                   | Sanjay              | 9845327531/ 09341101800                 |
| 58 | Karnataka | Hubli         | Shruti Services             | shop no : B6, Laxmi complex, Court circle, Hubli- 580020  | Mr.Mahendar         | 0836-3090671, 98452-54251, 0836-3090671 |
| 59 | Karnataka | Mangalore     | Innovate Infocom            | 15-10-537/11, Jayavarma Centre, Mallikatte Circle, Kadri, Mangalore - 575002.                         | SEBASTIAN FERNANDES | 0824-56632441                           |
| 60 | Karnataka | Mysore        | K.K.Marketing,              | 1432/9, Tribhuvan Towers, opp Vetenary Hospital, Dewan's Road, DhanwantriRoad Cross, Mysore -570001   | Mr. Karunakaran.    | 09342115003, 09342120789                |
| 61 | Karnataka | Gulbarga      | Aishwaraya Communication    | G-15, G.R. Complex, Opp Mini Vidhan Soudha Main Road, Gulbarga  | Malikarjun          | 9342356000, 9342355116                  |
| 62 | Kerala    | Ernakulam     | Zenicon Infocom(P) limited  | 2nd floor, Tharian's Building, opp. Ship Yard, M.G. Road, Ernakulam-682015                            | Jaimon Joseph       | 0484-2359511, 9349271511                |
| 63 | Kerala    | Irinjalakuda  | Akbar Mobiles               | 376-44, Near St. Josephs college junction, Irinjalakuda-680121  | Mr Sebastian        | 0480-830796                             |
| 64 | Kerala    | Karunagapally | Supreme Enterprises         | Opp to KSRTC Bus stand, Karunagapally-690518  | Mr. Raish           | 0476-2620282                            |
| 65 | Kerala    | Kollam        | Digital Infosystems         | MC-3087, New Block, Bishop Jeromi Nagar, Chinnakada, Kollam-691001                                    | Johnson Lawrence    | 0474-2760647, 9846007059                |
| 66 | Kerala    | Kottayam      | SVM Technologies            | NSS Builbing, Near Pallipurathukavu Temple, Kodimapha, Kottayam - 686 002                             | Rajesh K S          | 0481-2565303, 9847310123                |
| 67 | Kerala    | Kozhikode     | Domain Infosystems          | Domain Infosystems, 2nd Floor, Darussalam Complex, Mavoor Road, Kozhikode- 673 004                    | Mukundan            | 0495-2722222                            |
| 68 | Kerala    | Manjeri       | Integrated Computer Systems | Royal Tower, TB Road, Manjeri - 676121  | Mr. Thomas Chacko   | 0483-3099686                            |
| 69 | Kerala    | Mavelilkarra  | Etutharayal Agency          | Etutharayil complex, K P Road, Kayamkulam-690502  | Anu T cheriyan      | 0479-2441760, 09388900025               |

|    | Circle         | City               | ASCs Name                            | Address   | Contact Person     | Phone  | Status                  |
|----|----------------|--------------------|--------------------------------------|---|--------------------|--|-------------------------|
| 70 | Kerala         | Pallakad           | Akbar Mobiles                        | N.S. Towers, Kalamandapam junction, Palakkad - 678 001  | Suresh             | 0491-2529823,<br>9847086446                  |                         |
| 71 | Kerala         | Thiruvananthapuram | Appolo Systems                       | TC 20/2392, Kalpalayam, Karamana P.O., Thiruvananthapuram - 695 002.  | Santosh            | 0471-2340523                                 |                         |
| 72 | Kerala         | Trichur            | Akbar Mobiles                        | Kadarathodh Building, North Bus stand, Trichur - 680 001  | Sojan              | 0487-2323424                                 |                         |
| 73 | Kerala         | Tirur              | Telit Telecom Shop                   | P.T.Building, Thazhepalam, Tirur  | Vasan,K.Nair       | 0494-2423311                                 | telittrur@lgmobiles.com |
| 74 | Madhya Pradesh | Bhopal             | Neha Sales Corporation               | F-104, Anmol Tower, E-5/14, Commercial Zone, Arera Colony, Bhopal-462016                                    | Ashok Hirwani      | 0755-5277247/2424088,<br>9826072327          |                         |
| 75 | Madhya Pradesh | Gwalior            | Computer Clinic                      | Global Appartments, City Centre, Opp Income Tax Office, Gwalior.  | Rishi Sharma       | 9329302200                                   |                         |
| 76 | Madhya Pradesh | Indore             | Neha Sales Corporation               | Shop No.18, Ground Floor, Johari Palace, M.G.Road, Indore - 452001.   | Ashok Hirwani      | 0731-5091833,<br>9826072327                  |                         |
| 77 | Madhya Pradesh | Jabalpur           | S M Shoppee                          | 846, Chattarpur Bhavan, Nr. Ashoka Hotel, Wright Town, Jabalpur, Pin 482002                                 | Vikas Jain         | 0761-5063183                                 |                         |
| 78 | Madhya Pradesh | Raipur             | Cybernet Systems                     | B-2,1st Floor, Garchaz Complex, Jail Road, Raipur - 492001  | Anand Singh        | 0771-2524033,<br>9826132918                  |                         |
| 79 | Madhya Pradesh | Ujjain             | Galaxy Computers & Communication     | 43/2, Varruchi Marg, Opp Madhav Nagar Police Staion, Freeganj, Ujjain                                       | Amitabh Chhajhlani | 9893003099                                   |                         |
| 80 | Maharashtra    | Amravati           | Scorpio Services                     | Shop No. 84, Ground Floor, GulshanTowers, Nr. Panchasheel Cinema, Amravati, Pin-444601                      | Mr. Pramod         | 0721-2567302,<br>09370151826, 9422156874     |                         |
| 81 | Maharashtra    | Aurangabad         | Unique Teletmatics                   | Shop no.108/B,Behind Sajawat Handloom, Tapdiya Super Market, Nirala Bazar, Aurangabad-431001                | Mr. Mahesh         | 0240-2356447, 9823007730,<br>09325210364     |                         |
| 82 | Maharashtra    | Chinchwad (Pimpri) | Ritz Communication                   | Shop No 22, Gawde Kunal garden,Pimpri-Chinchwad Link Road, Chinchwad, Pune-411033                           | Mr Reyaz           | 020-7485613,<br>020 30961900,<br>09890339777 |                         |
| 83 | Maharashtra    | Jalgaon            | Saranag Services                     | B-288, Golani Market, Jalgaon   | Mr. P.M. Waghanna  | 982331703                                    |                         |
| 84 | Maharashtra    | Kohlapur           | SMS Services                         | S5, Diwan Tower, Opp. Nutan Marathi School, Near Mirajkar Tikky, Kolhapur, Pin -416005.                     | Prakash Patil      | 0231-2541120,<br>9823026120                  |                         |
| 85 | Maharashtra    | Margao             | Comlink Synergies India Pvt Limited. | Ground Floor, Shop No.i,Garden view building., Next to UTI Bank, Near MargaoMunicipal Garden, Margao-403601 | Sunil              | 09326105629,<br>9822101522,<br>09326105637   |                         |

|     |             |             |                                 |   |                          |  |
|-----|-------------|-------------|---------------------------------|---|--------------------------|--|
| 86  | Maharashtra | Nagpur      | Spectrum Marketing              | Shop No.2, Dharampeth Towers, West High Court (WHC) Road, Dharampeth, Nagpur - 440010   | Sonali                   | 0712-3095700 / 5618186, 2527823        |
| 87  | Maharashtra | Nasik       | MOBS Associates                 | SHOP NO. 12, FIRST FLOOR, KAPOTE-MEHER MARKET, RENUKA NAGAR, WADALA NAKA, DAWRKA, NASIK - 422001                              | Girish Bhangre           | 0253-5623613, 09370291070, 09371531078 |
| 88  | Maharashtra | Panjim      | Comlink Synergies India Pvt Ltd | Shop No. 5, Dr Amaram Borkar Road, Next to RIL Mutual Fund, Panjim, Goa-403001  | Sunil                    | 09326105629                            |
| 89  | Maharashtra | Pune        | Mobile World                    | G-25, AKSHAY COMPLEX, DHOLE PATIL ROAD, PUNE-411 001 30, Time Square, Near Hotel Panchami, Pune Satara Road, Pune.            | Pawan Mantri             | 30942268, 9325088055                   |
| 90  | Maharashtra | Pune        | Horizon                         |   | Mr. Nilesh Pundye        | 39501222 / 9325002399                  |
| 91  | Maharashtra | Sangli      | Ramesh Electronics              | Opp. Kanya Purohit prashala, Rajwada, Sangli-416416   | Suresh Shegane           | 0233-2327601, 9823085176, 09372107601  |
| 92  | Maharashtra | Solapur     | Jawaharlal Radio Service        | 184, Gold Finch Peth, nr Hotel Ritesh, Solapur - 413007.  | Prasanna J Chavan        | 0217-2725030, 9422458830, 9823317081   |
| 93  | Mumbai      | Kalyan      | Vintech Solutions               | SHOP- 14, GROUND FLR, ARCHIES APARTMENT, OAK BAUG, KALYAN-421301  | Pawan                    | 9322877555                             |
| 94  | Mumbai      | Vasai       | E-Link Solutions                | Shop No.5, Type C, Bldg no.5/6, Shanti Vihar, Mira Road -E, Pin Code :401107.   | Kamlesh                  | 022-28552087, 09323182084              |
| 95  | Mumbai      | Mumbai      | Absolute Networks               | A007, Vishal Shopping Centre, Next to Vishal Hall, Near Station, M.V.Road, Andheri (E), Mumbai - 400 069                      | Arun                     | 022 39544800, 9322252390               |
| 96  | Mumbai      | Mumbai      | Bombay Telecom Services         | 211, 212, Navjeevan Commercial Society, Building No.3., Second Floor, Above Hasmmukh Tea, Mumbai Central (E), Mumbai: 400004. | Mr. Tejinder Singh Kalha | 9323900612                             |
| 97  | Mumbai      | Mumbai      | Creative Solutions              | SHOP NO 6 AMBIKA COOPERATIVE HOUSING SOCIETY, JAWAHAR NAGAR ROAD NO 2 NEAR RAILWAY CROSSING, GOREGAON WEST, MUMBAI 400062     | Anand                    | 022-28769003, 022-39533603, 9820198338 |
| 98  | Mumbai      | Mumbai      | Sai Tele Services               | A-110, Satyam Commercial Complex, M.G.Road, Ghatkoper (E), Mumbai - 400077.   | Mr. Suresh Kotle         | 9892549782                             |
| 99  | Mumbai      | Mumbai      | LG Service Centre               | Third Floor, Trade World, Kamala Mills Compound, Senapati Bapat Marg, Lower Parel, Mumbai-400013                              | Rajib Saha               | 022-24947375, 09323190401              |
| 100 | Mumbai      | Navi Mumbai | LG Service Centre- DAKK         | A Block, Ground Floor, Dhirubhai Ambani Knowledge City, Navi Mumbai-400709  | Rajnish                  | 022-30388052, 09323190405              |
| 101 | Mumbai      | Thane       | Vinay Technologies Pvt Ltd      | Shop no 3, Minal Chhaya Aptt, Municipal Corporation Road, Panch Pakhadi, Thane (W) - 400601                                   | Vinod Jakotiya           | 022-25304960, 9821068231, 09322213342  |
| 102 | Mumbai      | Navi Mumbai | Hello World                     | Shop No 53, GF, Welfare Chambers, Sector-17, Vashi, Mumbai-400703   | Mahesh                   | 022-27657705, 09322641396              |

|     | Circle | City        | ASCs Name                   | Address   | Contact Person   | Phone                                     | Status |
|-----|--------|-------------|-----------------------------|---|------------------|---|--------|
| 103 | Mumbai | Khar (W)    | Komplex Telecom Corporation | 1, Satguru Shopping Center, Ilrd road, Khar(W), Mumbai  | Mr Mohammad      | 022-26461917,<br>09323395024              |        |
| 104 | Mumbai | Parvel      | Oceanic Tele System         | Shop No.10, Prajapati Arcade, Sector 15, New Parvel (E), Dist. Raigad.  | Shailash Bobade  | 022-56104542,<br>0932217221               |        |
| 105 | Mumbai | Powai       | Unicom Infotel Pvt Ltd      | C- 413, Solaris, Sakivihar Road, opp. L & T gate No.6, Powai, Mumba-400 079.  | Chetan Pawar     | 022-39411140,<br>55049376                 |        |
| 106 | Mumbai | Dadar       | Trident Services            | 8-A, Vasant Smruti, Dadasaheb Phalke Road, Beside 'BharatKshetra Building', Near Dadar station(E), Dadar -East, Mumbai - 400 014. | Mr. Rajesh Sarda | 98200 36869                               |        |
| 107 | Orissa | Bhubneshwar | S.A.INFOSYS                 | 291.Bomikhal, Opp.Akamra cinema hall, Bhubaneswar-751010  | Sarabjeet Singh  | 0674-2573113/4                            |        |
| 108 | Orissa | Cuttack     | O.A.INFOTECH                | Behind Govt Bus Stand, Badambadi, Cuttack -753012   | Manas Mahapatro  | 0671-2312613                              |        |
| 109 | Punjab | Amritsar    | Bajaj Tele-communication    | 87, G Floor, Nehru Complex, Lawrence Road, Amritsar-143001  | Suman Bajaj      | 09356024827, 9814650314,<br>0183-3958859  |        |
| 110 | Punjab | Barnala     | Unique Infotech             | Mittal Street, Near M C Office, Barnala-148101  | Pankaj Goyal     | 01679- 238007,                            |        |
| 111 | Punjab | Bathinda    | Lalli's Electronic Gallery  | 1139-A, First Floor, Amrik Singh Road, Nr Gole Digg, Bhatinda-151005  | Ashok Kakria     | 0164- 2239500/2236337,<br>9814223310      |        |
| 112 | Punjab | Chandigarh  | Vignesh Services            | S.C.O- 189-90, Sec- 34, Chandigarh  | Mukesh Arya      | 0172-3018028,<br>09316134655              |        |
| 113 | Punjab | Hoshiarpur  | Kuldip's Mobile Care        | Dhobian Wali Gali, Phagwara Road, Hoshiarpur-146001   | Kuldip           | 01882-226906,<br>9815073906               |        |
| 114 | Punjab | Jalandhar   | Mobile Center               | Shop No-7, Gobind Market, Opp-Beni Hospital, Nakodar Road, Jalandhar.   | Jogesh Diwan     | 0181-3092666, 9814029696,<br>9815314060   |        |
| 115 | Punjab | Ludhiana    | Shahi Communication         | Shop No.5, 4X International, 583 L, Model Town, Ludhiana  | Amit Shahi       | 0161-3944190                              |        |
| 116 | Punjab | Malerkotla  | Prime Infocomm              | Opp. Main gate, Govt College, Malerkotla-148023   | Raj Verma        | 01675-253899, 9814040066,<br>01675-331979 |        |
| 117 | Punjab | Moga        | Super Communication         | Pawan Market, Opp shankar Batteries, Court Road, Moga-142001  | Jai Deep Mehta   | 9356314398                                |        |
| 118 | Punjab | Patiala     | Image Services              | 84, First Floor, Leela Bhawan, Patiala-147001   | Rohit Bansal     | 0175-2222796,<br>9815761262.              |        |



|     |           |             |                              |  |                   |  |
|-----|-----------|-------------|------------------------------|--|-------------------|--|
| 119 | Rajasthan | Jaipur      | Kamakshi Telecom             | 105,1st floor,Paradise, C-61(A), Sarojini Marg, C-Scheme, Jaipur-302001  | Rahul Bhargav     | 0141-2365575,<br>09314512863               |
| 120 | Rajasthan | Jaipur      | Alpha Infotech Systems       | F-1, First Floor, Krishna Mall, Lakshmi Mandir Crossing, Tonk Road, Jaipur-302015                                  | Shatrughan Mangal | 0141-5106777, 9829077136,<br>0141-3099724  |
| 121 | Rajasthan | Jodhpur     | Omega Electronics            | UG/4, Adeshwar Tower, Main Chopasani Road, Opp.Gehlrot Watch Co, Jodhpur-342003                                    | Pratap Singh      | 0291-3091214,<br>09314717171               |
| 122 | Rajasthan | Kota        | Cyber Infosystems            | 26, Ground floor, Kalawati Palival market, Gumanpura, Kota-324007  | Shyam Maheshwari  | 0744-2398153,<br>09352603354, 09352620153  |
| 123 | Rajasthan | Udaipur     | Ficus Enterprises            | 13, Darshanpura, Opp.M.B.Commerce College Gate, Nr Computer Zone, Udaipur-313002                                   | Virendra Ranka    | 0294-2410002, 2413002,<br>09314410002      |
| 124 | Tamilnadu | Chennai     | Unicare Infocomm Services    | No.293, Arcot Road, Next to Indian Overseas Bank, Kodambakkam Chennai - 24   | Kartik            | 044 24724666,<br>044 52047059, 09382306857 |
| 125 | Tamilnadu | Chennai     | GS Systems                   | 547/352, F M Towers, Mount Road, Nandanam, Chennai-600035  | Kanirajan         | 044-24330889,<br>9884160010                |
| 126 | Tamilnadu | Chennai     | U Com Technologies Pvt. Ltd. | Shop#3, Door # 24, New #30, Balfour Apartments, Balfour Road, Kilpauk,Chennai - 600 010.                           | Shyam             | 044-52174656/52175115,<br>9884187800       |
| 127 | Tamilnadu | Chennai     | Escomm Systems India P Ltd   | No 57-7, Arunodaya Apartments Next to Hotel Sindhoori Near by Everest BusStop, Ponnmalai High Road, Chennai-600003 | Mrs N S Vijayari  | 044-30901688,<br>256121212                 |
| 128 | Tamilnadu | Chennai     | Genesis Communication        | 63/3, First main road, Gandhi Nagar, Adyar, Chennai-600020   | Mr Suresh         | 044-24401188                               |
| 129 | Tamilnadu | Coimbatore  | Fast Track                   | Sudera Complex, 354B, 100 Feet Road, COIMBATORE - 641012   | Anand Prakash     | 0422-2490577, 9843080040,<br>09363100080   |
| 130 | Tamilnadu | Cuddalore   | Kasturi Cellular Service     | NO: 37 (2C) BHARATHI ROAD,CUDDALORE. 607 001,CUDDALOREDISTRICT,TAMIL NADU.   | Mr Raghupati      | 04142 - 220183                             |
| 131 | Tamilnadu | Erode       | JANS Electronics             | 148,Mettur Road, Opposite shakti vinayak temple, Dana Complex, Erode-638011  | M Kanan           | 0424-2258526,<br>9443263508                |
| 132 | Tamilnadu | Madurai     | Deava Electronics            | No 4, Thirumakulam North Street,Near Ayyappan koil, Thhallakulam, Madurai-625002                                   | Guna              | 0452-5360995, 0452-2526179, 09344107995    |
| 133 | Tamilnadu | Pondicherry | Digital Logistics            | 126/2, Perumal Koil Street (Bharathi Street Cutting), Pondicherry-605001   | G Singaravelu     | 9843093348, 09345455351,<br>0413-5210148   |
| 134 | Tamilnadu | Salem       | Vishwesh Mobiles             | Sixer Complex, 121/19A, Sarada College Road, Next to Abi Medical Centre, Salem - 636007                            | Vasudev Nayak     | 0427-3090535                               |
| 135 | Tamilnadu | Thanjavur   | Z M Electronics              | 33,New Municipal Shopping Complex, Opp LIC, Gandhi ji road, Thanjavur-613001                                       | Ziauddin          | 04362-272595,<br>09360313254               |
| 136 | Tamilnadu | Tirunelveli | Classic Electronic           | 39, Trivendrum Road, Opposite Kalimark, Welcome Complex, Palayamkottai, Tirunilveli-627002                         | Erkins            | 0462-2575801                               |

|     | Circle        | City       | ASCs Name  | Address  | Contact Person      | Phone                                  | Status |
|-----|---------------|------------|--|--|---------------------|--|--------|
| 137 | Tamilnadu     | Tirupur    | Shri Vasavi Electronics                          | # 155-303, Mangalam Road, Karuvam palayam, Tirupur - 641604                      | MR.U.B. Bala Murali | 0421-3091438, 98422-74300, 09363005560 |        |
| 138 | Tamilnadu     | Trichy     | S K Electronics                                  | Raj Complex, 9/A EVR Road, Puthur, Trichy- 620017                                | Krishnan            | 0431-2771946, 9843178104, 09345101502  |        |
| 139 | Tamilnadu     | Coimbatore | Nucom Services                                   | 3/61, Master Building, Kattoor Road, Pappa Naicken, Palayam, Coimbatore -641037. | Mr.Uthaman          | 9348621788, 0422-5351569               |        |
| 140 | Tamilnadu     | Vellore    | Matha Communication                              | 4, S.L.N Plaza, Opposite Odai Pilliar Koil, Gandhinagar, Vellor - 632006         | Gunaa Shekhar       | 0416-2240800                           |        |
| 141 | Uttar pradesh | Agra       | NSC Computers                                    | Shop No G-124, Block No- 29, Sanjay Place, Agra - 282002                         | Rajiv Singhal       | 0562-2520032, 09319111350              |        |
| 142 | Uttar pradesh | Agra       | Space Consultancy & Services                     | UG 1 & 2, Opp. Jaihind Hotel, Merchant Chamber, Sadar Bazar, Agra-282001.        | Tarvir              | 0562-3957826, 09358504140              |        |
| 143 | Uttar pradesh | Aligarh    | A V Computer Services                            | G-1, Ganpati Plaza, Jha Compound, Marris Rd, Aligarh-202001                      | Vaibhav             | 0571-2506148, 9412274391               |        |
| 144 | Uttar pradesh | Allahabad  | B.P.Electronics                                  | G-11, Indira Bhawan, Ground Floor, Civil Lines, Allahbad-211001                  | Ms Naina Pandey     | 0532-2608088                           |        |
| 145 | Uttar pradesh | Bareilly   | Sapan Infotech                                   | G- 64 A Kunwar Complex, Near Gupta Watch Co, 116 Civil Lines, Bareilly           | Sanjeev Singh       | 9359102467                             |        |
| 146 | Uttar pradesh | Dehradun   | Krishna Communication                            | Shop No 15A, Meedo Plaza, Rajpur Road, Dehradun, Uttaranchal-249001              | Vinod               | 0135 3090895,09358112922, 09358119696  |        |
| 147 | Uttar pradesh | Ghaziabad  | Concessionair Documentation India Pvt Ltd (CDIL) | C-83, Rajnagar District Center (RDC), Ghaziabad                                  | Arun Sharma         | 0120-3092011                           |        |
| 148 | Uttar pradesh | Gorakhpur  | Eternal Electronics                              | Shop No.11, Pandey Complex, 33, Kasya Road, Opp DIG Bunglow, Gorakhpur 273001    | Ram Pratap          | 0551-2204520                           |        |
| 149 | Uttar pradesh | Kanpur     | AR Infotech                                      | 111/402 Ashok Nagar, Kanpur Pin 208012   | Manoj Shukla        | 0512 3111662, 9839068734, 0512-3093011 |        |
| 150 | Uttar pradesh | Lucknow    | NET COM  | 3 way road, City Point, Opp Krishi Bhawan, Lucknow-226024                        | Kawaljeet           | 0522-3094222                           |        |
| 151 | Uttar pradesh | Meerut     | Systech Computers                                | F-124/125 1st floor Ganga Plaza, Begum Bridge Road, Meerut-250002                | Vineet Goyal        | 0121-2691167, 09358416631              |        |
| 152 | Uttar pradesh | Moradabad  | Bhavya Technologies                              | A12, 1st Floor, Rampur Road,Gandhi Nagar, Moradabad                              | Vivek Kumar Singh   | 0591-3092318                           |        |

|     |               |               |                            |  |                                   |                                       |
|-----|---------------|---------------|----------------------------|--|-----------------------------------|---------------------------------------|
| 153 | Uttar pradesh | Muzaffarnagar | Jai Computers              | Shop No. 4, 1st Floor, Roorkee road, Near Shiv Chowk, Central Bank Mkt. Muzaffarnagar-251001                     | Manohar Singh                     | 0131-2635483,<br>9412110215           |
| 154 | Uttar pradesh | Noida         | M R Telecom                | J-45, First Floor, Sector-18, NOIDA-201301   | Kailash Aggarwal                  | 0120-2591440,<br>9871197801           |
| 155 | Uttar pradesh | Saharanpur    | Maharaj Communications     | Near Maharaja Palace, Delhi Road, Saharanpur-247001  | Pankaj Malhotra                   | 0132-2720881,<br>09358311202          |
| 156 | Uttar pradesh | Varanasi      | Shivam Mobile Distributors | Shop No.5,B37/115-B-1 Baradari Complex, Rathyatra Crossing, Varansi Pin221010                                    | Rishi Mohan                       | 9839241003, 9335418998,<br>9335497424 |
| 157 | Uttar pradesh | Lucknow       | ALFA ELECTRONICS           | Shop No.GF20 ABC Complex, Kanpur Road, Lucknow   | Harjinder Singh                   | 0522-3948730                          |
| 158 | W Bengal      | Assansol      | Sky Computer & Telecom     | Islam Market, Nuruddin Road, Assansol-713301   | Syed Arshad Ali                   | 0341- 2207719,<br>9832160886          |
| 159 | W Bengal      | Burdwan       | San Infosys                | Tikonia Bus Stand, Central Mkt, GT Road, Burdawan-713101   | Sanjit Debnath                    | 0342-3090265,<br>9832192170           |
| 160 | W Bengal      | Calcutta      | Benma Infosol Pvt Ltd.     | P-168/1 CIT Road,Scheme VIIM,KOLKATA 700 067   | Arun Surana                       | 033-30943176/7                        |
| 161 | W Bengal      | Calcutta      | JP Computers               | 5B Ekdalia Place, Kolkata - 700019   | Somim Kabir                       | 033-24401923                          |
| 162 | W Bengal      | Calcutta      | Jaksom Engineering Pvt Ltd | Block-A, Shop-1, Ambika Vihar,1/1 Harduttrai Chamarua Road,Howrah- 711001  | P.Mukherjee                       | 033- 30950383                         |
| 163 | W Bengal      | Calcutta      | Skylink                    | 8/1A, Little Russel Street, Calcutta-700071  | H R Molla                         | 033-30903814,<br>033-32091037         |
| 164 | W Bengal      | Durgapur      | Tech International         | Red Cross Road, City Centre, Durgapur-713216   | Amitava Banerjee                  | 0343-2546893,<br>9434002244           |
| 165 | W Bengal      | Barrackpore   | Friends Communication      | 32(8) Barasat Road,N/L 15 no railgate,PO-nonachandanpukur,PS- Titagarh,Barrackpore, Dist-North 24PGS, PIN-743102 | Arup Sarkar & TarasankarMukherjee | 033-25921263,<br>9330986253           |