LG

ENGLISH | ITALIANO | ESPAÑOL | FRANÇAIS | DEUTSCH | ΕΛΛΗΝΙΚΆ | ČEŠTINA | NEDERLANDS | POLSKI | LIMBA ROMÂNĂ | MALTI | EESTI KEEL | DANSK | NORSK | SVENSKA | HRVATSKI | SRPSKI | БЪЛГАРСКИ | MAGYAR | PORTUGUÊS | SLOVENŠČINA | LATVIEŠU VALODA | LIETUVIŲ KALBA | GAEILGE | МАКЕДОНСКИ | SHQIP | BOSANSKI | SLOVENŠČINA

INSTALLATION MANUAL

AIR CONDITIONER

Please read this installation manual completely before installing the product.
Installation work must be performed in accordance with the national wiring standards by authorized personnel only.
Please retain this installation manual for future reference after reading it thoroughly.

HVAC Controller(AC Manager 5)
PACM5A000
Original instructions

MFL69396403
Rev.08_101425

www.lg.com

Copyright © 2016 - 2025 LG Electronics Inc. All Rights Reserved.

SAFETY INSTRUCTIONS

The following safety guidelines are intended to prevent unforeseen risks or damage from unsafe or incorrect operation of the appliance. The guidelines are separated into 'WARNING' and 'CAUTION' as described below.

⚠ This symbol is displayed to indicate matters and operations that can cause risk.
Read the part with this symbol carefully and follow the instructions in order to avoid risk.

⚠ WARNING

This indicates that the failure to follow the instructions can cause serious injury or death.

⚠ CAUTION

This indicates that the failure to follow the instructions can cause the minor injury or damage to the product.

⚠ WARNING

Installation

- To reinstall the product, please contact the dealer from where you purchased the product, or a service center for reinstallation service.
  - Installation of the product by an unauthorized person may result in fire, electric shock, explosion, injury, or a malfunctioning of the product.
- Do not twist or damage the power cord.
  - It may cause fire or electric shock.
- For electrical work, please contact the dealer from where you purchased the product, or a service center.
  - Disassembly or repair by an unauthorized person may result in fire or electric shock.
- Install the product in an area shielded from rain.
  - If water gets into the product, it may malfunction.
- Do not install the product in a humid area.
  - If the product is damp, it may malfunction.

- For installation of the product, please contact the dealer from where you purchased the product, or a service center.
  - Installation of the product by an unauthorized person may result in fire, electric shock, explosion, injury, or a malfunctioning of the product.
- For electrical work, please have an electrician do the work based on the installation manual and specified circuit diagram.
  - Using an unsuitable cord, or having a non-professional work on the electricals may result in fire or electrical shock.
- Do not place the product near a fire source.
  - It may result in the product catching fire.
- If the product is installed in a hospital or a communication base station, provide sufficient protective equipment against electrical noise.
  - The product may malfunction or other products may work abnormally.
- Securely install the product.
  - If the product is not secured during installation, it may fall or malfunction.
- Read the manual thoroughly to correctly install the product.
  - If not, an incorrect installation may cause fire or electric shock.
- When wiring the product, do not use a non-standard cable, nor extend the cable excessively.
  - It may cause a fire or electric shock.
- Securely install the power cord and communication cable.
  - An unsecure installation may result in a fire or electric shock.
- Do not connect the power cord to the communication terminal.
  - It may cause a fire, electric shock, or a product malfunction.
- Do not install the product in an area near combustible gas.
  - It may result in fire, electric shock, explosion, injury, or a malfunctioning of the product.

Operation

- Do not place a heavy object on the power cord.
  - It may cause a fire or electric shock.
- Do not change or extend the power cord arbitrarily.
  - It may cause a fire or electric shock.
- Use the cord specific to the product.
  - Using an unauthorized non-standard cord may result in a fire or electric shock.

- Do not use a heat device near the power cord.
  - It may cause a fire or electric shock.
- Ensure that water never gets into the product.
  - It can result in an electric shock, or the product may malfunction.
- Do not place any container with liquid on the product.
  - The product may malfunction.
- Do not touch the product with wet hands.
  - It may cause a fire or electric shock.
- Use standard components.
  - Use of an unauthorized product may result in fire, electric shock, explosion, injury, or a malfunctioning of the product.
- If the product has been submerged in water, you should contact a service center.
  - It may cause a fire or electric shock.
- Do not shock the product.
  - The product may malfunction.
- Do not store or use any combustible gas or flammable substances near the product.
  - It may cause a fire, or a product malfunction.
- Do not disassemble, repair, or revamp the product arbitrarily.
  - It may cause a fire or electric shock.
- Children and the elderly should use the product under the supervision of a guardian.
  - Carelessness may cause an accident, or the product to malfunction.
- The guardian should prevent children from accessing the product.
  - The product may be damaged or it may fall, causing injury to children.
- Keep in mind the operating temperature range specified in the manual. if there is no operating temperature range in the manual, use the product between 0 and 40 °C (32 and 104 °F).
  - If the product is used outside this range, the product may be severely damaged.
- Do not press the switch or button with a sharp object.
  - It can result in an electric shock, or the product may malfunction.
- Do not wire the product while it is turned on.
  - It may cause a fire or electric shock.

- If the product sounds or smells different, stop using the product.
  - It may cause a fire or electric shock.
- Do not place a heavy object on the product.
  - The product may malfunction.
- Do not spray water on the product, or clean it with a water-soaked cloth.
  - It may cause a fire or electric shock.
- Do not use the product for the preservation of animals and plants, precision instruments, art pieces, or for other special purposes.
  - It may cause property damage.
- Dispose the packing material safely.
  - If it is not disposed, user may be hurt by the unattended packaging material, and plastic or vinyl packaging envelope, etc. shall be disposed to a safe place to prevent children playing with it. If children play with vinyl envelope that is hard to be ripped, there is a danger of suffocation.

⚠ CAUTION

Installation

- Securely install the product in an area where the weight of the product can be supported.
  - The product may fall and be destroyed.
- Do not use the product where there is oil, steam, or sulfuric gas.
  - It may effect the product's performance, or damage it.
- Check the rated power capacity.
  - It may cause a fire, or a product malfunction.
- Be careful not to drop or damage the product when moving it.
  - The product may malfunction or the person may sustain an injury.
- Ensure that the cord is connected securely to prevent dew, water, or insects from getting into the product.
  - If a foreign substance gets inside, it may cause an electric shock or the product may malfunction.
- Do not install the unit in potentially explosive atmospheres.

Operation

- Clean the product with a soft cloth, but not with a solvent-based detergent.

- The use of a solvent-based detergent may cause a fire or deform the product.

- Do not touch the panel using a pointy or sharp object.
  - It can result in an electric shock, or the product may malfunction.
- Do not let the product come into contact with a metal substance.
  - The product may malfunction.
- When sterilizing or disinfecting, stop using the product.
  - The product may work abnormally.
- Do not touch inside the product.
  - The product may malfunction.
- Check the condition of the product after using the product for an extended period of time.
  - If the product is used for an extended period of time, the product's condition may be worsen, causing injury to the user.
- Do not leave the product near a flower base, water bottle, or any other liquids.
  - It may cause a fire or electric shock.
- If the liquid crystal of the product is broken, please do not let your skin such as face or hands contact with.
  - Personal injury or property damage may occur.

Class A device

NOTE

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment.

This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

⚠ CAUTION

Changes or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment.

Disposal of your old appliance

1. This crossed-out wheeled bin symbol indicates that waste electrical and electronic products (WEEE) should be disposed of separately from the municipal waste stream.
2. Old electrical products can contain hazardous substances so correct disposal of your old appliance will help prevent potential negative consequences for the environment and human health. Your old appliance may contain reusable parts that could be used to repair other products, and other valuable materials that can be recycled to conserve limited resources.
3. You can take your appliance either to the shop where you purchased the product, or contact your local government waste office for details of your nearest authorised WEEE collection point. For the most up to date information for your country please see www.lg.com/global/recycling

Disposal of waste batteries/accumulators

1. This symbol may be combined with chemical symbols for mercury (Hg), cadmium (Cd) or lead (Pb) if the battery contains more than 0.0005% of mercury, 0.002% of cadmium or 0.004% of lead.
2. All batteries/accumulators should be disposed separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities.
3. The correct disposal of your old batteries/accumulators will help to prevent potential negative consequences for the environment, animal and human health.
4. For more detailed information about disposal of your old batteries/accumulators, please contact your city office, waste disposal service or the shop where you purchased the product. (http://www.lg.com/global/sustainability/environment/take-back-recycling/global-network-europe)

Disposal of Waste Batteries

- All batteries should be disposed separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities.
- The correct disposal of your old batteries will help to prevent potential negative consequences for the environment, animal and human health.
- For more detail information about disposal of your old batteries, please contact your city office, waste disposal service or the shop where you purchased the product. Also You can contact our LG Support Representative Call center from below Link https://www.lg.com/sa_en/support/contact/telephon

❊ The above information applies only to Saudi Arabia.

التخلص من مخلفات البطاريات

- يجب التخلص من جميع البطاريات بشكل منفصل عن مجاري النفايات البلدية عن طريق مرافق الجمع المعينة التي تعينها الحكومة أو السلطات المحلية.
- يساعد التخلص الصحيح من البطاريات القديمة في منع الآثار السلبية المحتملة على البيئة وصحة الحيوان والبشر.
- لمزيد من المعلومات التفصيلية حول التخلص من البطاريات القديمة ، يرجى الاتصال بمكتب خدمة التخلص من النفايات في مدينتك أو المتجر الذي اشتريت منه المنتج.
  كما يمكنك الاتصال بمركز اتصال ممثل دعم LG عن طريق الدخول علي الرابط التالي

  https://www.lg.com/sa_en/support/contact/telephone

  تنطبق المعلومات الواردة أعلاه فقط على المملكة العربية السعودية.

*Safely dispose all materials in accordance with federal/state/local laws or ordinances.

التخلص الأمن من كافة المواد بما يتوافق مع القوانين والأوامر المحلية

AC MANAGER 5 FUNCTIONS AND SPECIFICATION

AC Manager 5 is the central controller that can manage up to 8192 units in one space individually or as combined. AC Manager 5 can monitor or control the units installed in each room of the building from the places such as the management office of a building or the administration office of a school.

AC Manager 5 Functions

Major functions of AC Manager 5 are as follows.

Controlling of up to 8192 air conditioner devices (32 central controllers)
- Monitoring of error and operation status
- Controlling the peak power / demand power
- System setting function

AC Manager 5 Components

Inside the packaged box of AC Manager 5, there are the components as in the following drawing. Open the packaged box of AC Manager 5, and check if all of the corresponding components are included.



AC Manager 5



Manual

Screw



Power Supply Adaptor
Input: 100-240 V~ 50/60 Hz, 1.2 A
Output: 12 V⎓ 3.33 A, 40 W MAX



Power Cord
250 V~, 3 A

SD Card 8 GB

Item	Specification
Protection class	IP20

CAUTION

SD Card provided by LG is for the data backup and recovery when specialized service technician supports the service, so be careful not to lose it by using it for other purposes.

CAUTION

If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.

NOTE

Components or options may differ from the actual product picture.

Names of each part of AC Manager 5

AC Manager 5 is composed as follows.

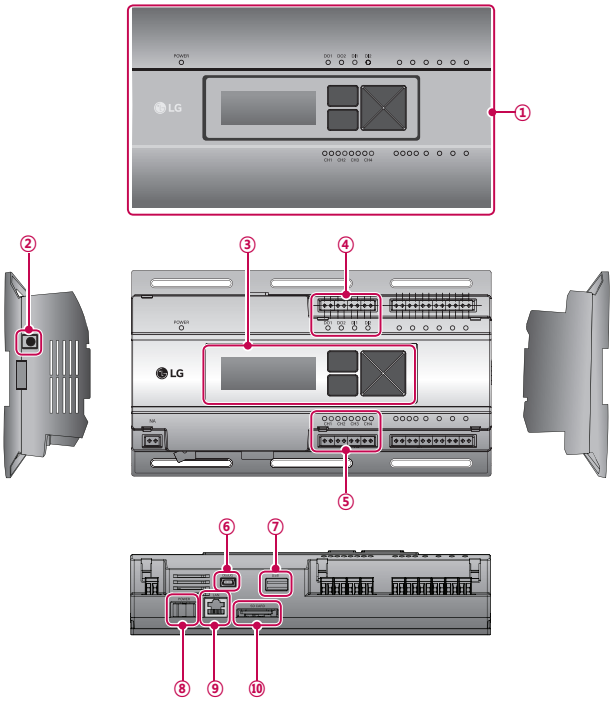

Number	Interfacing product	Remark
①	Cover	Front cover of AC Manager 5
②	Adaptor connection jack	Jack for 12 V⎓ to connect to the power supply adaptor
③	Buttons and LCD	Buttons and LCD to set network environment and to display other information
④	Basic external input/ output signal connectors	Reserved (DI: 2EA, DO: 2EA)
⑤	RS-485 communication port	Reserved (total 4EA)
⑥	Mini USB port	USB to Serial port for software debugging
⑦	USB port	For software update and data backup
⑧	Power switch	Switch to turn on or off the power of AC Manager 5
⑨	Ethernet port	Ethernet port to connect to internet
⑩	SD card slot	For data backup

INSTALLING AC MANAGER 5

Installing AC Manager 5

This chapter describes how to install AC Manager 5 to use. In order to use AC Manager 5, the installation should be performed by the following order.

STEP 1. Install AC Manager 5 and connect cables

Install AC Manager 5 and connect network and other cables.

STEP 2. Set AC Manager 5 network address

To be able to access AC Manager 5 through internet, set the network address.

STEP 3. Input central controller (ACP, AC SMART) information

Input and save the device information in Web GUI, which is AC Manager 5 operating program.

STEP 4. Check Web GUI control/monitoring

Access Web GUI, which is AC Manager 5 operating program, to check if control/monitoring are properly performed.

⚠ CAUTION

- AC Manager 5 installation should be performed by the certified installation professional. Therefore, the installations mentioned in this chapter must be carried out certified installation technician.
- Consult the service center or the professional installation agency certified by us about any question or request related to the installation.

Installing AC Manager 5 and connecting cables

AC Manager 5 shall be installed in an adequate place, and Ethernet cable (LAN cable) shall be connected for the connection to internet or central controller. To fix AC Manager 5, the following 2 methods may be used. Install in DIN RAIL or fix to the wall considering the environment of the site.

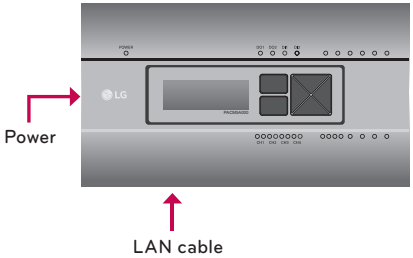

Installing AC Manager 5 in DIN RAIL

AC Manager 5 can be installed in DIN RAIL with width 35 mm and height 7.5 mm.

To install AC Manager 5 in adequate place, proceed according to the following instructions.

Here, it describes the installation method of AC Manager 5 with the example of installing AC Manager 5 in DIN RAIL.

- Decide the space to install AC Manager 5.
- Before installing AC Manager 5, check if it is the adequate place to connect AC Manager 5 with the power, and LAN cable.
- Install DIN RAIL.
- Hook the top part of AC Manager 5 on DIN RAIL.
- Push the main body of AC Manager 5 until you hear the sound of installation.
- Pull AC Manager 5 to check if it is fixed.

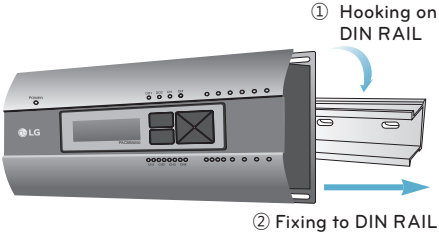

CAUTION

- After installing to DIN RAIL, do not fix to the wall using screws. AC Manager 5 may be damaged.
- DIN Rail fixing Screw Spec: M3, screw head height 2.0 ~ 1.75 mm, screw head diameter 7.0 ~ 5.5 mm

Fixing AC Manager 5 to the wall

AC Manager 5 can be installed by fixing to the wall.

To install AC Manager 5 in adequate place, proceed according to the following instructions.

Here, it describes the installation method of AC Manager 5 with the example of installing AC Manager 5 on the wall.

- Decide the space to install AC Manager 5
  Before installing AC Manager 5, check if it is an adequate place for the connection of AC Manager 5, power, and LAN cable.
- Use driver to fix on the wall. According to the installation location, you can fix it as in the following figure.

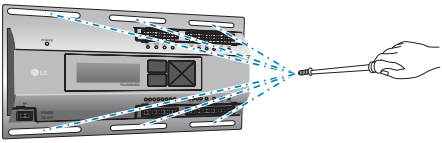

Connecting Ethernet cable (LAN cable) to AC Manager 5

AC Manager 5 can be connected to hub or directly to the internet network through Ethernet cable.

It is the case of connecting AC Manager 5 to the basic internet network installed at the site, and it is generally connected a hub.

In such case, Ethernet cable shall be connected as a direct cable.

Use Ethernet cable to connect to LAN port of AC Manager 5.

Setting AC Manager 5 network address

After connecting AC Manager 5 to various devices via the cable, the network environment of AC Manager 5 should be set by starting AC Manager 5. The following information should be set to use AC Manager 5.

- IP address of AC Manager 5
- Gateway address
- Netmask

CAUTION

Setting the network environment information
Without the above information input, communication defect may occur or control through AC Manager 5 may be impossible. Therefore, take caution and input correctly.

Before setting AC Manager 5 environment

The network environment of AC Manager 5 can be set by the LCD and the buttons at the front side of AC Manager 5.

The current AC Manager 5 information and the menu are displayed on the LCD, and the menu can be changed and selected by pressing SET and button and Up/Down/Left/Right (▲, ▼, ◀, ▶) buttons.

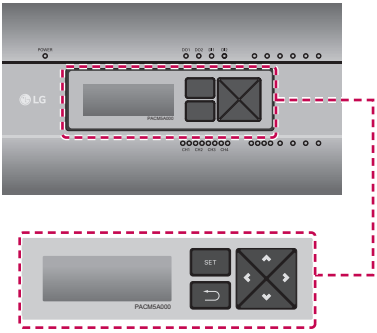

Turning on AC Manager 5

Turn on AC Manager 5 to set the network environment of AC Manager 5.

When the power switch is turned on, AC Manager 5 booting screen is displayed on the LCD as shown at the following figure, and when booting is completed, the initial AC Manager 5 screen is displayed.



NOTE

Software version

The software version of the current AC Manager 5 is displayed at the initial AC Manager 5 screen. Also,

the software version may be different according to the manufacturing date of AC Manager 5.



Entering into the environment setup mode

Press [SET] button of AC Manager 5 to enter into the environment setup mode of AC Manager 5.

When the [SET] button is pressed for the first time, the menu to set the IP address is displayed as shown below.



Press up/down (▲, ▼) button to place the arrow on the desired function.

- When you select [Network Info] and press [SET] button, it enters the No. 1 menu in the following figure. In [Network Info] menu, input the network information such as IP address of AC Manager 5.
- When you select [Function] and press [SET] button, it enters the No. 2 menu in the following figure. In [Function] menu, AC Manager 5 software service function is supported.

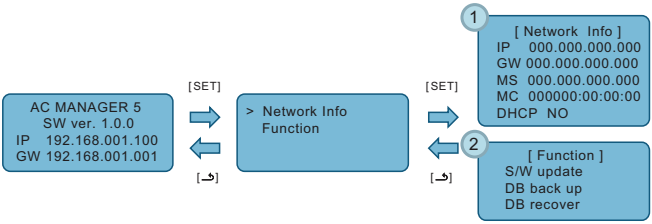

⚠ CAUTION

- [Function] menu is used by the system air conditioner service technician, so user shall never use this function.
  If this function is incorrectly used, it may cause disorder of the AC Manager 5.

STARTING

Login and logout

You can access to AC Manager 5 with IP address in the internet address window and use various central control functions.

NOTE

- For Web control, Chrome browser is recommended.
- For access to web, IP address needs to be set.

Login

Log in method is as follows.

1 Input IP address of AC Manager 5 in the internet address window.

2 Input ID and password in the log in window and click [Log In] button.

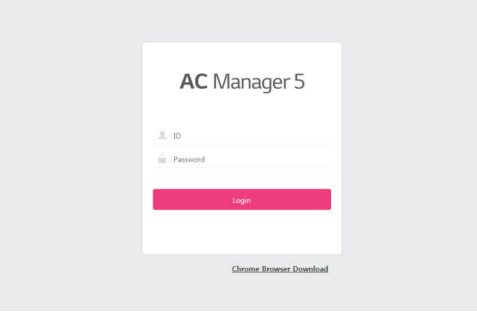

Logout

Log out method is as follows.

1 In menu, click [Account] menu.

2 In Account information window, click [Log Out] button.

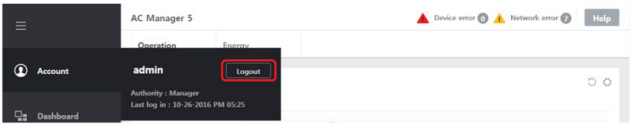

Disposal of your old appliance (as per e-waste Rules)

1. When this crossed out wheeled bin symbol is depicted on the product and its operator's manual, it means the product is covered by the e-waste Management and Handling Rules , 2011 and are meant to be recycled, dismantled, refurbished or disposed off.
2. **Dos**
   a. The product is required to be handed over only to the authorized recycler for disposal.
   b. Keep the product in isolated area, after it becomes non-functional/unrepairable so as to prevent its accidental breakage.

   Don't
   a. The product should not be opened by the user himself/herself, but only by authorized service personnel.
   b. The product is not meant for re-sale to any unauthorized agencies/scrap dealer/kabariwalah.
   c. The product is not meant for mixing into household waste stream.
   d. Do not keep any replaced spare part(s) from the product in exposed area.
3. Any disposal through unauthorized agencies/person will attract action under Environment (Protection) Act 1986.
4. This product is complied with the requirement of Hazardous Substances as specified under Rule 13 (1) & (2) of the E-Waste (Management & Handling) Rules, 2011.
5. To locate a nearest collection centre or call for pick-up (limited area only) for disposal of this appliance, please contact Toll Free No. **1800-180-9999** for details. All collection centre and pick up facilities are done by third parties with **LG Electronics India Ltd.** Merely as a facilitator. For more detailed information , please visit : http://www.lge.com/in.

※ The above information applies only to India.

Recycling Info.
EPR registration number :
11595375254588000000 0

अपने पुराने नपिटान के उपकरण (ई-अपशष्टि नयिम के अनुसार)

1. जब इस काटे गए पहयि वाले बनि का चन्हि कसी उपकरण और इसके ओपेरटर की पुस्तकि के साथ संलग्न होता है तो इसका मतलब है कि इसे "ई- अपशष्टि "(प्रबंधन और हथालन) नयिम २०११ के अंतर्गत सम्मलिति कयिा गया है , और इसे नवीनीकरणकरन ,वघिटन और नपिटान के लएि बनाया गया है ।
2. **करें**
   क . उपकरण को सर्फि अधकृित पुनः नवीनीकरणकर्ता को ही नपितारण करने हेतु हस्तांतरति करें ।
   ख. जब उपकरण कार्यरत न हो इसे अलग क्षेत्र में रखें ताकि उपकरण से होने वाली दुर्घटनाओ से बचा जा सके ।

   न करें
   क. इस उपकरण को स्वयं/खुद नहीं खोलना चाहएि ! उपकरण को केवल अधकृित अधकिारी के द्वारा ही खोला जाना चाहएि ।
   ख. इस उपकरण को पुनः बक्रिी के लएि कसी भी कबाड़ीवाला / भंगार-वाला / अनाधकृित संस्था को न दें ।
   ग. इस उपकरण को कसी घरेलू अपशष्टि सामान के साथ मलिाकर न रखें ।
   घ. उपकरण के बदले हुए या आतंरकि पुरजो को खुले क्षेत्र में न रखें ।
3. यदि कसी अनाधकृित वभिाग या व्यक्ति के द्वारा नपिटारन कयिा जाता है तो यह पर्यावरण (सुरक्षा) धारा १९८६ के अंतर्गत आता है ।
4. यह उत्पाद ई-अपशष्टि (प्रबंधन और हथालन) नयिम 2011 के अन्तर्गत 13(1) एवं (2) के तहत नर्दिष्टि खतरनाक पदार्थो की आवश्यकता का पालन करता है ।
5. उपरोक्त पदार्थो के नपिटारन के लएि नजदीकी नपिटारन संसथान (संकीर्ण क्षेत्र)में कॉल करें। अधकि जानकारी के लएि हमारे टोल फ्री नंबर **1800-180-9999** पर कॉल करें. सभी संग्रहण केंद्र व पकि-अप की सुवधिाएं कसी थर्ड- पार्टी जो **"LG Electronics India Ltd."** को अपनी सेवाएं प्रदान कर रही हों, से करवाएं ।
   ज्यादा जानकारी के लएि देखें वेब:साईट - **http://www.lge.com/in**

※ ऊपर दी गई जानकारी केवल भारत पर लागू होती है।

[For Equipment under battery regulation]

English
The battery is in compliance with the Regulation (EU) 2023/1542

Italiano
La batteria è conforme al Regolamento (UE) 2023/1542

Español
La pila cumple con el Reglamento (UE) 2023/1542

Français
La pile est conforme à la réglementation (UE) 2023/1542

Deutsch
Die Batterie entspricht der Verordnung (EU) 2023/1542

Ελληνικά
Η μπαταρία συμμορφώνεται με τον κανονισμό (ΕΕ) 2023/1542

Česky
Baterie odpovídá Nařízení (EU) 2023/1542

Nederlands
Deze accu voldoet aan de verordening (EU) 2023/1542

Polski
Bateria spełnia wymogi rozporządzenia (UE) 2023/1542

Română
Bateria este în conformitate cu Regulamentul (UE) 2023/1542

Português
A bateria está em conformidade com o Regulamento (EU) 2023/1542

Magyar
Az akkumulátor megfelel az (EU) 2023/1542 rendeletnek

Български
Батерията е в съответствие с Регламент (ЕС) 2023/1542

Srpski
Baterija je u skladu sa Uredbom (EU) 2023/1542.

Hrvatski
Baterija je u skladu s Uredbom (EU) 2023/1542.

Svenska
Batteriet överensstämmer med förordning (EU) 2023/1542

Norsk
Batteriet overholder forordningen (EU) 2023/1542

Dansk
Batteriet er i overensstemmelse med forordning (EU) 2023/1542

Eesti
Aku vastab määrusele (EL) 2023/1542

Malti
Il-batterija hija konformi mar-Regolament (UE) 2023/1542

Slovenčina
Batéria je v súlade s nariadením (EÚ) 2023/1542

Slovenščina
Baterija je v skladu z Uredbo (EU) 2023/1542.

Latviešu
Akumulators ir atbilstīgs Regulai (ES) 2023/1542.

Lietuvių K.
Baterija atitinka Reglamentą (ES) 2023/1542

Gaeilge
Tá an cadhnra i gcomhréir le Rialachán (AE) 2023/1542

Македонски
Батеријата е во согласност со Регулативата (ЕУ) 2023/1542.

Shqip
Bateria është në përputhje me Rregulloren (BE) 2023/1542

Bosanski
Baterija zadovoljava zahtjeve navedene u Propisu (EU) 2023/1542

LG Electronics EU Importer names and addresses / Имена и адреси на вносителите на LG Electronics в ЕС / Nazivi i adrese uvoznika LG Electronics u EU / Nazivi i adrese uvoznika LG Electronics u EU / Názvy a adresy dovozců LG Electronics v EU / Navne og adresser på importører af LG Electronics i EU / Namen und Adressen der LG Electronics EU-Importeure / Ονόματα και διευθύνσεις εισαγωγέων της LG Electronics EU / Nombres y direcciones de importadores para la UE de LG Electronics / LG Electronics EL maaletoojate nimed ja aadressid / LG Electronics – EU:n maahantuojien nimet ja osoitteet / Noms et adresses des importateurs pour LG Electronics EU / Ainmneacha agus seolaí Iompórtálaí AE LG Electronics / Nazivi i adrese uvoznika proizvoda tvrtke LG Electronics u Europskoj uniji / Az LG Electronics európai uniós importőreinek neve és címe / Nöfn og heimilisföng LG Electronics innflytjenda innan ESB / Nomi e indirizzi degli importatori UE di LG Electronics / LG Electronics ES importuotojų pavadinimai ir adresai / LG Electronics ES importētāju nosaukumi un adreses / Имиња и адреси на увозници на LG Electronics за ЕУ / LG Electronics: ismijiet u indirizzi tal-importaturi tal-UE / Namen en adressen van importeurs voor LG Electronics EU / Navn og adresser for EU-importører for LG Electronics / Nazwy i adresy importerów produktów LG Electronics w Europie / Nomes e endereços dos importadores para LG Electronics EU / Numele și adresele Importatorului UE al LG Electronics / Názvy a adresy dovozcov LG Electronics do EÚ / Imena in naslovi uvoznikov za LG Electronics EU / Emrat dhe adresat e importuesve të LG Electronics në BE / Nazivi i adrese EU uvoznika kompanije LG Electronics / Namn och adresser för LG Electronics EU-importörer

LG Electronics Benelux B.V.	Krijgsman 1, 1186 DM Amstelveen, The Netherlands
LG Electronics Deutschland GmbH	Alfred-Herrhausen-Allee 3-5, 65760, Eschborn, Germany
LG Electronics France, SAS	Immeuble Workstation, 25 quai du Président Paul Doumer, 92 400 Courbevoie, France
LG Electronics España S.A.U.	Calle Chile 1, 28290, Las Rozas, Madrid, Spain
LG Electronics Portugal S.A.	Taguspark, Av. Jacques Delors 3, Edifício Inovacao I, Corpo 1, 2740-122, Porto Salvo, Portugal
LG Electronics Hellas S.A.	Ethnarhou Makariou str. 1, 17501, Delta Paleo Faliro, Greece
LG Electronics Italia S.p.A.	Via Aldo Rossi 4, 20149, Milan, Italy
LG Electronics Latvia SIA	Gustava Zemgala gatve 74A, Rīga, LV-1039, Latvia
LG Electronics Magyar Kft.	Konyves K. krt.3/a, 1097, Budapest, Hungary
LG Electronics Polska Sp. z o.o.,	Wołoska 22, 02-675, Warszawa, Poland
LG Electronics Magyar Kereskedelmi Kft. Budapesta Sucursala București,	11-15, Tipografilor Street, S-Park Business Centre, Building B3, 5th Floor, District 1, 013714 Bucharest, Romania
LG Electronics Nordic AB	Esbogatan 18, 164 94, Kista, Sweden
LG Electronics Shared Services Center B.V.	Krijgsman 1, 1186 DM Amstelveen, The Netherlands

Depending on products or models, actual importers may be limited to some subsidiaries. For EU-produced units, there is no applicable EU importer. / В зависимост от продуктите или моделите действителните вносители може да са ограничени до някои дъщерни дружества. За апарати, произведени в ЕС, няма приложим вносител в ЕС. / U zavisnosti od proizvoda ili modela, uvoznici mogu biti ograničeni na neka povezana društva.
Za jedinice proizvedene u EU ne postoji važeći uvoznik iz EU. / U zavisnosti od proizvoda ili modela, uvoznici mogu biti ograničeni na određene podružnice. Za jedinice proizvedene u EU ne postoji EU uvoznik. / V závislosti na výrobcích nebo modelech mohou být aktuální dovozci omezeni na některé dceřiné společnosti. U výrobků vyráběných v EU není žádný relevantní dovozce do EU. / Afhængigt af produkter eller modeller kan de faktiske importører være begrænset til enkelte datterselskaber. For EU-fremstillede enheder er der ingen relevant EUimportør. / Je nach Produkt oder Modell können die tatsächlichen Importeure auf einige Tochtergesellschaften beschränkt sein. Für in der EU produzierte Geräte gibt es keinen anwendbaren EU-Importeur. / Ανάλογα με τα προϊόντα ή τα μοντέλα, οι πραγματικοί εισαγωγείς ενδέχεται να περιορίζονται σε ορισμένες θυγατρικές. Για μονάδες που παράγονται στην ΕΕ δεν υπάρχει ισχύων εισαγωγέας της ΕΕ. / Dependiendo de los productos o modelos, los importadores efectivos podrían quedar limitados a algunos subsidiarios. Para las unidades producidas en la UE, no hay ningún importador para la UE aplicable. / Sõltuvalt toodetest või mudelitest võivad tegelikud maaletoojad olla piiratud mõnede tütarettevõtetega. EL-is toodetud seadmete puhul ei ole kohaldatavat EL maaletoojat. / Tuotteista tai malleista riippuen todelliset maahantuojat voivat rajoittua muutamiin tytäryhtiöihin. EU:ssa valmistetuilla laitteilla ei ole sovellettavaa EU:n maahantuojaa. / Selon les produits ou les modèles, les importateurs effectifs peuvent être limités à certaines filiales. Pour les unités produites dans l'UE, il n'y a pas d'importateur applicable pour l'UE. / Ag brath ar tháirgí nó múnlaí, d'fhéadfaí go mbeadh iompórtálaithe iarmhír srianta go roinnt fochomhlachtaí. Maidir le aonaid déanta sa AE, níl iompórtálaí AE infheidhme. / Ovisno o proizvodima ili modelima uvoznici mogu biti ograničeni na neke podružnice. Za uređaje proizvedene u Europskoj uniji nije predviđena tvrtka za uvoz iz EU. / A termékektől vagy modellektől függően előfordulhat, hogy a tényleges importőrök egyes leányvállalatokra korlátozódnak. Az EU-ban gyártott készülékek esetében nincs vonatkozó európai uniós importőr. / Raunverulegir framleiðendur geta verið takmarkaðir við tiltekin dótturfélög, en það fer eftir vörum eða vörumódelum. Engin ESB innflytjandi er fyrir hluti sem eru framleiddir innan ESB. / A seconda dei prodotti o dei modelli, gli importatori effettivi potrebbero essere limitati ad alcune filiali. Per le unità prodotte nell'UE, non esiste un importatore UE applicabile. / Priklausomai nuo gaminių ar modelių, tikrieji importuotojai gali apsiriboti kai kuriomis dukterinėmis įmonėmis. ES pagamintiems vienetams nėra tinkamo ES importuotojo. / Atkarībā no produktiem vai modeļiem, faktiskie importētāji var būt dažādi meitasuzņēmumi. ES ražotām vienībām nav piemērojama ES importētāja. / Зависно од производите или моделите, актуелните увозници можеби се ограничени на некои подружници. За единиците произведени за ЕУ, нема применлив увозник за ЕУ. / Skont il-prodott jew il-mudell, l-importaturi attwali jistgħu jkunu limitati għal ċerti sussidjarji. Għall-unitajiet prodotti fl-UE, m'hemmx importatur applikabbli tal-UE. /

Afhankelijk van de producten of modellen, kunnen de eigenlijke importeurs beperkt zijn tot enkele dochterondernemingen. Voor in de EU geproduceerde eenheden is er geen toepasselijke EU-importeur. / Avhengig av produkter eller modeller, kan faktiske importører være begrenset til enkelte datterselskaper. Det er ingen gjeldende EU-importør for EU-produserte enheter. / W zależności od produktów lub modeli, rzeczywiści importerzy mogą polegać na swoich podmiotach zależnych. W przypadku wyrobów produkowanych w UE nie ma odpowiedniego importera na region Unii. / Dependendo dos produtos ou modelos, os importadores existentes podem ser limitados a algumas filiais. Para as unidades produzidas na UE, não há nenhum importador da UE aplicável. / În funcție de produse sau modele, importatorii actuali ar putea fi limitați la anumite filiale. Pentru unitățile produse în UE, nu există niciun importator UE aplicabil. / V závislosti od výrobkov alebo modelov môžu byť skutoční dovozcovia obmedzení na niektoré dcérske spoločnosti. Pre zariadenia vyrobené v EÚ neexistuje žiadny príslušný dovozca do EÚ. / Odvisno od izdelkov ali modelov so lahko dejanski uvozniki omejeni na nekatere hčerinske družbe. Za enote, proizvedene v EU, ni ustreznega uvoznika iz EU. / Në varësi të produkteve ose modeleve, importuesit aktual mund të jenë të kufizuar vetëm në disa degë. Për njësitë e prodhuara në BE, nuk ka importues të zbatueshëm të BE-së. / U zavisnosti od proizvoda ili modela, stvarni uvoznici mogu biti ograničeni na neke podružnice. Za jedinice proizvedene u EU ne postoji merodavni EU uvoznik. / Beroende på produkter eller modeller kan faktiska importörer vara begränsade till vissa dotterbolag. För EU-tillverkade enheter finns det ingen tillämplig EU-importör.

LG Electronics Inc. Single Contact Point (EU/UK) :
LG Electronics Deutschland GmbH
Alfred-Herrhausen-Allee 3-5, 65760 Eschborn, Germany

	①	②	③
ENGLISH	Single Contact Point	EU	Germany
ITALIANO	Punto di contatto unico	UE	Germania
ESPAÑOL	Punto de contacto único	UE	Alemania
FRANÇAIS	Point de contact unique	UE	Allemagne
DEUTSCH	Einheitliche Anlaufstelle	EU	Deutschland
ΕΛΛΗΝΙΚΆ	Ενιαίο σημείο επαφής	EE	Γερμανία
ČEŠTINA	Jednotné kontaktní místo	EU	Německo
NEDERLANDS	Eén enkel contactpunt	EU	Duitsland
POLSKI	Punkt kontaktowy	UE	Niemcy
LIMBA ROMÂNĂ	Punct unic de contact	UE	Germania
PORTUGUÊS	Ponto de contacto único	UE	Alemanha
MAGYAR	Egyetlen kapcsolattartó pont	EU	Németország
БЪЛГАРСКИ	Единна контактна точка	EC	Германия
SRPSKI	Jedinstvena kontaktna tačka	EU	Nemačka
HRVATSKI	Jedinstvena kontaktna točka	EU	Njemačka
SVENSKA	Enskild kontaktpunkt	EU	Tyskland
NORSK	Enkelt kontaktpunkt	EU	Tyskland
DANSK	Enkelt kontaktpunkt	EU	Tyskland
SLOVENČINA	Jednotné kontaktné miesto	EÚ	Nemecko
SLOVENŠČINA	Enotna kontaktna točka	EU	Nemčija
GAEILGE	Pointe Teagmhála Aonair	AE	an Ghearmáin
SHQIP	Pikë e vetme kontakti	BE	Gjermania
BOSANSKI	Jedinstvena kontaktna tačka	EU	Njemačka
EESTI KEEL	Üks kontaktpunkt	EL	Saksamaa
LATVIEŠU VALODA	Vienotais kontaktpunkts	ES	Vācija
LIETUVIŲ KALBA	Bendras kontaktas visiems	ES	Vokietija
MALTI	Punt ta' Kuntatt Uniku	UE	il-Ġermanja
МАКЕДОНСКИ	Единствена контакт точка	ЕУ	Германија

Manufacturer :
LG Electronics Inc.
84, Wanam-ro, Seongsan-gu, Changwon-si, Gyeongsangnam-do, KOREA

UK Importer :
LG Electronics U.K. Ltd
Velocity 2, Brooklands Drive, Weybridge, KT13 0SL