



GB250f מדריך למשתמש

חלק מתוכנו של מדריך זה עלול להיות שונה מהטלפון עצמו, זאת בהתאם לתוכנת הטלפון או לחברת הסלולר שלכם.

CE0168

www.lgmobile.com

P/N : MMBB0334525 (1.0)

GB250f User Guide

Some of the contents in this manual may differ from your phone depending on the software of the phone or your service provider.

CE0168

www.lgmobile.com

P/N : MMBB0334525 (1.0)



Bluetooth QD ID B015097

מדריך למשתמש - GB250f עברית

חלק מתוכנו של מדריך זה עלול להיות שונה מהטלפון עצמו, זאת בהתאם לתוכנת הטלפון או לחברת הסלולר שלכם.

מדריך למשתמש - GB250f עברית

מדריך זה יסייע לכם להכיר את הטלפון הנייד החדש שלכם. תוכלו למצוא בו הסברים מועילים ביחס לאפשרויות שאותן מציע טלפון זה. חלק מתוכנו של מדריך זה עלול להיות שונה מהטלפון עצמו, זאת בהתאם לתוכנת הטלפון או לחברת הסלולר שלכם.

כיצד להשליך את המכשיר הישן שלכם



- 1 כשסמל זה של פח אשפה המסומן באיקס מופיע במדריך למוצר כלשהו, הכוונה היא לכך שמוצר זה מכוסה ע"י הנחייה מס' EC/2002/96 של האיחוד האירופי.
- 2 יש להשליך את כל המוצרים החשמליים והאלקטרוניים בנפרד ממערכת איסוף הזבל העירונית, באמצעות מתקני איסוף ייעודיים שנקבעו ע"י המשרד לאיכות הסביבה או הרשות המקומית.
- 3 בכך שתשליכו את המכשיר שלכם לאשפה בצורה הנכונה, תסייעו בהפחתת ההשפעות השליליות הפוטנציאליות על הסביבה ועל הבריאות.
- 4 לפרטים נוספים אודות השלכת המכשיר הישן שלכם לאשפה, צרו קשר עם הרשות המקומית שלכם, עם שירות איסוף האשפה המקומי או עם החנות שבה רכשתם את המוצר.

תוכן העניינים

הכרת הטלפון והכנתו לשימוש

- 5 היכרות עם הטלפון שלכם.....
- 6 התקנת כרטיס זיכרון.....
- 6 אתחול כרטיס זיכרון.....
- 7 התקנת כרטיס SIM וטעינת סוללה..
- 8 מפת התפריטים.....

העקרונות הבסיסיים

- 9 שיחות.....
- 9 ביצוע שיחה.....
- 9 ביצוע שיחות מתוך רשימת אנשי הקשר.....
- 9 מענה לשיחה ודחיית שיחה.....
- 9 שימוש ברמקול.....
- 9 חיג מהיר.....
- 9 צפייה ביומני השיחות שלכם.....
- 9 שינוי הגדרות שיחה.....
- 9 שימוש בחסימת שיחות.....
- 10 אנשי קשר.....
- 10 חיפוש אנשי קשר.....
- 10 הוספת איש קשר חדש.....
- 11 הוספת איש קשר לקבוצה.....
- 11 הוספת תמונה לאיש קשר.....
- 11 הודעות.....
- 11 שליחת הודעה.....
- 12 הגדרת דואר אלקטרוני.....
- 12 שליחת דוא"ל באמצעות חשבון..
- 12 הזנת טקסט.....
- 12 תיקיות הודעות.....

מולימדיה

- 14 מצלמה.....
- 14 צילום מהיר.....
- 14 מצלמה וידאו.....
- 14 נגן MP3.....
- 14 השמעת שיר.....
- 14 יצירת רשימת השמעה.....
- 14 רדיו.....
- 15 הקלטה קולית.....

הפריטים שלי

- 15 תמונות.....
- 15 צלילים.....
- 16 סרטוני וידאו.....
- 16 המשחקים ויישומים שלי.....
- 16 תוכן SVG.....
- 16 אחרים.....
- 16 כרטיס הזיכרון שלי.....
- 16 משחקים ויישומים.....
- 17 עזרי ניהול.....
- 17 שימוש בלוח שנה.....
- 17 הוספת פריט למשימות לביצוע... ..
- 17 הוספת תזכורת.....
- 17 הוספת תזכורת סודית.....
- 17 איתור תאריך.....
- 17 כלים.....
- 17 הגדרת התראת שיעון מעורר.....
- 17 שימוש במחשבון.....
- 17 שימוש בשעון עצר.....
- 17 המרת יחידות.....

תוכן העניינים

17	הוספת עיר לשעון עולמי
17	שירותי SIM
18	דפדפן
18	גישה לדפדפן
18	קישוריות
18	Bluetooth
18	חיבור USB
19	פרופילים

הגדרות

20	שינוי שפה
20	חיסכון בחשמל
20	שינוי הגדרות תצוגה
20	שינוי תאריך ושעה
20	שינוי הגדרות אבטחה
20	בקשת קוד PIN
20	נעילת מכשיר
20	החלף קודים
20	צפייה במצב זיכרון
20	שחזור הגדרות יצרן
20	שינוי הגדרות רשת
20	רשת
20	פרופילי אינטרנט
20	נקודות גישה
21	חיבור לחב' נתונים
21	הגדרות זרימה

הנחיות

22	הנחיות לשימוש בטוח ויעיל
26	נתונים טכניים

היכרות עם הטלפון שלכם




התקנת כרטיס זיכרון

הרימו את מכסה כרטיס הזיכרון והכניסו כרטיס מסוג micro SD כאשר אזור המגעים הזהובים שלו פונה כלפי מטה. סגרו את מכסה כרטיס הזיכרון עד לשמיעת הקליק. להסרת כרטיס הזיכרון, לחצו עליו בעדינות כפי שמתואר בתרשים.



הערה: כרטיס הזיכרון הוא אבזר אופציונלי.

אתחול כרטיס הזיכרון

הקישו על  ואחר כך בחרו **הגדרות**. בחרו **מנהל הזיכרון**, בחרו **זיכרון חיצוני** ולחצו על **אתחל**.


אזהרה: בעת אתחול כרטיס הזיכרון, כל תוכנו יימחק. אם אינכם מעוניינים לאבד את הנתונים השמורים בכרטיס, גבו אותו קודם לכן.

אזנייה/מטען/כבל
USB




לחצן עוצמה

- שולט בעוצמת צליל המקשים.
- במהלך שיחה: שולט בעוצמת האזניות.
- בעת השמעת רצועת רקע: שולט בעוצמת המוסיקה.



חריץ כרטיס זיכרון
Micro SD



התקנת כרטיס SIM וטעינת הסוללה


התקנת כרטיס SIM

בעת ההרשמה לרשת סלולרית, תקבלו כרטיס SIM יחד עם פרטי המנוי שלכם, כגון קוד PIN, שירותים אופציונליים נוספים וכרטיס אחרים.

חשוב! < כרטיס SIM ומגעיו עלולים להינזק בקלות על ידי שריטות או כיפוף, ולכן יש להיזהר בעת החזקתו, הכנסתו או הוצאתו של הכרטיס. הרחיקו את כל כרטיסי ה-SIM מהישג ידם של ילדים.

תרשימים

- 1 פתחו את מכסה הסוללה
- 2 הוציאו את הסוללה
- 3 הכניסו את ה-SIM
- 4 הכניסו את הסוללה
- 5 סגרו את מכסה הסוללה
- 6 טענו את הסוללה

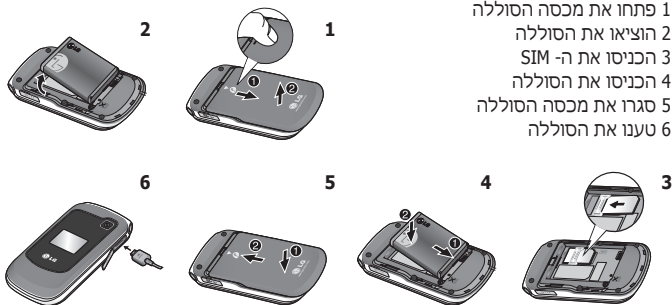

אזהרה: אין להסיר את הסוללה בעת שהטלפון דלוק, מכיוון שהדבר עלול לגרום נזק למכשיר.

מפת התפריטים

משחקים ויישומים

- 1 המשחקים והיישומים שלי
- 2 הגדרות

שיחות

- 1 יומני שיחות
- 2 מוני שיחות
- 3 נפח נתונים
- 4 עלויות שיחה
- 5 הפניית שיחה
- 6 חסימת שיחה
- 7 מספרים קבועים לחיג
- 8 שיחה ממתנה
- 9 הגדרות נפוצות

עזרי ניהול

- 1 לוח-שנה
- 2 משימות לביצוע
- 3 תזכורת
- 4 תזכורת סודית
- 5 איתור תאריך
- 6 הגדרות

מולטימדיה

- 1 מצלמה
- 2 מצלמת וידאו
- 3 מוסיקה
- 4 רדיו
- 5 הקלטה קולית

הודעות

- 1 צור הודעה חדשה
- 2 תיבת דואר נכנס
- 3 תיבת דואר
- 4 טיוטות
- 5 תיבת דואר יוצא
- 6 פריטים שנשלחו
- 7 התיקיות שלי
- 8 תבניות
- 9 סמלי הבעה
- 0 הגדרות

הפריטים שלי

- 1 התמונות שלי
- 2 הצלילים שלי
- 3 סרטוני הווידאו שלי
- 4 המשחקים והיישומים שלי
- 5 תוכן SVG
- 6 אחרים
- 7 כרטיס הויכרון שלי

פרופילים

- 1 רגיל
- 2 שקט
- 3 חוץ
- 4 מצב טיסה
- 5 מותאם-אישית 1
- 6 מותאם-אישית 2
- 7 מותאם-אישית 3

אנשי קשר

- 1 הוספת חדש
- 2 חפש
- 3 חיג מהיר
- 4 קבוצות
- 5 מספרי שירותים
- 6 המספר שלי
- 7 כרטיס הביקור שלי
- 8 הגדרות

כלים

- 1 תפריט מהיר
- 2 שעון מעורר
- 3 מחשבון
- 4 שעון עצר
- 5 ממיר
- 6 שעון עולמי
- 7 שירותי SIM

דפדפן

- 1 בית
- 2 הון כתובת
- 3 סימניות
- 4 קורא RSS
- 5 דפים שמורים
- 6 היסטוריה
- 7 הגדרות

קישוריות

- 1 Bluetooth
- 2 מצב חיבור USB



הגדרות

- 1 טלפון
- 2 תצוגה
- 3 תאריך ושעה
- 4 רשת
- 5 פרופילי אינטרנט
- 6 נקודות גישה
- 7 חיבור חב' נתונים
- 8 אבטחה
- 9 מנהל הזיכרון
- 0 הגדרות זרימה
- * שחזור הגדרות יצרן

שיחות

ביצוע שיחה

1 הקלידו את המספר באמצעות לוח המקשים. למחיקת ספרה, לחצו על **מחק (C)**.


2 לחצו על  כדי לחבר את השיחה.
3 לסיום השיחה, לחצו על .

טיפ! כדי להזין את התו + לצורך שיחה בינלאומית, לחצו לחיצה ארוכה על 0.


ביצוע שיחות מתוך רשימת אנשי הקשר

1 הקישו על  ובחרו **אנשי קשר** ואז **בחפש**.

2 תוך שימוש בלוח המקשים, הזינו את האות הראשונה בשם איש הקשר שברצונכם להתקשר אליו.


3 בחרו באפשרויות ואז **בצע שיחה** או לחצו על  כדי לחבר את השיחה.

מענה לשיחה ודחיית שיחה

כשהטלפון מצלצל, לחצו על המקש **קבל** או על  כדי לענות לשיחה.

כדי להשתיק את הטלפון בזמן הצלצול, פשוט בחרו **השתק**. מצב זה מועיל במיוחד במקרה ששכחתם להעביר את הפרופיל 'לשקט' לצורך פגישה.

לחצו על  או בחרו **בדחה** כדי לדחות שיחה נכנסת.

טיפ! ניתן לשנות את ההגדרות כך שתוכלו לענות לשיחות שלכם בדרכים שונות. לחצו על , בחרו **שיחות** ובחרו **הגדרות נפוצות ומצב מענה**. בחרו מתוך **לחץ על מקש התקשר**, **פתח פומית** או **לחץ על מקש כלשהו**.

שימוש ברמקול


במהלך שיחה ניתן להפעיל את הרמקול על ידי לחיצה על מקש  כדי שתוכלו להשתמש בטלפון ללא ידיים.

חיוג מהיר

לחצו על  ובחרו **אנשי קשר** ואז **בחיוג מהיר**.


ניתן להקצות מספר חיוג מהיר לאנשי קשר שעימם אתם משוחחים בתדירות גבוהה.

צפייה ביומני השיחות שלכם

לחצו על  ובחרו **בשיחות**. בחרו **ביומני שיחות**.

ניתן לבדוק את רישום השיחות שלא נענו, שהתקבלו ושחויגו רק אם הרשת שלכם תומכת בזיהוי המספר המתקשר באזור השירות שלכם.

שינוי הגדרות שיחה

ניתן להתאים את התפריט לשיחה לחצו על , ובחרו **בשיחות**.

• **מוני שיחות** - צפו בפרטים אודות משך השיחות שביצעתם - הנכנסות והיוצאות כאחד.

• **נפח נתונים** - צפו בכמות הנתונים שקיבלתם וששלחתם לאינטרנט, לנתונים או לשניהם, ביחידות קילובייט.

• **עלויות שיחה** - צפו בחיובים של ה'שיחה האחרונה' או של 'כל השיחות'. שירות זה הוא תלוי-רשת, ויש חברות סלולר שאינן מספקות אותו.

• **הפניית שיחה** - בחרו אם ולאן להפנות את שיחותיכם.

• **חסימת שיחה** - בחרו אילו שיחות ברצונכם לחסום.

• **מספרים קבועים לחיגו** - בחרו רשימת מספרים שניתן להתקשר אליהם מהטלפון שלכם. לשם כך תצטרכו את קוד PIN2 מחברת הסלולר שלכם. ניתן יהיה להתקשר מהטלפון שלכם רק למספרים הכלולים ברשימת המספרים הקבועים.

• **שיחה ממתונה** - קבלו התראה כשיש לכם שיחה ממתונה (תלוי בחברת הסלולר שלכם).

• הגדרות נפוצות

דחיית שיחה - ניתן לקבוע אם לדחות שיחות נכנסות.

שלח את המספר שלי - בחרו אם המספר שלכם יוצג כאשר אתם מתקשרים למישהו (תלוי בחברת הסלולר שלכם).

חיגו אוטומטי - מאפשר לכם להגדיר את החיגו האוטומטי החוזר בעקבות ניסיון חיגו שנכשל.

מצב מענה - מאפשר לכם להגדיר את שיטת המענה. ניתן לבחור בין 'לחץ על מקש שיחה', 'פתח פומית' ולחץ על מקש כלשהו.


התראת דקה - קבע אם יישמע צליל כל דקה במהלך השיחה שלכם.

מצב מענה BT - בחרו כיצד לענות לשיחה כשאתם משתמשים בדיבורית Bluetooth. בחרו בין **דיבורית** לבין **מכשיר**.

שמור מספר חדש - אפשרות זו תאפשר שמירה של מספרים שעדיין לא נמצאים ברשימת אנשי הקשר שלכם עם סיום השיחה.

אנשי קשר


חיפוש אנשי קשר

1 הקישו על  ובחרו **אנשי קשר** ואז **בחפש**.

2 תוך שימוש בלוח המקשים, היינו את האות הראשונה בשם איש הקשר שברצונכם להתקשר אליו.

3 כדי לגלול דרך אנשי הקשר ומספריהם השונים, השתמשו בחיצו הניווט.

הוספת איש קשר חדש

1 לחצו על  ובחרו **אנשי קשר** ואז **בהוסף חדש**.

2 בחרו אם לשמור את איש הקשר החדש **במכשיר** או ב-**USIM**.

3 היינו את המידע הרצוי בשדות שלפניכם ובחרו **בוצע**.

הוספת איש הקשר לקבוצה

ניתן לשמור אנשי קשר בקבוצות, לדוגמה כדי להפריד בין עמיתים מהעבודה לבין בני המשפחה שלכם. בטלפון כבר מוגדרות מספר קבוצות, כגון משפחה, חברים, עמיתים, בית ספר VIP.

הוספת תמונה לאיש קשר



ניתן לשנות את תצוגת אנשי הקשר בספר הטלפונים שלכם ולכלול תמונות עבורם.

- 1 הקישו על  ובחרו אנשי קשר ואז בהגדרות.
- 2 בחרו הגדרות רשימת אנשי קשר ואז בחרו הצג תמונה ופעיל.
- 3 כעת חזרו לרשימת אנשי הקשר ובחרו את איש הקשר שלו אתם רוצים להוסיף תמונה.
- 4 בחרו אפשרויות ובחרו ערוך.
- 5 גללו מטה לאזור התמונות. בחרו ערוך ואז בחרו בללא תמונה, צלמית, צלם או השתמש בתמונה קיימת. אם בחרתם בהשתמש בתמונה קיימת, תוכלו לבחור בתמונה השמורה בזיכרון הטלפון. אם בחרתם בצלם תמונה, תיפתח כוננת המצלמה כדי שתוכלו לצלם את איש הקשר. צלמו את התמונה ולחצו על **בחר**.
- 6 בחרו **בוצע**.

הודעות

מכשיר GB250f שלכם כולל פונקציות הקשורות ל-SMS (שירות הודעות קצרות), ל-MMS (שירות הודעות מולטימדיה), לדואר אלקטרוני וכן גם הודעות שירות של הרשת הסלולרית.

שליחת הודעה

- 1 הקישו על , בחרו הודעות ובחרו **צור הודעה חדשה**.
 - 2 בחרו הודעה כדי לשלוח SMS או MMS.
 - 3 כעת ייפתח עורך ההודעות. עורך ההודעות משלב הודעות SMS ו-MMS באופן אינטואיטיבי, נוח לשימוש וקל להחלפה ביניהם. מצב ברירת המחדל של עורך ההודעות הוא SMS.
 - 4 הקלידו את ההודעה שלכם.
 - 5 בחרו באפשרויות ולאחר מכן בהוסף הוספת תמונה, וידאו, צליל, סמלים, תבנית, סמל הבעה, שם ומספר, שקופית חדשה, נושא ועוד.
 - 6 בחרו **שלח**.
 - 7 בחרו איש קשר מתוך רשימת אנשי הקשר או הזינו את מספר הטלפון מתוך אפשרויות.
 - 8 בחרו **שלח**.
- טיפ!** ניתן לבחור את סוג ההודעה מתוך SMS או MMS כאשר אתם מקלידים טקסט שאורכו גדול מעמוד אחד בשדה ההודעה. אם ברצונכם לשנות את סוג ההודעה, לחצו על  < הודעות < הגדרות < הודעת טקסט, ובחרו ב **שלח הודעת טקסט ארוכה כ-.**

הערה: ישנם שדות שיאפשרו רק שיטת הזנת טקסט אחת (למשל מספר טלפון בשדות ספר הטלפונים).

מצב חיזוי T9

מצב חיזוי T9 משתמש במילון המובנה בטלפון כדי לזהות מילים שאתם כותבים על פי סדר הקלדתן. פשוט לחצו על מקש המספר המקושר לאות שברצונכם להזין והמילון יזהה את המילה לאחר הזנת חלק מהאותיות.

מצב ABC דיני

מצב זה מאפשר הזנת אותיות באמצעות לחיצה על המקש המכיל את האות הרצויה פעם, פעמיים, שלוש, או ארבע פעמים עד להצגתה.

מצב 123

הקלידו מספרים על ידי הקשה אחת לכל מספר. ניתן גם להוסיף מספרים בזמן שאתם במצב אותיות על ידי לחיצה ארוכה על המקש הרצוי.

תיקיות הודעות

לחצו על , בחרו **הודעות**. מבנה התיקיות שבהם אתם משתמשים בדגם GB250f הוא קבוע ולא ניתן לשנותו.

תיבת דואר נכנס - כל ההודעות הנכנסות מגיעות לתיבת הדואר הנכנס.

תיבת דואר - כאן יופיעו כל ההודעות הדוא"ל שלכם.

טיטות - כאשר אין לכם זמן להשלים את כתיבת ההודעה, תוכלו לשמור את מה שהספקתם לכתוב עד כה.

אזהרה: אם מוסיפים תמונה סרטון וידאו, וכי להודעה, היא תומר אוטומטית להודעת MMS ואתם תחויבו בהתאם.

הגדרת דואר אלקטרוני

ניתן לשמור על קשר גם בעת נסיעות על ידי שימוש בדואר אלקטרוני ב- GB250f שלכם. קל ומהיר ליצור חשבון דוא"ל מסוג POP3 או IMAP4.

1 לחצו על , בחרו **בהודעות** ואז בחרו **בהגדרות**.

2 בחרו **דוא"ל** ואחר כך **בחשבונות דוא"ל**.

3 בחרו **בהוסף** והגדירו את חשבון הדוא"ל.

שליחת דוא"ל באמצעות חשבון חדש

כדי לשלוח/לקבל דוא"ל, יש להגדיר חשבון דוא"ל.

1 בחרו ב- , בחרו **בהודעות** ובחרו **בצור הודעה חדשה**.

2 בחרו **דוא"ל** וכעת ייפתח חלון דוא"ל חדש.

3 כתבו נושא ולחצו על **אפשרות**, בחרו 'כתוב דוא"ל' ולחצו על 'אישור'.

4 הקלידו את ההודעה שלכם.

הזנת טקסט

ניתן להזין תווים אלפא-נומריים באמצעות לוח המקשים של הטלפון. בטלפון זה מוצעות אפשרויות הזנת הטקסט הבאות: מצב חיזוי T9, מצב דיני ABC ומצב 123.

תיבת דואר יוצא - זו תיקיית אחסון זמנית
בעת משלוח ההודעות.

פריטים שנשלחו - כל ההודעות ששלחתם
נשמרות בתיקיית הפריטים שנשלחו.
התיקיות שלי - ניתן להעביר הודעות מתיבת
הדואר הנכנס או היוצא לתוך 'התיקיות שלי'.
ניתן גם להעביר הודעות משם לתיבת הדואר
המקורית.



תבניות - רשימת הודעות שהוגדרו מראש,
ואפשרות נוחה לשליחת תשובה מהירה.

סמלי הבעה - ניתן להוסיף, לערוך
ולמחוק סמלי הבעה. ניתן להזין את
סמלי הבעה שאתם מעדיפים
בעת כתיבת ההודעה.

מולטימדיה


מצלמה

צילום מהיר

- 1 לחצו על  ובחרו **מולטימדיה**. בחרו ב**מצלמה** כדי להתחיל לצלם.
- 2 תוך שאתם מחזיקים את הטלפון בצורה אנכית, כווננו את העדשה אל נושא הצילום.
- 3 מקמו את הטלפון כך שתוכלו לראות את נושא הצילום.
- 4 לחצו על  כדי לצלם.

מצלמת וידאו

צילום סרטון וידאו מהיר

- 1 הקישו על  ובחרו **מולטימדיה**.
- 2 בחרו ב**מצלמת וידאו**.
- 3 כווננו את העדשה אל נושא הוידאו.
- 4 לחצו על  כדי להתחיל לצלם.
- 5 הטקסט 'מקליט' יופיע על המסך והטיימר בתחתית יציג את משך הוידאו שלכם.
- 6 בחרו **הפסק** כדי להפסיק את הצילום.

נגן MP3

במכשיר GB250f שלכם יש נגן MP3 מובנה כך שתוכלו לשמוע את כל השירים האהובים עליכם.

השמעת שיר

- 1 הקישו על  ובחרו ב**מולטימדיה** ואז ב**מוסיקה**.
- 2 בחרו ב**כל הרצועות** ואז בחרו בשיר שברצונכם להשמיע. בחרו ב**הפעל**.
- 3 בחרו ב- כדי להשהות את השמעת השיר.
- 4 בחרו ב- כדי לעבור לשיר הבא.
- 5 בחרו ב- כדי לעבור לשיר הקודם.
- 6 בחרו ב**אחורה** כדי להפסיק את ההשמעה ולחזור לתפריט כל הרצועות.

יצירת רשימת השמעה

תוכלו ליצור רשימות השמעה משלכם על ידי בחירה במבחר שירים מתוך **תיקיית** כל הרצועות.


- 1 הקישו על  ובחרו ב**מולטימדיה** ואז ב**מוסיקה**.
- 2 בחרו ב**רשימות השמעה**.
- 3 בחרו ב**הוסף**, הזינו את שם רשימת ההשמעה ולחצו על **שמור**.
- 4 כעת יוצגו **כל הרצועות**. בחרו בכל השירים שברצונכם לכלול ברשימת ההשמעה שלכם על ידי גלילה אליהם ובחירה בסמן .
- 5 בחרו ב**בוצע** כדי לשמור את רשימת ההשמעה.

רדיו

במכשיר GB250f שלכם יש רדיו FM כדי שתוכלו להאזין לתחנות האהובות עליכם כשאתם בתנועה.

הפריטים שלי

ניתן לשמור את כל קבצי המולטימדיה בזיכרון הטלפון כך שתהיה לכם גישה נוחה לכל התמונות, הצלילים, סרטוני הוידאו ופריטים אחרים. ניתן כמו כן, לשמור את הקבצים שלכם בכרטיס זיכרון. היתרון בשימוש בכרטיס זיכרון הוא בכך שניתן לפנות נפח זיכרון בטלפון.

כל קבצי המולטימדיה שלכם יישמרו תחת **הפריטים שלי**. לחצו על  ואז בחרו ב**פריטים שלי** כדי לפתוח את רשימת התיקיות.

תמונות

תיקיית **התמונות שלי** מכילה תיקיית תמונות ברירת מחדל שנטענו מראש לטלפון, תמונות MMS שנטענו מראש וניתנות לשליחה. תמונות שהורדתם ותמונות שצילמתם במצלמת הטלפון.

צלילים

תיקיית **הצלילים שלי** מכילה את צלילי ברירת המחדל של הטלפון, את הקלטות הקול שלכם, ואת קבצי השמע שהורדתם ושמרתם. מכאן ניתן לנהל ולשלוח קבצי שמע או להגדיר צלילים כרינגטונים.

הערה: כדי להאזין לרדיו, יש לחבר את האוזניות. הכניסו את תקע האוזניות לתוך השקע המתאים (אותו שקע שאליו אתם מחברים את המטען).

האזנה לרדיו

1 הקישו על  ובחרו ב**מולטימדיה** ואז ב**רדיו**.


2 בחרו במספר הערוץ של התחנה שברצונכם להאזין לה.


טיפ! ניתן להאזין לרדיו דרך הרמקול המובנה במכשיר. לחצו על **אפשרויות**, בחרו ב**הקשב דרך רמקול**.

הקלטה קולית

השתמשו בהקלטה קולית על מנת להקליט תזכורות קוליות או צלילים אחרים.

הקלטת תזכורת קולית


1 לחצו על  ובחרו ב**מולטימדיה** ואז ב**הקלטה קולית**.

2 לחצו על  לתחילת ההקלטה.

3 בחרו ב**הפסק** כדי להפסיק את ההקלטה.

4 לחצו על **אפשרויות** ובחרו ב**הפעל** כדי להאזין לתזכורת הקולית.

משחקים ויישומים

בטלפון GB250f שלכם יש משחקים שנטענו בו מראש כדי לשעשע אתכם בזמנכם החופשי. אם בחרתם להוריד משחקים או יישומים נוספים, הם יישמרו בתיקייה זו. לחצו על  ובחרו **במשחקים ויישומים**.

סרטוני וידאו

תיקיית **סרטוני הווידאו שלי** מכילה רשימה של כל סרטוני הווידאו שהורדתם או שצילמתם באמצעות הטלפון שלכם.

המשחקים והיישומים שלי

בתיקייה זו קיימים המשחקים והיישומים של הטלפון וכמו כן, ניתן לשמור את המשחקים והיישומים שהורדתם.

תוכן SVG

תיקיית 'תוכן SVG' מכילה את כל קבצי SVG ו-SVGZ - קבצי ברירת המחדל ואלה שהורדתם בעצמכם.

אחרים

מתוך תפריט **אחרים**, תוכלו לצפות בקבצים שלא נשמרו תחת תמונות, צלילים או סרטוני וידאו.

כרטיס הזיכרון שלי

אם הכנסתם כרטיס זיכרון, הוא יוצג כתיקייה בתוך 'הקבצים שלי'.

עזרי ניהול

השימוש בלוח השנה

(< עזרי ניהול > לוח שנה)

כאשר תכנסו לתפריט זה, ייפתח לוח השנה. התאריך הנוכחי מסומן ע"י סמן מרובע. ניתן להיזי את הסמן לתאריך אחר באמצעות מקשי הניווט.

הוספת פריט לרשימת המשימות

לביצוע

(< עזרי ניהול > משימות לביצוע)

ניתן להציג, לערוך ולהוסיף משימות לביצוע.

הוספת תזכורת

(< עזרי ניהול > תזכורת)

כאן תוכלו לשמור את התזכורת שלכם.

תזכורת סודית

(< עזרי ניהול > תזכורת סודית)

ניתן לכתוב תזכורת סודית כדי לשמור על הפרטיות שלכם. כדי להשתמש בתפריט זה יהיה עליכם להזין קוד אבטחה.

איתור תאריך

(< עזרי ניהול > איתור תאריך)

כלי איתור התאריך הוא כלי שימושי לחישוב התאריך בעוד מספר מסוים של ימים.

כלים

הגדרת התראת שעון מעורר

(< כלים > שעון מעורר)

ניתן להגדיר עד 5 התראות שעון מעורר שיצלצלו בשעות ספציפיות.

שימוש במחשבון

(< כלים > מחשבון)

המחשבון נועד לפעולות חשבון בסיסיות: חיבור, חיסור, כפל וחילוק.

שימוש בשעון עצר

(< כלים > שעון עצר)

אפשרות זו נועדה לשימוש בשעון עצר.

המרת יחידות

(< כלים > ממיר)

פונקציה זו ממירה כל מידה ליחידה הרצויה.

הוספת עיר לשעון העולמי

(< כלים > שעון עולמי)

ניתן להוסיף את העיר הרצויה לרשימת השעון העולמי. ניתן גם לבדוק את השעה הנוכחית בגריניץ' (GMT) ובערים חשובות ברחבי העולם.

שירותי SIM

(< כלים > שירותי SIM)

אפשרות זו תלויה ב-SIM ובשירותי הרשת. אם כרטיס SIM שלכם תומך בשירותי SAT (ערכת כלים של יישומי SIM), תפריט זה יהיה ספציפי לחברת הסלולר ששמה מופיע על גבי ה-SIM.

דפדפן

גישה לדפדפן

ניתן לפתוח דפדפן WAP ולגשת לדף הבית של הפרופיל שהופעל בהגדרות הדפדפן. ניתן גם להזין כתובת אינטרנט באופן ידני ולגלוש לדף WAP הרלוונטי.

1 לחצו על  ואחר כך בחרו **דפדפן**.

2 כדי לגשת ישירות לדף הבית של הדפדפן, בחרו **בבית**. לחילופין, בחרו **בהזן כתובת** והקלידו את כתובת האינטרנט הרצויה.

הערה: על ההתחברות לשירות זה והורדת תכנים חל חיוב נוסף. בדקו את החיובים הרלוונטיים אצל חברת הסלולר שלכם.

קישוריות

שינוי הגדרות הקישוריות

(<  קישוריות)

הגדרות הקישוריות שלכם כבר הוגדרו מראש על ידי מפעילת רשת הסלולר שלכם, כך שתוכלו ליהנות מהטלפון החדש שלכם מרגע הדלקתו. אם ברצונכם לשנות הגדרות כלשהן, השתמשו בתפריט זה. מפרופיל זה ניתן לשנות את הגדרות הרשת ואת פרופילי הגישה לנתונים.

Bluetooth - הגדירו את GB250f שלכם

לשימוש ב- @Bluetooth. תוכלו להתאים את ניראות מכשירכם למכשירים אחרים או לחפש מכשירים שהטלפון שלכם מותאם להם.

• חיבור USB - בחרו במצב PC Suite

לסנכרון ה GB250f באמצעות תוכנת LG PC Suite וכדי להעתיק קבצים מהטלפון שלכם. אם יש בטלפון כרטיס זיכרון, בחרו **ביזכרון בנפח גדול** כדי להשתמש בטלפון שלכם בדיוק באותה צורה כמו Disc on key. התחברו למחשב וגררו ושחררו קבצים לתיקיית ההתקן הניתן-החסרה של GB250f.

הערה: כדי להשתמש באפשרות הזיכרון בנפח גדול, יהיה עליכם להכניס כרטיס זיכרון חיצוני לטלפון.

שינוי הגדרות Bluetooth

1 הקישו על  ובחרו בקישוריות ואז ב- **Bluetooth**.

2 בחרו בהגדרות. תוכלו לשנות את:

• **ניראות המכשיר שלי** - בחרו אם **להציג** או **להסתיר** את המכשיר שלכם מאנשים אחרים.

• **שם המכשיר שלי** - הזינו שם עבור מכשיר GB250f LG שלכם.

• **שירותים נתמכים** - ניתן לצפות ברשימת מכשירים כגון אוניות ודיבוריות הנתמכים על ידי טלפון Bluetooth זה.

• **הכתובת שלי** - הצגת כתובת Bluetooth של המכשיר שלכם.

התאמה עם מכשיר Bluetooth

אחר

באמצעות התאמה (pairing) של GB250f שלכם למכשיר אחר, תוכלו לקבוע סיסמה שתגן על החיבור ביניהם. כך תהיה ההתאמה ביניכם מאובטחת יותר.

פרופילים

התאמה אישית של הפרופיל

ניתן להתאים כל פרופיל באופן אישי.

1 לחצו על  ואחר כך בחרו

בפרופילים.

2 בחרו בפרופיל הרצוי, בחרו באפשרויות

ובחרו בערוך.

3 עבור הפרופילים השקטים, ניתן רק

להפעילם ולא לערכם.

1 בדקו אם Bluetooth **פועל ונראה**. ניתן

לשנות את הנראות שלכם בתפריט

הגדרות, על ידי בחירה ב**ניראות**

המכשיר שלי ואז ב'גלוי'.

2 במצב Bluetooth, בחרו **הפעל** ואז

בחרו **חפש מכשיר חדש**.

3 מכשיר GB250f שלכם יחפש אחר

מכשירים אחרים. לאחר השלמת

החיפוש, יופיעו על המסך הפקודות

הוסף וכן **רענן**.

4 בחרו במכשיר שעמו אתם רוצים להיות

מותאמים, בחרו **הוסף**, היינו את

הסיסמה, ואחר כך הקישו על **אישור**.

5 כעת יתחבר הטלפון שלכם למכשיר

האחר ובו יהיה עליכם להזין את אותה

סיסמה.

6 חיבור Bluetooth מוגן-הסיסמה שלכם

מוכן כעת.

הגדרות

שינוי השפה

(< הגדרות > טלפון < שפה >)

ניתן לשנות את שפת הטקסטים המוצגים בטלפון. דבר זה ישפיע גם על שפת הקלט של המכשיר.

חיסכון בחשמל

(< הגדרות > טלפון < מצב חיסכון בחשמל >)

אם תגדירו זאת כ'פעיל', תוכלו לחסוך בסוללה. הגדרות החיסכון בחשמל הן 'אוטומטי', 'פועל' ו'לכבו'.

שינוי הגדרות התצוגה

(< הגדרות > תצוגה >)

ניתן לשנות את הגדרות התצוגה של הטלפון.

שינוי התאריך והשעה

(< הגדרות > תאריך ושעה >)

ניתן להגדיר פונקציות הקשורות לתאריך ולשעה.

שינוי הגדרות אבטחה

לחצו על ובחרו בהגדרות. בחרו באבטחה כדי לשנות את הגדרות

האבטחה שלכם ולהגן על מכשיר GB250f שלכם ועל המידע החשוב שהוא מכיל.

• **בקשת קוד PIN** - בחרו בהפעלת קוד PIN שהמכשיר יבקש אותו כשתפעילו אותו.

• **נעילת מכשיר** - בחרו בקוד אבטחה לנעילת הטלפון שלכם **בעת ההפעלה**,

עם החלפת USIM, מיידית או ללא.

החלף קודים - שנו את קוד PIN, קוד PIN2 או קוד האבטחה.

צפייה במצב הזיכרון

(< הגדרות > מנהל הזיכרון >)

בטלפון GB250f שלכם שלושה זיכרונות זמניים: המכשיר, כרטיס USIM וכרטיס זיכרון חיצוני (שאותו יש לרכוש בנפרד). ניתן להשתמש במנהל הזיכרון כדי לקבוע את דרך השימוש בכל זיכרון ולראות מה נפח הזיכרון הפנוי.

שחזור הגדרות יצרן

(< הגדרות > שחזור הגדרות יצרן >)

השתמשו באפשרות זו כדי להחזיר את כל הגדרות הטלפון להגדרות המקוריות שלו. כדי להשתמש באפשרות זו יש צורך בקוד אבטחה. קוד ברירת המחדל הוא "0000".

שינוי הגדרות הרשת

(< הגדרות >)

• **רשת - בחר רשת וכן מצב רשת**

באמצעות תפריט זה. ניתן גם להוסיף

רשת מועדפת להתחברות אל רשימות המועדפות.

• **פרופילי אינטרנט** - תפריט זה מציג

את פרופילי האינטרנט. ניתן ליצור

פרופילים חדשים, למחוק או לערוך אותם באמצעות תפריט 'אפשרויות'. עם זאת, לא ניתן למחוק או לערוך הגדרות ברירת מחדל.

• **נקודות גישה** - תפריט זה מציג את

רשימת נקודות הגישה. ניתן ליצור

נקודות גישה חדשות, למחוק או לערוך אותם באמצעות תפריט 'אפשרויות'. עם זאת, לא ניתן למחוק או לערוך הגדרות ברירת מחדל.

- **חיבור לחב' נתונים** - אם בחרתם באפשרות 'כאשר זמין', יירשם הטלפון שלכם באופן אוטומטי לרשת GPRS עם הדלקתו. אם בחרתם 'במקרה הצורך', ייווצר חיבור GPRS למשך חיבור WAP או יישום כלשהו.
- **הגדרות זרימה** - אם ברצונכם לקבוע הגדרות רשת שיאפשרו קבלת תוכן בצורת זרימה (streaming), תוכלו לעשות כן בעזרת הגדרות אלו.

הנחיות לשימוש בטוח ויעיל

- ערך ה-SAR הגבוה ביותר עבור דגם טלפון זה שנמדד על-ידי DASY4 לשימוש קרוב לאוזן הוא 1.28 ואט/ק"ג (10 גר) וכאשר לובשים אותו על הגוף, מדובר ב-0.753 ואט/ק"ג (10 גר).
- מידע נתוני SAR עבור תושבי המדינות/אזורים שאמצו את רמת ה-SAR המומלצת על-ידי Institute of Electrical and Electronics Engineers (IEEE), היא 1.6 ואט/ק"ג בממוצע על פני גרם אחד של רקמה.

הטיפול במוצר ותחזוקתו

⚠ אזהרה

- השתמשו רק בסוללות, מטענים ואביזרים שאושרו לשימוש לדגם זה של הטלפון. השימוש בכל סוג אחר עלול לבטל כל אישור או אחריות ביחס לטלפון, ועלול גם להיות מסוכן.
- אין לפרק מכשיר זה. כאשר נדרש תיקון, פנו לטכנאי שירות מוסמך.
- אין לקרב את המכשיר למכשירים חשמליים כגון טלוויזיות, מכשירי רדיו או מחשבים אישיים.
- יש לשמור את היחידה הרחק ממקורות חום דוגמת רדיאטורים או תנורי בישול.
- אין להפיל את היחידה.
- אין לאפשר זעזוע מכני או חבטה.
- כבו את הטלפון בכל אזור שבו נדרש לעשות כן על ידי תקנות מיוחדות.

נא קראו הנחיות פשוטות אלו. אי עמידה בהנחיות אלו עלולה להיות מסוכנת או לא-חוקית.

חשיפה לאנרגיית תדר רדיו

מידע על חשיפה לגלי רדיו ושיעורי בליעה ספציפיים (Specific Absorption Rate - SAR)

הטלפון הנייד הזה, מדגם GB250f, תוכנן לעמוד בדרישות הבטיחות בהקשר לחשיפה לגלי רדיו. דרישות אלו מבוססות על הנחיות מדעיות הכוללות מרווחי בטיחות שנועדו להבטיח שימוש בטוח במכשיר לכל המשתמשים, בלא קשר לגילם או למצב בריאותם.

- הנחיות החשיפה לגלי רדיו משתמשות ביחידת מדידה הנקראת 'שיעור בליעה ספציפי' (SAR), או Specific Absorption Rate. בדיקות SAR נערכות בשיטות סטנדרטיות כאשר הטלפון משדר בעוצמה המרבית שלו בכל תחומי התדרים.
- למרות שעשויים להיות הבדלים ברמות SAR בין טלפונים שונים של LG, כל הטלפונים מתוכננים לעמוד בהנחיות הרלוונטיות של חשיפה לגלי רדיו.
- מגבלת ה-SAR המומלצת על-ידי International Commission on Non-Ionizing Radiation Protection (ICNIRP) היא ממוצע של 2 ואט/ק"ג על פני 10 גרם של רקמה.

הנחיות לשימוש בטוח ויעיל (המשך)

תפעול יעיל של הטלפון

התקנים אלקטרוניים

- אין להשתמש בטלפון ליד ציוד רפואי ללא קבלת רשות. אין להניח את הטלפון ליד קוצבי לב, כלומר בכיס החזה שלכם.
- טלפונים ניידים עלולים ליצור הפרעה לעזרי שמיעה מסוימים.
- הפרעה משנית עלולה להשפיע על טלפוניזות, מכשירי רדיו, מחשבים וכו'.

בטיחות בדרכים

- בדקו את החוקים והתקנות לגבי שימוש בטלפונים ניידים באזורים שבהם אתם נוהגים.
- אין להחזיק את הטלפון ביד בזמן נהיגה.
- יש להפנות את מלוא תשומת הלב לנהיגה.
- יש להשתמש בדיבורית, אם היא זמינה.
- רדו לשול הדרך וחנו לפני ביצוע שיחה או מענה לשיחה, בהתאם לתנאי הדרך.
- אנרגיית תדר רדיו עשויה להשפיע על מערכות אלקטרוניות מסוימות בכלי רכב דוגמת מערכת סטריאו או ציוד בטיחות.
- כאשר יש ברכב שלכם כרית אוויר, אל תחסמו אותה עם ציוד אלחוטי מותקן או נייד. הדבר יכול לגרום לכך שכרית האוויר לא תפעל כלל או שתפעל שלא כראוי, ואז תיגרם לכם פציעה חמורה.

לדוגמה, אין להשתמש בטלפון בבתי חולים מכיוון שהוא עלול להשפיע על ציוד רפואי רגיש.

- אין להשתמש בטלפון בידיים רטובות בעת טעינתו. הדבר עלול לגרום למכת חשמל ועלול לגרום לזנק רציני לטלפון.
- אין לטעון את הטלפון ליד חומר דליק, מכיוון שהמכשיר עלול להתחמם ולהפוך לסכנת שריפה.
- השתמשו במטלית יבשה לניקוי חלקו החיצוני של המכשיר (אין להשתמש בחומרים ממיסים כגון בנזן, מדלל או אלכוהול).
- אין לטעון את הטלפון כאשר הוא נמצא על גבי מצעים או ריפוד.
- יש לטעון את הטלפון באזור מאוורר היטב.
- אין לחשוף יחידה זו לכמות מוגזמת של עשן או אבק.
- אין להחזיק את הטלפון בסמוך לכרטיסי אשראי או כרטיסי נסיעה; הנתונים בפס המגנטי עלולים להיפגם.
- אין להקיש על המסך באמצעות חפצים חדים; הדבר עלול לגרום נזק לטלפון.
- אין לחשוף את הטלפון לנוזלים או ללחות.
- השתמשו באביזרים כגון אוזניות בזהירות רבה. אין לגעת באנטנה ללא צורך.

הנחיות לשימוש בטוח ויעיל (המשך)

- אם אתם מאזינים למוסיקה בעת תנועה, ודאו שהעוצמה היא ברמה סבירה, כך שתמשיכו להיות מודעים לסביבתכם. הדבר קריטי במיוחד בסביבת כבישים.

כלי טיס

- התקנים אלחוטיים עלולים לגרום להפרעה במטוס.
- יש לכבות את הטלפון הנייד לפני העלייה למטוס.
- אין להשתמש בו על הקרקע ללא קבלת רשות מאנשי הצוות.

ילדים

- יש לשמור על הטלפון במקום בטוח מחוץ להישג ידם של ילדים קטנים.
- המכשיר כולל חלקים זעירים העלולים להוות סכנת חנק אם ינתקו מהטלפון.

שיחות חירום

- יתכן ששיחות חירום לא תהיינה זמינות בכל הרשתות הסלולריות. אי לכך, לעולם אל תסמכו רק על הטלפון לצורך שיחות חירום. בדקו עם חברת הסלולר שלכם.

מידע אודות הסוללה והטיפול בה

- אין צורך לרוקן את הסוללה לגמרי לפני טעינה מחודשת שלה. בניגוד למערכות אחרות עם סוללות, אין השפעה על הזיכרון העלולה לפגוע בביצועי הסוללה.
- השתמשו רק בסוללות ובמטענים של LG. מטעני LG נועדו להאריך את חיי הסוללה בצורה הטובה ביותר.

מנעו נזק לשמיעתכם

- עלול להיגרם נזק לשמיעתכם אם תהיו חשופים לצלילים גבוהים במשך זמן ארוך. לכן אנו ממליצים לא להדליק או לכבות את הטלפון קרוב לאוזנכם. אנו גם ממליצים לקבוע רמת שמע סבירה לשיחות ולהאזנה למוסיקה.

סביבה שבה מבוצעות עבודות עם חומרי נפץ

- אין להשתמש בטלפון באזור שבו מתבצעים פיצוצים. שימו לב להגבלות ועקבו אחר הכללים והתקנות.

סביבה נפיצה פוטנציאלית

- אין להשתמש בטלפון באזורי תדלוק.
- אין להשתמש בו בסמוך לדלק או לכימיקלים.
- אין להוביל או לאחסן גז דליק, נוזלים דליקים או חומרי נפץ בתא הרכב המכיל את הטלפון הנייד או את אבזריו.

הנחיות לשימוש בטוח ויעיל (המשך)

- אין לפרק או לקצר את מארו הסוללה. שמרו על ניקיון מגעי המתכת של הסוללה.
 - החליפו את הסוללה כאשר היא כבר אינה מספקת לכם ביצועים סבירים. אפשר לטעון את ערכת הסוללה מאות פעמים לפני שיהיה צורך בהחלפתה.
 - כדי למרב את שמישות הסוללה, טענו אותה מחדש אם לא הייתה בשימוש במשך זמן רב.
 - אין לחשוף את מטען הסוללה לאור שמש ישיר ואין להשתמש בו בתנאי לחות גבוהה, דוגמת חדר אמבטיה.
 - אין להשאיר את הסוללה במקומות חמים וקרים; הדבר עלול לפגום בביצועי הסוללה.
 - יש סכנת התפוצצות אם הסוללה הוחלפה בסוג סוללה שאינו מתאים. השליכו סוללות משומשות על פי הוראות היצרן. מחזרו במידת האפשר. אל תשליכו אותן יחד עם האשפה הביתית.
 - אם עליכם להחליף סוללה, קחו אותה לנקודת השירות הקרובה של LG Electronics או למפיץ לצורך קבלת עזרה.
 - יש לנתק תמיד את המטען מהשקע לאחר שהטלפון נטען במלואו כדי למנוע בזבוז מיותר של חשמל מצד המטען.
- אורך חיי הסוללה בפועל תלוי בתצורת הרשת, בהגדרות המוצר, באופי השימוש, בתנאי הסוללה ובתנאים הסביבתיים.

נתונים טכניים

כללי

שם המוצר: GB250f

מערכת: GSM 850 / 900 / 1800 / 1900 W-CDMA 2100 / 850

טמפרטורת סביבה

מרבית: 55 מעלות צלזיוס (פריקה)

45 מעלות צלזיוס (טעינה)

מינימלית: -10 מעלות צלזיוס

Bluetooth QD ID B015097

Declaration of Conformity



Suppliers Details

Name

LG Electronics Inc

Address

: LG Twin Tower 20, Yeouido-dong, Yeongdeungpo-gu Seoul, Korea 150-721

Product Details

Product Name

GSM 850 / 900 / 1800 / 1900 W-CDMA 2100 / 850 Terminal Equipment

Model Name

GB250f

Trade Name

LG

CE 0168

Applicable Standards Details

R&TTE Directive 1999/5/EC

EN 301 489-01 v1.6.1 / EN 301 489-07 v1.3.1 / EN 301 489-17 v.1.2.1/ EN 301 489-24 V1.3.1
EN 300 328 V 1.7.1/ EN 301 908-1 V3.2.1/ EN 301 908-2 V3.2.1
EN 60950-1 : 2001
EN 50360: 2001/ EN 62209-1:2006
EN 301 511 V9.0.2

Supplementary Information

The conformity to above standards is verified by the following Notified Body(BABT)

BABT, Balfour House, Churchfield Road, Walton-on-Thames, Surrey, KT12 2TD, United Kingdom
Notified Body Identification Number : 0168

Declaration

I hereby declare under our sole responsibility that the product mentioned above to which this declaration relates complies with the above mentioned standards and Directives

European Standard Center
LG Electronics Logistics and Services B.V.
Veluwezoom 15, 1327 AE Almere, The Netherlands
Tel : +31 -36-547.8940, Fax : +31 .36 .547 -8794
e-mail : jacob @ lge.com

Name

Seung Hyoun, Ji / Director

Issued Date

30. Apr. 2009

Signature of representative

GB250f User Guide - English

This guide will help you understand your new mobile phone. It will provide you with useful explanations of features on your phone.

Some of the contents in this manual may differ from your phone depending on the software of the phone or your service provider.



Disposal of your old appliance

- 1 When this crossed-out wheeled bin symbol is attached to a product it means the product is covered by the European Directive 2002/96/EC.
- 2 All electrical and electronic products should be disposed of separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities.
- 3 The correct disposal of your old appliance will help prevent potential negative consequences for the environment and human health.
- 4 For more detailed information about disposal of your old appliance, please contact your city office, waste disposal service or the shop where you purchased the product.

Table of contents

Getting to know your phone

Getting to know your phone	4
Installing a memory card	5
Formatting the memory card	5
Installing the SIM card.....	6
Menu map	7

The Basics

Calls	8
Initiating a call	8
Initiating a call from your contacts	8
Answering and rejecting a call	8
Using the speakerphone.....	8
Speed dialling.....	8
Viewing your call logs	8
Changing the call settings	8
Contacts	10
Searching for a contact	10
Adding a new contact	10
Adding a contact to a group	10
Adding a picture to a contact.....	10
Messaging	11
Sending a message.....	11
Setting up your email.....	11
Sending an email using your.....	11
Entering text	12
Message folders.....	12

Multimedia

Camera	13
Taking a picture.....	13
Video Camera	13
Shooting a picture	13
MP3 Player.....	13
Video Camera	13
Playing a song.....	13
Creating a playlist.....	13
Radio	14
Voice recorder.....	14

My Stuff

Images	14
Sounds	14
Videos	14
My games & apps.....	15
SVG contents	15
Others	15
My memory card	15
Games and apps	15
Organiser	15
Using the calendar.....	15
Adding an item to the ToDo list..	15
Adding a memo	15
Secret memo.....	15
Date finder.....	15

Table of contents

Tools	16
Setting your alarm	16
Using your calculator	16
Using the stopwatch	16
Converting a unit.....	16
Adding a city to your world clock	16
SIM services.....	16
Browser.....	16
Accessing the browser	16
Connectivity.....	17
Bluetooth.....	17
USB connection	17
Profiles	18


Settings

Changing the language.....	18
Power save	18
Changing your display settings	18
Changing your date & time	18
Changing your security settings....	18
PIN code request.....	19
Handset lock	19
Change codes.....	15
Viewing memory status	19
Resetting your phone	19
Changing the connectivity settings	19
Network	19
Internet profiles	19
Access points	19
Packet DATA conn	19
Streaming settings	19

Guidelines


Guidlines for safe and efficient use .	20
Technical data.....	25

Getting to know your phone

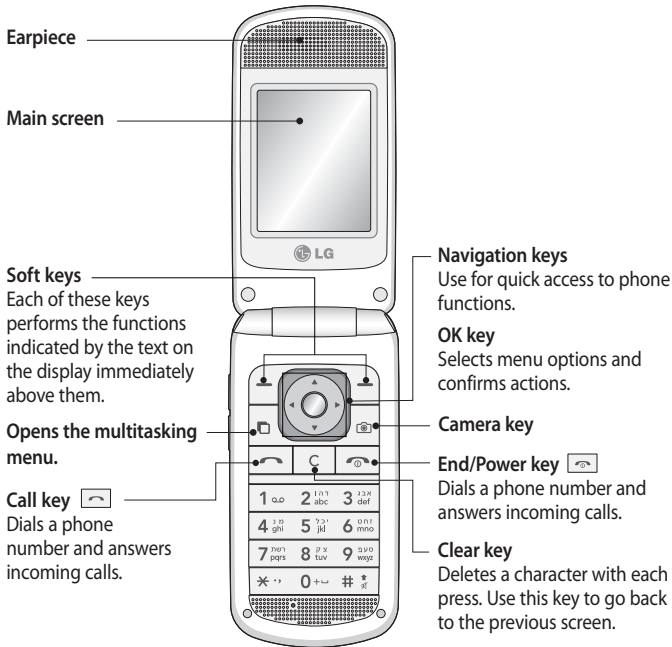



Headset/ Charger /
USB Cable connector



Volume key

- When the screen is idle: Controls the volume of key tone.
- During a call Controls the volume of the earpiece.
- When playing a BGM track: Controls the volume of music.

microSD/memory/
card slot

Installing a memory card

Lift the memory card cover and insert a micro SD card with the golden contact area facing downwards. Close the memory card cover so that it clicks shut.

To remove the memory card, gently push it as shown in the diagram.



Note: A memory card is an optional accessory.

Formatting the memory card

Press **○** and select **Settings**.
Choose **Phone settings** and **Memory manager** select **External memory** and press **Format**.

WARNING: When you format your memory card, all the content will be wiped. If you do not want to lose the data on your memory card, back it up first.

Installing the SIM Card and Charging the Battery


Installing the SIM Card

When you subscribe to a cellular network, you are provided with a plug-in SIM card loaded with your subscription details, such as your PIN, any optional services available and many others.

Important! › The plug-in SIM card and its contacts can be easily damaged by scratches or bending, so be careful when handling, inserting or removing the card. Keep all SIM cards out of the reach of small children.

Illustrations

- 1 Open battery cover
- 2 Remove the battery
- 3 Insert your SIM
- 4 Install the battery
- 5 Close the battery cover
- 6 Charge your battery



WARNING: Do not remove the battery when the phone is switched on, as this may damage the phone.

Menu map

Games & apps

- 1 My games & apps
- 2 Settings

Calling

- 1 Call logs
- 2 Call durations
- 3 Data volume
- 4 Call costs
- 5 Call divert
- 6 Call barring
- 7 Fixed dial numbers
- 8 Call waiting
- 9 Common settings

Organiser

- 1 Calendar
- 2 To do
- 3 Memo
- 4 Secret memo
- 5 Date finder
- 6 Settings

Multimedia

- 1 Camera
- 2 Video camera
- 3 Music
- 4 Radio
- 5 Voice recorder

Messaging

- 1 Create new message
- 2 Inbox
- 3 Mailbox
- 4 Drafts
- 5 Outbox
- 6 Sent items
- 7 My folders
- 8 Templates
- 9 Emoticons
- 0 Settings

My stuff

- 1 My images
- 2 My sounds
- 3 My videos
- 4 My games & apps
- 5 SVG contents
- 6 Others
- 7 My memory card

Profiles

- 1 Normal
- 2 Silent
- 3 Outdoor
- 4 Flight mode
- 5 Customised 1
- 6 Customised 2
- 7 Customised 3

Contacts

- 1 Add new
- 2 Search
- 3 Speed dials
- 4 Groups
- 5 Service dial numbers
- 6 Own number
- 7 My business card
- 8 Settings

Tools

- 1 Quick menu
- 2 Alarms
- 3 Calculator
- 4 Stopwatch
- 5 Converter
- 6 World time
- 7 SIM Service

Browser

- 1 Home
- 2 Enter address
- 3 Bookmarks
- 4 RSS reader
- 5 Saved pages
- 6 History
- 7 Settings

Connectivity

- 1 Bluetooth
- 2 USB connection mode

Settings


- 1 Phone
- 2 Screen
- 3 Date & Time
- 4 Network
- 5 Internet profile
- 6 Access points
- 7 Packet Data Conn.
- 8 Security
- 9 Memory manager
- 0 Streaming settings
- * Reset settings


Calls

Initiating a call

1 Dial the number using the keypad.


To delete a digit press **Clear**.

2 Press  to initiate the call.


3 To end the call, press .

TIP! To enter + when making an international call, press and hold 0.


Initiating a call from your contacts

1 Press  and select **Contacts**, then choose **Search**.


2 Using the keypad, enter the first letter of the contact you want to call.


3 Press **Options** and select **Make Call** or press  to initiate the call.

Answering and rejecting a call


When your phone rings, press **Accept** or press  to answer the call.

To mute your phone while it is ringing, simply select **Silent**. This is useful if you have forgotten to change your profile to Silent for a meeting.


Press  or select **Reject** to reject the incoming call.

TIP! You can change the settings on your phone to answer your calls in different ways. Press  select **Calling** and choose **Common settings** and **Answer mode**. Choose from **Press send key**, **Open flip** and **Press any key**.

Using the speakerphone

During a call, you can activate speakerphone by pressing  key and you can use the handset in hands-free.

Speed dialling

Press  and select **Contacts**, then choose **Speed dials**.

You can assign a speed dial number to a contact you call frequently.

Viewing your call logs

Press  and select **Calling**. Choose **Call logs**.

You can check the record of missed, received, and dialled calls only if the network supports the Calling Line Identification (CLI) within the service area.

Changing the call settings

You can set the menu relevant to a call.

Press  select **Calling**.

• **Call durations** - View details of how

long you have spent on your calls both received and dialled.

- **Data volume** - View the amount of all your received and sent data for Web, Data or All, measured in kilobytes.
- **Call costs** - View the charges applied to your Last call or All calls. This service is network dependent, some operators are unable to support this.
- **Call divert** - Choose whether to divert your calls.
- **Call barring** – Select when you would like calls to be barred.
- **Fixed dial number** – Choose a list of numbers that can be called from your phone. You'll need your PIN2 code from your operator. Only numbers included in the fixed dial list can be called from your phone.
- **Call waiting** - Be alerted when you have a call waiting. (Depends on your network provider.)
- **Common settings**
 - Call reject** - You can set whether to reject incoming calls.
 - Send my number** - Choose whether your number will be displayed when you call someone.

(Depends on your network provider.)

Auto redial - Allows you to set the auto redial function when a call attempt has failed.

Answer mode - Allows you to set the answering method. You can choose between Press send key, Open flip and Press any key.


Minute minder - Determines whether to play a sound every 1 minute when you are on the phone.

BT answer mode - Choose how to answer a call while using a Bluetooth headset. Select **Hands-free** or **Handset**.


Save new number - Selecting this option will save numbers that are not already in your contacts upon ending the call.

Contacts

Searching for a contact

- 1 Press  and select **Contacts**, then choose **Search**.
- 2 Using the keypad enter the first letter of the contact you want to call.
- 3 To scroll through the contacts and their different numbers use the navigation arrows.

Adding a new contact


- 1 Press  and select **Contacts**, then choose **Add new**.
- 2 Choose whether to store your new contact on your **Handset** or **USIM** card.
- 3 Insert all the information you have in the fields provided and select **Done**.

Adding a contact to a group

You can save your contacts into groups, for example, keeping your work colleagues and family separated. There are a number of groups including Family, Friends, Colleagues, School and VIP already set in the phone.

Adding a picture to a contact


You can change the appearance of your contacts in your address book to include a picture.


- 1 Press  and select **Contacts**, then choose **Settings**.
- 2 Select **Contact list settings** and choose **Show picture** and select **On**.
- 3 Then return to the address book and select the contact you want to add a picture to.
- 4 Choose **Options** and select **Edit**.
- 5 Scroll down to the Image section. Choose **Edit** and select **No image**, **Avatar**, **Take a picture** or **Use existing image**. If you select **Use existing image**, you can choose an image that is saved in your phone memory. If you select **Take a picture**, your camera viewfinder will open, so you can take a picture of your contact. Take the picture then press **OK**.
- 6 Select **Done**.

Messaging

Your GB250f includes functions related to SMS (Short Message Service), MMS (Multimedia Message Service) and E-mail, as well as the network's service messages.

Sending a message


- 1 Press , select **Messaging**, and choose **Create new message**.
- 2 Choose **Message in order** to send an SMS or MMS.
- 3 A message editor will open. The message editor combines SMS and MMS into one intuitive and easy to switch between mode. The default setting of the message editor is SMS mode.
- 4 Enter your message using either the T9 predictive mode or Abc manual mode.
- 5 Select **Options** and choose **Insert** to add an **Image, Video, Sound, Symbols, Template, Emoticon, Name & Number, New slide, Subject, or More**.
- 6 Choose **Send**.
- 7 Choose a contact from the list of contacts or enter the phone number from **Options**.
- 8 Select **Send**.

TIP! You can select your message type as SMS or MMS when you enter a text longer than 1 page in the message field. If you want to change the type of message to send, press  > **Messaging** > **Settings** > **Text message**, and choose **Send long text as**.

WARNING: If an Image, Video, Sound, New slide or Subject is added to the message editor, it will be automatically converted to MMS mode and you will be charged accordingly.


Setting up your email

You can stay in touch on the move using email on your GB250f. It's quick and simple to set up a POP3 or IMAP4 email account.

- 1 Press , select **Messaging**, and choose **Settings**.
- 2 Select **Email**, then **Email accounts**.
- 3 There are 5 default accounts which you can edit and insert your user name and password.

Sending an email using your new account

To send/receive an email, you should set up an email account.

- 1 Select  select **Messaging** and choose **Create new message**.
- 2 Choose **Email** and a new email will open.

- 3 Write the Email address your Email is addressed to.
- 4 Enter the subject and your message.

Entering text

You can enter alphanumeric characters using the phone's keypad. The following text input methods are available in the phone: T9 predictive mode, ABC manual mode and 123 mode.

Note: Some fields may allow only one text input mode (e.g. telephone number in address book fields).

T9 predictive mode

T9 predictive mode uses a built-in dictionary to recognise words you're writing based on the key sequences you press. Simply press the number key associated with the letter you want to enter, and the dictionary will recognize the word once all the letters are entered.


ABC manual mode

This mode allows you to enter letters by pressing the key labeled with the required letter once, twice, three or four times until the letter is displayed.

123 mode

Type numbers using one keystroke per number. You can also add numbers while remaining in letter modes by pressing and holding the desired key.

Message folders

Press , select **Messaging**. The folder structure used on your GB250f is fairly self explanatory.

Inbox - All the messages you receive are placed in your Inbox.

Mailbox - Contains all your email messages.

Drafts - If you don't have time to finish writing a message, you can save what you have done so far here.

Outbox - This is a temporary storage folder while messages are being sent.

Sent items - All the messages you send are placed into your Sent folder.

My folders - You can move messages from Inbox or Sent messages into My folders. In addition, you can move those messages from My folders into the original message box.

Templates - A list of pre written messages, useful for a quick reply.



Emoticons - You can add, edit and

delete emoticons. You can insert the emoticon which you prefer when writing a message.

Multimedia



Camera

Taking a picture

- 1 Press  and select **Multimedia**. Choose **Camera** to open the viewfinder.
- 2 Holding the phone and, point the lens towards the subject of the picture.
- 3 Position the phone so you can see the subject of your picture.
- 4 Press  to take a picture.

Video camera

Shooting a video





- 1 Press  and select **Multimedia**.
- 2 Choose **Video camera**.
- 3 Point the camera lens towards the subject of the video.
- 4 Press  to start recording.
- 5 Rec will appear in the bottom left corner of the viewfinder and a timer will show the length of your video.

- 6 Select **Stop** to stop recording.

MP3 player



Your GB250f has a built-in MP3 player so you can play all your favourite music.

Playing a song

- 1 Press  and select **Multimedia**. Choose **Music**.
- 2 Choose **All tracks** then select the song you want to play. Select **Play**.
- 3 Select  to pause the song.
- 4 Select  to skip to the next song.
- 5 Select  to skip to the previous song.
- 6 Select **Back** to stop the music and return to the MP3 player menu.

Creating a playlist

You can create your own playlist by choosing a selection of songs from the **All tracks** folder.

- 1 Press  and select **Multimedia**. Choose **Music**.
- 2 Choose **Playlists**.
- 3 Press **Add** enter the playlist name and press **Save**.
- 4 The **All tracks** folder will show. Select all of the songs that you would like to include in your playlist by scrolling to them and selecting .


5 Select **Done** to store the playlist.

Radio

Your GB250f has an FM radio feature so you can tune into your favourite radio stations to listen on the move.

Note: You will need to insert your headset in order to listen to the radio. Insert the plug into the headset socket (this is the same socket that you plug your charger into).

Listening to the radio



- 1 Press  and select **Multimedia**, then choose **Radio**.
- 2 Select the channel number of the station you would like to listen to.

TIP! You can listen to the radio via built-in speaker. Press **Options**, select **Listen via speaker**.

Voice recorder

Use your Voice recorder to record voice memos or other sounds.

Recording your voice memo

- 1 Press  and select **Multimedia**, then choose **Voice recorder**.
- 2 Press  to begin recording.
- 3 Choose **Stop** to end the recording.
- 4 Press **Options** and choose **Play** to

listen to the voice memo.

My stuff

You can store any multimedia files into your phone's memory so that you have easy access to all of your images, sounds, videos, others and games.

You can also save your files to a memory card. The advantage of using a memory card is that you can free up space on your phone's memory. All your multimedia files will be saved in **My stuff**. Press  then select **My stuff** to open a list of folders.

Images

My images folder contains a folder of default images on your phone, default MMS images, images downloaded by you, and images taken on your phone's camera.

Sounds

My sounds folder contains the Default sounds, your voice recordings, and sound files downloaded by you. From here you can manage, send, or set sounds as ringtones.

Videos

My videos folder shows the list of

downloaded videos and videos you have recorded on your phone.

My games & apps

You can keep downloaded games and applications into this folder.

SVG contents

The SVG contents folder contains all of your default and downloaded SVG and SVGZ files.


Others

From the **Others** menu, you can view the files that are not saved to the Images, Sounds or Videos folders.

My memory card

If you've inserted a memory card, it will be displayed as a folder within My Files.

Games and Apps

Your GB250f comes with preloaded games to keep you amused when you have time to spare. If you choose to download any additional games or applications they will be saved into this folder. Press  and select **Games & apps**.

Organiser

Using the calendar

( > **Organizer** > **Calendar**)

When you enter this menu, a calendar will appear. A square cursor is located on the current date. You can move the cursor to another date using the navigation keys.

Adding items to your to do list

( > **Organizer** > **To do**)

You can view, edit and add tasks to do.

Adding a memo

( > **Organizer** > **Memo**)

You can register your own memos here.

Secret memo

( > **Organizer** > **Secret memo**)

You can write the private memo to protect your privacy. You enter the security code to use this menu.


Date finder

( > **Organizer** > **Date finder**)

Date finder is a handy tool to help you calculate what the date will be after a certain amount of days has passed.

Tools

Setting your alarm

( > **Tools** > **Alarm clock**)

You can set up to 5 alarm clocks to go on at a specified time.

Using your calculator

( > **Tools** > **Calculator**)

The calculator provides the basic arithmetic functions: addition, subtraction, multiplication and division.

Using the stopwatch

( > **Tools** > **Stopwatch**)


This option allows you to use the function of a stopwatch.

Converting a unit

( > **Tools** > **Unit converter**)


This converts many measurements into a unit you want.

Adding a city to your world clock

( > **Tools** > **World clock**)

You can add a required city to the list of world clock. You can also check the current time of Greenwich Mean Time (GMT) and major cities around the world.

SIM services


( > **Tools** > **SIM services**)

This feature depends on SIM and the network services. In case the SIM card supports SAT (i.e. SIM Application Toolkit) services, this menu will be the operator specific service name stored on the SIM card.

Browser

Accessing the browser

You can launch the wap browser and access the homepage of the activated profile on browser settings. You can also manually enter an URL address and access the associated wap page.

- 1 Press  and select **Browser**.
- 2 To access the browser homepage directly, select **Home** Alternately, select **Enter address** and type in your desired URL.

Note: An additional cost will be collected when connecting to this service and downloading content. Check your data charges with your network provider.

Connectivity


Changing your connectivity settings (> Connectivity)

Your connectivity settings have already been set up by your network operator, so you can enjoy your new phone from switch on. If you want to change any settings, use this menu. You can configure the network setting and data access profiles in this menu.

- **Bluetooth** - Setup your GB250f for Bluetooth® use. You can adapt your visibility to other devices or search devices your phone is paired with.
- **USB connection** - Choose a **Data service** and synchronise your GB250f using the LG PC Suite software to copy files from your phone. If you have a memory card inserted, select **Mass storage** to use your phone in the same way as you would use a USB stick. Connect to your computer and drag and drop files to the GB250f removable device folder.

Note: To use the USB mass storage function, you will need to insert an external memory card in your phone.

Changing your Bluetooth settings

- 1 Press  and select **Connectivity**, Choose **Bluetooth**.
- 2 Choose **Settings**. You can make the following modifications :
 - **My device visibility** - Choose whether to **Show** or **Hide** your device to others.
 - **My device name** - Enter a name for your LG GB250f.
 - **Supported services** - You can view the list of devices such as headsets and handsfree kits supported by this Bluetooth enabled phone.
 - **My address** - View your Bluetooth address.

Pairing with another Bluetooth device

By pairing your GB250f and another device, you can set up a password for protected connection. This means your pairing is more secure.


- 1 Check your Bluetooth is **On** and **Visible**. You can change your visibility in the **Settings** menu, by selecting **My device visibility**, then **Visible**.
- 2 Select **Search new device**.
- 3 Your GB250f will search for devices. When the search is completed **Add**

- and **Refresh** will appear on screen.
- 4 Choose the device you want to be paired with, select **Add** and enter a password then choose **OK**.
 - 5 Your phone will then connect to the other device, on which you should enter the same password.
 - 6 Your password protects the Bluetooth connection is now ready now.

Profiles


Personalising your profiles

You can personalise each profile setting.

- 1 Press  and select **Profiles**.
- 2 Choose the profile you want and select **Options** and choose **Edit**.
- 3 Silent profiles can be activated only.


Settings

Changing the language

( > **Settings** > **Phone** > **Language**)

You can change the language for the display texts in your phone. This change will also affect the language input mode.

Power save

( > **Settings** > **Phone** > **Power save**)

If you set Always on, you can save the battery power. Choose to switch the power save settings On or Off.

Changing your display settings

( > **Settings** > **Display**)

You can change the settings for the phone display.

Changing your date & time

( > **Settings** > **Date & Time**)

You can set functions relating to the date and time.

Changing your security settings


Press  and select **Settings**.

Choose **Security** to change your security settings and keep your GB250f and the important

information it holds protected.


- **PIN code request** - Choose a PIN code to be requested when you turn your phone on.
- **Handset lock** - Choose a security code to lock your phone from **When switching on, If USIM changed or Immediate**.
- **Change codes** - Change your PIN code, PIN2 code, or Security code.

Viewing memory status

( > **Settings** > **Memory status**)

Your GB250f has three memories available: the phone, the USIM card and an external memory card (you may need to purchase the memory card separately). You can use the memory manager to determine how each memory is used and see how much space is available.

Resetting your phone

( > **Settings** > **Reset Settings**)

Use Reset settings to reset all the settings to their initial definitions. You need the security code to activate this function. The default password is "0000".

Changing your connectivity settings

- **Network - Select network and Network mode** settings using this menu. Also you can add a preferable network to be connected to **Preferred lists**.
- **Internet profile** - This menu shows the Internet profiles. You can create new profiles, delete or edit them using the Options menu. However, you cannot delete or edit default configurations.
- **Access points** - This menu shows the access points list. You can create new profiles, delete or edit them by using the Options menu. However, you cannot delete or edit default configurations.
- **Packet Data Conn** - If you select the 'When available' option, your phone is automatically registered to a GPRS network when you switch the phone on. If you select "When needed", the GPRS connection is established for the duration of a WAP or application connection.
- **Streaming settings** - If you want to set different network setting to play streaming content, you can set different network settings by using Streaming settings.

Guidelines for safe and efficient use

Please read these simple guidelines. Not following these guidelines may be dangerous or illegal.

Exposure to radio frequency energy

Radio wave exposure and Specific Absorption Rate (SAR) information

This mobile phone model GB250f has been designed to comply with applicable safety requirements for exposure to radio waves. These requirements are based on scientific guidelines that include safety margins designed to assure the safety of all users, regardless of age and health.

- The radio wave exposure guidelines employ a unit of measurement known as the Specific Absorption Rate, or SAR. Tests for SAR are conducted using standardised methods with the phone transmitting at its highest certified power level in all used frequency bands.
- While there may be differences between the SAR levels of various LG phone models, they are all

designed to meet the relevant guidelines for exposure to radio waves.

- The SAR limit recommended by the International Commission on Non-Ionizing Radiation Protection (ICNIRP) is 2W/kg averaged over 10g of tissue.
- The highest SAR value for this model phone tested by DASY4 for use close to the ear is 1.28 W/kg (10g) and when worn on the body is 0.753 W/kg(10g).
- SAR data information for residents in countries/regions that have adopted the SAR limit recommended by the Institute of Electrical and Electronics Engineers (IEEE), which is 1.6 W/kg averaged over 1g of tissue.

Product care and maintenance

WARNING

Only use batteries, chargers and accessories approved for use with this particular phone model. The use of any other types may invalidate any approval or warranty applying to the phone, and may be dangerous.

Guidelines for safe and efficient use (Continued)

- Do not disassemble this unit. Take it to a qualified service technician when repair work is required.
- Keep away from electrical appliances such as TVs, radios, and personal computers.
- The unit should be kept away from heat sources such as radiators or cookers.
- Do not drop.
- Do not subject this unit to mechanical vibration or shock.
- Switch off the phone in any area where you are required by special regulations. For example, do not use your phone in hospitals as it may affect sensitive medical equipment.
- Do not handle the phone with wet hands while it is being charged. It may cause an electric shock and can seriously damage your phone.
- Do not to charge a handset near flammable material as the handset can become hot and create a fire hazard.
- Use a dry cloth to clean the exterior of the unit (do not use solvents such as benzene, thinner or alcohol).
- Do not charge the phone when it is on soft furnishings.
- The phone should be charged in a well ventilated area.
- Do not subject this unit to excessive smoke or dust.
- Do not keep the phone next to credit cards or transport tickets; it can affect the information on the magnetic strips.
- Do not tap the screen with a sharp object as it may damage the phone.
- Do not expose the phone to liquid or moisture.
- Use the accessories like earphones cautiously. Do not touch the antenna unnecessarily.

Guidelines for safe and efficient use (Continued)

Efficient phone operation

Electronics devices

- Do not use your mobile phone near medical equipment without requesting permission. Avoid placing the phone over pacemakers, i.e. in your breast pocket.
- Some hearing aids might be disturbed by mobile phones.
- Minor interference may affect TVs, radios, PCs, etc.

Road safety

Check the laws and regulations on the use of mobile phones in the area when you drive.

- Do not use a hand-held phone while driving.
- Give full attention to driving.
- Use a hands-free kit, if available.
- Pull off the road and park before making or answering a call if driving conditions so require.
- RF energy may affect some electronic systems in your vehicle such as car stereos and safety equipment.

- When your vehicle is equipped with an air bag, do not obstruct with installed or portable wireless equipment. It can cause the air bag to fail or cause serious injury due to improper performance.
- If you are listening to music whilst out and about, please ensure that the volume is at a reasonable level so that you are aware of your surroundings. This is particularly imperative when near roads.

Avoid damage to your hearing

Damage to your hearing can occur if you are exposed to loud sound for long periods of time. We therefore recommend that you do not turn on or off the handset close to your ear. We also recommend that music and call volumes are set to a reasonable level.

Blasting area

Do not use the phone where blasting is in progress. Observe restrictions, and follow the rules and regulations.

Guidelines for safe and efficient use (Continued)

Potentially explosive atmospheres

- Do not use the phone at a refueling point.
- Do not use near fuel or chemicals.
- Do not transport or store flammable gas, liquid, or explosives in the same compartment of your vehicle as your mobile phone and accessories.

In aircraft

Wireless devices can cause interference in aircraft.

- Turn your mobile phone off before boarding any aircraft.
- Do not use it on the ground without permission from the crew.

Children

Keep the phone in a safe place out of the reach of small children. It includes small parts which may cause a choking hazard if detached.

Emergency calls

Emergency calls may not be available under all mobile networks. Therefore, you should never depend solely on the phone for emergency calls. Check with your local service provider.

Battery information and care

- You do not need to completely discharge the battery before recharging. Unlike other battery systems, there is no memory effect that could compromise the battery's performance.
- Use only LG batteries and chargers. LG chargers are designed to maximize the battery life.
- Do not disassemble or short-circuit the battery pack.
- Keep the metal contacts of the battery pack clean.
- Replace the battery when it no longer provides acceptable performance. The battery pack maybe recharged hundreds of times until it needs replacing.

Guidelines for safe and efficient use (Continued)

- Recharge the battery if it has not been used for a long time to maximize usability.
- Do not expose the battery charger to direct sunlight or use it in high humidity, such as in the bathroom.
- Do not leave the battery in hot or cold places, this may deteriorate the battery performance.
- There is risk of explosion if the battery is replaced by an incorrect type.
- Dispose off used batteries according to the manufacturer's instructions. Please recycle when possible. Do not dispose as household waste.
- If you need to replace the battery, take it to the nearest authorized LG Electronics service point or dealer for assistance.
- Always unplug the charger from the wall socket after the phone is fully charged to save unnecessary power consumption of the charger.
- Actual battery life will depend on network configuration, product settings, usage patterns, battery and environmental conditions.

Technical data

General

Product name : GB250f

System : GSM 850 / 900 / 1800 / 1900 W-CDMA 2100 / 850

Ambient Temperatures

Max : +55°C (discharging)

+45°C (charging)

Min : -10°C

Bluetooth QD ID B015097

Declaration of Conformity



Suppliers Details

Name

LG Electronics Inc

Address

: LG Twin Tower 20, Yeouido-dong, Yeongdeungpo-gu Seoul, Korea 150-721

Product Details

Product Name

GSM 850 / 900 / 1800 / 1900 W-CDMA 2100 / 850 Terminal Equipment

Model Name

GB250f

Trade Name

LG

CE 0168

Applicable Standards Details

R&TTE Directive 1999/5/EC

EN 301 489-01 v1.6.1 / EN 301 489-07 v1.3.1 / EN 301 489-17 v.1.2.1/ EN 301 489-24 V1.3.1
EN 300 328 V 1.7.1/ EN 301 908-1 V3.2.1/ EN 301 908-2 V3.2.1
EN 60950-1 : 2001
EN 50360: 2001/ EN 62209-1:2006
EN 301 511 V9.0.2

Supplementary Information

The conformity to above standards is verified by the following Notified Body(BABT)

BABT, Balfour House, Churchfield Road, Walton-on-Thames, Surrey, KT12 2TD, United Kingdom
Notified Body Identification Number : 0168

Declaration

I hereby declare under our sole responsibility that the product mentioned above to which this declaration relates complies with the above mentioned standards and Directives

European Standard Center
LG Electronics Logistics and Services B.V.
Veluwezoom 15, 1327 AE Almere, The Netherlands
Tel : +31 -36-547_8940, Fax : +31_36_547 -8794
e-mail : jacob @ lge.com

Name

Seung Hyoun, Ji / Director

Issued Date

30. Apr. 2009


Signature of representative

Memo

A series of horizontal dotted lines for writing.

