


Mini Hi-Fi System

Model: CM8350


ENGLISH | SIMPLE MANUAL (1 of 2)

To view the instructions of advanced features, visit $\underline{\text{http://www.lg.com}}$ and then download Owner's Manual. Some of the content in this manual may differ from your unit.

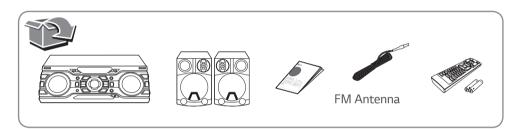

www.lg.com


Speaker Connection




Make sure to connect the speaker plugs into their corresponding colored speaker connectors.

Using External Device (a or b)

a AUX IN Connection



b PORT. IN Connection




2 Select AUX or PORTABLE. FUNCTION



Play the music on the connected external device.



You can connect two units to play music together.












This function is available on CD, USB 1, USB 2, BT, PORTABLE Function.

Disc & Data Playback






Select CD, USB 1 or USB 2.



Press ◄ / ► to select a desired song and press ► / II






Press **PRESET·FOLDER** Λ / V to select a folder and press \blacktriangleright / \blacksquare to play the first file of the selected folder.

! Empty folders are not searched.



Radio Operation

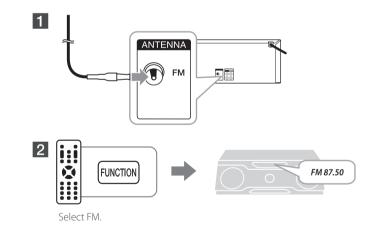





Select STEREO or MONO on FM Function.




Presetting Radio Station






Select the preset number and store the station.




Select preset station to listen to.





2 Press **PROGRAM/MEMORY** when 'ERASEALL' blinks to confirm. ERASEALL






Deleting File

Select the file you want to delete in stop mode.

Select the folder you want to delete.

Select to delete the file, folder or format the USB. DEL FILE FORMAT




In the state of th Perform the selection.

3

This function is supported only in stop status. (USB only)

CM8350-FB.DAUSLLK_MFL68899705_SIM_1.indd 1

Using BLUETOOTH®

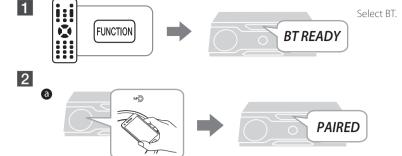

- If NFC connection does not work well, try again after checking the location of NFC tag in your phone.
- Android O/S: Ver 4.1.2 (or later)



Set on the ${\bf Bluetooth}$ and select "LG CM8350 (XX)" on your ${\bf Bluetooth}$ device.

Enter the PIN code (0000) as needed.



Play music on your **Bluetooth** device.

• When this unit is successfully connected with your **Bluetooth** device, "PAIRED" will appear on the display window. The display will change to the **Bluetooth** device's name soon after.

- If the device name isn't available on the unit, "_" will be displayed.
- Even when this unit is connected to 3 **Bluetooth** devices in the **Bluetooth** mode, you can play and control music by using only one of the connected devices.
- The multi pairing connection is only supported on Android or iOS devices. (Multi pairing connection may not be supported depending on the connected device specifications.)
- A removable/detachable **Bluetooth** device (Ex : Dongle etc.) doesn't support multi pairing.
- Even when this unit is connected with multiple **Bluetooth** devices, only one device which is playing will keep the **Bluetooth** connection, even if you change the function of the other devices.



Using Music Flow Bluetooth App

To use this unit more comfortably, install "Music Flow Bluetooth" on your **Bluetooth** devices. Select a way of installation (a) or b).



Search for "Music Flow Bluetooth" on the Google Play Store.





Scan QR code.



• Android O/S : Ver 4.0.3 (or later) • Refer to the guide from the "Music Flow Bluetooth" App on your smart device.




Press **USER EQ**.







Auto DJ blends the end of one song into the beginning of another for seamless playback.



Select a desired AUTO DJ mode.

AUTO DJ SEQUENTIAL is selected when playing programmed list.





Press **DJ EFFECT** to select a desired DJ effect (FLANGER, PHASER, CHORUS, DELAY, DJ OFF).






Rotate **SCRATCH & CONTROL** to adjust the effect level.





Additional Feature

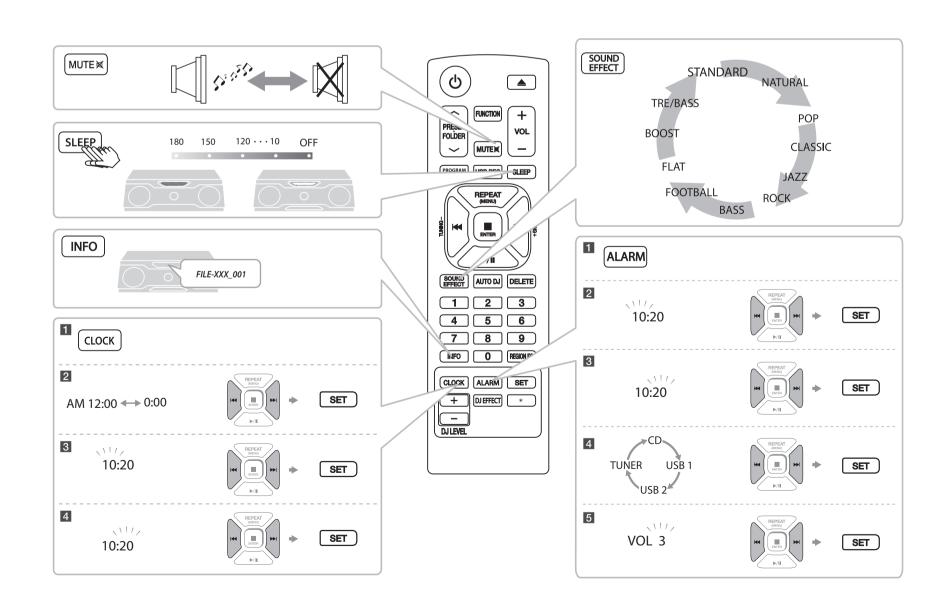

Alarm function works only after clock is set.

2015-01-28 2:47:07 CM8350-FB.DAUSLLK_MFL68899705_SIM_1.indd 2






ENGLISH | SIMPLE MANUAL (2 of 2)

To view the instructions of advanced features, visit http://www.lg.com and then download Owner's Manual. Some of the content in this manual may differ from your unit.



www.lg.com






Programmed Playback

You can make a playlist of your favourite tracks/files from a disc or USB device using programmed Playback .

This function is supported only on stop status.


To make Programmed Playback list




Select CD, USB 1 or USB 2.



Press **PROGRAM/MEMORY**.



Press ► / ► I to select a track/file and press PROGRAM/MEMORY. Repeat this step to store more files.




Enjoy the music on the Programmed Playback list.

 To delete all of the Programmed Playback list, remove the CD or USB device from the unit. • A playlist of up to 20 tracks/files can be entered for each media.

To enjoy Programmed Playback







Press **ENTER** twice to exit from Programmed Playback mode.

To delete Programmed Playback List



Press **PROGRAM/MEMORY** in stop status.




Press to select a track/file to delete.




Delete selected song.

REC

USB Copying



Connect USB devices to USB ports and select USB 1.




Press ${f USB}$ ${f REC}$ to start recording. Audio files in USB 1 are copied to USB 2.



Status	Recording
Playback	One track/file
Programmed playback	Programmed track(s)/file(s)
Full stop	All track(s)/file(s)

REC


USB Recording







Connect a USB device and select the function (CD, AUX, PORTABLE, Tuner) to record.



Press **USB REC** to start recording. Press **ENTER** to stop recording.

A file is recorded by about 512 Mbyte when you record for a long term.

When you stop recording during playback, the file that has recorded at that time will be stored.(Execpt MP3/WMA

- Recording is not supported in BT or LGTV mode.
- Volume level will be changed between MIN to 30 during recording. (Only CD function)
- Press ►/II to pause the recording. (Only Tuner, AUX, PORTABLE)
- It'll be stored as follows. * The other source : AUX and the like.

AUDIO CD CD_REC - TRK_0001	MP3/WMA	TUNER	The other source*
TRK_0001	ABC(File name) DEF(File name)	AUDIO_0001_107-7FM	AUDIO_0001 - AUDIO_0002

To select bitrate and recording speed

You can select bitrate and recording speed before recording.







CM8350-FB.DAUSLLK_MFL68899706_SIM_2.indd 1 2015-02-09 5:25:25



Auto Power On



LG Sound Sync

Sound Syn®

Set up the sound output of your TV: TV setting menu

 \rightarrow [Sound] \rightarrow [TV Sound output] \rightarrow [LG Sound Sync


How to affix the Ferrite Core


1 Pull the stopper [a] of the ferrite core to open.

Ferrite core may not be provided depending on each nation's regulations.

Wind the power cord around the ferrite core twice (Once for 110 V cord). Wind the SPEAKERS cables around the ferrite core once.

Close the ferrite core until it clicks.

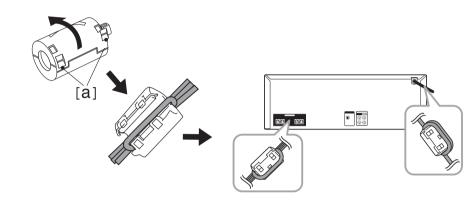

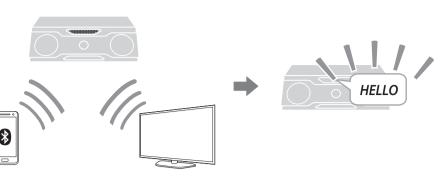

This unit automatically turns on by an input source : LG TV or ${\bf Bluetooth}$ If you have already paired with this unit, automatically this unit can turn on by an input source when this unit is turned off.





LG Sound Sync enables you to control some functions of this unit by a remote control of your LG TV. Controllable functions

are volume up/down and mute. Make sure that your TV has LG Sound Sync logo as shown above.

For specific information of operating, refer to the instruction manual of your TV. When the connections failed, make sure of the conditions of this unit and your TV: power, function. The amount of time to turn off this unit is different depending on your TV.

Auto Function Change

Additional Information

Music File Requirement

Sampling frequency

Bit rate

Maximum files

Maximum folders

File extensions

CD-ROM file format

USB Flash Drive

Bluetooth Codec

This unit recognizes input signals such as **Bluetooth** and LGTV and then changes suitable function automatically.

MP3:32 kHz - 48 kHz

• WMA: 32 kHz - 48 kHz

MP3:32-320 kbps

WMA: 40 - 192 kbps

Data CD: 999 / USB: 2000

Data CD : 99 / USB : 200

• ".mp3"

• ".wma"

ISO9660+JOLIET

Devices that support USB2.0 or USB1.1.



Specification



Power Requirements	Refer to the main label on the unit.	
Power Consumption	Refer to the main label on the unit.	
	Networked standby: 0.4 W (If all network ports are activated.)	
Bus Power Supply (USB)	5 V === 500 mA	
Amplifier Total Output	2000 W	

Design and specifications are subject to change without notice.

How to disconnect the wireless network connection or the wireless device Turn off the unit by pressing the power button for more than 5 seconds.



TV Speaker External Speaker LG Sound Sync (Optical) LG Sound Sync (Wireless)

PAIRED












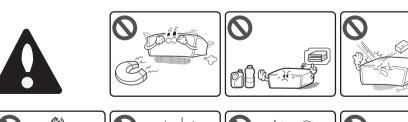





REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.

This lightning flash with arrowhead symbol within an equilateral triangle

is intended to alert the user to the

presence of uninsulated dangerous

The exclamation point within an

equilateral triangle is intended to

alert the user to the presence of

companying the product.

WARNING: TO PREVENT FIRE OR FLECTRIC SHOCK HAZARD, DO

WARNING: Do not install this equipment in a confined space such

CAUTION: The apparatus shall not be exposed to water (dripping or splashing) and no objects filled with liquids, such as vases, shall

CAUTION: Do not use high voltage products around this product. (ex. Electrical swatter) This product may malfunction due to

Slots and openings in the cabinet are provided for ventilation and to ensure reliable operation of the product and to protect it from over heating. The openings shall be never be blocked by placing the product on a bed, sofa, rug or other similar surface. This product

shall not be placed in a built-in installation such as a bookcase or

rack unless proper ventilation is provided or the manufacturer's

CAUTION: Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.

NOT EXPOSE THIS PRODUCT TO RAIN OR MOISTURE.

be placed on the apparatus.

instruction has been adhered to.

electrical shock.

voltage within the product's enclosure that may be of sufficient magnitude

o constitute a risk of electric shock to

mportant operating and maintenance

rvicing) instructions in the literature

The Power Plug is the disconnecting device. In case of an emergency, the Power Plug must remain readily accessible. This device is equipped with a portable battery or accumulator. CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK DO NOT REMOVE COVER (OR BACK) NO USER-SERVICEABLE PARTS INSIDE

CAUTION concerning the Power cord

Safety way to remove the battery or the battery from the **equipment:** Remove the old battery or battery pack, follow the steps in reverse order than the assembly. To prevent contamination of the environment and bring on possible threat to human and animal health, the old battery or the battery put it in the appropriate container at designated collection points. Do not dispose of batteries or battery together with other waste. It is recommended that you use local, free reimbursement systems batteries and accumulators. The battery shall not be exposed to


RF Radiation Exposure Statement

This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.

excessive heat such as sunshine, fire or the like.

- The appliance is not intended for use by young children or infirm persons without supervision.
- Young Children should be supervised to ensure that they do not play with appliance.
- If the appliance is supplied from a cord extension set or an electrical portable outlet device, the cord extension set on electrical portable outlet device must be positioned so that it is not subject to splashing or ingress of moisture.







CAUTION: This product employs a Laser System. To ensure proper use of this product, please read this owner's manual carefully and retain it for future reference. Shall the unit require maintenance, contact an authorized service center. Use of controls, adjustments or the performance of procedures other than those specified herein may result in hazardous radiation exposure.

To prevent direct exposure to laser beam, do not try to open the enclosure.

The USB function of this unit does not support all USB devices.

Using NTFS file system is not supported. (Only FAT(16/32) file system is supported.) • External HDD, Card readers, Locked devices, or hard type USB devices are not supported.

• The DTS is not supported. In case of DTS audio format, audio is not output.

CM8350-FB.DAUSLLK_MFL68899706_SIM_2.indd 2

2015-02-09 5:25:28