

Table of Contents

Introduction	Introduction	A1
	Important Precautions	A2
Installation	Connecting the Monitor	A4
	Making use of USB (Universal Serial Bus)*	A6
Operation	Location and Function of Controls	A8
	Control Panel Function	A9
	On Screen Display (OSD) Control Adjustment	A10
	On Screen Display(OSD) Selection and Adjustment	A11
Technical Information	Energy Saving Design	A14
	Low Radiation Compliance (MPRII) and DDC (Display Data Channel)	A15
	Video Memory Modes	A16
	Troubleshooting	A17
	Service	A18
	Specifications	A19

* Applies to **995E *plus*** only.

Introduction

Introduction

Thank you for purchasing a high resolution monitor. It will give you high resolution performance and convenient reliable operation in a variety of video operating modes.

Features

- The monitor is a 19 inches (18.0 inches viewable) intelligent, microprocessor based monitor compatible with most analog RGB (Red, Green, Blue) display standards, including IBM PC®, PS/2®, Apple®, Macintosh®, Centris®, Quadra®, and Macintosh II family.
- USB (Universal Serial Bus) ports at the back of the monitor are prepared for the USB cable and hub. You can easily and flexibly connect USB-designed devices-such as a mouse, keyboard or printer- to the monitor for true Plug and Play function.*
- The monitor provides crisp text and vivid color graphics with VGA, SVGA, XGA, and VESA Ergonomic modes (non-interlaced), and most Macintosh compatible color video cards when used with the appropriate adaptor. The monitor's wide compatibility makes it possible to upgrade video cards or software without purchasing a new monitor.
- Digitally controlled auto-scanning is done with the micro-processor for horizontal scan frequencies between 30 and 96kHz, and vertical scan frequencies between 50-160Hz. The microprocessor-based intelligence allows the monitor to operate in each frequency mode with the precision of a fixed frequency monitor.
- This monitor is capable of producing a maximum horizontal resolution of 1600 dots and a maximum vertical resolution of 1200 lines. It is well suited for CAD work and sophisticated windowing environments.
- For low cost of monitor operation, this monitor is certified as meeting the EPA Energy Star requirements, and utilizes the VESA Display Power Management Signalling (DPMS) protocol for power saving during non-use periods.

* Applies to **995E plus** only.

Monitor Registration

The model and serial numbers are found on the rear of this unit. These numbers are unique to this unit and not available to others. You should record requested information here and retain this guide as a permanent record of your purchase. Staple your receipt here.

Date of Purchase : _____
Dealer Purchased From : _____
Dealer Address : _____
Dealer Phone No. : _____
Model No. : _____
Serial No. : _____

Important Precautions

This unit has been engineered and manufactured to assure your personal safety, but improper use can result in potential electrical shock or fire hazard. In order not to defeat the safeguards incorporated in this monitor, observe the following basic rules for its installation, use, and servicing. Also follow all warnings and instructions marked directly on your monitor.

On Safety

Use only the power cord supplied with the unit. In case you use another power cord, make sure that it is certified by the applicable national standards if not being provided by the supplier. If the power cable is faulty in any way, please contact the manufacturer or the nearest authorized repair service provider for a replacement.

Operate the monitor only from a power source indicated in the specifications of this manual or listed on the monitor. If you are not sure what type of power supply you have in your home, consult with your dealer.

Overloaded AC outlets and extension cords are dangerous. So are frayed power cords and broken plugs. They may result in a shock or fire hazard. Call your service technician for replacement.

Do not Open the Monitor

- There are no user serviceable components inside.
- There are Dangerous High Voltages inside, even when the power is OFF.
- Contact your dealer if the monitor is not operating properly.

To Avoid Personal Injury :

- Do not place the monitor on a sloping shelf unless properly secured.
- Use only a stand recommended by the manufacturer.
- Do not try to roll a stand with small casters across thresholds or deep pile carpets.

To Prevent Fire or Hazards:

- Always turn the monitor OFF if you leave the room for more than a short period of time. Never leave the monitor ON when leaving the house.
- Keep children from dropping or pushing objects into the monitor's cabinet openings. Some internal parts carry hazardous voltages.

Introduction

Important Precautions

- Do not add accessories that have not been designed for this monitor.
- During a lightning storm or when the monitor is to be left unattended for an extended period of time, unplug it from the wall outlet.
- Do not bring magnetic devices such as magnets or motors near the picture tube.

On Installation

Do not allow anything to rest upon or roll over the power cord, and do not place the monitor where the power cord is subject to damage.

Do not use this monitor near water such as near a bathtub, washbowl, kitchen sink, laundry tub, in a wet basement, or near a swimming pool.

Monitors are provided with ventilation openings in the cabinet to allow the release of heat generated during operation. If these openings are blocked, built-up heat can cause failures which may result in a fire hazard.

Therefore, NEVER:

- Block the bottom ventilation slots by placing the monitor on a bed, sofa, rug, etc.
- Place the monitor in a built-in enclosure unless proper ventilation is provided.
- Cover the openings with cloth or other material.
- Place the monitor near or over a radiator or heat source.

On Cleaning

- Unplug the monitor before cleaning the face of the picture tube.
- Use a slightly damp (not wet) cloth. Do not use an aerosol directly on the picture tube because overspray may cause electrical shock.

On Repacking

- Do not throw away the carton and packing materials. They make an ideal container in which to transport the unit. When shipping the unit to another location, repack it in its original material.

Connection to any IBM VGA PC compatible system

Connecting the Monitor

Figure 1 shows the signal cable connections from the monitor to the Video Graphics Array (VGA) port typical in an IBM PC or PC compatible. This also applies to any graphics video card for PC-CAD or workstation that has a 15 pin high density (3 row) d-Sub connector.

1. Power off both the monitor and PC.
2. Connect the 15 pin VGA connector of the supplied signal cable to the output VGA video connector on the PC. The connectors will mate only one way. If you cannot attach the cable easily, turn the connector upside down and try again. When mated, tighten the thumbscrews to secure the connection.
3. Power ON the PC, then the monitor.
4. If you see the SELF DIAGNOSTICS message, check the signal cable and connectors.
5. After using the system, power OFF the monitor, then the PC.

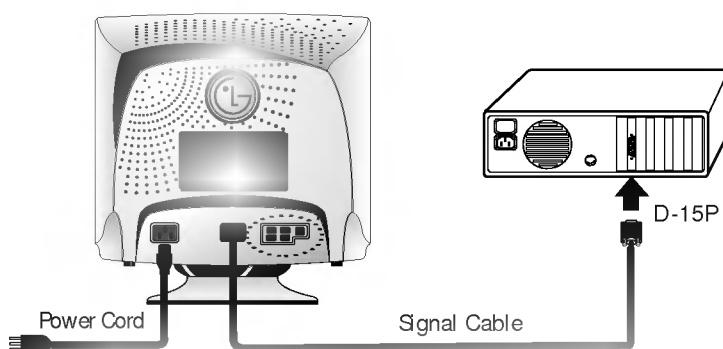


Figure 1.

* Applies to **995E plus** only.

Connecting to an Apple Macintosh PC

Connecting the Monitor

Figure 2 shows the connection to an Apple Macintosh, using a separately purchased adapter.

1. Power OFF both the monitor and the PC.
2. Locate the appropriate MAC to VGA adapter block at your local computer store. This adapter changes the high density 3 row 15 pin VGA connector to the correct 15 pin 2 row connection to mate with your MAC. Attach the other end of the signal cable to the side of the adapter block with 3 rows.
3. Connect the attached adapter block/signal cable to the video output on your MAC.
4. Power ON the PC, then the monitor.
5. If you see the SELF DIAGNOSTICS message, check the signal cable and connectors.
6. After using the system, power OFF the monitor, then the PC.

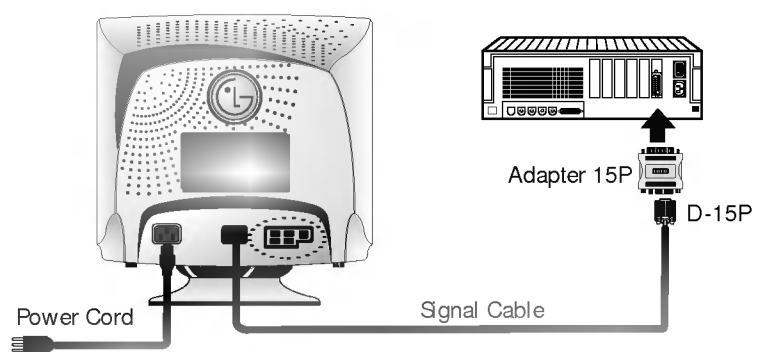


Figure 2.


* Applies to **995E plus** only.

Making use of USB (Universal Serial Bus)*



USB (Universal Serial Bus) is an innovation in connecting your different desktop peripherals conveniently to your computer. By using the USB, you will be able to connect your mouse, keyboard, printer, and other peripherals to your monitor instead of having to connect them to your computer. This will give you greater flexibility in setting up your system. USB allows you to connect chain up to 120 devices on a single USB port, and you can “hot” plug (attach them while the computer is running) or unplug them while maintaining Plug and Play auto detection and configuration. This monitor has an integrated self-powered USB hub, allowing up to 4 other USB devices to be attached it.

USB connection


1. Connect the upstream port of the monitor to the downstream port of the USB compliant PC or another hub using the USB cable (Computer must have a USB port).
2. Connect the USB compliant peripherals to the downstream ports of the monitor.

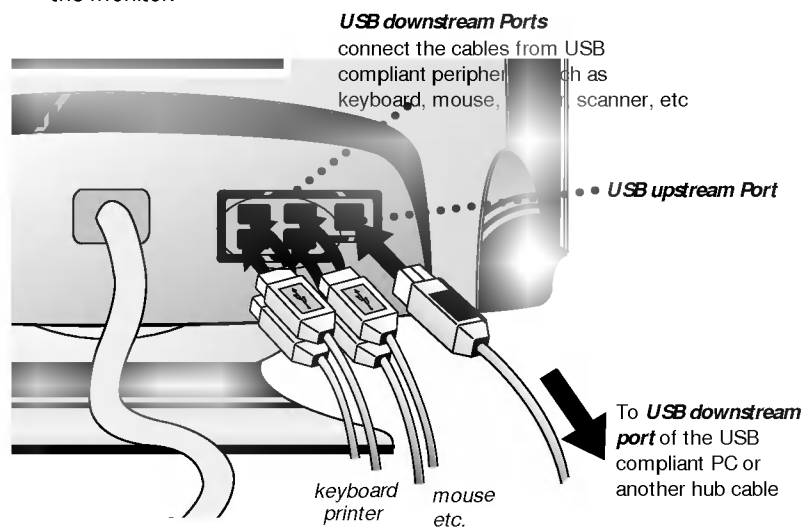

* Applies to **995E plus** only (A6~A7page).



Making use of USB (Universal Serial Bus)*

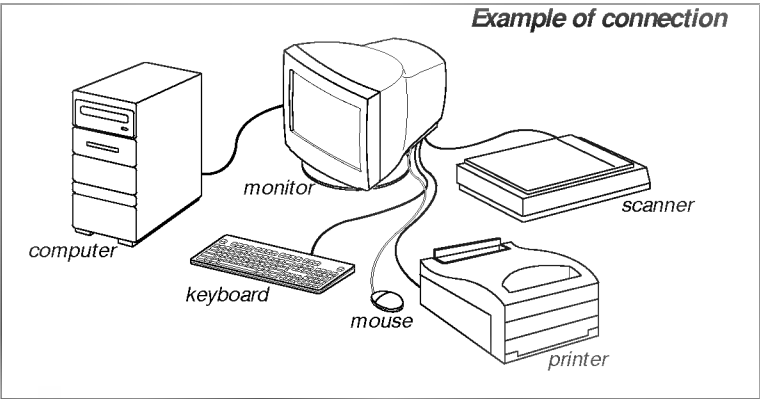

- NOTE**
- To activate the USB hub function, the monitor must be connected to a USB compliant PC(OS) or another hub with the USB cable(enclosed).
 - When connecting the USB cable, check that the shape of the connector at the cable side matches the shape at the connecting side.
 - When the monitor is not plugged into an electric socket, the peripherals connected to the downstream ports will not operate.
 - Even if the monitor is in a power saving mode, USB compliant devices will function when they are connected the USB ports(both the upstream and downstream) of the monitor.


USB specifications

* Applies to **995E plus** only (A6~A7page).


USB standard	Rev. 1.0 complied self-powered hub
Downstream power supply	500mA for each (MAX)
	12 Mbps (full), 1.5 Mbps (low)
	1 Upstream port
	4 Downstream ports

Location and Function of Controls

Front View

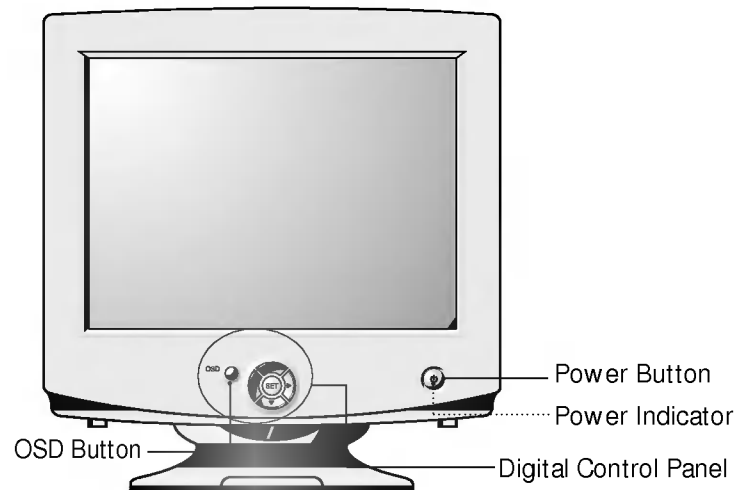

Rear View

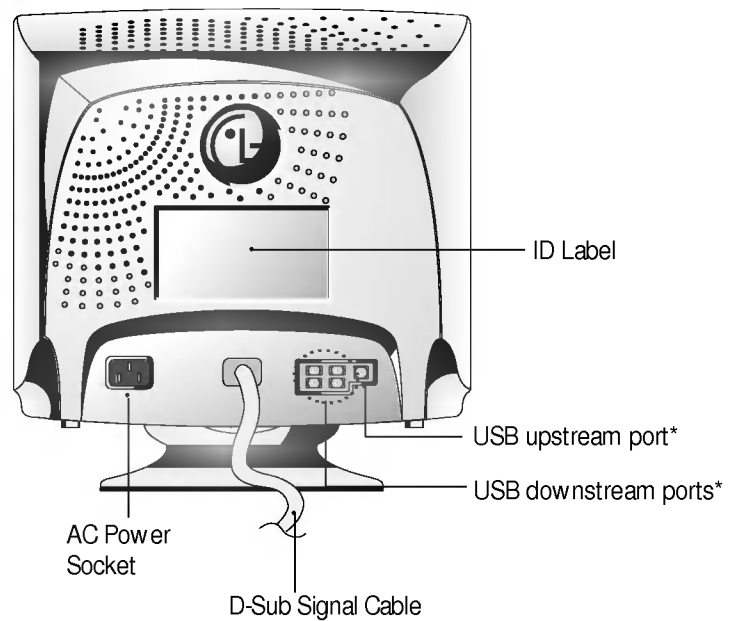


* Applies to **995E plus** only.



Control Panel Function

Front Panel Controls

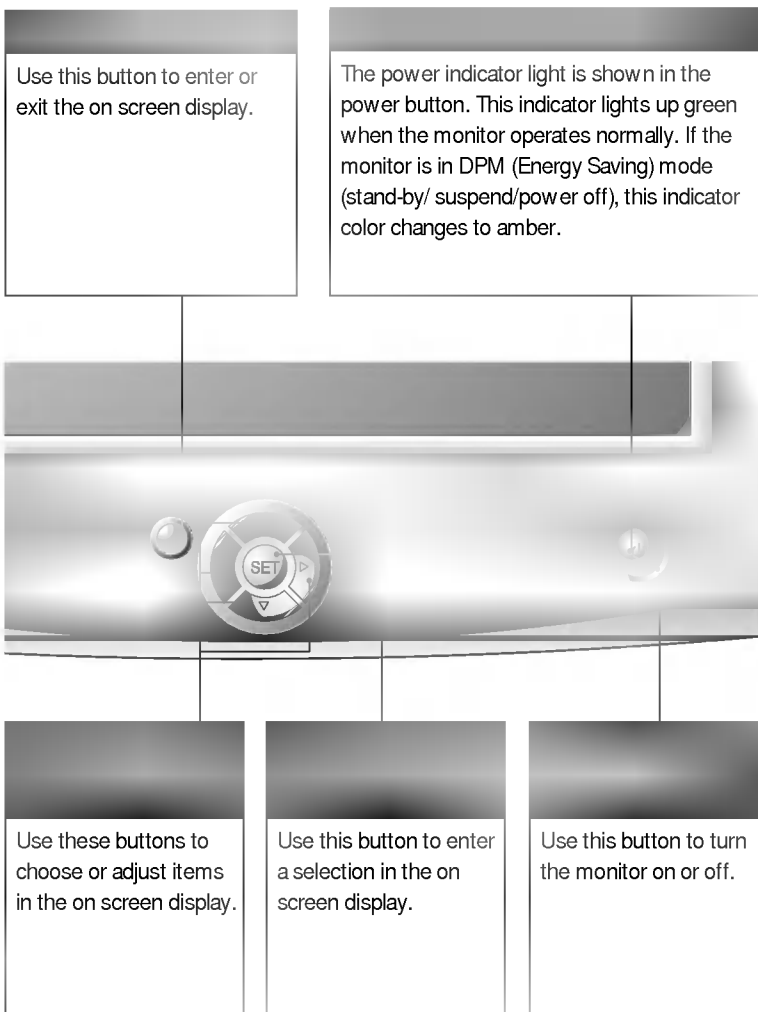


On Screen Display (OSD) Control Adjustment

Making adjustments to the image size, position and operating parameters of the monitor are quick and easy with the On Screen Display Control system. A quick example is given below to familiarize you with the use of the controls. Following section is an outline of the available adjustments and selections you can make using the OSD.

NOTE

- Allow the monitor to stabilize for at least 30 minutes before making image adjustment.

To make adjustments in the On Screen Display, follow these steps:


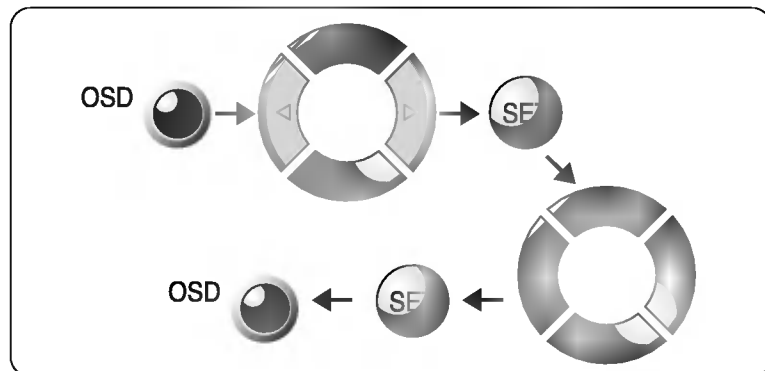


- 1 Press the OSD Button, then the main menu of the OSD appears.
- 2 To access a control, use the Δ or ∇ Buttons. When the icon you want becomes highlighted, press the SET Button.
- 3 Use the $\Delta\nabla/\triangleleft\triangleright$ Buttons to adjust the item to the desired level.
- 4 Accept the changes by pressing the SET Button.
- 5 Exit the OSD by Pressing the OSD Button.

On Screen Display(OSD) Selection and Adjustment

You were introduced to the procedure of selection and adjusting an item using the OSD system.

Listed below are the icons, icon names, and icon descriptions of the items that are shown on the Menu.

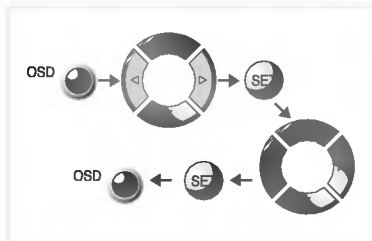

Brightness

Used to adjust the brightness of the screen.



Contrast

Adjust the display to the contrast desired.



PRESET 6500K/ 9300K

To appear the displays color temperature.


- 6500K:Slightly reddish white.
- 9300K:Slightly bluish white.

TEMP

User easily color set without adjustment Red, Green and Blue (R/G/B).

RED GREEN BLUE

To set your own color levels.
To set your own color levels.
To set your own color levels.




Vertical Position

To move image up and down.




Horizontal Position

To move picture image left and right.

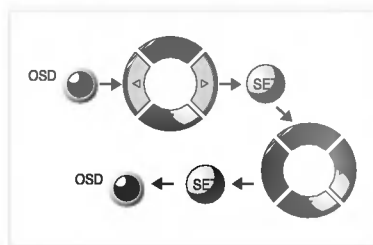

On Screen Display(OSD) Selection and Adjustment




Vertical Size

To adjust image height.



Horizontal Size

To adjust image width.



Side Pincushion

To correct the bowing in and out of the image.



Side pincushion balance

To correct the balance of both sides bowing.



Trapezoid

To correct geometric distortion.



Parallelogram

This control adjusts for a skewing of the screen image.



Top Corner

To correct the irregular distortion of the displayed image.




Bottom Corner

To correct the irregular distortion of the displayed image.




Tilt

To correct image rotation.

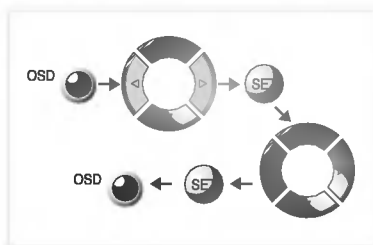

On Screen Display(OSD) Selection and Adjustment




VIDEO LEVEL This item is used to select the monitor's input signal level. The normal level used for most PC's is 0.7V. When the screen suddenly gets brightened or blurry, please select 1.0V and try again.

DDC To select the DDC function(ON/OFF).

LANGUAGE To choose the language in which the control names are displayed.

OSD POSITION To adjust position of the OSD window on the screen.

CLAMP There are two signal types: SEP(Separate or Composite Signals) and SOG(Sync On Green). The monitor automatically detects the signal types and displays either of them.



DEGAUSS To manually demagnetize the screen which may show some image or color incorrectly.

RECALL If the monitor is operating in a factory preset mode, this control will reset the image to the factory preset mode.

MOIRE This item allows you to reduce the moire (Moire is caused by interference Horizontal Scan Line with the periodical dot screen). It is normally OFF(H:0/V:0). The moire adjustments may affect the focus of the screen. The screen image may shake slightly while the moire reduction function is on.

CONVERGENCE This item allows you to adjust the horizontal convergence. The horizontal convergence control adjust the alignment of the red and blue horizontal fields.

Energy Saving Design

This monitor complies with the EPA's Energy Star program, which is a program designed to have manufacturers of computer equipment build circuitry into their products to reduce power consumption during time of non-use.

This monitor also goes into its energy saving mode if you exceed the monitor's operating limits, such as the maximum resolution of 1600x1200 or the frequency refresh rates of 30-96kHz horizontal or 50-160Hz vertical. When this monitor is used with a Green or EPA Energy Star PC, or a PC with a screen blanking software following the VESA Display Power Management Signalling (DPMS) protocol, this monitor can conserve significant energy by reducing power consumption during periods of non-use. When the PC goes into the energy saving mode, the monitor will go into a suspended operation state, indicated by the Power LED light changing from a green color to an amber color. After an extended period in the suspended mode, the monitor will then enter a semi-OFF mode to conserve more energy. In the semi-OFF mode or DPMS OFF mode as we call it in our specifications, the Power LED will still show an amber color. When you awaken your PC by hitting a key or moving the mouse, the monitor will also awaken to its normal operating mode, indicated by the green Power LED light. By following these conventions, the power consumption can be reduced to the following levels:

Power Consumption

Normal(Max.)	On	On	Normal	≤110W(130W)	Green
Stand-by	Off	On	Off	≤ 8W (30W)	Amber
Suspend	On	Off	Off	≤ 8W (30W)	Amber
Off	Off	Off	Off	≤ 3W (20W)	Amber

* () : with USB

Low Radiation Compliance (MPR II)

Low Radiation Compliance (MPR II) and DDC (Display Data Channel)

This monitor meets one of the strictest guidelines available today for low radiation emissions, offering the user extra shielding and an antistatic screen coating. These guidelines, set forth by a government agency in Sweden, limit the amount of emission allowed in the Extremely Low Frequency (ELF) and Very Low Frequency (VLF) electromagnetic range.

DDC (Display Data Channel)

DDC is a communication channel over which the monitor automatically informs the host system (PC) about its capabilities. This monitor has two DDC functions; DDC1 and DDC2B. DDC1 and DDC2B carry out uni-directional communication between the PC and the monitor. Under these situations, the PC sends display data to the monitor but not commands to control the monitor settings.

NOTE

- PC must support DDC functions to do this.
- If your monitor is displaying a mono chrome image or the wrong resolution, select the DDC OFF function.

Video Memory Modes

The monitor has 31 memory locations for display modes, 5 of which are factory preset to popular video modes.

Display Modes (Resolution)

Mode	Resolution	Frequency (kHz)	Refresh Rate (Hz)
1	VESA 640 x 480	43.269	85
2	VESA 800 x 600	53.674	85
3	VESA 1024 x 768	68.677	85
4	VESA 1280 x 1024	91.146	85
5	VESA 1600 x 1200	93.750	75

User Modes

- Modes 6-31 are empty and can accept new video data. If the monitor detects a new video mode that has not been present before or is not one of the preset modes, it stores the new mode automatically in one of the empty modes starting with mode 6.

If you use up the 26 blank modes and still have more new video modes, the monitor replaces the information in the user modes starting with mode 6.

Recalling Display Modes

- When your monitor detects a mode it has seen before, it automatically recalls the image settings you may have made the last time you used that mode.

You may, however, manually force a recall of each of the 5 preset modes by pressing the Recall button. All preset modes are automatically recalled as the monitor senses the incoming signal.

The ability to recall the preset modes is dependent on the signal coming from your PC's video card or system. If this signal does not match any of the factory modes, the monitor automatically sets itself to display the image.

Troubleshooting

Check the following before calling for service.

SELF DIAGNOSTICS message.

- The signal cable is not connected, or is loose. Check and secure the connection.

OUT OF FREQUENCY message appears.

- The frequency of the signal from the video card is outside the operating range of the monitor.

* Horizontal Frequency : 30-96kHz

* Vertical Frequency : 50-160Hz

Use the graphics board's utility software to change the frequency setting (Refer to the manual for graphics board).

The power LED is illuminated amber.

- Display power management mode.
- There is no active signal coming from the PC.
- The signal cable is not fastened securely.
- Check the computer power and graphics adapter configuration.

The image on the SCREEN is not centered, or too small, or not a rectangle shape.

- Image adjustment not been done yet in the current operating mode. Use the OSD, SET and $\Delta \nabla / \triangleleft \triangleright$ buttons to set the image to your liking.

The monitor doesn't enter the power saving off mode (Amber).

- Computer video signal is not VESA DPMS standard. Either the PC or the video controller card is not using the VESA DPMS power management function.

NOTE

- If the power indicator(LED) light is blinking amber, may result in abnormal condition of the monitor.
- Then press a power ON/OFF button on the front panel control and call your service technician for more information.

Service

Unplug the monitor from the wall outlet and refer servicing to qualified service personnel when :

- The power cord or plug is damaged or frayed.
- Liquid has been spilled into the monitor.
- The monitor has been exposed to rain or water.
- The monitor does not operate normally following the operating instructions. Adjust only those controls that are covered in the operating instructions. An improper adjustment of other controls may result in damage and often requires extensive work by a qualified technician to restore the monitor to normal operation.
- The monitor has been dropped or the cabinet has been damaged.
- The monitor exhibits a distinct change in performance.
- Snapping or popping from the monitor is continuous or frequent while the monitor is operating. It is normal for some monitors to make occasional sounds when being turned on or off, or when changing video modes.

Do not attempt to service the monitor yourself, as opening or removing covers may expose you to dangerous voltage or other hazards. Refer all servicing to qualified service personnel.

Sync Signal Types

Specifications

1	Separate Sync.	H. Sync.	V. Sync.
2	Composite Sync.	H/V. Sync.	N.C
3	Sync. On Green	N.C.	N.C

(N.C : No Connection)

Signal Connector
Pin Assignment

15pin VGA Connector



1	Red	9	N.C.
2	Green	10	Ground
3	Blue	11	Ground
4	Ground	12	SDA
5	Self-Test	13	H. Sync.
6	Red Ground	14	V. Sync.
7	Green Ground	15	SCL
8	Blue Ground		



Specifications

Picture Tube	19 inch (18.0 inches viewable) FST	
	90 degree deflection	
	0.26mm dot pitch	
	ARAS (Anti-Reflective Anti-Static) Coating	
Sync Input	Horizontal Freq.	30 - 96kHz (Automatic)
	Vertical Freq.	50 -160Hz (Automatic)
	Input Form	Separate TTL, Positive/Negative Composite TTL, Positive/Negative SOG (Sync On Green)
	Signal Input	15 pin D-Sub Connector
Video Input	Input Form	Separate, RGB Analog, 0.7Vp-p/75 ohm, Positive
	Resolution	max 1600 x 1200 @75Hz
	Recommend	1280 x 1024 @85Hz
		1024 x 768 @85Hz
Dimensions (with tilt/swivel stand)	Width	44.80 cm / 17.6 inches
	Height	46.50 cm / 18.3 inches
	Depth	47.60 cm / 18.7 inches
Power Input	Europe	AC 200~240V 50Hz 1.5A(995E/995E <i>plus</i>)
	Others	AC 100~240V 50/60Hz 2.0A(995E)
		AC 100~240V 50/60Hz 2.5A(995E <i>plus</i>)
	The products should be used according to the Power requirements of each ID LABEL.	
Weight Environmental Conditions	Net	21kg (46.3 lbs)
	Operating Condition	
	Temperature	10 °C to 40 °C
	Humidity	10 % to 90 % non-Condensing
	Storage Condition	
	Temperature	0 °C to 60 °C
	Humidity	5 % to 90 % non-Condensing

NOTE

- Information in this document is subject to change without notice.