



KF750 User Guide

CE 0168

www.lgmobile.com

P/N : MMBB0299001 (1.0) G

LG ELECTRONICS INC.

KF750 User Guide

ENGLISH

Bluetooth QD ID B013855



Some of the contents in this manual may differ from your phone depending on the software of the phone or your service provider.

KF750 User Guide

Congratulations on your purchase of the advanced and compact KF750 phone by LG, designed to operate with the latest digital mobile communication technology.



Disposal of your old appliance

- 1** When this crossed-out wheeled bin symbol is attached to a product it means the product is covered by the European Directive 2002/96/EC.
- 2** All electrical and electronic products should be disposed of separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities.
- 3** The correct disposal of your old appliance will help prevent potential negative consequences for the environment and human health.
- 4** For more detailed information about disposal of your old appliance, please contact your city office, waste disposal service or the shop where you purchased the product.

Setup **01**

Your standby screen **02**

The basics **03**

Get creative **04**

Get organised **05**

The web **06**

Settings **07**

Accessories **08**

Contents

Setup

Getting to know your phone	8
Installing the USIM and battery	10
Memory card.....	12
Menu map.....	14

Your standby screen

Touch screen tips.....	16
The status bar	17

The basics

Calls	18
Making a voice call	18
Making a video call.....	18
Making a voice/video call from Contacts.....	18
Making international calls.....	19
Answering and rejecting a call.....	19
Speed dialling.....	19
Making a second call.....	19
DTMF tones	20
Viewing your call logs.....	20
Using call divert	20
Using call barring.....	21
Changing the common call settings	21
Changing your video call settings	22
Contacts.....	23
Searching for a contact.....	23
Adding a new contact	23
Contact options	24

Creating a group.....	24
Using service dial numbers	25
Viewing your own number.....	25
Creating a business card.....	25
Changing your contact settings	25
Messaging.....	27
Messaging.....	27
Sending a message	27
Entering text	27
T9 predictive	27
Abc manual	28
Setting up your email	28
Retrieving your email	29
Sending an email using your new account	29
Changing your email settings ...	29
Message folders.....	30
Managing your messages	30
Using templates.....	31
Using emoticons.....	31
Changing your text message settings	31
Changing your multimedia message settings.....	32
Changing your other settings....	32

Get creative

Camera	33
Taking a quick photo	33
After you've taken your photo	33
Using the flash.....	34

Adjusting the brightness.....	34	Adding an effect to a photo	44
Choosing a shot mode	34	Morphing a photo.....	44
Using continuous shot mode	35	Spotlighting a photo	45
Using a frame shot mode.....	35	Editing your videos.....	45
Taking a panoramic shot	35	Trimming the length of your video	45
Using the advanced settings	36	Merging two videos together....	45
Changing the image size.....	37	Merging a photo with a video	46
Choosing a colour tone.....	37	Adding text to a video.....	46
Viewing your saved photos.....	38	Overlaying a photo.....	46
Setting a photo as a wallpaper or contact image	38	Adding a voice recording.....	47
Video camera	39	Adding a soundtrack to your video	47
Shooting a quick video	39	Changing the speed of your video	48
After you've shot your video	39	Adding a dimming effect	48
Adjusting the brightness.....	39	Multimedia.....	49
Using the advanced settings	39	Images.....	49
Changing the video size	40	My images option menus	49
Choosing an effect tone	41	Sending a photo.....	49
Watching your saved videos	41	Using an image	50
Your photos and videos	42	Organising your images	50
Editing photo album options	42	Deleting an image	50
Editing video album options	42	Moving or copying an image.....	50
Adjusting the volume when viewing a video.....	42	Editing an image	51
Capturing an image from a video	42	Marking and unmarking images.....	51
Sending a photo or video from the album	43	Checking your memory status	51
Viewing your photos as a slide show	43	Sounds	51
Setting a photo as a wallpaper	43	Using a sound.....	51
Editing your photos.....	44	Videos.....	52

Contents

Watching a video.....	52	Searching for stations.....	58
Using options while video is paused.....	52	Editing the channels.....	58
Sending a video clip.....	52	Resetting channels.....	58
Using a video clip as a ringtone.....	52	Listening to the radio.....	59
Using the video options menu.....	52	Using voice recorder.....	59
Games and Applications.....	53	Sending the voice recording.....	59
M-Toy menu.....	53	Get organised	
Playing a game.....	53	Organiser.....	60
Using the games options menu.....	53	Adding an event to your calendar.....	60
Flash contents.....	54	Changing your default calendar view.....	60
Viewing an SWF/SVG file.....	54	Adding an item to your to do list.....	60
Using options viewing the SWF/SVG file.....	54	Sharing a to do item.....	61
Documents.....	54	Adding a memo.....	61
Transferring a file to your phone.....	54	Tools.....	62
Viewing a file.....	55	Setting your alarm.....	62
Others.....	55	Using your calculator.....	62
Movie maker.....	55	Using the stopwatch.....	62
Creating a movie.....	55	Converting a unit.....	63
Music.....	55	Adding a city to your world time.....	63
Playing a song.....	56	PC Sync.....	64
Using options while playing music.....	56	Installing LG PC Suite on your computer.....	64
Creating a playlist.....	56	Connecting your phone and PC.....	64
Editing a playlist.....	57	Backing up and restoring your phone's information.....	64
Deleting a playlist.....	57	Viewing your phone files on your PC.....	65
Using the radio.....	57		

Synchronising your contacts	65	Settings	Changing your screen settings.....	74
Synchronising your messages.....	65		Personalising your profiles.....	74
Synchronising your music.....	65		Changing your phone settings.....	75
Using your phone as a mass storage device.....	66		Using Date & Time.....	75
PIN for DivX connection	66		Changing your other settings.....	75
			Changing security settings	76
			Using memory manager.....	76
			Using flight mode.....	76
The web		Anti Theft Mobile Tracker	77	
Browser	68	Accessories.....	78	
Accessing the web.....	68	Network service	79	
Adding and accessing your bookmarks.....	68	Technical data	79	
Saving a page	69	Guidelines		
Accessing a saved page	69	Guidelines for safe and efficient use	81	
Viewing your browser history	69			
Using RSS reader	69			
Adding the Feed.....	70			
Updating the RSS reader	70			
Changing the web browser settings	70			
The web	71			
Using your phone as a modem	71			
Using Bluetooth.....	71			
Sending and receiving your files using Bluetooth	72			
Pairing with another Bluetooth device	73			
Using a Bluetooth headset	73			

Getting to know your phone





Charger, USB Cable, Handsfree connector

TIP: To connect the USB cable, wait until the phone has powered up and has registered to the network.



Side keys

- **When the screen is idle:** volume of ring tone.
- **During a call:** volume of the earpiece.
- **When playing a BGM track**
 - **Short press:** controls the volume.
 - **Long press:** move to the next or previous music file.
- **Touch screen button:** turn the LCD into a touch screen to access your files.
- **Opens the multitasking menu**
- **Capture button**

01

02

03


04

05

06

07


08

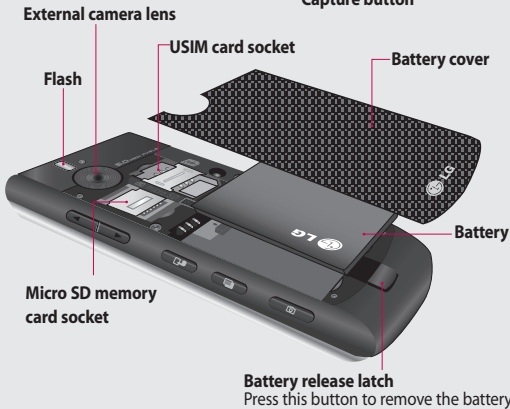

Installing the USIM and battery

1 Remove the battery cover

Press and hold down the battery release button at the top of the phone and lift off the battery cover.



2 Remove the battery

Hold the top edge of the battery and lift it from the battery compartment using the battery cover.




WARNING: Do not use your fingernail when removing the battery.

WARNING: Do not remove the battery when the phone is switched on, as this may damage the phone.

3 Install the USIM card

Slide the USIM card into the USIM card holder. Make sure that the gold contact area on the card is facing downwards. To remove the USIM card, pull it gently in the reverse direction.




4 Install the battery

Insert the top of the battery first into the top edge of the battery compartment. Ensure that the battery contacts align with the terminals on the phone. Press down the bottom of the battery until it clips into place.



5 Charging your phone

Slide back the cover of the charger socket on the side of your KF750. Insert the charger (with the arrow to the back of the handset) and plug into a mains electricity socket. Your KF750 will need to be charged until a message reading "Battery full" appears on screen.



01

02

03

04

05

06

07

08

Memory card

Installing a memory card

You can expand the memory available on your phone using a memory card. The KF750 will support up to a 4GB memory card.

TIP: A memory card is an optional accessory.


- 1 Remove the battery cover as before.
- 2 Lift the memory card cover and insert a micro SD card with the gold contact area facing downwards. Close the memory card cover so that it clicks shut.



- 3 Replace the battery cover.

Formatting the memory card

If your memory card is already formatted, you can begin using it straight away. If your card isn't formatted, you will need to do so.

- 1 From the standby screen press  then select **Settings**.
- 2 Select **Memory manager** then choose **External memory**.
- 3 Select **Format** and then confirm your choice.
- 4 Enter the password, if one is set, and your card will be formatted and ready to use.

TIP! To change your default storage destination, open **Memory manager** from the Phone settings menu and select **Primary storage settings**.

NOTE: If your memory card has existing content it will automatically be filed in the correct folder, for example, videos will be stored in the My Videos folder.

01

02

03

04

05

06

07

08

Setup

13

Menu map



Games & apps

- 1 M-Toy
- 2 My games & apps
- 3 Settings



Calling

- 1 Make video call
- 2 Call logs
- 3 Call durations
- 4 Data volume
- 5 Call costs
- 6 Call divert
- 7 Call barring
- 8 Fixed dial numbers
- 9 Call waiting
- 0 Common settings
- * Video call settings



Organiser

- 1 Calendar
- 2 To do
- 3 Memo
- 4 Secret memo
- 5 Date finder
- 6 Settings



Multimedia

- 1 Touch media
- 2 Camera
- 3 Video camera
- 4 Music
- 5 FM radio
- 6 Voice recorder
- 7 Media editor
- 8 Movie maker



Messaging

- 1 Create new message
- 2 Inbox
- 3 Mailbox
- 4 Drafts
- 5 Outbox
- 6 Sent items
- 7 My folders
- 8 Templates
- 9 Emoticons
- 0 Settings



My stuff

- 1 My images
- 2 My sounds
- 3 My videos
- 4 Games & Apps
- 5 Flash contents
- 6 Documents
- 7 Others
- 8 My memory card



Google

- 1 Search
- 2 Mail
- 3 Maps
- 4 Blogger
- 5 You Tube
- 6 Upload History



Tools

- 1 Quick menu
- 2 Alarms
- 3 Calculator
- 4 Stopwatch
- 5 Converter
- 6 World time
- 7 SIM service



Connectivity

- 1 Bluetooth
- 2 Server sync
- 3 USB connection mode
- 4 TV out
- 5 PIN for DivX connection



Contacts

- 1 Add new
- 2 Search
- 3 Speed dials
- 4 Groups
- 5 Service dial numbers
- 6 Own number
- 7 My business card
- 8 Settings



Browser

- 1 Home
- 2 Enter address
- 3 Bookmarks
- 4 RSS reader
- 5 Saved pages
- 6 History
- 7 Settings
8. NDTV Active



Settings

- 1 Profiles
- 2 Phone
- 3 Screen
- 4 Date & Time
- 5 Network
- 6 Internet profile
- 7 Access points
- 8 Packet data conn.
- 9 Security
- 0 Memory manager
- * Streaming settings
- # Reset settings

01

02

03

04

05

06

07

08

Your standby screen

Whenever your KF750 isn't in use it will return to your standby screen. From here you can access menu options, make a quick call and change your profile - as well as many other things.

Touch screen tips

If you press the touch screen button on the right-hand side of the phone the screen will switch to an interactive touch screen keypad.

Press and hold the touch screen button from the standby screen to enter a further multimedia menu.

To select an item, touch the icon on the touch screen. Your KF750 will vibrate slightly when it recognises that you've touched an option.

- There's no need to press too hard as the touchscreen is sensitive enough to pick up on a light touch.
- Use the tip of your finger to touch the option you require. Be careful not to touch any other keys.
- Don't cover the phone with a case or cover, as the touch screen will not work with any material covering it.

- The touch pad below the screen can be used as a four way arrow pad to navigate you through the phone menus.

TIP! Use the touch screen for fast and easy access to your music, Photo, M-Toy, Document and FM radio.



Touch pad

NOTE: When the screen light goes off, you can press the camera key on the right hand side of the phone to restore the standby screen.

Advice to the customer

In order to allow better antenna sensitivity LG suggest that you hold the handset as shown below.



Please do not cover the antenna area with your hand during a call or when using a Bluetooth connection. It may reduce signal quality.

The status bar

The status bar indicates, using various icons, things like signal strength, new messages and battery life as well as telling you whether your Bluetooth or GPRS is active.

Below is a table which explains the meaning of icons you're likely to see in the status bar.

Icon	Description
	Multitasking
	Network signal strength (number of bars will vary)
	No network signal
	Battery empty

Icon	Description
	New text message
	New email
	An alarm is set
	Normal profile in use
	Silent profile in use
	External memory
	Calls are diverted
	GPRS available
	EDGE in use
	Roaming
	Bluetooth is active
	Calls are rejected
	3G available

01

02

03

04

05





06

07

08

Calls

Making a voice call


- 1 Enter the number including the full area code.
To delete a digit press .
To delete all digits press and hold .
- 2 Press  to make the call.
- 3 Press  or close the handset to finish the call.

Making a video call

You can make a video call in a 3G-covered service area if the user you are calling also has a 3G video phone in a 3G-covered service area. You can also receive video calls. To make a video call, do the following.



- 1 Enter the phone number, as before.
- 2 If you do not want to use the speakerphone, ensure you have the headset plugged in.
- 3 To start the video function, press the left soft key **Options** and select **Make video call**. You will be notified that you will need to close other applications to make the video call.

NOTE: The video call may take some time to connect. Please be patient. While the video call is connecting, you will see your own image; after the other party has answered, their image will be displayed on the screen.



- 4 Adjust the camera position if necessary.
- 5 Press  to finish the call, or close the handset.

Making a voice/video call from Contacts


It's easy to call anyone whose number you have stored in your Contacts.

- 1 Press the down key on the navigation touch pad to access the contacts list.
- 2 Scroll to the contact to make a call.
- 3 Press  to make a voice call. Press the left soft key and select **Make video call** to make a video call.
- 4 Press  to finish the call.

Making international calls

- 1 Press and hold  for the international prefix. The '+' character prefixes the international access code.
- 2 Enter the country code, area code, and the phone number.
- 3 Press .

Answering and rejecting a call


When your phone rings press the  hard key to answer the call.

Press Silent to mute the ringing. This is great if you've forgotten to change your profile to Silent for a meeting!

Press the End key to reject the incoming call.



Speed dialling

You can assign a frequently-called contact to a speed dial number.


- 1 Press  and select **Contacts**.
- 2 Select **Speed dials**.
- 3 Your Voicemail is set to speed dial 1. Select any other number to assign it to a speed dial contact.

- 4 Your address book will open. Select the contact you'd like to assign to that number.

To call a speed dial number:

- 1 Press the assigned number then press the send key , or .
- 2 Press and hold the assigned number until the contact appears on screen.

Making a second call

- 1 During your initial call, press **OK**, then **Options**, and select **Add new call**.
- 2 Dial the number or search your contacts (see page 18 for details on how to make a call from Contacts).
- 3 Press  to connect the call.
- 4 Both calls will be displayed on the call screen. Your initial call will be locked and the caller put on hold.
- 5 Select **Swap** to change between the calls.
- 6 To end one or both calls select **Options** → **End** followed by **All** or **Active**.

NOTE: You will be charged for each call you make.

01

02

03

04

05

06

07


08

Calls

DTMF tones

DTMF allows you to use numerical commands to navigate menus within automated messages. DTMF is switched on as default.

Viewing your call logs

Press , then select **Calling** → **Call logs**.


Choose to view:

All calls - View a complete list of all of your dialled, received and missed calls.

Dialled calls - View a list of all the numbers you have called.

Received calls - View a list of all the numbers that have called you.

Missed calls - View a list of all the calls you have missed.

Press , select **Calling**.

Before Calling you can also choose to view:


Call durations - View the duration of all your sent and received calls.

Data volume - View the amount in kilobytes of all your received and sent data.

Call costs - View the charges applied to your dialled numbers (this service is network-dependant. Some operators are unable to support it).

TIP! From any calls list, touch the left soft key and **Delete All** to delete all the recorded items.

Using call divert

- 1 Press , then select **Calling**.
- 2 Select **Call divert** and choose **Voice calls** and/or **Video calls**.
- 3 Choose when to divert all calls; when the line is busy, when there is no answer or when you are not reachable.
- 4 Input the number you'd like to divert to.
- 5 Select **Activate**.

NOTE: Charges may be incurred for diverting calls. Please contact your network provider for details.


TIP! To turn off all call diverts, choose **Deactivate all**.

Using call barring

- 1 Press , select **Calling**.
- 2 Select **Call barring** and choose **Voice calls** and/or **Video calls**.
- 3 Choose any or all of the five options:
 - All outgoing**
 - Outgoing international**
 - Outgoing international calls except home country**
 - All incoming**
 - Incoming when abroad**
- 4 Enter the call barring password. Please check with your network operator for this service.

TIP! Select **Fixed dial number** to turn on and compile a list of numbers that can be called from your phone. You'll need your PIN2 code from your operator. When activated, only numbers included in the fixed dial list can be called from your phone.

Changing the common call settings

- 1 Press , then select **Calling**.
- 2 Select **Common settings**. From here you can amend the settings for:
 - Call reject** - Select **On** or **Off** and choose to reject all calls, those from specific groups, contacts, unregistered numbers (those not in your list of contacts) or those with no caller ID.
 - Send my number** - Choose whether your number will be displayed when you call someone.
 - Auto redial** - Choose **On** or **Off**.
 - Answer mode** - Choose whether to answer the phone by pressing the **Send** key, by pressing any key, or by opening the slide.
 - Minute minder** - Select **On** to hear a tone every minute during a call.
 - BT answer mode** - Choose how to answer a call when using a Bluetooth headset. Select **Handsfree** or **handset**.

01

02

03

04

05

06

07

08


Calls

Save new number - Saves numbers you use that aren't already stored in Contacts.

Slide close setting - Select **End call** to be able to disconnect a call by closing the slide.

Voice clarity- Select **Yes** to listen to the voice clearly.

Changing your video call settings

- 1 Press , then select **Calling**.
- 2 Select **Video call settings**.
- 3 Determine whether to **Use private picture** and/or, switch on the **Mirror**.

Contacts

Searching for a contact

There are two ways to search for a contact:

From the standby screen


- 1 From the standby screen touch the down key on the touch pad to open the address book.
- 2 Press the number key corresponding to the first letter of the contact you'd like to view. So, for 'Home' press **4** (GHI) twice.

TIP! You can search by group by touching the left soft key and selecting **Search by group**. This will bring up a list of all your groups.

From the main menu

- 1 Select **Contacts**.
- 2 Select **Search** and enter the first few letters of the contact you'd like to find using the keypad.
- 3 Your address book will bring up a list of the contacts corresponding to the letters you've entered.

Adding a new contact

- 1 Press  and select **Contacts**.
- 2 Select **Add new**.
- 3 Choose whether to save the contact to your **Handset** or **USIM**.
- 4 Enter the first and last name of your new contact. You do not have to enter both, but you must enter one or the other.
- 5 Enter up to five different numbers and assign a type for each. Choose from **Mobile, Home, Office, Pager, Fax, VT** and **General**.
- 6 Add up to two email addresses.
- 7 You can assign the contact to a group. Choose from **No group, Family, Friends, Colleagues, School** or **VIP**.
- 8 You can also add a **Homepage, Home address, Company name, Job title, Company address** and a **Memo**.

TIP! You can create customised groups for your contacts. See **Creating a group** on page 24.

01

02

03

04

05

06

07

08

Contacts

Contact options

There are many things you can do when viewing a contact. Here's how to access and use the options menu:

- 1 Open the contact you'd like to use. See **Searching for a contact** on page 23.
- 2 Press the left soft key to open the list of options.

From here you can:

Send message - Send a message or an email to the contact. See page 27 for details on how to send messages.

Send business card - Send the contact's details to another person as a business card. Choose to send as a **Text message, Multimedia msg, Email** or via **Bluetooth**.

Make voice call - Call the contact.

Make video call - Make a video call to the contact.

Edit - You can edit the contact.

Mark/Unmark - Mark your contacts for multiple selection.


Search by - You can search the entry by number or group.

Save to USIM/ Handset - Choose to move or copy to the USIM card or handset (depending on where you originally saved the contact).

Delete - Delete the contact.

Text input - You can set the text input method.


Creating a group

- 1 Press  and select **Contacts**.
- 2 Select **Groups** and touch the left soft key.
- 3 Select **Add new group**.
- 4 Enter a name for your new group.
- 5 Touch **Done**.

NOTE: If you delete a group, the contacts which were assigned to that group will not be lost. They will remain in your address book.

TIP! You can edit an existing group by highlighting it and touching the left soft key. Choose to **Add a member** to the group from your contacts, assign a **Group ringtone, Rename** the group or **Delete** the group.

Using service dial numbers

You can view the list of Service Dial Numbers (SDN) assigned by your service provider (if supported by the USIM card). Such numbers include emergency, directory enquiries and voicemail numbers. After selecting a service number, press  to dial that service.

Viewing your own number


Select **Own number** in the Contacts menu to view your number.

Creating a business card

You can create your own business card by selecting **My business card**, then **Add**. Enter your name, number, email address and image.

Changing your contact settings

You can adapt your contact settings so that your address book works according to your preferences.

- 1 Press  and select **Contacts**.
- 2 Select **Settings**. From here you can adjust the following settings:

Contact list settings - Choose whether to view contacts saved to both your **Handset & USIM**, **Handset only** or **USIM** only. You can also select to show the first name or last name of a contact first, and to show a contact picture.

Synchronise contacts - Connect to your server to synchronise your contacts. See **Synchronising your contacts** on page 65.

Copy - Copy your contacts from your USIM to your handset or from your handset to your USIM. Choose to do this one by one, or all together.

Move - This works in the same way as **Copy**, but the contact will only be saved to the location you've moved it to. If you move a contact from the USIM to the handset it will be deleted from the USIM memory.

Send all contacts via Bluetooth - Send all contacts information to another handset by Bluetooth.

Back up contacts - See **Backing up and restoring your phone's information** on page 64.

01

02

03

04

05

06

07

08

Contacts

Restore contacts - See **Backing up and restoring your phone's information** on page 64.

Clear contacts - Delete all your contacts.

Memory info. - You can check how much memory you've got left on your handset or your USIM.

Sending Group message


You can send the message by grouping at a time.

Messaging

Messaging

Your KF750 combines SMS, MMS and email into one intuitive and easy to use menu.

Sending a message

- 1 Select **Messaging** then choose **Create new message**.
- 2 Choose **Message** to send an SMS or MMS. A new SMS will open.
- 3 Select **Options**, then **Insert**, to add an image, video, sound or subject.
- 4 Press  **Send**. Enter the phone number or select **Contacts** to open your contacts list. You can add multiple contacts.



WARNING: You will be charged per 160 character text message for each person that you send the message to.





WARNING: If an image, video or sound is added to an SMS it will be automatically convert to an MMS and you will be charged accordingly.


Entering text

There are two ways to enter text:

T9 predictive and Abc manual.

To switch between text entry methods, press and hold the  key when you have a blank message open.

To change between upper, lower and title case press the  key.

To delete a character use the  hard key below the screen.

To enter a symbol select **Options** and **Insert**.

T9 predictive

T9 mode uses a built-in dictionary to recognise words you're writing based on the key sequences you touch. Simply touch the number key associated with the letter you want to enter, and the dictionary will recognise the word once all the letters are entered. For example, press 8, 3, 5, 3, 7, 4, 6, 6, 3 to write 'telephone'.

01

02

03

04

05

06

07

08

Messaging

Abc manual

In Abc mode you must press the key repeatedly to enter a letter. For example, to write 'hello', press **4** twice, **3** twice, **5** three times, **5** three times again, then **6** three times.

Setting up your email

You can stay in touch on the move using email on your KF750. It's quick and simple to set up a POP3 or IMAP4 email account.

- 1 Select **Messaging** then select **Settings**.
- 2 Select **Email**, then **Email accounts**.
- 3 You can now choose how your account works:
 - Title** - Enter a name for this account.
 - My name** - Enter your name.
 - Username** - Enter the account username.
 - Password** - Enter the account password.
 - Email address** - Enter the account email address.
 - Reply email address** - Enter the 'reply to' email address.

Outgoing mail server - Enter the account details.

Incoming mail server - Enter the account details.

Maximum receive size - Choose the size limit of your emails, the maximum is 1MB.

Mailbox type - Enter the mailbox type, POP3 or IMAP4.

Save to server - Choose whether to save your emails to the server. For IMAP4 accounts copies are always saved.

Save sent mail into - Choose where to save your IMAP4 emails. For POP3 accounts copies are always saved on the phone.

Access point - Choose your Internet access point.

Auto retrieve - Choose whether to fetch your new emails automatically.

Advanced settings - Choose whether to use the advanced settings.

Incoming server port - Normally, this is 110 for POP3 accounts and 143 for IMAP4 accounts.

SMTP authentication - Choose the security settings for the outgoing mail server.

APOP secure login - Choose to activate APOP secure login for a POP3 account. IMAP4 accounts are always set to off.

Now your account is set up, it will appear in the list of accounts in your Email folder.

Retrieving your email

You can automatically or manually check your account for new email. See 'Changing your email settings' to check automatically.

To check manually:

- 1 Select **Messaging** then **Mailbox**.
- 2 Select the account you want to use.
- 3 Choose **Retrieve** and the phone will connect to your email account and retrieve your new messages.

Sending an email using your new account

- 1 Select **Messaging**, then choose **Create new message**.
- 2 Choose **Email** and a new email will open.

3 Use **Options** to enter the recipient's address and to write your message. Use **Insert** to attach images, videos, sounds or other file types.

4 Select **Send** and your email will be sent.

TIP! You can email Word, Excel, Power Point and PDF documents to your KF750 so you can review them on the move.

Changing your email settings

You can adapt your email settings so that it works according to your preferences.

- 1 Select **Messaging** then open **Settings**.
- 2 Select **Email** and then you can adapt the following settings:

Allow reply email - Choose to allow the sending of 'read confirmation' messages.

Request reply email - Choose whether to request 'read confirmation' messages.

Retrieve interval - Choose how often your KF750 checks for new email messages.

01

02

03

04

05

06

07

08

Messaging

Include message in Fwd & Reply -

Choose whether or not to include the original message.

Include attachment - Choose whether or not to include the original attachment.

Auto Retrieval in Roaming -

Choose whether or not to automatically retrieve your messages when abroad.

New email notification - Choose whether or not to be alerted to new emails.

Signature - Create an email signature and switch this feature on.

Priority - Choose the priority level of your email messages.

Message folders

Inbox - All the messages you receive are placed into your inbox. Here you can read, reply to and forward your messages.

Mailbox - All emails you receive are placed into your Mailbox.

Drafts - If you don't have time to finish writing a message, you can save what you've done so far here.

Outbox - This is a temporary storage folder for messages that are being sent.

Sent items - All the messages you send are placed into your Sent items folder.

Managing your messages

- 1 Select **Messaging** then **Inbox**.
- 2 Select Options and then choose to:
 - Reply** - Send a reply to the selected message.
 - Forward** - Send the selected message on to another person.
 - Call** - Call the person who sent you the message.
 - Delete** - Delete the message.
 - Create new message** - Open a new, blank message or email.
 - Mark/Unmark** - Mark your messages for multiple deletion.
 - Copy & Move** - Copy or move the message to your phone, USIM or My folders.
 - Filter** - View your message by type. This will group SMS separately from MMS.

Message info. - See additional information for the message, including the time it was sent.

If you see the message **No space for USIM message** you should delete some messages from your inbox.

If you see the message **No space for messages** you can delete either messages or saved files to create space.

Using templates

Create templates for the SMS and MMS messages you send most frequently. You'll find some templates already on your phone, and you can edit these if you wish.

- 1 Select **Messaging** then choose **Templates**.
- 2 Choose **Text templates** or **Multimedia templates**. You can then select Options to **Add new, Edit, Delete** or **Delete all** templates.

Using emoticons

Liven up your messages using emoticons. You'll find some commonly used emoticons already on your phone.

- 1 Select **Messaging** then choose **Emoticons**.
- 2 Select Options to **Add new, Edit, Delete** or **Delete all** emoticons.

Changing your text message settings

Your KF750 message settings are pre-defined so that you can send messages immediately. If you'd like to change the settings, you can do so as follows.

Select **Messaging**, then choose **Settings**, then **Text message**. You can make changes to:

Text message centre - Enter the details for your message centre.

Delivery report - Choose to receive confirmation that your message was delivered.

Validity period - Choose how long your message is stored at the message centre.

Message types - Convert your text into **Voice, Fax, X.400** or **Email**.

Character encoding - Choose how the characters in your messages are encoded, this impacts the size of your message and therefore data charges.

01

02

03

04

05

06

07

08

Messaging

Send long text as - Choose to send as **Multiple SMS** or as an **MMS**.

Changing your multimedia message settings

Your KF750 message settings are pre-defined so that you can send messages immediately. If you'd like to change the settings, you can do so as follows.

Select **Messaging**, then choose **Settings**, then **Multimedia message**.

You can make changes to:

Retrieval mode - Choose **Home** or **Roaming** network. If you then choose **Manual** you will receive only notifications of MMS and you can then decide whether or not to download them in full.

Delivery report - Choose to allow and/or request a delivery report.

Read reply - Choose to allow and/or send a read reply.

Priority - Choose the priority level of your MMS.

Validity period - Choose how long your message is stored at the message centre.

Slide duration - Choose how long your slides appear on screen.

Delivery time - Deliver your message at a specific time.

Multi msg. centre - Enter the details for your message centre.

Changing your other settings

Select **Messaging**, choose **Settings** then:

Info. service - Choose your reception status, language and other settings.

Service message - Choose to receive or block service messages. You can also set your message security by creating trusted and untrusted lists of senders.

Camera

Taking a quick photo

- 1 Press and hold the capture button on the right-hand side of the handset and the camera's viewfinder will appear on the screen.
- 2 Holding the phone horizontally, point the lens towards the subject of the photo.
- 3 Slightly depress the capture button and a focus box will appear in the centre of the viewfinder screen.
- 4 Position the phone so you can see the subject of your photo in the focus box.
- 5 When the focus box turns green, the camera has focused on your subject.
- 6 Press the capture button fully.

After you've taken your photo

Your captured photo will appear on the screen. The name of the image runs along the bottom of the screen together with five icons down the right side.



Back Go back to previous menu.

- View the pictures you have taken in your Album.
- Send the photo as an MMS, Email, via Bluetooth or Blog This. See page 27 for **Sending a message**, page 72 for **Sending and receiving your files using Bluetooth**.
- Take another photo straight away. Your current photo will be saved.
- Use the image as wallpaper, as a Contact image, or in your Start-up or Shut down screen.
- Delete the photo you have just taken. The viewfinder will reappear.

TIP! In camera mode select the Play icon to open the photo album. See page 38, **Viewing your saved photos**, for details.

01

02

03

04

05

06


07

08

Camera

Using the flash



Flash is set to Auto by default, but there are other options.

- 1 Select  from the top right corner of the viewfinder to enter the flash sub-menu.
- 2 There are three flash options:
 - On** - Your camera will always flash when taking a picture.
 - Auto** - Your camera will assess whether or not the flash is necessary for a good picture.
 - Off** - The camera will never flash. This is useful if you want to save battery power. Select the flash option you'd like to use.
- 3 When you've made your selection the flash menu will automatically close, ready for you to take your picture, and the flash icon in the viewfinder will change according to your chosen flash mode.

NOTE: Whenever you exit the camera, the flash setting will revert to Auto mode. You'll need to switch the flash back on if you still need it when you reopen the camera.

Adjusting the brightness

Contrast defines the difference between light and dark in an image. A low contrast image will appear foggy, whereas a high contrast image will appear much sharper.

- 1 Select **Brightness** in **Settings**.
- 2 Slide the contrast indicator along the bar, towards  for a lower contrast, hazier image or towards  for a higher contrast, sharper image.

Choosing a shot mode

- 1 Select **Settings** to view the available shot modes.
- 2 Choose from the five options:
 - Normal** - This is the default shot type. The photo will be taken in the normal way, as outlined in **Taking a quick photo** on page 33.
 - Continuous shot** - This enables you to take nine shots automatically in very quick succession. See **Using continuous shot mode** below for details.
 - Frame shot** - Choose from one of the fun frames to transform your friend into a pirate or just to

decorate their surroundings.

Panorama - This shot type is great for taking a photo of a large group of people or for capturing a panoramic view. See **Taking a panoramic shot** below for more details.

Music video shot - This shot type allows to take a shot with music or voice.

Using continuous shot mode

Continuous shot mode is great for taking photos of moving objects or at sporting events.

- 1 Select **Continuous shot**.
- 2 Position the subject in the viewfinder and press the capture button as you would to take a normal photo.
- 3 The camera will take nine shots in quick succession and display the first with eight thumbnails on the screen.
- 4 Select the shot you want to keep by selecting the thumbnail.

Using a frame shot mode

Frame shot can be used to transform your friend into a pirate, or just to decorate their surroundings with a frame.

- 1 Select **Frame shot** menu.
- 2 Position the subject in the fun frame and press the capture button.
- 3 Save the image by selecting **Save**.

Taking a panoramic shot

Capture life as it appears using panoramic shot. The camera will let you take three photos, all aligned, and combine them into one image so that your wide angle view becomes a panoramic photo.

- 1 Select **Panorama**.
- 2 Take the first photo as normal. A ghosted version of the right side of the image will appear in the viewfinder.
- 3 When you take the second and third photos, line the ghost of the previous image up with the next image in the viewfinder.
- 4 In phone photos are saved as a one panoramic image only.

01

02

03

04

05

06

07

08

Camera

NOTE: Due to the image size the panoramic photo will appear slightly distorted in the Album view.

Using the advanced settings

From the viewfinder select **Settings**.

Size - Change the size of the photo. See **Changing the image size** on page 37.

Scene mode - Set the the camera to adjust for the environment. Choose from **Auto, Portrait, Landscape, Night, Beach, Sports, and Party**.

Brightness - Set the brightness of the image in the viewfinder of the camera.

Effect - Choose a colour tone to apply to the photo you're taking. See **Choosing a colour tone** on page 37.

White Balance - The white balance ensures that any white in your photo is realistic. In order for your camera to correctly adjust the white balance you may need to determine the light conditions. Choose from **Auto, Daylight, Cloudy, Illuminate and Indoors**.

Timer - The self-timer allows you to set a delay after the capture button is pressed. Choose from **3 seconds, 5 seconds or 10 seconds**. Great for a group photo that you want to be part of too!

Shot mode - See page 34.

ISO - ISO determines the sensitivity of the camera's light sensor. The higher the ISO, the more sensitive the camera will be to light. This is useful in darker conditions when the flash can't be used. Choose an ISO value from **Auto, ISO 100, ISO 200, ISO 400 or ISO 800**.

Quality - Super fine/ Fine /Normal

Memory in use - Choose whether to save your photos to the **Handset** memory or to the **External** memory.

Hide icons - Hide the icons to the side of the viewfinder.

Focus mode - Set the camera to focus automatically.

Sound - Select one of three different shutter sounds.

NOTE: Always select **Save** after selecting a new setting to implement the changes you've made.

TIP! When you exit the camera, all your settings will return to default, except image size and image quality. Any non-default settings you require will need to be reset, for example, colour tone and ISO. Check them before you take your next photo.

TIP! The settings menu is superimposed over the viewfinder, so when you change elements of the image colour or quality, you'll be able to see the image change in preview behind the settings menu. Remember to select **Save** before exiting to apply any changes.

Changing the image size

The more pixels, the larger the file size, which in turn means they will take up more of your memory. If you want to fit more pictures on your phone or memory card you can alter the number of pixels to make the file size smaller.

- 1 From the viewfinder select **Settings** in the bottom left corner.
- 2 Select **Size**.
- 3 Select a pixel value from the six numerical options (**5M: 2592x1944**, **3M: 2048x1536**, **2M: 1600x1200**, **1M: 1280x960**, **640x480**, **320x240**) or choose the preset:
Contact - This sets the camera to take a photo the perfect size to be added to a phone contact.
- 4 Select the size option you'd like to use and press **Select** to implement your changes. The settings menu will automatically close, ready for you to take your picture.

Choosing a colour tone

- 1 From the viewfinder, select **Settings**.
- 2 Select **Effect**.
- 3 There are twelve colour tone options: **Off**, **Black & White**, **Negative**, **Sepia**, **Blue**, **Emboss**, **Sketch**, **Purplish**, **Bluish**, **Monochrome**, **Edgemap**, or **Posterize**.
- 4 Choose the colour tone you'd like to use and press **Select**.

01

02

03

04

05

06

07

08

Camera

5 When you've made your selection, the colour tone menu will automatically close, ready for you to take your picture.

TIP! You can change a photo taken in colour to black and white or sepia, taken but you cannot change a picture taken in black and white or sepia back to colour.

NOTE: Contact images can only be added to contacts saved to your phone, not your SIM.

TIP! You can also access your photos using the touch screen. Press and hold the touch screen button on the right-hand side of the phone and touch the **Photo** icon. You can then scroll through your pictures by touching the screen.

Viewing your saved photos


- 1** You can access your saved photos from within the camera mode and from the Album at the top of the icon menu.
- 2** Your album will appear on the screen.
- 3** Highlight the photo you want to view to bring it to the front of the album.
- 4** Select the photo to open it fully.

Setting a photo as a wallpaper or contact image

From your image album, select an image and **Use as** to use the image as a wallpaper or contact image.





Video camera


Shooting a quick video

- 1 Move the camera mode switch to  and press the centre button. The video camera's viewfinder will appear on screen.
- 2 Holding the phone horizontally, point the lens towards the subject of the video.
- 3 Press the capture button once to start recording.
- 4 **REC** will appear at the bottom of the viewfinder. Press the capture button again to stop recording.

After you've shot your video

A still image representing your captured video will appear on screen. The name of the image runs along the bottom of the screen together with five icons down the right side.




-  View your video album.
-  Play the file.
-  New video is played.
-  Send the video as an MMS, as an Email, via Bluetooth or YouTube. See page 27 for **Sending a message**, or page 72 for **Sending and receiving your files using Bluetooth**.

 Delete the video you have just made. The viewfinder will reappear.

TIP! Select the album icon to open the video album. See **Watching your saved videos** on page 41 for details.

Adjusting the brightness

Contrast defines the difference between light and dark in an Video. A low contrast Video will appear foggy, whereas a high contrast Video will appear much sharper.

- 1 Select .
- 2 Slide the contrast indicator along the bar, towards  for a lower contrast, hazier Video, or towards  for a higher contrast, sharper Video.

Using the advanced settings

From the viewfinder select **Settings**.

Size - Change the size of the video. See **Changing the video size** on page 40.

Scene mode - Set the Video for adjusting the environment. Choose from **Auto**, **Portrait**, **Landscape**, **Night**, **Beach**, **Sports**, and **Party**.

01

02

03

04

05

06

07

08

Video camera

Effect - Choose an effect tone to apply to the video you're making. See **Choosing an effect tone** on page 41.

White Balance - The white balance ensures that any white in your Videos is realistic. In order for your camera to correctly adjust the white balance you may need to determine the light conditions. Choose from **Auto**, **Daylight**, **Indoors**, **Illuminate** and **Cloudy**.

Music video shot - This shot type allows to take a shot with music or voice.

Recording speed - Record the video using **Normal**, **Slow video**, **Fast video**.

Duration - Select the maximum length of the recording.

Memory in use - Choose whether to save your videos to the **Handset** memory or to the **External** memory.

Hide icons - Hide the icons to the side of the viewfinder.

Voice - Choose **Mute** to record a video without sound.

NOTE: Always touch **Save** after selecting a new setting to implement the changes you've made.

TIP! When you exit the video camera all your settings will return to default, except Video Size & Video Quality. Any non-default settings you require will need to be reset, for example colour tone and white balance. Check them before you shoot your next video.

Changing the video size

The more pixels, the larger the file size, which in turn means they will take up more memory. If you want to fit more videos onto your phone you can alter the number of pixels to make the file size smaller.

- 1 Select **Size** from the settings menu.
- 2 Select a pixel value from the four options:

640x480(W) - The highest quality wide screen option.

320x240 - Smaller Video size, therefore smaller file size. Great for saving on memory space.

176x144 - Smallest Video size and therefore a smaller file size.

16:9 Wide - Wide screen option.

- 3 Select the size option you'd like to use and press **Save** to implement your changes. The settings menu will automatically close, ready for you to shoot your video.

NOTE: When you view your videos, playback speed is 30 frames per second, with the exception of 120 fps where playback is at 15 frames per second.

Choosing an effect tone

- 1 Select **Settings** and choose **Effect**.
- 2 There are twelve colour tone options: **Off, Black & White, Negative, Sepia, Blue, Emboss, Sketch, Purplish, Bluish, Monochrome, Edgemap** and **Posterize**.
- 3 Choose the colour tone you'd like to use and press **Select**.

- 4 When you've made your selection, the colour tone menu will automatically close, ready for you to shoot your video.

TIP! You can change a video shot in colour to black and white or sepia after it's taken, but you cannot change a video shot in black and white or sepia to colour.

Watching your saved videos

- 1 Select the album icon. Your album will appear on screen.
- 2 Highlight the video you want to view to bring it to the front of the album.
- 3 Select the video to open it fully.

01

02

03

04

05

06

07

08

Your photos and videos

Editing photo album options

You can view and edit your images using the Options menu in the photo album.

View - View the image.

Send - Send the image to a friend.

Delete - Delete the image.

Use as - Set the image as a wallpaper/ contacts image/start-up or shut down image.

Slide show - Set the image as a slide show.

Edit - Edit the image.

Print - Print an image file via PictBridge or Bluetooth.

Editing video album options

You can view and edit your videos using the Options menu in the video album.

Play - Play the video.

Send - Send the video to a friend.

Delete - Delete the video.

Use as - Set the video as a ringtone.

Rename - Rename the video.


Edit - Edit the video.

TIP! You can easily delete a photo or video. Select the photo or video, then select **Options** and choose **Delete**.


Adjusting the volume when viewing a video

To adjust the volume of the audio on a video, use up and down on the touch pad.


Capturing an image from a video

- 1 Play the video you would like to capture an image from.
- 2 Press  to pause the video on the frame you'd like to convert to an image and open the options menu.
- 3 From the options menu select **Capture**.
- 4 The image will appear on the screen with its assigned image name.
- 5 Select **OK**.
- 6 Select **Delete** to return to the album.

- 7 The image will be saved in the My files folder and will appear in the album (You need to exit the album and then re-open for this to appear).

 **WARNING:** Some functions may not work properly if the multimedia file has not been recorded on the phone.

Sending a photo or video from the album

- 1 Select a photo or video to open it. If you select a video, press  when it starts to play.
- 2 Select the left soft key to open the options menu.
- 3 Select **Send** and choose how you would like to send the video or photo: **Message, Email or Bluetooth**.
- 4 The chosen messaging application will open so you can send the video or photo.

NOTE: The photo or video may need to be resized before it can be sent by MMS. Some videos may be too large to send by MMS at all, in which case you can choose one of the other sending options.

Viewing your photos as a slide show

Slide show mode will show all the photos in your album one at a time as a slide show.

- 1 Select the photo you would like to begin the slide show.
- 2 Press the left soft key to open the Options menu.
- 3 Select **Slide show** and it will begin.

Setting a photo as a wallpaper

- 1 Select the photo you would like to set as a wallpaper.
- 2 Select the left soft key to open the Options menu.
- 3 Select **Use as - Wallpaper**.

01

02

03

04

05

06










07

08

Your photos and videos

Editing your photos

There are loads of great things you can do to your photos to change them, add to them or liven them up a little.

- 1 Open the photo you'd like to edit and select **Options**.
- 2 Select **Edit**.
- 3 Select an icon to adapt your photo:
 -  Rotate the image left or right.
 -  Change the size of the photo.
 -  Insert an icon to the image.
 -  Clip the image to 640X480, 320X240, 176X146.
 -  Distort the image.
 -  Change the colour tone to Black and white, Sepia, or Colour negative.
 -  Change or add a frame to the image.
 -  Reverse the picture to a mirror image.
 -  Change the image using morphing, fun mirror, or spotlight.

Adding an effect to a photo

- 1 From the editing screen, select **Special effect** or **Frame effect**.

- 2 Choose to apply any of the two options to the photo:
 - Special effect** - Change the colour of a photo to **Black and white**, **Sepia** or **Colour Negative**.
 - Frame effect** - Add a frame to your photo. Select the desired frame type. Select **OK** to have the chosen frame superimposed over your photo.
- 3 To undo an effect simply select **Undo**.

TIP! You can use more than one effect on a photo, except for a colour effect.

Morphing a photo

Morphing a photo is great for changing the facial expressions of friends, or just for distorting a photo for artistic effect.

- 1 From the editing screen select **More** and then **Morphing**.
- 2 If the face in the picture is not detected, a pop up message **Face is not detected** will be displayed and the morphing effect will be cancelled.

- 3 If the face is detected the first morphing style will be applied to the picture.
- 4 Select the morphing style you would like to use on the photo.
- 5 Select the intensity of morphing.
- 6 Select **OK** to apply the changes.

Spotlighting a photo

- 1 Select the desired location on the image.
- 2 Select the size of spotlight.
- 3 Select **OK** to apply the changes.

TIP! Use the Fun mirror to copy the left side of the image over the right side to make fun pictures.

TIP! You can undo more than one effect on a photo, except for a resize. If any effect is already applied before the resize effect, the applied and resize effects will be saved. The undo count will then be reset.

Editing your videos

Editing features are available for all video types except 640x480. Don't record in this format if you plan to edit your video.

Trimming the length of your video

- 1 Choose the video you'd like to edit, and touch **Options**.
- 2 Select **Edit** and choose **Trim**.
- 3 Select **Start** and **End** to mark the new start and end points.

Merging two videos together

- 1 Choose the first video you'd like to edit, and select **Options**.
- 2 Select **Edit** and choose **Video merge**.
- 3 The My videos folder will open. Choose the video you would like to merge to and choose **Select**.
- 4 Select **Effect** to choose how the videos merge together: **None**, **Fade out**, **Pan zoom**, **Oval**, **Uncover**, **Blind**, **Checker board** or **Dissolve**.

01

02

03

04


05

06


07

08

Your photos and videos

- 5 Press  to save the new merged video. Choose to save over the original file or as a new file.
- 6 Repeat these steps to merge more videos.

Merging a photo with a video

- 1 Choose the video you'd like to edit, and select **Options**.
- 2 Select **Edit** and choose **Image merge**.
- 3 The My images folder will open. Choose the photo you would like to merge into your video and choose **Select**.
- 4 Select and slide the photo to merge it to the end or the beginning of the video.
- 5 Select **Effect** to choose how the photo and video merge together: **None, Fade out, Pan zoom, Oval, Uncover, Blind, Checker board** or **Dissolve**.
- 6 Press . Choose to save over the original file or as a new file.
- 7 Repeat these steps to merge more photos.

Adding text to a video

- 1 Choose the video you'd like to edit, and select **Options**.
- 2 Select **Edit** and choose **Text overlay**.
- 3 Enter your text using the keypad and press **Save**.
- 4 Press **Start** and mark when you'd like the text to appear.
- 5 Select the area of the screen you'd like the text to appear in.
- 6 Select **OK** to mark when you'd like the text to disappear.
- 7 Select **Save** to save it. Choose to save over the original file or as a new file.
- 8 Repeat these steps to add more text.

Overlaying a photo

- 1 Choose the video you'd like to edit, and select **Options**.
- 2 Select **Edit** and choose **Image overlay**.

- 3 The My images folder will open. Choose the photo you would like to overlay your video and choose **Select**.
- 4 Select **Start** and mark when you'd like the photo to appear.
- 5 Select the area of the screen you'd like the photo to appear in. If the photo is too big it will overlay the whole screen, not just the area selected.
- 6 Select **OK** to mark when you'd like the photo to disappear.
- 7 Select **Save** to save it. Choose to save over the original file or as a new file.
- 8 Repeat these steps to add more photos.

Adding a voice recording

- 1 Choose the video you'd like to edit and select **Options**.
- 2 Select **Edit** and choose **Voice recording**. The quality of the original audio will be affected by adding a voice recording.
- 3 Select **Yes** to continue.
- 4 Press **Play** to view your video. When you get to the part you'd like to record your voice over, press **Pause**.
- 5 Press **End** to stop recording.
- 6 Select **Save** followed by **Yes** to save. Choose to save over the original file or as a new file.
- 7 Repeat these steps to add more voice recordings to the video.

Adding a soundtrack to your video

- 1 Choose the video you'd like to edit and select **Options**.
- 2 Select **Edit** and choose **Audio dubbing**.
- 3 The My sounds folder will open. Choose the track you would like to add to your video and press **Select**.
- 4 The original audio recording of your video will be erased.
- 5 If the audio is shorter than the video choose whether to play **Once** or to **Repeat** it.
- 6 Choose to save over the original file or as a new file.

01

02

03

04

05

06

07


08

Your photos and videos

Changing the speed of your video

- 1 Choose the video you'd like to edit and select **Options**.
- 2 Select **Edit** and choose **Time scaling**.
- 3 Select one of the four speed options: **x4**, **x2**, **x1/4**, **x1/2**.
- 4 Choose to save over the original file or as a new file.

Adding a dimming effect

- 1 Open the video you'd like to edit, select  and select **Options**.
- 2 Select **Edit** and choose **Dimming effect**.
- 3 Choose to save over the original file or as a new file.
- 4 Your video will now fade in at the start and fade out at the end.

Multimedia

You can store any multimedia files on your phone's memory in My stuff so that you have easy access to all of your pictures, sounds, videos and games. You can also save your files to a memory card. The advantage of using a memory card is that you can free up space on your phone's memory.

Images

My images contains a list of pictures including default images pre-loaded onto your phone, images downloaded by you and images taken on your phone's camera.

My images option menus

The options available to you in **My images** depend on what type of image you have selected. All of the options will be available for pictures you have taken on the phone's camera, but only the **Use as**, **Sort by Grid (List) view** and **Memory manager** options are available for default images.

Send - Send the image to a friend.

Use as - Set the image to appear on your phone at certain times.

Move - Move an image from the phone memory to a memory card or vice versa.

Copy - Copy an image from the phone memory to a memory card or vice versa.

Delete - Delete an image.

Mark/Unmark - Select multiple files.

Print - Print an image via PictBridge or Bluetooth®.

File - Change the name or view the information for the file.

Slide show - Start a slide show.

Sort by - Sort images into a specified order.

Grid view/ List view - View each image in grid or list type.

Memory manager - View the memory status.

Sending a photo

- 1 Select **My stuff** then choose **My images**.
- 2 Select the photo you want to send and press **Options**.

01

02

03

04

05

06

07

08

Multimedia

- 3 Select **Send** and choose from **Message, Email, Bluetooth** or **Blog**.
- 4 If you choose **Message** or **Email**, your photo will be attached to the message and you can write and send the message as normal. If you choose **Bluetooth**, you will be prompted to turn Bluetooth on and your phone will search for a device to send the picture to.

Using an image

You can choose images to use as wallpapers and screensavers or even to identify a caller.

- 1 Select **My stuff** then **My Images**.
- 2 Select the image and touch **Options**.
- 3 Select **Use as** and choose from:
 - Wallpaper** - Set a wallpaper for the standby screen.
 - Contacts image** - Allocate an image to a particular person in your contacts list so that the picture shows when they call you.
 - Start up image** - Set an image to appear when you switch the phone on.

Shut down image - Set an image to appear when you switch the phone off.

Organising your images

- 1 Select **My stuff**, then **My images**.
- 2 Select **Options**, then **Sort by**.
- 3 Choose from **Date, Type** or **Name**.

Deleting an image

- 1 Select **My stuff**, then **My images**.
- 2 Select the image you want to delete and choose **Options**.
- 3 Select **Delete**, then **Yes** to confirm.

TIP! To quickly delete any file in My files, highlight it with the cursor and press the **C** key.

Moving or copying an image

You can move or copy an image between the phone memory and the memory card. You might want to do this to either free up some space in one of the memory banks or to safeguard your images from being lost.

- 1 Select **My stuff** then **My images**.
- 2 Select an image and select **Options**.
- 3 Select **Move** or **Copy**.

Editing an image

You can edit the image using the **Options** menu.

- 1 Select **Multimedia** menu.
- 2 Select **Media editor**.
- 3 Select **Image** editor and choose from several options. See page 44 for details.

Marking and unmarking images

If you want to move, copy, send or delete several images at once, you first need to identify them by marking them with a tick.

- 1 Select **My stuff** then **My images**.
- 2 Select **Options** then **Mark/Unmark**.
- 3 A box will appear to the left of each image. If you select an image, a tick will appear in the box marking it.
- 4 To unmark an image, select the image again so that the tick disappears from the box.

- 5 Once you have marked all of the appropriate images, choose one of the options to apply to all of them.

Checking your memory status

You can check to see how much of your memory you have used and how much you have remaining.

- 1 Select **My stuff**, then **My images**.
- 2 Select **Options**, then **Memory manager**.
- 3 Choose **Handset memory** or **External memory**.

NOTE: If you do not have a memory card inserted, you will not be able to select External memory.

Sounds

The **My sounds** folder contains the **Default sounds** and **Voice recordings**. From here you can manage, send or set sounds as ringtones.

Using a sound

- 1 Select **My stuff**, then **My sounds**.
- 2 Select **Default sounds** or **Voice recordings**.

01

02

03

04

05

06

07

08

Multimedia

- 3 Select a sound and press **Play** to listen to it.
- 4 Select **Options** and **Use as**.
- 5 Choose from **Voice ringtone**, **Video ringtone**, **Message tone**, **Start-up sound** and **Shut down sound**.

Videos

The **My videos** folder shows the list of downloaded videos and videos you have recorded on your phone.

Watching a video

- 1 Select **My stuff** then **My videos**.
- 2 Select a video and press **Play**.

Using options while video is paused

Select **Options** while in pause mode and choose from:

Landscape view - View the video file in full shot.

Mute/ Unmute - Switch the sound on/off.

Capture - Capture the frozen frame as a picture.

Repeat - Repeat the video file.

File info. - View brief details about the file.

Send - Send the video in a message, email or via Bluetooth.

Delete - Delete the video.

Use as - Use as a voice/video ringtone.

Sending a video clip

- 1 Select a video and press **Options**.
- 2 Select **Send** and choose from **Message**, **Email** or **Bluetooth**, **You Tube**.
- 3 If you choose **Message** or **Email**, your video clip will be attached to the message and you can write and send the message as normal. If you choose **Bluetooth**, you will be prompted to turn Bluetooth on and your phone will search for a device to send the video to.

Using a video clip as a ringtone

- 1 Select a video and select **Options**.
- 2 Select **Use as** and choose from **Voice ringtone** or **Video ringtone**.

Using the video options menu

From the **My videos** folder, you can choose from the following options:

Send - Send a video to a friend.

Use as - Set a video as your ringtone.

Move - Move a video clip from the phone memory to a memory card or vice versa.

Copy - Copy a video clip from the phone memory to a memory card or vice versa.

Delete - Delete a video.

Mark/Unmark - Select multiple files.

File - Edit the file name and view its information.

Create new folder - Create a new folder within the My videos folder.

Sort by - Sort videos into a specific order.

Grid view/ List view - View the options menu by grid or list type.

Memory manager - View the memory status.

Games and Applications

You can download games and applications to your phone to keep you amused when you have time to spare.

TIP! Java Games are present in My games & apps → Games → Death Camp, Flipper, Grand Golf, Sudden Stroke and Sudoku Puzzle

M-Toy menu

You can enjoy six default games:

Dart, Homerun Derby, Magic Ball, Hammer, Maze and Fishing.

About - View the information for a game.

Setting - Set the sound and vibration when activating a game.

Reset data - Reset all settings.

Exit - Leave the M-Toy menu.

Playing a game

1 Select **Games** menu.

2 Select a game and touch **Launch**.

My Games & Applications

You can also enjoy 5 default Java games (Death Camp, Flipper, Grand Golf, Sudden Stroke, Sudoku Puzzle).

There are three Java Applications present in application folder (Cocktails Mocktails, Data wallet, Health Chart).

From the Games and Applications folders, the following options are available:

Create new folder - Create a folder within the games and applications menu.

Sort by - Sort the games and applications by **Date, Size or Name**.

01

02

03

04

05


06

07

08

Multimedia

Memory manager - View the memory status.

TIP! You can also access these games using the touch screen. Press and hold the  touch screen button on the right-hand side of the phone and touch the **M-Toy** icon.

Flash contents

The Flash contents folder contains all of your default and downloaded flash contents.

Viewing an SWF/SVG file

- 1 Select **My Stuff**, then **Flash contents**.
- 2 Select the file and press **Play**.

Using options viewing the SWF/SVG file

Select **Options** while in pause mode and choose from:

Play/Pause - Pause or resume playback.

Full screen/ Landscape view -

View your SWF/SVG in full screen or landscape view mode (this only appears if you select **Options** without pausing).

Mute/Unmute - Switch the sound on/off.

Use as wallpaper - Set the SWF/SVG file as a wallpaper.

File info. - View brief details about the file.

Documents

From the Documents menu, you can view Excel, Powerpoint, Word, text and pdf files.

Transferring a file to your phone

Bluetooth is probably the easiest way to transfer a file from your computer to your phone. You can also use LG PC Suite via your sync cable. See page 64 for details.

To transfer using Bluetooth:

- 1 Make sure your phone and computer have Bluetooth switched on and are visible to one another.
- 2 Use your computer to send the file via Bluetooth.
- 3 When the file is sent, you will have to accept it on your phone by selecting **OK**.
- 4 The file should appear in your **Documents** or **Others** folder.

Viewing a file

- 1 Select **My stuff**, then **Documents**.
- 2 Select a document and choose **View**.

Others


The **Others** folder is used to store files which are not pictures, sounds, videos, games or applications. It is used in the same way as the **Documents** folder. You may find that when you transfer files from your computer to your phone that they appear in the **Others** folder rather than the **Documents** folder. If this happens, you can move them.

To move a file from Others to Documents:

- 1 Select **My Stuff** then **Others**.
- 2 Select a file and choose **Options**.
- 3 Select **Move**.

Movie maker

The Movie maker allows you to create an image slide show combined with music.



Creating a movie

- 1 Go to **Multimedia** and select **Movie maker**.
- 2 Select **+** to add an image. Choose the images you want to include then select **Done**.
- 3 Select **Style** menu to choose a movie style.
- 4 Select **Sound** to choose a movie sound
- 5 Select **Play** to see what you've created.

Music

Your LG KF750 has a built-in music player so you can play all your favourite tracks. To access the music player, select **Music** from the Multimedia menu. From here you can access a number of folders:

01

02

03

04

05

06

07

08

Multimedia

Recently played - View all of the songs you have played recently.

All tracks - Contains all of the songs you have on your phone.

Artists - Browse through your music collection by artist.




Albums - Browse through your music collection by album.

Genres - Browse through your music collection by genre.

Playlists - Contains any playlists you have created.

Shuffle tracks - Listen to your music in a random order.

Playing a song

- 1 Select **My music**, then **All tracks**.
- 2 Select the song you want to play and choose **Play**.
- 3 Press  to pause the song.
- 4 Touch  (right) to skip to the next song.
- 5 Touch  (left) to skip to the previous song.

Using options while playing music

Select **Options** and choose from:

Minimise - Make the music player screen disappear so that you can continue using your phone as normal.

Go to my music - Move the Cursor to the My music folder.

Repeat - Repeat the selected track.

Shuffle - Listen to your music in a random order.

Equaliser - Set the equaliser menu.

Visualisation - Select the visual effects.

Add to playlist - Add the file to a playlist.

File info. - View brief details about the file.


Send - Send the song as a message or via Bluetooth.

Delete - Delete the song.

Use as - Use the song as one of your ringtones.

Creating a playlist

You can create your own playlists by choosing a selection of songs from the **All tracks** folder.

- 1 Select **My music**, then **Playlists**.
- 2 Select **Add**, enter the playlist name and press  **Save**.
- 3 The All tracks folder will be displayed. Select all of the songs that you would like to include in your playlist; a tick will show next to the file name.

To play a playlist, select it and choose **Play**.

NOTE: To add a second playlist, select **Options** then **Add new playlist**.

Editing a playlist

From time to time, you may want to add new songs or delete songs from a playlist.

- 1 Select **My music**, then **Playlists**.
 - 2 Select the playlist.
 - 3 Select **Options**.
- Add new songs** – Add more songs to the playlist. Mark the ones you want and select **Done**.

File info. - View the Name, Size, Date, Time, Type, Duration, Protection and Copyright of the song.

Send – Send a song as a message or via Bluetooth.

Remove from list – Remove a song from the playlist.

Mark/Unmark – Select multiple files.

Use as – You can set the song as an effect sound.

Memory manager - You can view the current status of memory.

Deleting a playlist

- 1 Select **My music**, then **Playlists**.
- 2 Select **Options** then **Delete** or **Delete all** to delete all of the playlists.

Using the radio

Your LG KF750 has an FM radio feature so you can tune into your favourite stations to listen to on the move.

NOTE: You need to insert your headphones to listen to the radio. Insert them into the same socket as your charger.

01

02

03

04

05

06

07

08

Multimedia

Searching for stations

You can tune radio stations by searching for them either manually or automatically. They will be saved to specific channel numbers so you don't have to keep re-tuning. You can save up to 50 channels in your phone.

To auto tune:



- 1 From **Music** select **FM radio** then **Options**.
- 2 Select **Auto scan**. The stations found will automatically be allocated to a channel number.

TIP! You can access music using the touch screen. Press and hold the touch screen button on the right-hand side of the phone and choose the **FM Radio** or **Music** icon. You can then scroll through and select your music files or the radio functions by touching the screen.

To manually tune:

- 1 Select **FM radio** then **Options**.
- 2 Select **Channel list** and choose the channel number you want to save the station to.

- 3 Enter the station frequency and touch **Select** to save.

NOTE: You can also manually tune into a station by using  (left) and  (right) displayed next to the radio frequency.

Editing the channels

You may want to move the stations to another channel so that the ones you listen to most frequently are easier to access.

- 1 Select **FM radio** then **Options**.
- 2 Select **Channel list** and select the channel you want to change.
- 3 Either select a station from one of the other channels, or manually tune the channel into the frequency you want.

You can edit each channel by highlighting it and touching **Options**:

Rename - Rename the channel.

Replace - Set new frequency for the selected channel.

Resetting channels

- 1 Select **FM radio**, then **Options**.
- 2 Select **Channel list**, then **Options**.

- 3** Choose **Reset channel** to reset the current channel or choose **Reset all channels** to reset all of the channels. Each channel will return to the starting 87.5Mhz frequency.

TIP! To improve the radio reception, extend the headset cord, which functions as the radio antenna.

Listening to the radio

Select **FM radio**, then enter the channel number of the station you would like to listen to.

Using voice recorder

Use your voice recorder to record voice memos or other sounds.

- 1** Select **Multimedia**.
- 2** Select **Voice recorder** then options and choose from:

Duration – Set the recording duration.

Choose from **MMS msg. size, 30 secs, 1 min** or **No limit**.

Quality – Select the sound quality. Choose from **Super Fine, Fine** or **Normal**.

Memory in use - Check the current status of each memory.

Go to Voice recordings – Open the Voice recordings folder in **My sounds**.

- 3** Select **Rec.** to begin recording.
- 4** Select **Stop** to end recording.
- 5** Select **Play** in the options menu to listen to your recording.

Sending the voice recording

- 1** Once you have finished recording, select options.
- 2** Select **Send** and choose from **Message, Email** or **Bluetooth**. If you choose **Message** or **Email**, the recording will be added to the message and you can write and send it as normal. If you choose **Bluetooth**, you will be prompted to turn Bluetooth on.

NOTE: After you have finished recording, select **Options** and choose **Play, Send, File, Delete, Use as** (to use the recording as your ringtone) or **Go to Voice recordings**.

01

02

03

04

05


06

07

08


Organiser

Adding an event to your calendar


- 1 From the standby screen, press  and choose **Organiser**. Select **Calendar**.
- 2 Select the date you would like to add an event to.
- 3 Select **Options** then **Add new event**.
- 4 Select whether you would like to add an **Appointment**, **Anniversary** or **Birthday** and select **Done**.
- 5 Check the date and enter the time you would like your event to begin.
- 6 For appointments and anniversaries enter the time and date your event finishes in the lower time and date boxes.
- 7 If you would like to add a subject or a note to your event, touch **Subject** or **Name** and type in your note.
- 8 Select **Done** and your event will be saved in the calendar. A cursor will mark the day that any events have been saved to and a bell will ring at the start time of your event, so that you can stay organised.

TIP! You can set a holiday in your calendar. Select each day you are on holiday one at a time, then choose **Options** and select **Set holiday**. Each day will be shaded red. When you come to set an alarm, you can choose to exclude days set as holidays.

Changing your default calendar view


- 1 From the standby screen press  and choose **Organiser**. Select **Settings**.
- 2 Select **Calendar** and choose either **Month view** or **Week view**.
- 3 Press **Done** to confirm your choice.

Adding an item to your to do list

- 1 From the standby screen press  and choose **Organiser**.
- 2 Select **To do** and select **Add**.
- 3 Set the date for the to do item, add notes and select a priority level: **High**, **Medium** or **Low**.
- 4 Save your to do list item by selecting **Done**.


TIP! You can edit an item by selecting it, touching **Options** and **Edit**. Confirm your amendments by selecting **Save**.

Sharing a to do item

- 1 From the standby screen press  and choose **Organiser**. Select **To do**.
- 2 Select the to do item you would like to share, then select **Options**.
- 3 Select **Send**. You can choose to share your to do item by **Text message**, **Multimedia msg**, **Email** or **Bluetooth**.

TIP! You can back up and synchronise your calendar with your computer. See PC Sync on page 64.

Adding a memo

- 1 From the standby screen press  and choose **Organiser - Memo**.
- 2 Select **Add**.
- 3 Type your memo, followed by **Save**.
- 4 Your memo will appear on screen next time you open the **Memo** application.

TIP! You can edit an existing memo. Select the one you want to edit and select **Edit**.

You can write the private memo to protect your privacy. You enter the security code to use this menu.

TIP! The security code is 0000.

01

02

03

04

05



06

07

08

Tools


Setting your alarm

- 1 From the standby screen press  and choose **Tools** then **Alarms**.
- 2 Select **Options** and touch **Add new**.
- 3 Set the time you would like the alarm to sound.
- 4 Choose whether you would like your alarm to sound **Once, Daily, Mon-Fri, Mon-Sat, Sat-Sun, Sat-Wed, Sat-Thu, Sun-Thu** or **Except Holiday**.
- 5 Select  and **Edit** to select a sound for your alarm. To listen to sounds select the sound, and touch **Play**.
- 6 Add a memo for the alarm and select **Done** when you have finished typing. When the alarm sounds the memo will be displayed.
- 7 Finally, you can set the snooze interval at **5, 10, 20** or **30 mins, 1 hour** or **off**.
- 8 Once you have set your alarm, select **Done**.


NOTE: You can set up to 5 alarms.

The alarm will be alerted on even if the phone is switched off.


Using your calculator

- 1 From the standby screen, press  and choose **Tools**. Select **Calculator**.
- 2 Select the numeric keys to input numbers.
- 3 For simple calculations, select the function you require (+, -, x, ÷), followed by =.
- 4 For more complex calculations, select **Options** and choose from +/-, **sin, cos, tan, log, ln, exp, sqrt, deg** or **rad**.


Using the stopwatch

- 1 From the standby screen, press  and choose **Tools**. Select **Stopwatch**.
- 2 Select **Start** to begin the timer.
- 3 Select **Stop** to stop the timer.
- 4 Select **Lap** to measure each lap time.
- 5 To restart stopwatch, select **Resume**.
- 6 Select **Reset** to return to zero.

Converting a unit

- 1 From the standby screen, press  and choose **Tools**. Select **Converter**.
- 2 Choose whether you would like to convert **Currency, Surface, Length, Weight, Temperature, Volume** or **Velocity**.
- 3 You can now select the unit and enter the value you would like to convert from, followed by the unit you would like to convert to.
- 4 The corresponding value will appear on the screen.

Adding a city to your world time

- 1 From the standby screen, press  and choose **Tools**. Select **World time**.
- 2 Select **Options**, followed by **Add city**. Start typing the name of the city you require and it will show at the top of the screen. Alternatively choose **Map**, and select your chosen city from the map.
- 3 Press **Select** to confirm your choice.

TIP! If you are abroad, you can change your time zone from World time by selecting **Options**, followed by **Change current city**. Choose your required city as above.

01

02

03

04

05

06


07

08

PC Sync

You can synchronise your PC with your phone to make sure all your important details and data match, and also as a backup to put your mind at ease.

Installing LG PC Suite on your computer

- 1 From the standby screen press  and choose **Connectivity**.
- 2 Select **USB connection mode** and click **OK**.
Music - Music Sync mode.
Others - Data Service mode.
- 3 Insert the supplied CD into your PC. Click on the **LG PC Suite Installer** which will appear on your screen.
- 4 Select the language you would like the installer to run in and click **OK**.
- 5 Follow the instructions on the screen to complete the **LG PC Suite Installer wizard**.
- 6 Once installation is complete, the **LG PC Suite icon** will appear on your desktop.

Connecting your phone and PC

- 1 Connect the USB cable to your phone and your PC.
- 2 Double click on the **LG PC Suite Icon** on your desktop.
- 3 Click on **Connection Wizard** and **USB**.
- 4 Click on **Next**, then **Next** again, and **Finish**. Your phone and PC are now connected.

Backing up and restoring your phone's information

- 1 Connect your phone to your PC as outlined above.
- 2 Click on the **Backup** icon, and select **Backup** or **Restore**.
- 3 Mark the contents you would like to back up or restore. Select the location you would like to backup information to, or restore information from. Click **OK**.
- 4 Your information will be backed up.

Viewing your phone files on your PC

- 1 Connect your phone to your PC as outlined above.
- 2 Click on the **Contents** icon.
- 3 All of the documents, flash contents, images, sounds and videos you have saved onto your phone will be displayed on the screen in the LG Phone folder.

TIP! Viewing the contents of your phone on your PC helps you to arrange files, organise documents and remove contents you no longer need.

Synchronising your contacts

- 1 Connect your phone to your PC.
- 2 Click on the **Contacts** icon.
- 3 Select **Transfer**, then **Import from mobile handset**. Your PC will now import and display all contacts saved to your USIM card and handset.
- 4 Click on **File** and select **Save**. You can now select where you would like to save your contacts to.

NOTE: To backup contacts saved to your USIM card, click on the SIM card folder on your PC screen. Right-click your contacts and select **Copy to contacts**. Now click on the **Handset** folder on the left of your screen and all your numbers will be displayed.

Synchronising your messages

- 1 Connect your phone to your PC.
- 2 Click on the **Messages** icon.
- 3 All of your PC and phone messages will be displayed in folders on your screen.
- 4 Use the tool bar at the top of your screen to edit and rearrange messages.

Synchronising your music

- 1 Connect your phone to your PC.
- 2 Click on the **Music** icon.
- 3 The music files you have saved will be displayed on the screen in the Music folder.

01

02

03

04

05

06

07

08

PC Sync

NOTE: The following conditions must be met.

- Windows XP Service Pack 2 or higher.
- Windows Media Player 11 or higher.
- USB Connection mode should be active and Music Sync mode should be on.

Using your phone as a mass storage device

Your phone can only be used as a mass storage device if you have a memory card inserted.

- 1 Disconnect your phone from your PC.
- 2 From the standby screen, press .
- 3 Select **Connectivity**, then **USB connection mode**.
- 4 Highlight **Mass storage** and press **Select**.
- 5 Connect your phone to your PC. Your phone will read: **Connecting as Mass Storage...** followed by **Connected as Mass Storage Mode**. Do not disconnect during transfer.

- 6 All of your phone files will automatically be stored onto your PC hard drive.

NOTE: Your phone must be unplugged from your PC to initiate Mass Storage.

NOTE: Mass storage backs up content saved on your memory card only, not your handset memory. To transfer the contents of your handset memory (e.g. contacts) you'll need to synchronise using PC Sync.

PIN for DivX connection

Install the DivX converter which is supplied on the same CD as the PC Sync software.

Once installed select DivX from the Program Files on your PC, then DivX converter followed by Converter.

This will open the Converter application. Use the arrows in the application to change the conversion format to Mobile. If you right-click on the application box and select Preferences, you can change the location that the converted files are saved in.

Once you are ready to convert your files, simply drag and drop the files into the application. You will need then to select Convert for the process to begin. When the process is finished a “Conversion complete” pop up will be displayed. The converted file can now be transferred to your phone using the Mass Storage functionality (see page 66 for details) or uploaded using the PC Sync software (see page 64 for details).

Using TV out

Choose PAL or NTSC for connecting your KF750 to a TV.

01

02

03

04

05

06


07

08

Browser

With a browser at the tip of your fingers, you can get up-to-date news and weather forecasts as well as information on sports or traffic whenever you need it. In addition, the browser allows you to download the latest music, ringtones, wallpapers and games.


Accessing the web

- 1 From the standby screen, press  and choose **Browser**.
- 2 To access the browser homepage directly, select **Home**.
Alternatively, select **Enter address** and type in your desired URL, followed by **Open**.

NOTE: An additional cost is incurred when connecting to this service and downloading content. Check your data charges with your network provider.

Adding and accessing your bookmarks

For easy and fast access to your favourite websites, you can add bookmarks and save web pages.


- 1 From the standby screen press  and choose **Browser**.
- 2 Select **Bookmarks**. A list of your Bookmarks will appear on the screen.
- 3 To create a new folder, select **Options** and choose **Create new folder**. Enter the name of your bookmark folder.
- 4 To add a new bookmark, select **Options** and touch **Add new**. Enter a name for your bookmark followed by the URL.
- 5 Select **Done**. Your bookmark will be displayed in the list of bookmarks.
- 6 To access the bookmark, simply scroll to it and select **Open**.

Saving a page


- 1 Access your required webpage as described above.
- 2 Select **Options, Save items**, then **Save this page**.
- 3 Enter a name for the webpage so you can easily recognise it.
- 4 Select **Save**.

TIP! This menu will also allow you to edit titles of saved pages, and delete saved pages.

Accessing a saved page

- 1 From the standby screen press  and choose **Browser**.
- 2 Select **Saved pages**.
- 3 Select **Open** to connect to the saved page.

Viewing your browser history

- 1 From the standby screen press  and choose **Browser**, and then select **History**.
- 2 **Visual history** will be displayed. Select **Options** and select **List history**, to show a list of web page titles you have accessed recently.
- 3 To access one of these pages, simply select the required page and touch **Open**.

Using RSS reader

RSS (Really Simple Syndication) is a family of web feed formats used to publish frequently updated content such as blog entries, news headlines or podcasts. An RSS document, which is called a **feed, web feed, or channel**, contains either a summary of content from an associated web site or the full text.

RSS makes it possible for people to keep up with their favorite web sites in an automated manner that is easier than checking them manually.

01

02

03

04

05

06

07

08

Browser

The user subscribes to a feed by entering the feed's link into the reader or by clicking an RSS icon in a browser that initiates the subscription process. The reader checks the user's subscribed feeds regularly for new content, downloading any updates that it finds.


Adding the Feed

You can input the feed directly yourself: **Browser** → **RSS reader** → **Options** → **Add new** or you can click the feed link by selecting the RSS icon in the webpage.

Updating the RSS reader

- 1 You can select **Update** or **Update all Options**.
- 2 If you want to update it automatically, select **Update schedule**.

Changing the web browser settings

- 1 From the standby screen press  and choose **Browser**. Select **Settings**.
- 2 You can choose to edit **Profiles**, **Appearance settings**, **Cache**, **Cookies**, **Security**, or **Reset Settings**.
- 3 Once you have changed your settings, touch **Select**.

NDTV Active

KF750 supports NDTV Active URL:
Access this to get information about news & current affairs etc.

The web

Using your phone as a modem

Your KF750 can double as a modem for your PC, giving you email and internet access even when you can't connect using wires. You can use either the USB cable or Bluetooth.

Using the USB cable:

- 1 Ensure you have LG PC Suite installed on your PC.
- 2 Connect your KF750 and your PC using the USB cable and launch the LG PC Suite software.
- 3 Click **Internet kit** on your PC. Then click **New** and select **Modem**.
- 4 Choose **LG Mobile USB Modem** and select **OK**. It will now appear on screen.
- 5 Click **Connect** and your PC will connect through your KF750.

NOTE: For more information on synchronising using LG PC Suite see page 64.

Using Bluetooth

- 1 Ensure Bluetooth is switched **On** and **Visible** for both your PC and KF750.
- 2 Pair your PC and KF750 so that a passcode is required for connection.
- 3 Use the **Connection wizard** on your LG PC Suite to create an active Bluetooth connection.
- 4 Click **New** on your PC. Then click **Settings**.
- 5 Click **Modem**.
- 6 Choose **Standard Modem over Bluetooth link** and click **OK**. It will now appear on screen.
- 7 Click **Connect** and your PC will connect through your KF750.

01

02

03

04

05

06

07

08

The web

Sending and receiving your files using Bluetooth

Bluetooth is a great way to send and receive files as no wires are needed and connection is quick and easy. You can also connect to a Bluetooth headset to make and receive calls.

To send a file:

- 1 Open the file you want to send.
- 2 Select Options and choose **Send**. Choose **Bluetooth**.
- 3 Select **Yes** to turn Bluetooth on.
- 4 Your KF750 will automatically search for other Bluetooth enabled devices within range.
- 5 Choose the device you want to send the file to and choose **Select** to send the file.
- 6 Your file will be sent.


TIP! Keep an eye on the progress bar to make sure your file is sent.

To receive a file:

- 1 To receive files, your Bluetooth must be both **On** and **Visible**. See **Changing your Bluetooth settings** below for more information.

- 2 A message will prompt you to accept the file from the sender. Select **Yes** to receive the file.
- 3 You will see where the file has been saved and you can choose to **View** the file. Files will usually be saved to the relevant folder in My Stuff.

Changing your Bluetooth settings:

- 1 Press  in the standby screen, and choose **Connectivity**.
- 2 Choose **Bluetooth** then **Settings**. Make your changes to:

My device visibility - Choose to be Visible, Visible for 1 min or Hidden.

My device name - Enter a name for your KF750.

Supported services - Search for the profile supported by KF750. See **Using your phone as a modem** on page 71 or **Using a Bluetooth headset** on page 73.

My address - Search your Bluetooth device address.

Pairing with another Bluetooth device

By pairing your KF750 and another device, you can set up a passcode-protected connection. This means your pairing is more secure.

- 1 Check your Bluetooth is **On** and **Visible**. You can change your visibility in the **Settings** menu.
- 2 Select **Paired devices, Options**, then **Add new device**.
- 3 Your KF750 will search for devices. If devices are found, **Refresh** and **Add** will appear on screen.
- 4 Choose the device you want to pair with and enter a passcode then press **Add**.
- 5 Your phone will then connect to the other device, on which you should enter the same passcode.
- 6 Your passcode-protected Bluetooth connection is now ready.

Using a Bluetooth headset

- 1 Check your Bluetooth is **On** and **Visible**.
- 2 Follow the instructions that came with your headset to place your headset in pairing mode and pair your devices.
- 3 Select **Yes** to **Connect now**. Your KF750 will automatically switch to Headset profile.

01

02

03

04

05

06

07


08

Settings

Within this folder you can adapt your settings to personalise your KF750.

NOTE: For information on call settings see page 21.

Changing your screen settings

- 1 From the standby screen, press  and select **Settings**.
- 2 Select **Screen** and then choose from:
 - Screen theme** - Choose the theme for your Home Screen, start Up, Shut down the phone.
 - Menu style** - Choose the style used to display menus.
 - Dialling** - Set the display used when making a call.
 - Font** - Adjust the font.
 - Backlight** - Choose how long the backlight remains on for.
NOTE: The longer the backlight is on for, the more battery power is used and you may need to charge your phone more often.
 - Image quality enhancement** - Chooosed the menu to enhance the quality of the selected image.

Handset theme - Quickly change the whole look of your screen.


Greeting message - Enter the greeting message used when the phone is switched on.

- 3 Choose **Select** to save your settings.

Personalising your profiles

You can quickly change your profile on the standby screen. Simply touch the currently active profile icon.

Using the settings menu you can personalise each profile setting.

- 1 From the standby screen, press  and select **Settings**.
- 2 Select **Profiles** and then choose the profile you want to edit. You cannot edit the **Silent** profile. You can edit the Alert By option of your silent profile.
- 3 Select **Options** and choose **Edit**.
- 4 You can then change all of the sounds and alert options available in the list, including your **Ring tone** and **Volume, Message alerts** and more.

Changing your phone settings

Enjoy the freedom of adapting your KF750 so that it works in a way that suits you.

- 1 From the standby screen, press



- 2 Select **Settings**, then **Phone**, and choose from the list below.

Auto key lock - Lock the keypad automatically in the standby screen.

Touchpad - Turn the touchpad vibration **On** or **Off**.

Touchscreen effect - Set the effect tone used when touching the screen.

Languages - Change the language of for your KF750's display.

Power save - Choose to switch the power saving settings **On** or **Off**.

Information - View the technical information for your KF750.

Using Date & Time

Date & Time - Adjust your date and time settings or choose to automatically update the time when you travel or for daylight saving.

Changing your other settings

Your connectivity settings have already been set up by your network operator, so you can enjoy your new phone immediately. If you want to change any settings, use this menu.

Network - Your KF750 connects automatically to your preferred network. To change these settings, use this menu.

Internet profiles - Set the profiles to connect to the internet.

Access points - Your network operator has already saved this information. You can add new access points using this menu.

Packet data conn - Set the packet data connection.

01

02

03

04

05

06

07

08

Settings

Changing security settings

PIN code request - Set the phone to ask for the PIN code of your SIM card when switching on the phone.

Handset lock - Set the phone lock to avoid unauthorised use. You will need a security code.

Change codes - Change the codes: PIN/ PIN2/ Security code.

Using memory manager

Your KF750 has three memories available: the phone, the USIM Card and an external memory card (you may need to purchase the memory card separately).

You can use memory manager to determine how each memory is used and see how much space is available.

Press  in standby screen. Select **Settings** then **Memory Manager**.

Handset Common memory - View the memory available on your KF750 for images, sounds, videos, flash, MMS, applications, java and others.

Handset reserved memory - View the memory available on your handset for SMS, contacts, calendar items, to do list, memos, alarms, call history, bookmarks and miscellaneous items.



USIM memory - View the memory available on your USIM Card.

External memory - View the memory available on your external memory card (you may need to purchase the memory card separately).

Primary storage setting - choose Handset memory or External memory.

TIP! See page 12 for information on **Installing a memory card**.

Using flight mode

Turn on flight mode by pressing  in standby screen, and then select **Settings** and **Profiles**. Select **Flight mode** and press  to activate.

Flight mode will not allow you to make calls, connect to the internet, send messages or use Bluetooth.

Anti Theft Mobile Tracker

- 1** The ATMT feature of this phone provides you with the ability to have a tracking system in place for your mobile in case you loose or misplace it.
- 2** The moment an un-authorized user uses your phone, a SMS is triggered from your phone and the message is send to your pre-defined number.

TIP!

- In case you want to use your phone with some other SIM card, make sure to set the ATMT feature OFF.
- It is recommended to enter the pre-defined number with the country code (e.g. for INDIA +91 followed by mobile number)

NOTE: Default code for ATMT is "000000".

Accessories

These accessories were supplied with KF750.

Charger



USB cable and CD

Connect and synchronise your KF750 and PC.



Battery



User Guide

Learn more about your KF750.



Stereo headset



NOTE:

- Always use genuine LG accessories.
- Failure to do this may invalidate your warranty.
- Accessories may be different in different regions; please check with our regional service company or agent for further inquiries.

Network service

The wireless phone described in this guide is approved for use on the GSM 900, DCS 1800, PCS1900 and W-CDMA network.

A number of features included in this guide are called Network Services. These are special services that you arrange through your wireless service provider. Before you can take advantage of any of these Network Services, you must subscribe to them through your service provider and obtain instructions for their use from your service provider.

Technical data

General

Product name : KF750

System : GSM 900 / DCS 1800 /
PCS 1900 / W-CDMA

Ambient Temperatures

Max : +55°C (discharging), +45°C
(charging)

Min : -10°C

Declaration of Conformity



LG Electronics

Suppliers Details

Name

LG Electronics Inc

Address

LG Electronics Inc, LG Twin Towers 20,
Yeouido-dong, Yeongdeungpo-gu, Seoul, Korea 150-721

Product Details

Product Name

GSM 900 / DCS 1800 / PCS 1900 / W-CDMA Terminal Equipment

Model Name

KF750

Trade Name

LG

CE 0168

Applicable Standards Details

R&TTE Directive 1999/5/EC

EN 301 489-01 V1.6.1, EN 301 489-07 V1.3.1
EN 301 489-17 V1.2.1, EN 301 489-24 V1.3.1
EN 301 511 V9.0.2
EN 301 908-1 V3.2.1 EN 301 908-2 V3.2.1,
EN 300 328 V1.6.1
EN 50360/EN 50361:2001
EN 60950-1 : 2001

Supplementary Information

Declaration

I hereby declare under our sole responsibility that the product mentioned above to which this declaration relates complies with the above mentioned standards and Directives

Name

Seung Hyoun, Ji / Director

Issued Date

21.Mar. 2008

LG Electronics Inc, Amsterdam Office
Veluwezoom 15, 1327 AE Almere, The Netherlands
Tel : +31 - 36- 547 - 8940, e-mail : seokim @ lge.com


Signature of representative

Guidelines for safe and efficient use

Please read these simple guidelines. Not following these guidelines may be dangerous or illegal.

Exposure to radio frequency energy

Radio wave exposure and Specific Absorption Rate (SAR) information This mobile phone model KF750 has been designed to comply with applicable safety requirements for exposure to radio waves. These requirements are based on scientific guidelines that include safety margins designed to assure the safety of all persons, regardless of age and health.

- The radio wave exposure guidelines employ a unit of measurement known as the Specific Absorption Rate, or SAR. Tests for SAR are conducted using standardised methods with the phone transmitting at its highest certified power level in all used frequency bands.
- While there may be differences between the SAR levels of various LG phone models, they are all designed to meet the relevant guidelines for exposure to radio waves.
- The SAR limit recommended by the International Commission on Non-Ionizing Radiation Protection (ICNIRP) is 2W/kg averaged over 10g of tissue.
- The highest SAR value for this model phone tested by DASY4 for use at the ear is 0.5 W/kg (10g).
- SAR data information for residents in countries/regions that have adopted the SAR limit recommended by the Institute of Electrical and Electronics Engineers (IEEE), which is 0.755 W/kg averaged over 1g of tissue.

Product care and maintenance

WARNING

Only use batteries, chargers and accessories approved for use with this particular phone model. The use of any other types may invalidate any approval or warranty applying to the phone, and may be dangerous.

- Do not disassemble this unit. Take it to a qualified service technician when repair work is required.

Guidelines for safe and efficient use

- Keep away from electrical appliances such as TVs, radios, and personal computers.
- The unit should be kept away from heat sources such as radiators or cookers.
- Do not drop.
- Do not subject this unit to mechanical vibration or shock.
- Switch off the phone in any area where you are required by special regulations. For example, do not use your phone in hospitals as it may affect sensitive medical equipment.
- Do not handle the phone with wet hands while it is being charged. It may cause an electric shock and can seriously damage your phone.
- Do not to charge a handset near flammable material as the handset can become hot and create a fire hazard.
- Use a dry cloth to clean the exterior of the unit (do not use solvents such as benzene, thinner or alcohol).
- Do not charge the phone when it is on soft furnishings.
- The phone should be charged in a well ventilated area.
- Do not subject this unit to excessive smoke or dust.
- Do not keep the phone next to credit cards or transport tickets; it can affect the information on the magnetic strips.
- Do not tap the screen with a sharp object as it may damage the phone.
- Do not expose the phone to liquid or moisture.
- Use the accessories like earphones cautiously. Do not touch the antenna unnecessarily.

Efficient phone operation

Electronics devices

All mobile phones may get interference, which could affect performance.

- Do not use your mobile phone near medical equipment without requesting permission. Avoid placing the phone over pacemakers, for example, in your breast pocket.
- Some hearing aids might be disturbed by mobile phones.
- Minor interference may affect TVs, radios, PCs, etc.

Road safety

Check the laws and regulations on the use of mobile phones in the area when you drive.

- Do not use a hand-held phone while driving.
- Give full attention to driving.
- Use a hands-free kit, if available.
- Pull off the road and park before making or answering a call if driving conditions so require.
- RF energy may affect some electronic systems in your vehicle such as car stereos and safety equipment.
- When your vehicle is equipped with an air bag, do not obstruct with installed or portable wireless equipment. It can cause the air bag to fail or cause serious injury due to improper performance.
- If you are listening to music whilst out and about, please ensure that the volume is at a reasonable level so that you are aware of your surroundings. This is particularly imperative when near roads.

Avoid damage to your hearing

Damage to your hearing can occur if you are exposed to loud sound for long periods of time. We therefore recommend that you do not turn on or off the handset close to your ear. We also recommend that music and call volumes are set to a reasonable level.

Glass Parts

Some parts of your mobile device are made of glass. This glass could break if your mobile device is dropped on a hard surface or receives a substantial impact. If the glass breaks, do not touch or attempt to remove. Stop using your mobile device until the glass is replaced by an authorized service provider.

Blasting area

Do not use the phone where blasting is in progress. Observe restrictions, and follow any regulations or rules.

Guidelines for safe and efficient use

Potentially explosive atmospheres

- Do not use the phone at a refueling point.
- Do not use near fuel or chemicals.
- Do not transport or store flammable gas, liquid, or explosives in the same compartment of your vehicle as your mobile phone and accessories.

In aircraft

Wireless devices can cause interference in aircraft.

- Turn your mobile phone off before boarding any aircraft.
- Do not use it on the ground without permission from the crew.

Children

Keep the phone in a safe place out of the reach of small children. It includes small parts which may cause a choking hazard if detached.

Emergency calls

Emergency calls may not be available under all mobile networks. Therefore, you should never depend solely on the phone for emergency calls. Check with your local service provider.

Battery information and care

- You do not need to completely discharge the battery before recharging. Unlike other battery systems, there is no memory effect that could compromise the battery's performance.
- Use only LG batteries and chargers. LG chargers are designed to maximize the battery life.
- Do not disassemble or short-circuit the battery pack.
- Keep the metal contacts of the battery pack clean.
- Replace the battery when it no longer provides acceptable performance. The battery pack maybe recharged hundreds of times until it needs replacing.
- Recharge the battery if it has not been used for a long time to maximize usability.

- Do not expose the battery charger to direct sunlight or use it in high humidity, such as in the bathroom.
- Do not leave the battery in hot or cold places, this may deteriorate the battery performance.
- There is risk of explosion if the battery is replaced by an incorrect type.
- Dispose of used batteries according to the manufacturer's instructions. Please recycle when possible. Do not dispose as household waste.
- If you need to replace the battery, take it to the nearest authorized LG Electronics service point or dealer for assistance.
- Always unplug the charger from the wall socket after the phone is fully charged to save unnecessary power consumption of the charger.

WARRANTY CARD

This LG handset and charger comes with a 12-month warranty from date of purchase or 15 months from manufacturing date of corresponding IMEI No. Of the unit whichever is earlier, against defect in material or workmanship. In case of a defect, LG Electronics India Pvt. Ltd. undertakes to get the set repaired free of charge through its authorised service centre (ASC) or service dealer subject to following conditions:

Terms and Conditions

1. This warranty is applicable to the first purchase and in no case it can be transferred or extended.
2. Repair of this product will be carried out on a carry in basis to the nearest ASC.
3. While the company will make every effort to carry out repairs at the earliest, it however is made explicitly clear that the company is under no obligation to do so in a specified period of time.
4. The company or its authorised ASC/ service dealer reserves the right to retain any parts of the component/s replaced at its discretion. In the event of a defect being noticed in the equipment during the warranty period.
5. This warranty entitles the purchaser to free of cost repairs of the unit within warranty period and does not entitle for replacement or refund of entire unit. Claims, if any, to this warranty shall in no case exceed the purchase price of the unit.
6. In case of any software upgradation of the phone, no warranty is provided on phone memory or phone book.
7. The warranty is void in case the serial no./ IMEI no. is tampered / disfigured or details in the warranty card are not properly filled up at the time of purchase.
8. This warranty is not valid for damages resulting due to negligence, mishandling, improper use, tampering, breakage, soaking, fire, unauthorised repair and failure due to network upgrades.
9. Batteries are covered under warranty for a period of 6 months from date of purchase or 9 months from date of corresponding IMEI no. of the unit whichever is earlier
10. Warranty does not cover accessories external to the equipment supplied by the dealer.
11. The Delhi / New Delhi courts shall have the jurisdiction to try any dispute and /or suits related to or arising out of this agreement.

Customer Information Center/ Call Center Number

For any query related to the after sales service and customer support please contact us at the numbers listed below.

CITY NAME	CONTACT NO
Ahmedabad	079-26461603
Bangalore	080-39889999
Bhopal	0755-2768650
Bhubaneswar	0674-2435999
Calcutta	033-22272505
Chandigarh	0172-39010909
Chennai	044-28220370
Coimbatore	0422-2238602
Delhi + NCR	011-26145000/39889999
Hyderabad	040-23231448
Jaipur	0141-2365264
Lucknow	0522-2635535
Mumbai + Thane	022-24930044/39889999
Patna	0612-2221694
Pune	020-56031555

ALL INDIA BSNL/MTNL SUBSCRIBERS CALL:
1901 180 9999

BRANCH ADDRESSES

Sl. No.	Branch	Branch Office Address	STD Code	Landlines No.	Reliance No.
1.	Ahmedabad	LGEB, 233-234, Platinum Plaza, Judges Bungalow Road, Bodakdev Road, Ahmedabad- 51	079	2652974, 2653533/ 34	3062471
2.	Agra	LGEB, 17 7 Kendriya Hindi Samithan, Khambhat Crossing, Agra	0562	2539311, 2539017	
5.	Alamnoli	LGEB, Block - E, 8th Floor, PC Chatterjee Market, Gambharshu Talle, CT Road III, Alamnoli 713303	0661	3939018	393205, 3932010
4.	Aurangabad	LGEB, 301, DCCO-3, 3, Opp. Hotel Ramraj, Jyoti Road, Aurangabad- 411001	020	2447676	
5.	Amritsar	LGEB, Ganda Singh Walk, Majha Road, Basement of Syndicate Bank, Amritsar Punjab	0183	5458001-3	
6.	Bhatinda	LGEB, Y P O Gursar Saranwala, 12 KM Khatima Village, Multa Link Road Bhatinda-151001	0164	2439448, 2209933	308274/ 75
7.	Bangalore	LGEB, 25, TNM Marimoon, Ground Fl., 2nd Road, Bangalore - 560027	086	51120149	3012152/ 34
8.	Bhopal	11A Vignee Warehousing Corporation, Sector-6, Goodganga Industrial Area JK Road Bhopal	0535	526247-48, 526277	303208, 303804
9.	Bhubaneswar	LGEB, Plot No.02, 1st Fl. Rajaji Nagar, Bhubaneswar- 751009	0674	2511435, 2534380	306625, 3066230
10.	Calcutta	LGEB, 1, Ho-Chi-Min-Saran, 4th Floor, Metro Towers, Calcutta-700071	033	2280329/ 31	30480125
11.	Chandigarh	LGEB, Plot No.177, 4th, Ind. Area, Phase-1, Chandigarh	0172	582269/ 80	
12.	Chennai	LGEB, AA1, 12nd Avenue, Sriniva Tower, Anna Nagar West, Chennai-600040	044	5510309-38	3032478/ 79
13.	Cochin	LGEB, 40/170, Vasudeva Building, T.D.Road, Ernakulam Cochin-682011	0484	258966, 2570744	304877/ 76
14.	Coimbatore	LGEB, 250a, Sangarim Main Road, Kannappa Nagar, Coimbatore-641027	0422	233259, 2331862	304813, 3049513
15.	DESAI DEL	LGEB, 227, Dhule Industrial Area, Phase-III, New Delhi	011	2602019, 2609913/ 8	
16.	DESAI DESW	LGEB, 13, WIL ESTD, RICHAR ROAD, Opp Mahanaga Agren Hospital, Farangi Bagh, New Delhi- 110026	011	2602019	3007170, 30095111
17.	Dehradun	LGEB, M - 22, Mohabbata, Tata Commercial Compound, Dehradun Sahakarpur Road, Dehradun	0135	264213, 2644283	304341/ 12
18.	Goa	LGEB, Plot No. D-38, D-4, Raop Nagar, Alto Santacruz, Bambolim, Goa-403	0832		304750, 304995/ 56
19.	Gurgaon	LGEB, Plot No. A Block, Centre Front Bldg, Sushant Lok, Gurgaon	0124	582260/ 40/ 43	302019, 3009939
20.	Gwalahad	LGEB, J-10, 1002, Nangpur Ghoshabad	0193	2729011, 2729886	304946, 3049487
21.	Guzahat	LGEB, Shantivaner Bhawan, C K Aggarwal Path, Chemkurthi, Guwahati- 781003	0361	360994, 360988, 360365, 360360, 360363	
22.	Hydrabad	LGEB, Kr 11, 1, EDA, Uppal, Hyderabad- 500039	040	2720736/ 05/ 06	3027146
23.	Hydrabad	LGEB, 60/1, 1st, Rav Nagar Road, Behind Renuka, Prasad Pump, Goud Road, Hyde- 500020	0438	2372121/ 20/ 21	303740, 3009601
24.	Indore	LGEB, Indre, 304 Hans Trade Centre, 50/15, M.G.Road, Indore- 451003	0131	2665219-14, 2646881, 2646668	302660, 3049863
25.	Jajpur	LGEB, B-71, Sahakar Mang, 1st Kothi Scheme, Jajpur- 750075	0641	274553, 2742639	305148, 3051473
26.	Jalandhar	LGEB, Opp Jassi Market Village Khajur, Near TVS Godown, G T Road, Jalandhar	01824	523657/ 48	
27.	Jammu	LGEB, Plot No- 52, Transport Nagar, Narnaul Jammu	0191	2474119/ 28, 2474296, 2474584	
28.	Jodhpur	2011A, MCO Group Industrial area, Jodhpur- 341003	0291	2742683, 2742834	3034871, Account, 3034889
29.	Kandli	LGEB, Sunshine Enterprises, Sunder Ckd Storage, Gt Karnal Road, Kandli Saripat	0130	2710201-4	3007731, 3009746
30.	Kozhikode	LGEB, 11 / 434, Ennakkal Bldg, Chesery Road, Kozhikode-672001 Kerala.	0495	2386759/ 56, 2386678	303599/ 88
31.	Lucknow	LGEB, 537, Jati Ram, Keshav Nagar, Sitapur Road Lucknow	0522	275258/ 30/ 38/ 39	305159/ 786/ 39
32.	Ludhiana	LGEB, Village Jhandi, Near Badwal Railway Station, Opp. fenogpur Road Ludhiana.	0182	280412-5	303985
33.	Madurai	LGEB, 7-1-54, Kothimal Godown, Madurai Dindigul Highway, Paravai, Madurai-625402 Tamilnadu	0452	2849016	
34.	Mumbai/N 6 S1	LGEB, Unit No.3, Wing, 2nd Fl., Tax Centre Behind HCC/ Bank, Off. 1st Wihar Road, Chendrol, Andheri(E), Mumbai-400072	022	2842410-4	3052128, 3051612
35.	Nagpur	LGEB, Sa Road No. 3, 3rd floor, Maru, WorkShop, MIDC, Nagpur Nagar- 440016	0794	235230, 235124, fm 234481	303784/ 42
36.	Panaji	LGEB, Sumita Sadan, 1st Fl, West Boring Road Crossing Patna- 800011	0632		3030714, 3049155
37.	Pune	LGEB, 105/106, Premium Point, 2nd Fl, Shreeji Mang Pune- 411005	020	583076, 5608752/ 33/ 34	3022864, 3000736
38.	Puna Plant	LGEB, Plot A-5, MIDC, Sanjan Gaon, Talcoed Shirur Distt. Pune	0138	232268/ 40/ 70	
39.	Rajpur	LGEB, Nandan Compound, Shyam Nagar, Katar Taluk, Rajpur C G	0771	601428, 6033711	303977/ 89
40.	Ranchi	LGEB, (A0403) Commerce Tower, Opp. Gell Church Complex, Main Road, Ranchi	0651	237515, 2371875	304026
41.	Rajkot	LGEB, 301, 302, Dharamraj, D. Vignara Road, Rajkot - 360001	0838	2481469, 2407382	304363, 3049956
42.	Surat	LGEB, 1001-1004, Acon Plaza, 1st Fl, Anand Mahal Road, Behind Bhulka Bhawan School, Adajan, Surat- 395009	079	273962-49	3034479
43.	Thane	LGEB, A41-11, Kulkarni Commercial Complex, Opp. Durgesh Jee, Vikas Sahar, Thane Bhandel Highway, Dn. Thane-401103	022	275967, 277559	3026264
44.	Tirupati	LGEB, 19-3-13MA, Behind Hero Honda Showroom, Renuganta Road, Tirupati- 517501	0877	2282506/ 39	
45.	Tirchi	LGEB, 5/2, Kumaran Plaza, Kumaran Nagar, Vayalar Main Road, Tirchi- 57	0431	2771530/ 40/ 50	3039564
46.	Udaipur	LGEB, 101, Moti Nagar Scheme, Udaipur	0294		303426, 3039362
47.	Varanasi	LGEB, Shree Ganga Karamam Compound, Lahartara Road, Shreeguru Manduashri, Varanasi	0522	2733919	3031717, 3038000/ 80
48.	Vijaywada	LGEB, 1st Floor, Yalamanchi Complex, Ring Road, Near Executive Club, Vijay wada - 520008.	0866	2450118	304526, 3045233

Dealer name with stamp Dealer address

IMEI No. Date of sale Serial no.....

LG LG Electronics India Pvt. Ltd., Plot No. 51, Udyog Vihar Surajpur Kasna Road, Greater Noida, U.P.

SERVICE CENTER LIST

 **LG | SERVICE**



1800-180-9999*

* MTNL / BSNL

** Prefix STD Code

39-01-0909**

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Andhra Pradesh	Adhoni	RS CDMA	21/490,Arts & Science College Road, Near Devi Nursing home, Adhoni	9346490905	Mr.Mohan
Andhra Pradesh	Adlabad	KIRAN MOBILE WORLD	7-14-78/A. Near Niethaj Chouk, Cinema Road, Adlabad	9346358181	kiran kumar
Andhra Pradesh	Amalapuram	SANDESH CELLULAR	Shop no 5 R.K. TOWERS COLLEGE ROAD AMALAPURAM	9346398838	Mr.RAVI KUMAR
Andhra Pradesh	Anantpur	RK LG CDMA	Shop No 3, Cellular,Pallavi Towers, Opp to Canara Bank,Subash Road, Anantpur	9393722777	Sridhar
Andhra Pradesh	Amoor	SAI SRI Electronics	Shop.no.2, mahalakshmi road, Amoor	9392622038	Mr.srinivas
Andhra Pradesh	Bapatla	Vijaya Communications	G.B.C.Road, Bapatla	9346206305	Mr.B.Siva
Andhra Pradesh	Bhimavaram	Gopi Krishna Communications	JP Road Near Mohan Service Center Bhimavaram	9346700202	Mr.Siva
Andhra Pradesh	Chirala	Lakshmi Infocomm	Munthavani street, sangam thestre Road, Chirala	9347052181	Ms.Shakeena
Andhra Pradesh	Chittoor	CMT Computer Services	20-439, A.S.M.STREET, MITTOOR, CHITTOOR	9347361979	Mr.Gopi
Andhra Pradesh	Cuddapah	Srinivasa Communication	Shop No.4, Siddapriya Complex, Opp. HP Petrol Pumping Point, Cuddapah	9346350224	Mr.Sahadeva Reddy
Andhra Pradesh	Dharmavaram	Siddhartha Communications	Opp to Sathya Lodge, PRC Circle, Dharmavaram	9347064101	Mr.Naresh
Andhra Pradesh	Eluru	S.S.COMPUTERS	Door.No:238-4-8/3, Ayyapa Complex, Beside Kanuri Madhavi Hospital, Subbama Devi School Road, R.R.Pet, Eluru	329294	Mr.DIWAKER
Andhra Pradesh	Gudvada	KANKADURGACOMMUNITIONS	SHOP NO.4.C/O SURIYA RESIDENCY, OPP:VIJAYA GAS COMPANY,ELURU ROAD,GUDVADA	9394220688	Mr.KUMAR
Andhra Pradesh	Gudur	Srinivasa Electronics	1st floor, Airtel Building, Kumari Veedhi,Gudur	9390829440	S. Naga Suman
Andhra Pradesh	Guntur	Vasavi Associates	Shop No.21,Central PlazaNaar Center,Guntur	3257789	MR.Satyam
Andhra Pradesh	Huzumagi/Kodad	Sri Pavan Electronics	Malika Towers, Besides Reliance Web World, Kodad	9346901519	Mr.Narainma Rao
Andhra Pradesh	Hindupuram	S.V.A Cellular	Shop.no.3,Vinayaka Lodge, Railway Road, Hindupur	9390000135	Mr. D.B.Ravindra Nath
Andhra Pradesh	Huzurabad	BHARGAVI COMMUNICATIONS	DCMS Complex, Near bus Stand, main road, Huzurabad	9391755619	T.VISHNU VARDHAN
Andhra Pradesh	Hyderabad	SUNBEAM TECHNOLOGIES	120,Chenoy Trade Centre, Parkline, Near Paradise,Secunderabad	40200193 / 66383193	Mr.Suresh
Andhra Pradesh	Hyderabad	Bhagya Communications	Shop no.109, Upper Ground Floor.#12-2-825, S.G.M. Mall, Mehdpatnam, Hyderabad	32972308, 32001406	Mr.Bipin

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Andhra Pradesh	Hyderabad	JVR Infotech Pvt Ltd	Shop No 8 ,Vanija Vihar, Nalanda Building, Dilukh Nagar Main Road, Hyderabad	24161848, 55109604	EV Ramakanth
Andhra Pradesh	Hyderabad	PRIMUS INFOMATIC & SOFTWARE PVT LTD	#18/A,Methodist Complex, 5-9-190, Lane Opp to Chermas, Abids, Hyderabad	66755111	Mr.Govind Kabra
Andhra Pradesh	Hyderabad	Reliable Communication	G-8, 3-6-561, AALTO'S A & M Trade Centre, HIMAYATNAGAR, HYDERABAD	32913251	Mr.Sandeepsoni
Andhra Pradesh	Hyderabad	S V Electronics	Shop No. 41, Nilagiri Block, Aditya Enclave, Ameerpet Main Road, Hyderabad	55754477 32977389	Mr.Pradeep
Andhra Pradesh	Hyderabad	Shweta Communications	Shop No.9, Ground Floor, Pavan Anusya Complex, Opp. Huda Complex, Tamaka, Hyderabad	32968162	Mr. Sandeep Heda
Andhra Pradesh	Hyderabad	Shweta Computers	# 1-7-69/1 & 2, OPP Aditya Delux Hotel, Near Paradise circle, Sarojini Devi Road, Secunderabad	27721076, -32977548	Mr.Jagdish
Andhra Pradesh	Hyderabad	Sreesivasa Technologies	SAI VIKRAM TOWERS, SHOP NO -4,RELIANCE WEB WORLD BUILDING, Balaji Nagar Kakatpally	32961479	Mr.Praveen
Andhra Pradesh	Hyderabad	Sri Surya Communications	#Madhu Enclave,Street no 06,Shyamal Buildings, Begumpet , Hyderabad	32961127	Mr.Nageswara Rao
Andhra Pradesh	Hyderabad	Sri Varan Electronics	D.No 5-8-344/1, " DHAN BHAGYA ESTATE " , Chirag Ali Lane, Abids, Nest to Raghava Ratna Towers, Hyderabad	32909099 55781999	Mr.Alok Mohan
Andhra Pradesh	Hyderabad	VICTORY ELECTRONICS	Shop No. B-1, Qul Qutub Shah Stadium, Opp. City College, Hyderabad	32408999, 24502339	MR .BLVARMA
Andhra Pradesh	Jagtiyal	SS Communications	Opp to L.G.RAM. Lodge Street, Park Line, Jagtiyal	9391533535	Mr.Hari
Andhra Pradesh	Jangano	SKY WIN COMMUNICATIONS	#2-7-134, Beside Bharat Gas, Bus stand Road,Jangoan.	9390102839	VARUN
Andhra Pradesh	Jangareddygudem	SRI DEVI COMMUNICATION	Near Mallama Temple, Opp.Andhra Bank,Jangareddygudem	227297	Prasanna Lakshmi
Andhra Pradesh	Kakinada	Delta Infotech	Door No. 6-1-29, Opp. Swami Vivekananda Park, Jawahar Street, Surya Rao Pet, Kakinada	5593533	Mr. Shivanand
Andhra Pradesh	Kamareddy	Pager King Communication	Sircilla Road, Kamareddy, Dist. Nizambad	9397366633	Mr. Moizuddin
Andhra Pradesh	Karimnagar	SS Marketers	2-8-40, Mukarapura, Near Circus Grounds, Karimnagar	9391552223	Sujan
Andhra Pradesh	Kavali	Sree Balaji Infotech	Trunk Road/Near Ongole Bus stand, Kavali, Nellore District, Andhra Pradesh	6329567	Mr. C. Sri Sai Charan
Andhra Pradesh	Khammam	Sriven Technologies	D.No11-2-37,Shop No.3, D.V.Krishna Complex, Beside Baburao Petrol Bunk, Balaji Nagar, Wyra Road, Khammam	325567	Mr.Bhaskar Reddy
Andhra Pradesh	Kothagudem	S.Swathi CDMA Service Center	9-3-3,Above Sindhura Electronics, Near RTC BUS STAND,Kothagudem	9391552228	Mr.niaz Ahmed
Andhra Pradesh	Kuppam	SACAR COMPUTER SERVICES	14-124, PALACE ROAD, KLPPAM	9391862436	Mr.Sagar
Andhra Pradesh	Kurnool	R.K LG CDMA	Shop no:13, First floor, UCON Plaza, Kurnool	220201	Mr.G Rama Krishna
Andhra Pradesh	Machilipatnam	Om Sree Sai Communications	25/276, Kota Yari Tulla Center, Jaganathapuram, Machilipatnam	9347741777	Mr.Rafee
Andhra Pradesh	Madanapalle	Sri Balaji Computers	Shop No2, 1st floor, Sri sa Complex, CIM Road, Madanapally	9390025204	Ravi Kumar

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Andhra Pradesh	Mahabubnagar	SRI Chakra mobile care centre	Shop.no15,Shareef Complex, Near Bus stand, Mahabubnagar	9396348999	Mr.Anil
Andhra Pradesh	Mancherial	SS CDMA Service Centre	Shop no.7,Mounika Complex,BPL Chourasta,Mancherial	9394552223	Mr.T. Nagaraju
Medak	Kavali	Balaji Communications	Door.no:1-3-77/5, Opp to State bank of Hyderabad, Main Branch, Main road, Medak	9346439961	Mr. Rajkumar
Andhra Pradesh	Medchal	Khan Electronics	Sanjeeva Reddy Complex, Besides RTC Bus Depot, Medchal	9347222088	Mr. Jaleel Khan
Andhra Pradesh	Miryalguda	Needs Electronics	Jagannath Complex, Opp Bus Stand, Miryalguda	9394645696	Mr Ravi Kumar
Andhra Pradesh	Nalgonda	Quintessence Electronics	Shop No -5,Srinivasa complex, Opp to market office,H/D road, Nalgonda	9396610220	Mr Venkateshwar Rao
Andhra Pradesh	Nandyal	Dhanush Systems,	Dno:25/165 B,Sanjeev Nagar, Near Ramalayan, Nandyal	9392236699	Mr.Ramesh
Andhra Pradesh	Narasaraopet	Rajendra Infotech	C/o Hari priya Electronics, Aundelpet, Narasaraopet	224136	Mr.Sasi Bhushan
Andhra Pradesh	Nellore	Siri Enterprises	Co-Operative Bank Complex, 1st floor, Shop No: 26,Near Gandhi Statue, G.N.T.Road, NELLORE, Andhra Pradesh.	3290339, 9398309571	Mr.Pratap
Andhra Pradesh	NELLORE	Balaji Watch & Electronics	16/249,Trunk Road,Nellore	2339999	Mr.Rajesh
Andhra Pradesh	Nirmal	OM SAI Electronics	Shop.no:1, Kala Nagar road, Beside 2 town Police station, Nirmal	9390000024	Mr. Mahendar
Andhra Pradesh	Nizambad	Saty Electronics	# 7-10-65,Shop no 1 .1 st floor,H.M.H.V Complex,Beside Bus Stand,Nizambad	326000	Mr.Satyam
Andhra Pradesh	Ongole	TejaSri Communications	37-1-107,Near Mastan Darga Center,Trunk Road,Ongole	9393026115	Mr.SASI BHUSAN
Andhra Pradesh	Peddapalli (Rangundam)	Abhi Marketers	Shop No:19/8/291, MRK Plaza, Lakshmi Nagar, Godhavari Khani	9347077009	Srinivas
Andhra Pradesh	Peddapuram	Devi infotech	Opp.Veterinary Hospital, Shop No-1, Santa Market Road,Peddapuram	9394864400	Mr.Siva Kumar
Andhra Pradesh	Prodatar	SV Technologies	4-625-3,Gandhi Road, Opp Karu- Vyssa Bank, Prodattar	9347251806	Mr-Ravi Kumar
Andhra Pradesh	Puttur	Siva Sai Computer World	8-104/C, VIJAYA LAKSHMI COMPLEX TIRUPATI-CHENNAI ROAD, PUTTUR	9393028024	CJanardha Reddy
Andhra Pradesh	Rajamundry	Siri Infotech	Police Welfare Complex, City Hospitals Junction, Danval Pet Main Road, Rajamundry	2421567	Mr Raghvendra
Andhra Pradesh	Raychoti	Raju Computer World	Room No 3 Up Stairs Syeeda complex, bustand road, Rayachoty	9346209881	Mr.Raju
Andhra Pradesh	Repalle	Sri Satya Solutions	10/14-126,Municipal Office Road,Rajpet,Repalle	9396222993	Mr.Sridhar
Andhra Pradesh	Sangareddy	Sri Technologies	Sriman Complex, Beside Inspection Bungalow, Main Road, Sangareddy	9391216573	Mr.AJAZ AHMED
Andhra Pradesh	Sattenapalli	S.S. Communications	Opp.Telephone Exchange, Sattenapalli	9397610550	Mr.Sai
Andhra Pradesh	Shad Nagar	Sri Gana Electronics,	Shop No: 2, Khajja Yeerasam Complex, College Road, Shadnagar	9392633111	Mr. Vigneeswar
Andhra Pradesh	Siddpet	Gopala Krishana Communications	SHOP NO:13, FIRST FLOOR, MACCA COMPLEX, OPP:CITIZEN'S CLUB, M.G.ROAD, SIDDIPET	9392511064	Mr. Kura Giridhar
Andhra Pradesh	Srikakulam	SRI SAI COMPUTER SHOPPE	OPP TEJA TIFFN CORNER,C. T. ROAD, SRIKAKULAM	9390611779	MR SESHAGIRI
Andhra Pradesh	Srikalahasti	KSV Computer Services	NNR Buildings, d.no: 16-582, Panagal road, Srikalahasti	9390044399	SAHADEVA REDDY

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Andhra Pradesh	Sullurpet	Sai Baba Electronics,	D.No. 10/47, Bajaji Steet, Sullurpet	9346920527	S. Venkata Krishna
Andhra Pradesh	Tadepalligudem	SRI HARIPRIYA INFOTECH	THOTA GOP COMPLEX POICE QUARTERS LANE, BESIDES ZP HIGH SCHOOL, TADEPALLIGUDAM.	9346408640	Mr.Suresh
Andhra Pradesh	Tanuku	SHIVANAND ENTERPRISES	D/NO-34-3-3, MAIN ROAD GAMINI COMPLUND TANUKU.	220489	Mr. SRINIVAS
Andhra Pradesh	Tenali	Vaishnavi Infotech	D.No22/11/114, Opp.Kanikacharla Kalyanamandapam, Bose Road, Tenali.	9347651330	Mr.Murali
Andhra Pradesh	Tirupathi	CMT Computer Services	18-1-624 VV Mahal Road,OPP HDFC BANK, Tirupathi	3296979	Mr.K Yasu Naidu
Andhra Pradesh	Vijayawada	K.L Computer House	39-9-46 SVS Temple Street.Labbipet,Vijayawada	5520461, 5671461	Mr.Kartik
Andhra Pradesh	Vijayawada	V V Communications	28-23-31/32,OPP.SWARUGHA FOODS,VJAY TALKIES CENTER,VJAYAWADA	9396467789	Mr.Rahul
Andhra Pradesh	VJAYAWADA	Balaji Watch & Mobiles Pvt.Ltd	29-37-79, Eluru Road, Opp. Vijaya Talkies, Vijayawada	6648888	Mr.Prasad
Andhra Pradesh	Vishakapatnam	Sri Sai Ganesh Infotech	G5,Ground Floor, Backside of Sangam-Sarat Theatre,1st Lane,Dwarka Nagar, Vishakapatnam	3258777	Mr.Chandra Shekar
Andhra Pradesh	Vishakapatnam	Jai Bharani Communications	Door No:52-11-7/77, Saptahagi Plaza, Old Resuvaripallem, Vishakapatnam-13	3242111	Mr. P.Venkatapathi Raju
Andhra Pradesh	Vizayanagaram	S R TECHNOLOGIES	DRNO 17-2-29, RAJABAZAR, VIZAINAGARAM	9346418791	Mr.Balakrishna
Andhra Pradesh	Vuyyuru	Sugreeva Communications	Behind Datta Automobiles, Katturu Road, Vuyyuru	9393033355	Mr.Phani
Andhra Pradesh	Wanaparthy	Sri Ganesh Electronics	Shop No : 16-63, Opp R R Complex, Wanaparthy	9396800275	Mr Deva Raj
Andhra Pradesh	Warangal	S S Marketers	6-1-73/1, Sai Bhavan, Sridevi Theatre Road, Hanamkonda, Warangal	2552223	Mr. L.Srinivas Rao
Assam	Gowhati	A B PERIPHERALS & SERVICES	Wahed house, 2nd Floor,Opp ASTC Vovo point, Ulubari, Kamrup, Gowhati	2732417	Wassi Ahmed
Bihar	Arrah	Surya Services	Suthia Bhawan, Suryapur colony, By pass road, Arrah	9334538845	Sanjay Kumar
Bihar	Aurangabad	Computer Sansar	L.P.Complex,old G.T.Road, Aurangabad, Bihar, PIN:824101	9334926768	Shreenivas
Bihar	Begusarai	Krishna Communication	Eastwari Complex,Dak Bangla Chowk, Bismapur, Begusarai, Bihar-851101.	9334541700	Dinkar Kumar
Bihar	Bhagalpur	S.K. Communication	NEAR RAILWAY STATION,Super market complex, Patel Babu road, BHAGALPUR -812001	9334255275	Kundan Kumar
Bihar	Bhagalpur	Printronix Infosolutions	Gampati Complex,1st floor, Patel babu road	9934629247	Himansu Sheikar
Bihar	Biharsharif	Shanya Infotech	Magdha Commercial Complex, 1st.Floor, Shop.No.5, MG Road, Bharapoor,Bihar Sharif, Nalanda Dist. Bihar,Pin:803101	9334048037	Amit Kanchan
Bihar	Chapra	Ambey Associates	D-23, Hathwa Market, Chapra,Dist: Saran, Bihar, Pin:841301	9334295605	Jayant Kumar
Bihar	Darbhanga	Prime Computer	Hansuman Nagar, Doner Road, Darbhanga.	2220560	Abhinav Kumar Verma
Bihar	Gaya	Agrawal Distributors	Swarajpuri Road (Opp. Naghatia Road), Waves Building,Gaya, Pin:	9334218122	Lalit Agrawal
Bihar	Muzaffarpur	Kirish Enterprises	Nr-Kanhoulinaka.no.2, Kachisarai Road, Muzaffarpur.	9304410745	Sarjeev Kumar

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Bihar	Patna	INFOTEK TRADING COMPANY	1st floor, City Palace, New Dak Bungalow Road, Patna-800001	2227166	Sanjay Choubey
Bihar	Patna	Synergy Trading Company	G-01, Chanakya Plaza Complex, Main Road, Kankarabagh, Patna.8000020	2356900	Vikas Chandra
Bihar	Patna	COMPETENT MOBILE SERVICE	Shop 1, Hotel Lalitha Complex, East Bowring Canal Road, Patna	9354027706	Mohit Ahluwalia
Bihar	Patna	Micro Zone-Patna	17/C.S.K Puri, Near Basawan Park	3294696	Mithlesh Kumar
Bihar	Purnea	Micro Zone-Purnea	Narottam Hata, NH-31, Purnea	9304166633	Amit Kumar
Bihar	Sasaram	Nandika Enterprises	Hari Complex, Panjab National Bank, Sasaram, Rohtas (Bihar)	4222008	Abhinav Gupta
Chhattisgarh	AMBIKAPUR	NEHA COMMUNICATION	Ramanuj Ganj road, Opp. Kosa Form , Ambikapur , Sarguja, Pin-497001	440414	Mr.Rishi Dubey
Chhattisgarh	Bhilai	A B Automation	Shop No 117 , Ground Floor , Chouhan Estate, Supela Bhilai	09529750711/ 0788-2295989	Mr. Satish Singh
Chhattisgarh	Bhilai	Sai Ram Electronics	SHOP-NO-52/90, HIMALAY COMPLEX, AKASH GANGA, SUPELA, BHILAI	4038917	Mr. Balan
Chhattisgarh	Bilaspur	Mahamaya Infotech	Shop No 203, Jain Plaza, Ground floor, Link Road, Bilaspur	2413865	Mr. Pawan Kumar
Chhattisgarh	KORBA	STAR MOBILE SERVICES	SS Plaza FD-13 PH Road Korba Chhattisgarh	9300401485	Mr. Ansh Menon
Chhattisgarh	Raigarh	BLUE CHIP COMPUTER	Purana Sadar Bazaar, Raigarh, Chhattisgarh.	329888	Mr. Ashok Agrawal
Chhattisgarh	Raipur	Cybernet Systems	B-2,1st Floor, Garchaz Complex, Jail Road, Raipur - 492001	077-14069971	Mr Anand Singh
Chhattisgarh	Rajnandgaon	BHAVYE SERVICES	SHOP NO 5 , BELOW SBI , KAMPTEE LINE , RAJNANDGAON	395200	MANISH GOLCHA
Delhi	Delhi	Aegiss Infotech	UG-25 , Ansal Chamber -2 , 6, Bhikaji Cama Place, New Delhi-110066	65477740 , 9312294105, 9313796774	Mr. Atul Gupta
Delhi	Delhi	Anham Infotech Services	1/1, Regal Building, Near Malik Sweets, Connaught Place New Delhi - 110 001.	011-41501124, 011-32584421	Mr. Anil Sarana
Delhi	Delhi	Comhard Systems	D-30,31, First floor, Near Hotel Shira, Main Vikas Marg, Lakshmi Nagar	011-32955887, 9818867678, 011-32979819	Mr Ravi Kant Gupta
Delhi	Delhi	Comhard Systems	B-120, Hardev Puri, 100 Feet Main Road, Near MTNL Office, Nathu Colony Chowk, Shalada, New Delhi - 110 093.	011-32575507, 011-32572427	Mr. Ravi Kant Gupta
Delhi	Delhi	Connexions and Communications	183, Artar Enclave, Opposite Nirula's , Pashchim vihar ,New Delhi-110063	011-32451431, 011-65237374	Mr. Bhupinder Agrawal
Delhi	Delhi	Cube Engineers and Consultants Pvt Ltd	A-65, Naraina Industrial Area, Phase-1, New Delhi	09512224103, 011-65450272, 41411623.	Mr. Anvinder
Delhi	Delhi	Innovative Telecom	304 , GDITL Northes Towers, A-09 ,3rd Floor , Northes Tower, Netaji Subhash Place, Pitampura, New Delhi-110 088.	011-32925753, 011-65154343, 9811682453	Mr Manoj Garg
Delhi	Delhi	Nice Telecom	15/19 & 15/21, DDA Complex, Nargal raya, Near D Block, Janakpuri, Delhi - 110046	011-32607072, 0-9213264403	Ripul Garg

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Delhi	Delhi	R K Communications	2516 Hudson Lines, Kingsway Camp-Nr. Kamla Nagar, New Delhi	011-32508861, 9312606463	Mr. Pradeep Aggarwal
Delhi	Delhi	Sagar Technologies	J-39,Central Mit, Lajpat Nagar-II, New Delhi-110024	011- 65425644, 9350224692	Mr.Manoj Kumar
Delhi	Delhi	Sukriti Communication	101 Patparganj- Mayur Vihar phase -1 - New Delhi -110091	011-52498011, 011-65238011	Mr.Dipendra Kumar chaturvedi
Delhi	Delhi	Touch Tone Telecom	B-52, First Floor, Kalkaji, New Delhi	011 32939031, 011-65672800	Ashish Dey
Delhi	Delhi	Ucom Technologies Pvt Ltd.	45, 1st Fl, Corner Mkt, Mahiya Nagar, New Delhi - 110017	011-41745469, 09212131500	Mr. Neeraj
Delhi	Delhi	Telecom systems	67/4, harshvihar chowk, pitampura, new delhi	9910089333	mr. Satbir
Delhi	Delhi	Shree telecom	N-18, SOUTH EX-1, NEW DELHI	9811143204	Mr. Naveen Goyal
Delhi	Delhi	Elcom Trading Company Pvt. Ltd.	G-1, Goverdhan Building, 53-54, Nehru Place, New Delhi -110019.	9310577009, 011-64582709	Mr. Somenish Narang
Delhi	Delhi	Teletalk	C-21,First Floor, Near Bus Stand, Bhajan pura, Delhi-11053	9818400551	Mr.B.C. Vashist
Goa	Panjim	Mandovi Mobiles	Mohidin Towers Da. No. AS3 Opp to Hotel Manashanti Dudavaijya rd Panjim-403001	6452949	Prakash
Gujarat	Ahmedabad	Vision Communication	33, 1st Floor, Sukh Sagar Complex, Opp. Dinesh Chamber, Bapunagar, Ahmedabad	65123232	Mr Ajay Kachhadia
Gujarat	Ahmedabad	M Age Cellnet	A-17/6, Popular Plaza, Near Someshwar Part -1, 132 Ft. Ring Road, Satellite, Ahmedabad	30122838	Mr K Jairaj
Gujarat	Ahmedabad	A Com Technologies	Shop No-37, 1st Floor, Shubh Complex, Near Rajasthan Hospital, Camp Road, Shahbaag, Ahmedabad	32940560	Mr. Vijay S.Gohel
Gujarat	Ahmedabad	Mishree Communication	FF-17, RUDRA SQUARE, OPP. JUDGES BUNGALOW, POLICE STATION, BODANDEV, AHMEDABAD	32508491	Mr. Mitesh Patel
Gujarat	Ahmedabad	Silicon Valley	9, Golal Palace, Marinaragar Cross Road, Marinaragar Ahmedabad	30225430	Mr. Rajesh Patel
Gujarat	Ahmedabad	Shiv Sai Communications	21,Municipal Market, C.G.Road, Ahmedabad	66057999	Mr. K Jayraj
Gujarat	Anreli	Precision Telecom	32,33 Opera House, Station Road, Anreli.	230940	Mr. Kamlesh Tank
Gujarat	Anand	Desktop Infosystems	B/10, Vabhav Tower, V V Nagar Road, Anand	246885	Mr. Dipesh Patel
Gujarat	Ankaleshwar	Akshar Telecom	C 1 Keval Shopping Center,Old National Highway No.8,GIDC ,Ankaleshwar	02646-250860	Mrs. Anita Amin
Gujarat	Bharuch	Akshar Telecom	Pramukh Swami Complex, Parich Batti, Bharuch	26422241027	Mr. Hanif Patel
Gujarat	Bhanagar	Shivshrut Services	98/B, Makvana Building, Down Chowk, Bhanagar	3296222	Mr.P D Jala
Gujarat	Bhuj	Infotech Computer	2nd Floor, NarNarayan Chambers, Opp Indian Airlines Office, Station Road,Bhuj	324295	Mr. Vasant Mevani
Gujarat	Gandhidham	Vansh Electronics	Shop No. 35, Swami Vivekanand Complex, Near Oslo Circle, Gandhidham	232739	Mr. Siddarth Gajjar
Gujarat	Gandhinagar	Creative Communications	Shop No 102,Saman City,Sector 11,Gandhinagar	23226241	Mr. K J Barot

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Gujarat	Godhra	Binary Computers	34, Lohhandwala Complex, LIC Road, Nr. Chitra Cinema, Godhra.	9376589019	MR. A. Raja
Gujarat	Himmatnagar	Jay Telecommunications	B-F 105, 1st floor, Durga Complex, Near Railway Station, Himmatnagar	329532	Mr. Manbhai Patel
Gujarat	Idar	Manuti Communication	3, Sarvoday Market, Near Bus Stand, Behind Sarvoday Guest House, Idar		Mr. Niraj Patel
Gujarat	Jamnagar	Sudarshan Infoys	"Shradhhu", Park Colony, Motor House, Near UTI Bank, P.N.Marg, Jamnagar	2552696	Mr. Amit Unadkat
Gujarat	Junagadh	K.J.Traders	29/30, Dhanupith, Junagadh	2627320	Mr. Paresh Rughani
Gujarat	Kalol	Maitree Communication	B/93, Yogi Complex, near Mahendra Mill Road, Kalol	325288	Mr. Jignesh Shah
Gujarat	Mehsana	Prime Computer Consumables	83-8, Vimal Super Market, B K Road, S.T. Workshop Road, Mehsana	2325123	Mr. Saketu Patel
Gujarat	Morvi	Pulse Sales and Services	Madhav Market, 1st Floor, Near New ST Stand, Sanala Road Morbi.	300433	Mr. Natubhai Patel
Gujarat	Nadiad	D.C. Infosteams	105, Municipal Shopping Centre, Opp.Paras Cinema, Santram Road, Nadiad.		Mr. Dipesh Patel
Gujarat	Navsari	Deep Enterprise	10, Upper Level, Diamond Palace, Sattabir, Sayaji Road, Navsari-	02637 524095	Mr. Vinod Kasundra
Gujarat	Palanpur	Shree Manibhadra Mobile	16, 1st Floor, Aroma Arcad, Opp. Joravai Palace, Palanpur	320321	Mr. Panchal Sunil D
Gujarat	Patan	Able infotech	F/9, palika bazar complex, rajmahal road,near sanktoba hall, Patan	226400	Mr. Rakesh Bhai
Gujarat	Porbandar	Varun Infotech	1ST Floor,Garden Cafe Building, Opp>New Fountain, N.R.T.O Office, Porbandar	3290285	Mr. Mitesh Changela
Gujarat	Rajkot	Josh Telecom	Shop No.8, Kuber Complex, Opp Chandubhai Bhelwala, Dr Yagnik Road, Rajkot	6530707	Mr Jiten Dave
Gujarat	Rajkot	Roopang infocare	Vinod Nivas, 4, Sardarnagar(West), Nr Astron Cinema, Rajkot	6950111	Mr. Kishore Patel
Gujarat	Sanand	Ravi Communication	37,Sagar Complex, Opp.Hotel Khabar, Sarkhej Bavlva Cross Road, Sanand	32401211	Mr. Ravi N
Gujarat	Surat	Om Sai Services	39,Golden Point,Near Science Laboratory, Ring Road, Surat -	2615231233	Mr. Dhamesh Patel
Gujarat	Surat	Yash Telecom	M-20, Centre point, Near Kadwala High School, Civil Cross Road, Ring Road, Surat-395002	0261 2477905	Mr. Behan Saikh
Gujarat	Surat	Excel Solutions	H-3, Ruchi Flats, Near Igara Building, Adajan Hazira Road. Surat-	0261-6544500	Mr. Virender Jain
Gujarat	Surendranagar	Nihaal Computer Services	94, old housing board, opp school no 13, Surendranagar	320375	Mr. Sikandar
Gujarat	Vadodra	Shreeji Telecom	CF 13, Sterling Shopping Center,R.C.Dutt Road,Alikapuri, Vadodara -	0265-3059363	Mr. Jignesh Gohel
Gujarat	Valesad	Klassik Stationo Products	10, Jethalal Muji Market, Halar Road,Valsad -	02632-329363	Mr. Darshan Panchal
Gujarat	Vapi	Klassik Stationo Products	116, Bhanadarshan Co-Op Society, Koparli Road, Near Gunjan Cinema, GIDC, Vapi	0260-3292363	Mr. Avishk Suhasania
Haryana	Ambala	Bee Eas Air Communication	92-93, Gandhi market, Ambala Cantt-133001	2641234,	Rajiv Gupta

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Haryana	Bahadurgarh	Unique Telecom	5,Rajaram Market, Main Najafgarh Road, Bahadurgarh, Near Bajaj Showroom	9315873676, 9350941877	Mr. Harinder
Haryana	Bhiwani	Sandeep Electronics	10 th Plot, First Floor, Circular road, Mahem Gate Chowk, Near Dr. Kajal's Nursing Home, Adjacent to Rameshwar's Sweet House, Bhiwani, Haryana - 127021	252000	Mr. Sultveer Saini
Haryana	Faridabad	ComsoR Computers	601/1 Gopi Colony Chowk- Sector-19 , Near Prem Prakash Ashram, OLD Faridabad-121002	0129-3293512, 0129-4104252, 9310977888	Mr. Ashwani Jindal
Haryana	Faridabad	VR Infocomm	Shop No.44, Neelam Fly Over, Neelam Chowk, NT Faridabad.	0129-4031959, 0129-3208737	Mr. Vinod Kumar Gupta.
Haryana	Faridabad	Sky lark mobile point	4, G.T.Road, Near Bus Stand, Mala Colony, Fatehabad	0989655244	Parkaj
Haryana	Gurgaon	Signature Communications	B-100 A , South City -1, Opposite - Huda Gymkhana Club - Gurgaon 122001	0124-3256565, 0124-4102709	Raj Kumar Garg
Haryana	Gurgaon	Lalji Communication	SCO-31 - First Floor, Above MTNE Sarchar Hast, Main Market, Opp. BSNL Exchange, Secto-12A, OLD Gurgaon-122001.	95124-3200900	Mr.Bharat Bhushan
Haryana	HISAR	M K ELECTRONICS	SHOP NO-4A,FIRST FLOOR, NEELKANTH COMPLEX, CAMP CHOWK, MAN DELHI RD.	9991090260	MANMOHAN KRISHAN
Haryana	Hissar	Pamami Communication	32,Neel Kamal Complex, Red square Market,Near Elite Cinema Hall, Hissar, Haryana-125001	09354532000	Mr. Pradeep Garg
Haryana	Jind	Gaurav Telecom	Main Bazar, Near rani Talab, Near Bharat Electronics, Jind	325400	Deepak Garg
Haryana	Kaithal	Mahesh Communication	Shop no.22, Bajrang Ball Market, Near Randhir cinema -Kaithal	9315146000	Mr. Mahesh
Haryana	Karnal	Mass Communication	Shop No.69, Main Market, Ground Floor, Moughal Canal, Karnal -132001	3290717	Mr.Harish
Haryana	Kurukshetra	Bharti Communication	3,Krishna Market, Opp.Abhay Palace, Pipili Road,Kurukshetra,Haryana-	01744-327717	Mr. Ramesh
Haryana	NARNAUL	PRIME COMMUNICATION	Shop no.8 , 1st Floor Taneji complex, near Nirula Hotel , main Road Narnaul	9355375351	MR. Naveen
Haryana	Palwal	Shree Ganesh Communications	Basant Apts, Shop No.5, Kithwari Chowk, Mathura Road, Near Saraswati School, Palwal	01275-321028, 09315403328	Harish Chandra
Haryana	Panipat	INS Telecom	2, Bihari Sarup Colony, Opp Bus Stand, Near Hotel Deep, Panipat	3291860	Jagdeep Sachdeva
Haryana	Rewari	Mahak tele services	53-A, Model Town, Near Sireej restaurant, Rewari	01274-329222	Gaurave yadve
Haryana	Rohtak	Telecentre	Shakti Market, Civil Hospital Road, Near Chhotu Ram Chowk, Rohtak-124001	247242	Mr.Madaan
Haryana	Sisa	Sisa Communication	168,Huda Complex, Old Bus Stand, Sisa	0166-329591	Rajindera
Haryana	Sonpat	Teleworld	Shop No 20, 1st Floor, M.C.Market, Subhash Chowk, Sonpat, Haryana-138001	3290889	Vipin Dua
Haryana	SONPAT	RELIABLE TELLY SHOPPE	OPP. OLD CIVIL HOSPITAL RLY ROAD SONPAT NEAR S.B.I. BANK, SONEPAT	9991090252	UMESH CHAUDHARY
Haryana	YAMUNAGAR	KRISHNA COMMUNICATION	SHOP NO.19, 20-A 1ST FLOOR, WORKSHOP ROAD, YAMUNAGAR	9354784019	MR. SURESH/ Mr.Sandeep

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Haryana	Yamunanagar	Marish Communications	Shop No.3, Sharma Colony, Near Mahindra Petrol Pump, Yamunanagar - 135005	233227	Vinod Kumar Mittal
Himachal Pradesh	MANDI	Y.M. COMMUNICATION	NEAR PNB MOTI BAZAAR, MANDI-175001	9816024978	M Mahender Singh Thakur
Himachal Pradesh	Palampur	Electronic Home	Kallu Di Hatti, PO Maranda Thasil, Palampur, Distt-Kangra-176102	01894238463	Mr. Ravi Kumar
Himachal Pradesh	Poanta Sahb	SINGAL MARKETING	Badi Nagar, Near LIC Office, Poanta Sahb	9318715848	Mr. Rajesh singal
Himachal Pradesh	Shimla	Hans Computers	76/ 9, 2nd floor Lower Bazar Shimla	9418068421	Sandeep Patil
Himachal Pradesh	Solan	Vikas Mobile Repair Center	MOHAN COMPLEX, First Floor Upper Bazar, Solan-173212	9816271183	Vikas
Jammu	Jammu	MOBILE CARE	608-A Gandhi Nagar Behind Laxmi Narayan Mandir	0191-2436814	Mr Dixit Gupta
Jammu	Srinagar	THE NET SURFER	2nd Floor Mohi-ud-Din Building, Poloview, srinagar	0194-2459549	Mr Wasim
Jammu	Udhampur	SERVICE SOLUTIONS	Ward No. 15 Shakti Nagar Opp. Old ITI Udhampur	01992-276724	Mr Rakesh
JHARKHAND	BOKARO	Digital Equipment Centre	GB-11, City Palace, Opp./Indian Bank, Bokaro.	9334072270	Dewashish Ojha
Jharkhand	Daltonganj	MAA MOBILES	Jail Road, Jail Hata, Dalton Ganj-822101	9304285663	Mr.Navin Kr. Kashyap
Jharkhand	Deoghar	Kanan Electronics	Hotel Relax Complex, BLC Road, Deoghar-814112	9304059528	Mr. Mahesh Sharma
Jharkhand	Dhanbad	Nirmala Enterprises	Ground Floor, Muskan Complex, Nr Subhash Chowk, Dhanbad.	9334027583	Mr.Nirj Sinha
Jharkhand	Godda	Karan Moblink	Ma Kalyani, Katra, Main Market, Godda-814133	9334525200	Mr.Saroj Kumar Jha
Jharkhand	Hazaribagh	Digital Services	Plaza Mit, pugmill road, Nr Kallu Chowk, Hazaribagh.	9334599570	Mr.Sish Alam
Jharkhand	Jamshedpur	Tinupati Teletech	Chakravarti Compound, Near Hotel Castel, Contractors area, Bistupur, Jamshedpur-831001	0657 3293331	Abhijeet Mukherjee
Jharkhand	Jamshedpur	Prasad Electronics	Nr Bus stand, Community Center, Kagal Nagar, Jamshedpur.	0657-2226077	Mr.Raju/ Sanitha
Jharkhand	Rangarh	Shreyas Empaire	Bus Stand Complex, Rangarh-829122	9334085642	Mr.Piyush
Jharkhand	Ranchi	Balaji infotech	Near Dr.Kashyap Eyeclinic, Purulia Road,Ranchi.	0651-3205400, 9304412277	Mr. Sanjeev, Mr. Sunil Kedia
Jharkhand	Ranchi	Satyra Systems & Solutions	158, Opp Hotel Palace, Kadru, Ranchi-834002	0651 3291019	Amit Rastogi
Karnataka	Anekal	Sri Venkateshwara Communications	# 37, KSRTC COLONY, HOSUR MAIN ROAD, ANEKAL TALLUK, BANGALORE - 562106	320078	Rajagath
Karnataka	Bagalkote	Turning Point Computers	Opp. VRI Booking point, near Engg college BEC road, Vidyagiri, Bagalkote	329310	B.M. Hiremath/ Veeresh
Karnataka	Balhongal	3G Communication	Shop No 459/2 Near Inchal Cross Belgum Road Balhongal-591102	9343815097	Vishwanath
Karnataka	Bangalore	Ascent Communication	No:113, St Johns Church road, Bangalore - 560005	32914856	Kurneesan
Karnataka	Bangalore	Insta Service Point	NO-64.Mission road, SATHI COMPLEX, BANGALORE-27	22107560	Venkatesh
Karnataka	Bangalore	Optima Mobile Services	24/2,Dr.Rajkumar Road, Near Subramanyanagar Police Station, 2nd Block, Rajajinagar, Bangalore - 560 010	23131953	Umei Krishnan

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Karnataka	Bangalore	Optima Mobile Services	P-3, Mallikarjuna Complex, Opp R T Nagar Police Station, 80 Feet Road, R T Nagar, Bangalore-560032	32710202	Madan
Karnataka	Bangalore	Pranav infocom	No 102, Surya Mansion, 7th Main, 4th Block, JAYANAGAR, BANGALORE -560011	9343023209	S.V.Sirish
Karnataka	Belgaum	Hello India Telecom	G-4,Maratha Mandir Complex, Khanapur Road, Near Railway Flyover, Belgaum - 590 001.	2420533	Mohan
Karnataka	Bellary	Shri Vinayak Electronics	# C1, R K Complex, KC Road Bellary-583103	655045	Devandra / Richard
Karnataka	Bhadravati	Digital communication	SR Complex 4th cross B H Road Bhadravathi-577301	9341081291	Nagabushan
Karnataka	Bhatkal	Vijay Communication	Hussian Complex Bunder road Bhatkal - 581320	329327	Vittal H.Naik
Karnataka	Bidar	Mayuri infotech	Ravi complex,shop no: 4,Udgi road,Bidar-585401	225544	Ravi Halhalli
Karnataka	Bijapur	Turning point computers	Khed building,opp Vijaya college, Sholapur road, Bijapur-586103	329318	S.M.Hiremath
Karnataka	Channarayana	C&C Technology	"Ramanuj Nitya" No.2104, 11th Cross, Kuvempunagar B M Road, Channarayana - 571 501	324222	Charan
Karnataka	Chikaballapur	Sri Ram Prasad Enterprises	Post office road Chikaballapur-562101	329579	Yardhanji / Ram prasad
Karnataka	Chikmagalur	Cell Tec Electronics	ragavendra complex, NMC circle,Neharu road, Chikmagalur - 577101	9341013183	Prem kumar
Karnataka	Chintamani	Anrutha Mobles	Gajanna Circle Chintamani - 563125	9342262811	Sutarshan Reddy
Karnataka	Davangere	Kruthika Communication	Shop No: 6, Park View Plaza, (Income Tax Office's Ground Floor) , 4th Main, Near Vishweshwaraiah Park, P], Extension, Davangere-577002	395444	Sajay
Karnataka	Doddaballapur	Santosh Communication	VITOBHA TEMPLE ROAD, OPP ASHWINI HOSPITAL, DODDABALLAPUR -561203.	9341736645	Santosh
Karnataka	Gadag	Tranqil Telecom Service Pvt Ltd	Shop No12, Siddalingeshwar Complex Below SBM, Station Road,Gadag District Gadag-528101	376998	Raju / Zakir
Karnataka	Gokak	Cell World	Basaweshwara circle opp-court Gokak - 591307	93438-73777	Shivanand / Chougala
Karnataka	Gulbarga	Aishwarya Communication	C-9, Asian Plaza S.V.P.Chowk Main road Gulbarga-585102	329447	Mallikarjun
Karnataka	Hassan	Sree Digital Solutions	1380 Mission Hospital road opp Hindbed college - 573201	329481	Vidya Shankar
Karnataka	Hosakote	Emposys Communication	Shop no 1, Mahalatha Devi Complex MV Badavane, College Road Hosakote-562114	652532	RaghuNandan
Karnataka	Hubli	Shinuti Services	shop no - B6, Laami complex, Court circle , Hubli- 580020	3290671	Mahendar
Karnataka	Hunsur	Sriram infocom	No.6, Municipal complex, H.D.Kote road circle - 571105	253699	HR.Pradeep
Karnataka	Kadur	Ashwa Tele Mobiles	TB Road Kadur -577548	9341053310	R.Ananda Murthy
Karnataka	Kanapura	Sunshah Communications	Harshitha Complex, Budikere, Bangalore main rd, Near KSTC Bus stand Kanakapura-562117	9342743344	R.C.Harish
Karnataka	Karwar	Mithun Tele Solution	Prema complex Civil court road opp SBM Karwar -581301	9341199222	Mithun palyunker
Karnataka	KCF	Global Net Communications	Opp. King George Hall, Geetha road Robeton pet, KCF - 563122	329559	Shiva Kumar

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Karnataka	Kolar	Seamatrix	No:384 Suguna complex, Near KSRTC bus stand, Anthargange road, Kolar 560101	2228714	Shetty
Karnataka	Kumta	Krishna Mobiles	938, College road, NH 17, opp RWW, Kumta - 581343	329607	D.V.Prabhu
Karnataka	Kundapur	Reya Mobiles	Vaishali complex I fr Shastri circle, Kundapur - 576201	320866	Anantha / Ramya
Karnataka	Madikeri	C.M. Communications	Shop no. 8, M A Complex Ist fr Kohinoor rd Madikeri	9343837555	Mohamad Sharief
Karnataka	Mandya	C & C Technology	2068, First Cross, Krishna Krupa Nilaya Subhash Nagar, Mandya-571401	320777	Charan
Karnataka	Mangalore	Innovative Infocom	15-10-537/11, Jayarama Centre, Mallikette Circle, Kadri, Mangalore - 575002.	6563244	Sebastian Fernandes
Karnataka	Moodabidri	Media Guard Technologies	Rajeev Gandhi complex main road Moodabidri	325909	Vishwas Kumar
Karnataka	Mysore	K.K.Marketng	1432/9, Tribhuvan Towers, opp Veterinary Hospital, Dewan's Road, Dhanwantri Road Cross, Mysore -570001	4258613	Karunakaran.
Karnataka	Nipani	Manusoft Computers	Dumale Complex Chikodi road Nipani - 591237	9448148005	Mahesh Dumale
Karnataka	Raichur	Alkshay Electronics	1st floor, hotel UMA complex, station road, Raichur - 584101	329673	Narasimha
Karnataka	Ranibennur	Kruthika Communication	LIC Building Opp to Gupta Petrol bank PB road Ranibennur-581115	231444	Sujay
Karnataka	Shimoga	Chetan Electronics	C-5, Kenchappa complex, Durgiddi main road, Shimoga-577201	9543370193	Panduranga rao / Binoy
Karnataka	Tiptur	Shree Digital Solutions	Nanjappa complex, opp city union bank, BH road, Tiptur - 572201	9343813731	Vidyashankar
Karnataka	Tumkur	Durga Communication	No.14 CMI Complex, opp Jayadeva Hostel, B.H.Road - 572101	2256184	Naveen Kumar
Karnataka	Udupi	Samman Mobile Services	Shop No: 15, Simaz complex, Diana circle, Court road, Udupi- 576101.	3955770	Prakash
Kerala	Alappuzha	GETRONICS	FIRST FLOOR, KARTHIKA BUILDING, OPP SDV BOYS HIGH SCHOOL, COURT ROAD, ALLEPPY.	3290446	OMPRAKASH
Kerala	Alathur	MARSTEK	12/950, Ground Floor, AR Complex, Opp. Munsiff's Court, Alathur, Palakkad Dt.- 678 541	04922-321311	Mr. Rajesh. V.
Kerala	Aluva	SED INFOSYS	BUILDING NO 12/57 DOOR NO 8, FIRST FLOOR, POOTHULLIL BUILDING, ALUVA - 683 101.	3255599	Sudheesh
Kerala	Attingal	AM Technologies	Maman, Near Dreams Theater, Attingal	3290301	Saji
Kerala	Badagara	Amakish Communications	1st Floor, Sarala Complex, Near KVR Motors, NH, Bypass Road, Nut Street, Vadakara-673101.	0496 - 3255756	Mr Jeeju / Mr. Bajju
Kerala	Cherthala	Cherukattu Phones	Krishna Building, Opp govt boys high school, AC road, Cherthala	9388441434	Mahesh C D
Kerala	Ernakulam	TELETECH SYSTEMS	20, First Floor, Penta Estate, above Airtel office, Janatha Junction, Palairavattom, Cochin-25	3207554	SONY THOMAS
Kerala	Ernakulam	Zenicon Infocom(P) limited	Above Syndicate Bank, Opp Cochin Shipyard, M.G.Road, Cochin-15	2359511	Jaimon Joseph
Kerala	Ernakulam	Guidelines	Ground Floor, Mundakottackal Estates, Kadavanthara, S A Road, Cochin	4000113	Manoj G
Kerala	IRINJALAKKUDA	NICE MOBILES	NICE BUILDING, ST. JOSEPH'S COLLEGE JUNCTION, IRINJALAKKUDA - 680121	0480-3291515	MR. SEBASTIAN

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Kerala	Kalpetta	Mobi Care	Apasara Building, Near Municipality Office, Main Road, Kalpetta	04936-329366	Thansser
Kerala	Kanhangad	Xo COMPUTERS & DATA CARE	BENGACHERY COMPLEX, OPP.VYAPARA BHAVAN, T B ROAD JN, KANHANGAD.	0467-3259753	Mr.SANDEEP
Kerala	KANNUR	SAHAR COMMUNICATIONS	SB-666-C & D, PRESTIGE CENTRE, GROUND FLOOR, SUB REGISTER OFFICE ROAD, KANNUR.	0497-3258585	AJAI ABHIRAM
Kerala	Karunagapally	Supreme Enterprises	Vaiyath Plaza, Opp to KSRTC Bus stand, Karunagapally	2620282	Mr. Ratisih/Prem
Kerala	Kasargode	Xo COMPUTERS & DATA CARE	BENDICHAL COMMERCIAL COMPLEX, PRESS CLUB JN, MG ROAD, KASARGOD.	04994-324755	Mr. SANDEEP
Kerala	Kollam	Digital Infosystems	MC-3087, New Block, Bishop Jeroni Nagar, Chinmakada, Kollam-691001	2760647	Johnson Lawrence
Kerala	Kottarakkara	Sivashakthi Communications	KP II/1574, Vailyanla bldg, Near Marthoma Girls high school, Pulumon PO, Kottarakkara	3298191	Suresh
Kerala	Kottayam	SVM Technologies	M.P.M COMPLEX, Near Popular Maruti Show Room, M.C ROAD, SH MOUNT, KOTTAYAM, KERALA- 686 006	2565303	Rajesh K S
Kerala	Kozhikode	Domain Infosystems	1st Floor, Al Fahad Complex, Saba School Cross Road, Near Corporation Stadium, Puthiyara, Kozhikode-673004	0495-2722222, 0495-3243745	Mukundan
Kerala	KUNNAMKULAM	Y STAR MOBILES	ROOM NO 4/ VIII/1039, CITY COMPLEX, OPP TEMPO PARK, TOWN HALL ROAD, KUNNAMKULLAM.	04885-320009	VIJLJMONJ.K.V.
Kerala	Manjeri	Integrated Computer Systems	Royal Tower, TB Road, Manjeri - 676121	0483-3299686	Mr. Thomason Chacko
Kerala	Mavelikara	Ettutharai Agencies	GROUND FLOOR, KOIPPALLIL ROYAL ARCADE, PUTHYAKAVU, MAVELIKARA	3293340	Biji
Kerala	Palai	Cyrtac Tv Plaza	Vypana Building, Petta Road, Palai.	329746	Tom Cyrtac
Kerala	Palakkad	Benzaws International	12/310/6, Ground Floor, Mero Complex, H.P.O.Road, Palakkad - 678 001.	0491-3052002	Mathews
Kerala	Pallakad	ORION TECHNO SOLUTIONS	12/310/15 FIRST FLOOR, METRO COMPLEX, HEAD POST OFFICE ROAD, PALAKAD-678001	0491 - 3200255	KHAJA HUSSAIN
Kerala	Pathanamthitta	Melamparambi Agencies	10/264, Main Road, Town, Pathanamthitta	2223132	M.V. Francis Oommen
Kerala	THALASSERY	SAHAR COMMUNICATION	44-1929, MACKSON MONOR, OPP. PARIS RESIDENCY, LOGANS ROAD, THALASSERY	0490 - 3208585	AJAI
Kerala	Thiruvalla	Sangeetha Electronics	524/17, Central Tower, Cross Junction, Thiruvalla	3203000	Ranjeev Kumar
Kerala	Thiruvananthapuram	Appolo Systems	Thelungu Chetty Complex, Shop No 23-24, Kalpalayan JN Karamana, Thiruvananthapuram 695 002.	2340523	Santosh
Kerala	Thiruvananthapuram	Smart Mobile	TC 2/3554(5), First Floor, Opp. Petrol Pump, Kesavadasapuram, Trivandrum-695004	3200105	Krishnakumar P B
Kerala	Thodupuzha	National Electronics	Shop No 5, Aswathy Shopping Complex, Temple Junction, Thodupuzha	220320	Aneesh M A
Kerala	Thiriprayar	Nice Mobiles	382j 1st Floor, Century Plaza, NH.17, Near Bus Stand, Thiriprayar-680567	0487 - 3240400	T.P. Sebastian
Kerala	Tirur	Telit Telecom Shop	GROUND FLOOR, AL AMAL COMPLEX, PAN BAZAR, TIRUR	0494 - 3295623	Vasan.K.Nair

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Kerala	TRICHUR	CELL TECH	SHOP NUMBER 5B,TC23/326, N.P. TOWER, GURUYAYOOR ROAD, WEST FORT, Thrissur	0487-2387386	SANTOM KALLOOR
Kerala	Vaikom	VARUNDAM ELECTRONICS	II/ 214C , Mannamkeriel Complex, Bus stand Road, Vailiyakavala, Vaikom	326616	Sreelumar.G
Madhya Pradesh	Balaghat	Shri Computers	Keshar Plaza Complex, Hanuman Chowk, Balaghat	9300652132	Mr. Deepak Bajaj
Madhya Pradesh	Betul	Shivam Electronics	Jagprakash Chowk,Kotha Bazar, Auto Stand, Betul - 460001	9329099071	Mr.Vikram Motwani
Madhya Pradesh	Bhopal	Akasha Enterprises	25-26 , CENTRAL MARKET, ROSHANPURA SQUARE, BHOPAL MP	7553201626	Mr. Dinesh Asja
Madhya Pradesh	Bhopal	Neha Sales Corporation	F-104, Annol Tower, E-5/14, Commercial Zone, Aera Colony, Bhopal-462016	7553015088	Mr.Ashok Hirwani
Madhya Pradesh	Bhopal	MUSIC MAHAL BHOPAL	SHOPNO.1 NEW MARKET NEAR HANUMAN MANDIR, BHOPAL	0755-5220725/ 2579178	Mr.SHINU
Madhya Pradesh	Bhopal	CSM SOLUTION-BHO	M-2 CHETAK COMPLEX, ZONE -2 M.P NAGAR, Bhopal	07373-316816	Mr.NEERAJ
Madhya Pradesh	Biaora	MOBILECARE-BIAORA	KR Complex Rajkand Road, Biaora. M.P.	07373-316816	Mr.Atul Sharma
Madhya Pradesh	Chindwara	Bunty Photoelectronics	Shop.No.33, Jji Bai Complex, Parasia Road, Chindwara	07162-230358	Mr.Ritesh Shukla
Madhya Pradesh	Dewas	New Taj Electronics	New Taj Electronics, 4, New Market, Moti Bungalow Main Road, Dewas	07272-220005, 406006	Mr.Shabbir Shaikh
Madhya Pradesh	Guna	Mobile Junction	Jai Stambh Chauraha,Nr.Central Bank, Guna-473001	07542-529277	Mr.Deepak Arya
Madhya Pradesh	Gwalior	Galar Computers	Ground floor ,Garipali Plaza , City Centre , Gwalior	0751-4013311	Mr.Pradeep Dicit
Madhya Pradesh	Gwalior	VERSHA SALES & SERVICE-ASP	GROUND FLOOR SARAFIA BAZAR LASHKAR,GWALIOR	0751-4060444	Mr.AJIT KLUMAR
Madhya Pradesh	Indore	Apurva Electronics	UG 11 , 8 M Tower , Sagra Sangeta Road , Opp. Lotus, Indore	7313207283	Mr.Nitin Kulkarni
Madhya Pradesh	Indore	Ayushi Electronics	UG-10,Ratanmani Complex, 7/1 New Palasia, Indore-452001	0731 - 3251284	Mr.Santosh Divedi
Madhya Pradesh	Indore	PIONEER MARKETING	224, Prem Trade Center, Maharani Road, Indore.	0731-4006503	Mr.Ritesh
Madhya Pradesh	Indore	IT CUSTOMER CARE-IND	LG-13, TRADE CENTRE, 18,SOUTH TUKOGANJ, INDORE	0731-4207487	Mr. Sanjay Dhanekar
Madhya Pradesh	Itarsi	S.S. Telecommunications	Vijayshree Complex 5, Line Sarafia Bazar, Itarsi - 461111	9300272505.	Mr.Aklesh Saxena
Madhya Pradesh	Jabalpur	Sri Sai Communication	C/O MUSKAN CARD GALLERY, 766, SHAHD SMARK MARG, NEAR RANITAL SQUARE, JABALPUR-482001	0761-4046831	Mr.MOHIT SAREEN
Madhya Pradesh	Jabalpur	IT SOLUTION	GROUND FLOOR,ASTHA APARTMENTS,WRIGHT TOWN, Jabalpur	0761-4014064/ 4064370	Mr-SANJEEV CHOUBEY
Madhya Pradesh	Katni	Excellent Infosys	20/306, Gurunanak Ward, Katni	07622 406047	Mr.Prafull Agrawal
Madhya Pradesh	Khandwa	NAMAN REFRIGERATION-KHANDWA	TAPAL CHALL,KHANDWA	0733-2230089	MR.YASHWANT MALI
Madhya Pradesh	Mandsaur	Sky Link Mobile Services	Payas Ice Cream Parlour, 16, Opium Godown Road, Nai Abadi, Mandsaur 458001 (M.P.)	07422-243978	Mr.Gaurav B. Mittal
Madhya Pradesh	MORENA	MOBILE PLAZA	M S ROAD ,JIWAJI GUNJ , OPP BANK OF INDIA, MORENA	07532 400886	Mr.T C SHIVHARE

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Madhya Pradesh	Neemuch	Shree Balaji Mobiles	Jain Bhavan Road, Near Ganganagar Off, NEEMUCH (M.P.)	07423-320033	Mr.Saresh Goyal
Madhya Pradesh	Ratlam	Kirti Telecom	124 Station road Opp.Raj Tower, Ratlam - 457001	239346	Mr.Kirti Jain
Madhya Pradesh	Sagar	Neeta Computers	Jama Complex, Teen Batti, Sagar - 470002.	07582-329951	Mr.Ramesh Gupta
Madhya Pradesh	Satna	Maa Shaarda Communication	Gali No1, C/o Shri Gopal Sharan Singh, Pustp Raj Colony, Satna	7672320797	Mr.Prashant Singh
Madhya Pradesh	SATNA	AKASHWANI AGENCIES-SATNA	OPP.CMA SCHOOL.SHOP NO.2,ANNAM CHHAYA, REWA ROAD, Satna	07672-416455	Mr.Ajay Sultramani
Madhya Pradesh	Shipuri	Ocean Computer Corporation	1st Floor, Vishnu Mandir Market, Near Panipat Handloom, Shipuri	07492-225505	Mr.Saneer Saxena
Madhya Pradesh	Ujjain	Galaxy Computers & Communication	43/2, Varnuchi Marg,Opp Madhav Nagar Police Station, Freeganj, Ujjain	0734-2515995, 2530777	Mr.Ansurag Chhajlani
Maharashtra	AHMEDNAGAR	T V SPOT	B-3, ADARSH SAMRUDDH, NR. CHOUPATI KARANJA 414001	0241-2326267	MR ANIL APTE
Maharashtra	Alola	Supra Computers	Ushakiran Complex, Shastri Nagar, Opp. Hotel Surya, Alola.	9325866469	Mr.Prashant
Maharashtra	Amravati	Scorpio Services	Shop No. 84, Ground Floor, Gulshan Towers, Nr. Panchsheel Cinema, Amravati, Pin-444601	0721-2567302	Mr. Pramod
Maharashtra	Aurangabad	Unique Telematics	Shop no.108/B, Behind Sajawat Handloom, Tapdiya Super Market, Nirala Bazar, Aurangabad-431001	0240-2356447	Mr.Mazhar Ahmed Shaikh
Maharashtra	Aurangabad	Electronics World	Sahyadri Building,opp. To Shivaji School,Khokladpura, Aurangabad-431001.	0240-3296998	Mr. Raaf
Maharashtra	Beed	Shree Enterprises	Bahadur/Raj/Hotel, A.H Wada Yashraj Road, Beed-431122	02442 231831, 02442-228855	Mr. Rahul Joshi/ Mr. Rajiv Joshi
Maharashtra	BHIWANDI	VARAD ELECTRONICS	SHOP NO.2, PRABHU CHAYA BLDG, PRABHU ALL NEAR OLD GOVT. HOSPITAL, MANDAL, BHIWANDI, DIST THANE	02522-222653	Mr. Hitendra Zope
Maharashtra	Chalisgaon	Mobile Point	Shop-22, Momaya Complex, Near Bus Stand, Chalisgaon	02554-309996	Mohd. Israil Ansari
Maharashtra	Chandrapur	Crystal Services	Behind Hotel Simran, Jatpura Gate Chandrapur	9370273776	Mr. Mahmood
Maharashtra	Chandrapur	Shiv Communications	Ramnagar, Near Durga Mata Mandir, Sindhli Colony, Chandrapur	329546	Mr.Mahesh
Maharashtra	Chinchwad (Pimpri)	Ritz Communication	Shop No 10,'A' Wing,Ja Ganesh Vision/Next to Hotel Neelkanth/Near Fam Multiplex,Akurd, Pune-411033	020-27485613, 020 32661900, 09371029777	Ms Nikita
Maharashtra	Dhule	Pearl Communications	Below Reliance WebWorld Express, CKB Arcade, Nr Deopur Bus Stand, Dhule.	02562-324666	Mrs. Sonu Atul Bang
Maharashtra	Gondia	M/S V2 Care	Opp. Coffee house, Railtoil, Gondia 441614	329322	Mr. Krishna Sargam
Maharashtra	Hatkangale (Ichalkaranji)	Sai Vision Services	11/236 MOHAN ARCADE SHOP NO B14, STATION ROAD, TAL- HATKANGALE, CITY-ICHALKARANJI-416115	0230-2439989	Saneer Bhanale
Maharashtra	Islampur	Solar Shopyy	opp Sai Motor Driving School, Nr Stand Road, Islampur, Distt Sangli, ISLAMPUR-415409	9326777603	Mr. D.H.Patil
Maharashtra	Jalgaon	Global Enterprises	E-81, 1st floor, Golani Market, Jalgaon-425001	0257-2236899	Mr. Pramod
Maharashtra	KALYAN	SKY LARK ASSOCIATES	Shop1, 'A' Wing, Suresh Tower Co-op. Hsg. Soc. Opp. Municipal Vegetable Market, Santoshi Mata Road, Kalyan (W)	0251-3209899	MR. NASEER

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Maharashtra	Kolhapur	SMS Services	S5, Dhan Tower, Opp. Natan Marathi School, Near Mirajkar Tikky, Kolhapur, Pin -416005.	0231-2541120, 9326226120	Prakash Patil
Maharashtra	Kolhapur	KOMAL ELECTRONICS	517/10 "SAWALI" SHIVAJI PARK NEAR VIKRAM HIGHSCHOOL,SHIVAJI PARK, KOLHAPUR-416001	0231-2521424, 09823517055	MR. VASANT P. BODKE
Maharashtra	Kopergaon	Om Sai Mobile	Opp. ST Bus Stand, Dahargaoan Road, Kopergaon, Dist Ahmednagar.	02423-226463	Mr. Mahendra Devkar
Maharashtra	Latur	HINDUSTAN MOBILES SERVICES	Shop No.47/59,Site 110, Gandhi Market, Nr Bhalchandra Blood Bank, Main Road, Latur-413512	02382-641111, 982345500	Mr. Sandeep Parande
Maharashtra	Malegaon	Cell Care	Shop No.14, Beside Sana Travels, Bunkar Bazar, Qidwai Road, Malegaon - 423203.	937020819	Mr Ansuari Mohd Israfil
Maharashtra	Mumbai	Absolute Networks	A007, Vishal Shopping Centre, Next to Vishal Hall, Near Station, M.V.Road, Andheri (E), Mumbai - 400 069	022 32544800	Mr. Anun
Maharashtra	Mumbai	Creative Solutions	SHOP NO 6 AMBIKA COOPERATIVE HOUSING SOCIETY, JAWAHAR NAGAR ROAD NO 2 NEAR RAILWAY CROSSING,GOREGAON WEST, MUMBAI 400062	022-28769003	Mr. Anand
Maharashtra	Mumbai	CYBER-GIAN CONVERGENCE & SERVICES (INDIA) PVT. LTD.	43/44, Gold Filled Plaza, Sion Bandra Link Road, Sion, Mumbai-400017	022-24075939	Mr. Jatin Parekh
Maharashtra	Mumbai	G.P.ELECTRONIC	A/27, Gr. floor, Sagar Tech Plaza, Andheri-Kurla Road, Sakli-Naka, Andheri (E), Mumbai 400072	2232639960	Mr. MAYUR
Maharashtra	Mumbai	Grace Tele Services	Shop no 3, C/1, Manik Nagar Soc, Panjabi lane, Borivali (W), Mumbai 400092	022-32455033	Mr. Daniel
Maharashtra	Mumbai	Komplex Telecom Corporation	Shop no.A/19, Nootan Nagar Premises Co. Op. Htg. Society, Near Bandra Rly. Stn., Towards Bandra Talav, Turner Road, Bandra (West) Mumbai	022 64147153	Mr. Haque
Maharashtra	Mumbai	IG Service Centre	Shop No.1,2,3 Ground Floor, Rajakamal Bldg Opp.Ram Mandir, Subhash Road, Vile Parle(E) Mumbai 400 057	022-26134917	MR. RAKESH / OMKAR
Maharashtra	Mumbai	PARAS TELECOM	2nd floor, Rear Side Capital Cinema Building, Wauddy Road, Opp. Mumbai CST Railway Station, Mumbai	022 32022228	Mr. Ganesh
Maharashtra	Mumbai	Sai Tele Services	A-110, Satyan Commercial Complex, M.G.Road, Chhatkoper (E), Mumbai - 400 077.	022-40111264	Ms. ISHA
Maharashtra	Mumbai	Yash Telecom	Dadar Tower, Shop no.1, Opp.Film Centre, Near Crossroads, Tardeo, Mumbai - 400 034	9324049698	Mr.Gitish
Maharashtra	Mumbai	TERABYTE	Shop 27, Vikas Paradise, Bhakti Marg, Off L.B.S. Road, Near R Mall, Mulund (W), Mumbai 400080	022-32640045	Mr. Chirag
Maharashtra	Mumbai	Trident Communications	8-A Vasant Smruti, Dadasaheb Phalke Road, Beside "BharatKhastra Building", Near Dadar station(E), Dadar -East, Mumbai - 400 014.	9323960027	Mr. Kalpesh
Maharashtra	Mumbai	Sierra Mobiles	Opp Prabhu Darshan, L.J.Road, Shivaji Park, Near Shiv Sena Bhavan, Mumbai 400016	022 24382200	Mr. Anurag
Maharashtra	Nagpur	Epoch Services	"Shop No. UG-9, Bhakati Vihar Complex, Chapru Nagar Square, Lakadganj, Nagpur -440008"	0712 3246777	Mr. Gitish

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Maharashtra	Nagpur	Spectrum Marketing	Shop No.2, Dharampeth Towers, West High Court (WHC) Road, Dharampeth , Nagpur - 440010	712-22527823	Ms. Sonali
Maharashtra	Nagpur	Shivatronics	B-31 Sai Regency Complex Ravi Nagar Square Nagpur Maharashtra 440044	9300892579	Mr. Ravi Gupta
Maharashtra	NANDED	DEVANSH MICROTRONICS	zpp forest office, nr Ranbhidkar's residence -Nanded-431602	02462-249789	Mr. Prashant Palnate
Maharashtra	Nanded	ROYAL UNIQUE SERVICES-NANDED	Plot No-48,Krishna Kamal , Opp. Sunil Furniture, Bhagya Nagar road, Ashok Nagar Nanded-431605	2.462.262.419	Mrs. Sunita Ashish Naik
Maharashtra	Nasik	Mobs Associates	Shop No. 8a, First Floor, 'Kapote-Meher' Market, Renuka Nagar, Wadala Naka, Dawka, Nasik - 422 001.	0253-6523613	Mr. Mahesh
Maharashtra	PANVEL	Oceanic Tele System	Shop No. 3, Sai Arcade, Sector 15, New Panvel (E),Dist. Raigad.	9322217221	Ms. Swapnaja
Maharashtra	PEN	SKYPHONE ENTERPRISES	SHOP NO 3, SHREE COMPLEX, OPP UNIQUE BAZAR, PEN KHOPOLI ROAD, PEN, DIST RAIGAD-402107	9373435000	MR KULDEEP
Maharashtra	Pune	MICROCHIP SOLUTIONS	Akhay Chambers 216 Naryan Peth,Near Bhide Bridge, N C Kellar Rd. Pune-411030	020-24471155, 9823905949	Mr Mahyesh Bhosale
Maharashtra	Pune	Horizon	32A, Lotus Court, Near Hotel Panchami, Pune Satara Road, Pune.	02032501222, 9325002399	Mr. Nilesh Pundye
Maharashtra	Pune	Mobile World	G-25, AKSHAY COMPLEX, DHOLE PATIL ROAD, PUNE-411 001	30942268, 9325088055	Pawan Mamtri
Maharashtra	Pune	Viki Info Technologies	Shop No4, Amit Complex,474, Sadashiv Peth,Opp New English School, Tilak Road Pune Maharashtra	020 24434134, 9322206664,09 371 829891	MR.VIVEK SURVE
Maharashtra	Ratnagiri	S P ELECTRONICS-PUNE	shop no-19, Parasmani Complex, K C Jain Nagar, Nr Maruthi Mandir, Ratnagiri-415612	02352-329556, 221982, 9823317158	MR. SANTOSH PRABHU
Maharashtra	Sangamner	Rajpal Telecom	Yashodhan complex,New Nagar Rd, Near hotel Chaital, Sangamner	02425320888	Mr Harish Rajpal
Maharashtra	Sangli	Ramesh Electronics	Opp. Kanya Purohit prashala, Rajwada, Sangli-416416	0235-2327601, 9823085176, 09572107601	Suresh Shegane
Maharashtra	Satara	Shival Mobilink	173/6/7 Revivaripeth shop no-11, Withal Lila Complex, Powai Naka, opp Janta Bank, Satara-415002	02162-325212	Mr. Mahesh Shinde
Maharashtra	Shirampur	Siddharth Infocom	Shop No 1, Hotel Sidhartha Building, Sidhartha Stop, Sagamaner Road, Shirampur-413709	02422-222117, 02422-329530	Mr. Kedar Fargade
Maharashtra	Solapur	ATHARVA ELECTRONICS PUN	940/2 NORTH SADAR BAZAR, CARLUD BUNGLOW, SOLAPUR-413003	0217-2317595, 9823317081	MR. LIMESH KAMALAPURKAR
Maharashtra	Solapur	Jawaharlal Radio Service	184, Gold Finch Peth, nr Hotel Ritesh, Solapur - 413007.	0217-2725030	Prasanna J Chavan
Maharashtra	Thane	Umi Enterprises	G. F. Abhinan II , Opp. Forest Office, Teen Hath Naka, Thane (W)	022 65928384	Mr. Ritesh Panchal
Maharashtra	VASAI	E-Link Solutions	Shop No.5, Type C. Bldg no.5/6, Shanti Vihar, Mira Road -E, Pin Code : 401 107.	9322839386	Mr. OMKAR

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Maharashtra	VASHI	BEEKEYEN ENTERPRISES	Block No 1, Shop No. 17, Mahaveer Milan, Sector 28, Near Blue Diamond, Hotel, Vashi, New Mumbai	022-65114304	Mr. Shailesh
Maharashtra	VASHI	IG Service Centre- DAAC	H Block, Ground Floor, Dhruvhai Ambani Knowledge City, Navi Mumbai-400709	022-30386032	Mr. Rajnish
Maharashtra	VIRAR	Siddhivinyak Tele Services	Shop no 5&6, Vishnu Prasad Complex, Opp Ulkashu School, Near S.T. Bus stand, P.P. Marg., Virar (West) Pin 401305.	0250-3258111	Mrs. Yogita Kadam
Maharashtra	Wardha	Libra Electronics	Opposite to LIC office,Anvi Stand Main Road, Wardha :- 442001	245286	Ms. Manjusha
Maharashtra	Yavatmal	Star Electronics	Near Shyam Talkies Ram Mandir Road Yavatmal Maharashtra 445001	2324106	Mr.Snejay Chabda
Maharashtra	Yavatmal	Combine Electronics & Services	Shop No 13, 1st floor, Old Indra Gandhi Market, Azad Maidan Road, Yavatmal-445001	9822200166	Mr. Ajay Shukla
Maharashtra	Yavatmal	IT Services	Nr datay college,C/o Yahoo cyber cafe, Yavatmal 445001	9372610121	Mr. Umesh Gadve
Orissa	Anugul	Creative Solution	Haruman Bazar, Near gundicha mandir, Anugul-759122	06764-329207	Mr Tapas Sahu
Orissa	Balasore	Raghanath IT Solutions	Azimabad, Proof Road, Balasore-756001	06782-329267, 9337669107	Mr. Sujit Kr Sen
Orissa	Berhampur	Global Electronics	Gandhi Nagar, 1st Lane, Berhampur.	0680-2223124	Mr. D.B.Nepak
Orissa	Berhampur (Orisa)	RASHMI ELECTRONICS & COMPUTERS	Shop No.19, Sai Complex, Main Road, Gandhi Nagar, Berhampur, Orissa	0680-3290409	RASHMI RANJAN SHARMA
Orissa	BHADRAK	A B Associates	Nr.Reliance Web World Express, Bypass Road, BHADRAK-756001	9337040450	Kartik Chandra Rout
Orissa	Bhubaneswar	Miracle Services IT Estn.	Plot No. 136, Fr. Lane of Vigilance Office, Beh. Passport Office, Surya Nagar, BBSR.	0674-2390461, 2391533	Mr. Chaco/ Suprava
Orissa	Bhubaneswar	S.A.INFOSYS	291,Bomkhal, Opp.Akamra cinema hall, Bhubaneswar-751010	0674-2573114	Ashwini k saho
Orissa	Cuttack	O.A.INFOTECH	Behind Govt Bus Stand, Badambadi, Cuttack-753012	9338912613	Arabind Rout Ray
Orissa	Jajpurroad	Smruti Infotech	Dala Chhak, Jajpur Road, Jajpur	06726-324529	Mr Sumit Ranjan Nayak
Orissa	PURI	Bajjnath Infocomm	At Municipal Mkt, Grand Road, Puri-752001	9337032005	Mr.Ajay/ Sandeep Agrawal
Orissa	Rourkela	Infosys	13,Biora Road,subhadra complex Opp.Choudhary Petrol Pump, Rourkela	9337403999	Arun Chosh
Orissa	Sambalpur	A.N.Communication	Inf. Of Zilla School, Pensionpara, Sambalpur-768001	9337660919	Mr. Md. Abdul Aziz
Punjab	Amritsar	Bajaj Telecommunication	87, G Floor, Nehru Complex, Lawrence Road, Amritsar-143001	9814650314	Suman Bajaj
Punjab	Barnala	Unique Infotech	Mittal Street, Near M C Office, Barnala-148101	01679- 238007	Pankaj Goyal
Punjab	Batala	New Krishna Enterprise	Circular Road, Near Shekhani of Kothi, Batala	1871-396612	Navin Hamda
Punjab	Bathinda	Lall's Electronic Gallery	1139-A, First Floor, Amrik Singh Road, Nr Gole Digg, Bhatinda	0164-2239500, 2236337	Ashok Kakria
Punjab	Chandigarh	Vignesh Services	S.C.O- 189-90, Sec- 34, Chandigarh	0172-3018028	Mukesh Arya

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Punjab	Chandigarh	New Tech	SCO 495/496 SEC 35C First floor	9814244862	Mr Pawan
Punjab	Gurdaspur	S K Electronics	Ajit Singh Market, Batala Road, Nr. Petrol Pump, Gurdaspur	01874-329906	Mr. S.Sukhinder
Punjab	Hoshiarpur	Kuldip's Mobile Care	Dhobian Wali Gali,Phagwara Road, Hoshiarpur-	01882-226906	Kuldip
Punjab	Jalandhar	Mobile Center	235/1. Saheed Udham Singh Nagar,Backside Hotel Preet, Nakodar Road, Jalandhar-144001.	0181-3292666	Vikas Sangar
Punjab	Kapurthala	Arun Electronics	217.C Block,Jama Masjid, Shopping Complex-144601	01822 329254	Arun Khosla
Punjab	Kotkapura	OM MOBILE SERVICE CENTRE	1ST FLOOR DHANU RAM PANSARI , Railway Road-151204	1635-223069, 9815759239	ROHIT MITTAL
Punjab	Ludhiana	Shahi Communication	Shop No.5, 4X International, 583 L, Model Town, Ludhiana	0161-3244190	Amit Shahi
Punjab	Ludhiana	Anant Shree Comp	19K Opp PAU Gate no 1 Ferozpur Road	0161- 3245386	Ms Monia
Punjab	Malaut	KHURANA MOBILE SOLUTION	SHOP NO 7 OPP, NEW TELEPHONE EXCHANGE G T ROAD MALLUAT PIN NO - 152107	9316940003	RAMESH KHURANA
Punjab	Mieerola	Prime Infocomm	Opp. Main gate, Govt College, MaierKotla-148023	9317731979	Rohit Bansal/Raj Verma
Punjab	Mandi Gobindgarh	Aditya Infocom	Main Iron Market, Mandi Gobindgarh	9316320490	Naresh Aggarwal
Punjab	Mansa	Sharma Telecom	OPP.PARKASH BOOK DEPOT,NAGINA MARKET, MANSA	9316173009	Udesh Kumar Sharma
Punjab	Moga	Rashpal Telecom	6, Red Cross Road, Court Road, Near Old Court, Moga-142001	01636-222468	Mr. Rashpal Singh
Punjab	Nabha	Echo Telecom	Opp. Milan Palace Circular Road, NABHA 147201	01765-329244	Girish Garg
Punjab	Nawashar	Kapoor Electronics	Kothi Road, Opp Kumar Hotel, Nawashahr-144514	01823-509739	Narender Pal
Punjab	Pathankot	Touch InfoSys	189 Opp. Guru Nanak Park, Model Town, Pathankot.	0186-3290300	Mr.Navdeep Singh Bedi
Punjab	Pathankot	Leo Comp	Near Tourist hotel, military ground, Pathankot	9814586406	Mr Kamal
Punjab	Patiala	Image Services	84, First Floor, Leela Bhawan, Patiala-147001	0175-2222796, 9872281524	Rohit Bansal
Punjab	Phagwara	Bansal telecom	G T Road,Railway Road Chowk, Phagwara-144401	01824-461321, 9888005339	Mangalesh
Punjab	Rajpura	M K Enterprises	Shop no.6,Gurudwara Singh Sabha Market, Rajpura Town-140401	9316432866	Jahny
Punjab	Ropar	Arora Communication	Shop No.1,Lehari Shah Mandir Road,Ropar	9872363032	Amit Arora
Punjab	Samana	Sangam Mobile care	Tehsile Road,Near Garg Laboury	9316868292	Vaneet Kumar
Punjab	Sangrur	NATIONAL COMPUTERS	SUNAMI GATE, SANGRUR PIN NO - 148001	1672233335, 9814586196	SARABJIT SINGH
Punjab	Sarhind	A.S. Infocom	Grain Market,Cinema Road Sarhind City-140406	01763-324777	Jaspreet Singh
Rajasthan	Ajmer	Nehal Infotech	51, 2nd Floor, Inderlok Complex, Near Agra gate, Ajmer	3291404	Suresh sharma/ Shatrugan
Rajasthan	Ajmer	Prangan	112/10,Civil Lines,Ajmer		Pareek

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Rajasthan	Alwar	R.K.Telecom	SHOP NO.112, FIRST FLOOR, GANPATI TOWER NEAR NANGU CIRCLE , Alwar		Umesh sharma
Rajasthan	alwar	Pareek electronics	Opp. To Tehsil,Alwar		Pareek
Rajasthan	Beawar	Srikrishna Infocom	Chaoni Road, Bhagat Chauraha, Near Roadways Bus Terminus,Beawar	329675	Shravan
Rajasthan	Bhilwara	Ajanta Communications	No.3.Bapna Complex,Pur Road,Bhilwara	9351610212	Shravan
Rajasthan	Bikaner	Tech Solutions	1st floor,222&223, Ganspati plaza, KEM Road, Bikaner	3292423	Aziz/Yika
Rajasthan	chittorgarh	Arihant Infotech	A46,Meera Market, Near Rajasthan Patrika Office, Chittorgarh	325953	Abhishek
Rajasthan	chomu	Tambi Telelink	Kotwali chabutra, dhan ji ki gali, Sadar Bazar Chomu	9314090400	Arup tamba/DP Saini
Rajasthan	Dholpur	Tirupati Telecom	14,Bhagwati Market, Near Jagan Cinema hall, Jagan Tiraha,Dholpur		Moshin/Devender
Rajasthan	Jaipur	Alpha Infotech Systems	F-1, First Floor, Krishna Mall, Lakshmi Mandir Crossing, Tonk Road, Jaipur-302015	3299724	Shatrunjan mangal
Rajasthan	Jaipur	Vishwas Infotek	13-14,Indira Switch, Opp Chambal Power House, Hawa Sarak,Civil Lines,Jaipur-302016	3242050	Madan
Rajasthan	Jaipur	Alliance Communication	C6 City plaza,Space Cinema Hall,Jhotwara Road,Jaipur-16		Amit/Bhishan
Rajasthan	Jaipur	Solution Computers	Plot no4,Krishna nagar II, Janpath, Lalkothi, Near Hotel Paradise, Jaipur.		Dhreej mathur
Rajasthan	Jhunjunu	M S Mobile Point	Shop num.5,Karwan Complex,Opp Roadways Bus Stand,Jhunjunu		Abhishek/Sunil
Rajasthan	Jodhpur	Omega Electronics	UG/4, Adeshwar Tower, Main Chopasani Road, Opp.Gehlot Watch Co, Jodhpur-342003	3291214	Pratap singh
Rajasthan	Jodhpur	Space Electronics	Shop no4, Manidhari Hospital, Residency road, Jodhpur	3291214	Hemanbt
Rajasthan	Jodhpur	Digital electrocare	3/4B, 1st Polo Pawta,Jodhpur		Johender
Rajasthan	Kishangarh	Capital Enterprises	5,Radha Krishna market, Opp. Sardul school, Kishangarh	326550	Sharman
Rajasthan	Kota	Cyber Infosystems	26, Ground floor, Kalawati Palwal market, Gamanpura, Kota-324007	232153	Rais khan
Rajasthan	kota	Rajesh electronics	355,Shopping centre,Near Jain Mandir,Kota		Rajesh
Rajasthan	Kota	Saya electronics	1-TA-16,Vigyan Nagar,Kota		Lalit
Rajasthan	Kotputli	Isha Communications	11, ground floor, Govardhan plaza, Nehru Bazar, Kotputli		Vijender
Rajasthan	Nagar	Jam Apex	Shop num.7, Opp. Old power house, Station road, Nagar	329595	Amit
Rajasthan	Nathdwara	Geniune Infotech	Shop num.10,Suriya apartments, Opp.Vandana talkies, Bus stand, Nathdwara.	329208	Gajender
Rajasthan	Pali	Mansi Mobile	9,Vasant Vihar,Opp. Bangur college,Pali		Abhishek
Rajasthan	ShrigangNagar	Telecare Servicecs	33J Block, Near Birbal Circle, SriGanga nagar	3207687	Abhishek
Rajasthan	ShrigangNagar	Electro device care	10 H Block, Sri Ganga nagar.		Raman choudhary
Rajasthan	Sikar	Rita Computers	ShopNo4, Kabra Market, Shramdan Marg, Sikar		Sarav chakravartly

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Rajasthan	Udaipur	Ficusa Enterprises	13,Darshanpura,Opp.M8.Commerce College Gate, Nr Computer Zone,Udaipur-313002	2410002	Mahak/Virendra
Tamilnadu	Ambasamudram	THE MOST TECH	63D ,k.n.v.complex, Opp to Marichamman Temple , Ambasamudram	04634-251145	mr.stany
Tamilnadu	Arkonam	G.M. MARKETING	NO.3/4, SUBURAYAN STREET, ARAKKONAM-631001	04177-231395	Mr.p.gajepathi
Tamilnadu	Arni	Digitech Computers	Shop No. 201/82- B1, SM Road, Arani - 623101	04173-223929	d.mohan ram
Tamilnadu	Aruppukottai	THE MERCURY COMPUTERS	607, MADURAI ROAD, NEAR NEW BUS STAND, ARUPPUKOTTAI-626101	04566-222552	Mr.R.ROOMINATHAN
Tamilnadu	Attur	VRNET	V.R.Net,Dr.Anumugam complex,salem main road ATTUR	04282-243585	Mr.Senthil kumar
Tamilnadu	Baglagundu	Karthik Communications	No 221, Main Road , Baglagundu- 624202	9360019090	Mr Lakshmanan
Tamilnadu	Bhavani	Sri Abirami Electronics	2E , Pavadi Street, Arthiyur Corner, Bhavani-638301	04256-230919	Mr Balamurugan
Tamilnadu	Chegalapatu	SKB Electronics	No-42 Devarjanar pilai Street, Vedachalam Nagar, Chengalpet	044-37406080	Mr.Balaji
Tamilnadu	Chennai	Genesis Communication	63/3, First main road, Gandhi Nagar, Adyar, Chennai-600020	044-24401188	Mr Suresh
Tamilnadu	Chennai	CS Systems	547/352, F M Towers, Mount Road, Nandanam, Chennai-600035	044-24330889	Mr.Nicholus
Tamilnadu	Chennai	Sabisu	B2, Golden Enclave, New 275, Old 184, Poonamallee High Road, Kilpauk, CHENNAI 600 010.	044-26612347	Mr.palani
Tamilnadu	Chennai	Unicare Infocomm Services	No.293, Arcot Road, Next to Indian Overseas Bank, Kodambakkam Chennai - 24	044 24724666, 044 52047059, 09382306857	Kartik
Tamilnadu	Chennai	GARAGE DE TELECOM	OLD No:30: NEW No: 10, KMBF BUILDING,1ST FLOOR, DURAISAMY ROAD, NEAR POTHYS,T.NAGAR, CHENNAI 600017	044-28143454	
Tamilnadu	Chidambaram	Future Tech	Hasan Towers, 1st Floor, No. 14, V.G.P.Street, Near Hotel Ritz, Chidambaram	04144-222150	Mr.Shaker
Tamilnadu	Coimbatore	Fast track	138-C, TV Swamy Road (West) , RS Puram , Coimbatore - 641002	2551155 ,	Mr Anand
Tamilnadu	Coimbatore	Nucum Services	3/61, Master Building, Kattoor Road, Pappa Naicken, Palayam, Coimbatore - 641037.	4351569	Mr.Uthaman
Tamilnadu	Coimbatore	Classic Electronics - Coi.	No 1/1 , Alagappa Road , 6th St, Tatabad, Coimbatore - 640012	4374875	Mr Arivahagan
Tamilnadu	Cuddalore	Kasturi Cellular Service	NO. 37 (2C) BHARATHI ROAD, CUDDALORE. 607 001, CUDDALORE DISTRICT, TAMIL NADU.	04142 - 220183	Mr Raghupati
Tamilnadu	Cumbum	LC MOBILE SERVICE GALLERY	No 52, Ganthil Street, CUMBUM-625516	9360211100	Mr-Senthil kumar
Tamilnadu	Dharapuram	IT Zone	40-A-1, Bye Pass Corner, Dharapuram-624202	9360360779, 04258-329293	Mr Ramakrishnan
Tamilnadu	Dharmapuri	CALRITY DIGITAL PHOTO&AUDIO	98/29C KANDASAMY VADIYAR STREET, DHARMAPURM 636701	04342-265835	MR. RAJ MURUGESAN
Tamilnadu	Dindigul	padma electronics	15,Dudley High School, Dindigul	0451-2427080	murali chandra
Tamilnadu	Erode	Jans Electronics	29, Sathy Road, Near Hotel Oasis, Erode - 638004	3258526	Mr Kannan
Tamilnadu	Gobichettipalayam	BEST ELECTRONICS	47a/1, kms complex kachery medu, gobichettipalayam	04285-225598	Mr.g.jayalumar

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Tamilnadu	Hosur	Suryas will of people	R S Towers, Opp Traffic Police Station, Bangalore By Pass Road, Hosur-635109	04344-246687	Sharmugam
Tamilnadu	Kallikuruchi	NEW MAGESTIC CELL SALES&SERVICE	OPP TO TELEPHONE EXCHANGE, GANDHI ROAD KALLAKURICHI	04151-228270	MURUGESAN
Tamilnadu	Kancheepuram	Classic Mobile Care Centre	Door No.67-A, (Shop No.5), P.S.K. Street, Kancheepuram-631 501	9345636900	Mr. Damodaran
Tamilnadu	Karaikal	SHREE HARINI CELLULOR SERVICE	OPP. TO NEW BUS STAND , BHARATHI MAIN ROAD,KARAIKAL-609602	320544	K.SELVAGANPATHY
Tamilnadu	Karakudi	SITIYES ELECTRONICS	10 A / 3 , Muthukrishni Complex, Opp to Income Tax Office, Sekkai, Karakudi - 630002	9362611455	MR.SVEEPANDYAN
Tamilnadu	Karur	Awathi Electronics	108 ,Old Bye-pass Road , Near KG Hospital , Karur	9360244555 , 9367123748	Mr Satish Kumar
Tamilnadu	Kovilpatti	ST.MARYS CELLPHONES	No.6, Rajakumari Towers, AKS Theater Road, Kovilpatti	9360533649 / 9894133839	Mr. Iyyappan
Tamilnadu	Krishnagiri	Madura Care Centre	No 361, Crown Complex, Bangalore Main Road, Krishnagiri-635001	9364258223	Mr Suresh Kumar
Tamilnadu	Kumbakonam	FARGAN ELECTRONICS	NO.5 VRS COMPLEX, HAJIAR STREET, KLUMBAKONAM- 612001.	0435- 2401123, 3290303	SURBUDEEN
Tamilnadu	Kuzhithurai	Mobile Care	Shop no 211, SM Arcade, Main Road, Marthandam , Kuzhithurai - 629165	270587	Mr Surendra Kumar
Tamilnadu	Madurai	Deva Electronics	No.4, Thirumakulam North Street,Near Ayyappan kol, Thhallakulam, Madurai-625002	4360995	Gana
Tamilnadu	Mayiladuthurai	NRS MOBILE CITY	NO-28 - C/14, RR.COMPLEX, MAILADUTHURAI	04364-223277	ABDUL RAHIM
Tamilnadu	Nagercoil	Redeemer Electronics	Shop no 2, Pillars Gate, Balamore Road, Nagercoil-629001	04652- 327788, 9443453490	Mr.Dinkar
Tamilnadu	Namakkal	V.R CARE	77/2, Veera Vilas, Trichy Main Road, Namakkal - 637001	04286-329304	Mr. R.Vijyalakshmi
Tamilnadu	Ooty	MOUNTAIN CELL COM	NO:302,Band lane, Commercial road,Near Liberty Theatre, Ooty-643001.	0423-2443787	Mr.Sujith & Miss .Geetha
Tamilnadu	Palani	HI-TECH ELECTRONICS	No.76, New Dharapuram Road, Opp. ICICI Bank, Palani - 624601	04545-240244	Mr. rramachandran
Tamilnadu	Paramathy Velur	Vishwak Mobiles	No 5, KK High School Building, 98, High school Road, Paramathy Velur - 638182	04268- 224348, 9360110755	Mr Mohan
Tamilnadu	Pattukottai	MOBILE CARE	127, BIG STREET, PATTUKOTTAI	04373-252150	MR.ARUL ALAGAN
Tamilnadu	Perambalur	THE BEST	Vivkanand st., M.P. office opp., Perambalur	04328-275717	Mr.P.Kumar

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Tamilnadu	Perundurai	SREE BABY ELECTRONIC	483, mainroad, perundurai	04294-221800	Mr.shiva balan
Tamilnadu	Pilachi	STAR MOBILES	SHOP NO. 5 Ground Floor, Vasanth Complex, Immanam Street, POLLACHI.	04259-222230	Mr.Senthil Kumar
Tamilnadu	Pondicherry	Digital Logistics	126/2, Perumal Koil Street (Bharathi Street Cutting), Pondicherry-605001	9843093348	G Singaravelu
Tamilnadu	Pondicherry	BALAJI ELECTRONICS (ASC)PON-CHE	No.21, 3rd CROSS STREET, Annanagar, PONDICHERY	3090414	
Tamilnadu	Ponneri	SRI BALAJI MOBILE CARE CENTER	NO. 26, THALUKKA OFFICE ROAD, PONNERI, THIRUVALLUR DIST-601204	27973381	Mr-BALAJI
Tamilnadu	Port Blair	UNIVERSAL SERVICE CARE	R.G.T. ROAD, PORT BLAIR, ANDAMAN-744101	03192-329588	Mr.Naveen
Tamilnadu	Pudukkottai	YEM KAY ELECTRONICS	2, Subabharathi complex, 5378, 79, Alangudi Road, Pudukkottai-622001.	9344058441	Mr.Rajesh Kannan
Tamilnadu	Rajapalayam	SRI VIGNESH MOBILES	292V1, TENKASI ROAD, OPP BOMBAY LADCE, RAJAPALAYAM-626117	04563-220398	Mr. KJ.C.MUTHIAH
Tamilnadu	Ramanathapuram	ZEENATH TELECOM	13-8-23, PAL LUCKY PLAZA, Madurai Road , RAMANATHAPURAM-623501	04567-226750	Mr.M.S.JAHIR HUSSAIN
Tamilnadu	Ranjipet	Unicare Infocom Services	No.36, opp.Gangadhara Muddalair Middle School, MBT Road, Novelpur,ranjipet, Vellore Dist.	270806	Mr.Basker/ Mr.karthik
Tamilnadu	Rasipuram	SMS CARE SERVICE	No 179 / 1, Anna Salai, Ground Floor, Rasipuram-637208	9345052553	Mr Manikavasagam
Tamilnadu	Salem	Vishvesh Mobiles	Ssner Complex, 121/19A, Sarada College Road, Next to Abi Medical Centre, Salem - 636007	3290535	Vasudev Nayak
Tamilnadu	Sivakasi	TELE WORLD	78, PARSN PLAZA, Chariman Shanmuga Nadar Road , OPP.TQ.WATER TANK, SIVAKASI-626123	04562-325730	B.MATHAN KUMAR
Tamilnadu	Tamparam	SARAVANAS INFOCOM SERVICES PVT LTD	New No-43 ,Old No:5A,Mudichur road,Tamparam west,chenmai 600045	044-32915599	Mr.Palani/ Mr.ranjith
Tamilnadu	Tenkasi	AIRTONE	1/17, KMSS complex, west maini street, Tenkasi. 627811	04633-227980	Mr. MNagaraja sankar
Tamilnadu	Thanjavur	Z M Electronics	1006/1007, South East Rampart, Opp to Municipal Higher Sec School Tanjore - 613001	272595, 329554	Ziauddin
Tamilnadu	Tindivanam	REVA COMMUNICATIONS	Old No. 117/1, New No. 205/1, Nehru Street, Tindivanam - 604001	225250	LAKSHMI NARAYANAN
Tamilnadu	Tiruchendur	ARK MOBILE SOLUTIONS	ARK DTP centre, No. 1 a 7 North car street, Rayan Complex, Tiruchendur. 628215	04639-243330	Mr.Mahesh
Tamilnadu	Tiruchengode	BALAJI ELECTRONICS	108 s s d road,near lorry stand thiruchengode	04288-255157	Mr.sekar
Tamilnadu	Tirunelveli	Classic Electronic	39, Trivendrum Road, Opposite Kalimark, Welcome Complex, Palayamkottai, Tirunelveli-627002	2575801, 3290339	Erkins
Tamilnadu	Tirupattur	Acal Computer Systems	52/1, kkc complex, krishnagiri road, tirupattur	325385	sunder
Tamilnadu	Tirupur	Shri Vasavi Electronics	*# 155-303, Mangalam Road, Karuvam palayam, Tirupur -641604*	4244009	MR.L.B. Balu Murali


Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Tamilnadu	Tiruvanur	Softel Teleservices	No 21, Municipal Complex - Ground Floor, Panagal Road, Tiruvanur-610001	04366-22110, 9362721444	Mr Ravi
Tamilnadu	Tiruvellore	Yamkama Computer	38/1 85 JAWAHARLAL NEHRU ROAD, OPP TO SBI MAIN BRANCH, THIRUVALLUR - 602 001	37600329	Mr. Saravana
Tamilnadu	Trichy	S K Electronics	Raj Complex, 9/A EVR Road, Puthur, Trichy- 620017	277.194	Krishnan
Tamilnadu	Tuticorin	Snows Cell Care	Kala Complex, No 20.B-1,W G C Road, Tuticorin-628002	0461-2334043	Kennedy
Tamilnadu	Udumalpet	ALLWA ELECTRONICS	5 Thulava vellar shopping complex, V.O.C. street,LUDUMALPET.642126	04252-223047	Mr. Sertamarai kannan
Tamilnadu	Vaniyambadi	REVA COMMUNICATIONS	No.848/3, CL Road, Vaniyambadi - 635 751	395023	LAKSHMI NABAYANAN
Tamilnadu	Vellore	Matha Communication	4, S.L.N Plaza, Opposite Odai Pillar Koil, Gandhinagar,Vellore - 632006	0416-2240800	Gunaa Shekhar
Tamilnadu	Villupuram	BROAD BAND	no 642, nehruji road, VILLUPURAM	222936	Mr. Pragasam
Tamilnadu	Virudhunagar	RBG Electronics	76/9, Lakshmi Complex, Pullalakkottai Road, (Opposite Ushavar sandhal), Virudhunagar-626001.	04562-420160, 9344869593	Mr Karupuzwamy
U.P. (East)	Barabanki	Yash Enterprises	Rashid Enclave, Mugal Darbar, First Floor,nagar palika rd, Barabanki	9336323714	Mr. Ajay Srivastava
U.P. (East)	FAIZABAD	Microworld Computer Hardware Lab	1st floor, Baldev Plaza, Rekhabganj, Faizabad	9335098244	Kapil/Sunil
U.P. (East)	Fatehpur	TRIMURTI TELECOM SERVICES	230, SHADPUR CHAURAHHA, NASEPEER ROAD,FATEHPUR-212601	9336223093	Sanjay Sachan
U.P. (East)	Gonda	DIGITECH SERVICES	Suraj Complex Mahiya Nagar, Ground Floor.In front of Distt. Mahila Hospital, Gonda	9336695719	Atal Singh Chauhan
U.P. (East)	HARDOI	Shipra Electricals & Appliances	555 STATION ROAD, RAILWAY GANJ, HARDOI-241001	9335348407	Gaurav
U.P. (East)	JHANSI	Krishna Enterprises	372/A CIVIL LINES,GWALJAR ROAD, JHANSI-284001	9335090997	SUJEET
U.P. (East)	Kanpur	AAKARSH ELECTRONICS	63/2 C(9)BALAJI COMPLEX, THE MALL, KANPUR	9335360303	Mr.Raman
U.P. (East)	Kanpur	AR Infotech	111/402 Ashok Nagar, Kanpur Pin 208012		Amit Trivedi
U.P. (East)	Kanpur	LB Infotech	124/122A GOVIND NAGAR, KANPUR	0512-3207303	Deepak Bhatia
U.P. (East)	LAKHIMPUR	S S ELECTRONICS	CLRDARSHAN BUILDING, CACHEHRI ROAD, LAKIMPUR KHERI, LAKHIMPUR -262701	9335038258	SAURABH SINHA
U.P. (East)	Lucknow	ALFA ELECTRONICS	Shop No.GF20 ABC Complex, Kanpur Road, Lucknow	0522-3948730	Hajinder Singh


Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
U.P. (East)	Lucknow	Hitech Communication	SS 205, Road Cross Plaza, Badshah Nagar Crossing, Lucknow.	9335088061	MR.RAVI PRAKASH/ MR.RAJENDRA RAMAN
U.P. (East)	Lucknow	NET COM	3 way road, City Point, Opp Krishi Bhawan, Lucknow-226024	0522-3094222	Vinod Sharma
U.P. (East)	Lucknow	RR ENTERPRISES	Shop No.3,first floor, Deewan Chand Complex, 292/11 Chowk, Lucknow	0522-3262263	MR.YOGESH
U.P. (East)	Lucknow	MOBILE DOT COM	G2 Shri Ram Towers Ashok Marg, Lucknow	9335819202	Mr Anand /hour
U.P. (East)	Raebareilly	Karuna Enterprises	Shop No.3, Bajpai Market, Beliganj, Malk Main Road, Raebareilly	9336005741	Vikas
U.P. (East)	Sitapur	Higrade Computers	7, Municipal Market, Sitapur	05862-351808	Sanjeev Goel
U.P. (East)	SULTANPUR	S S INFOCOM	SHOP NO. 14&15 NANDINI COMPLEX NEAR SUPER MARKET SULTANPUR-228001	9335055217	SACHIN DWIVEDI
U.P. (East)	Unnao	Avijit Infocom	251 opp. Collector Ganj, Unnao	0512-6820020	VISHNU PANDEY
Uttar Pradesh	Agra	NSC Computers	Shop No G-124, Block No- 29, Sanjay Place, Agra -	9319111350	Rajeev Singhal
Uttar Pradesh	Agra	Ankur Care Centre	6/1, M.G.Road, Agra.	9412254152	Ankur Goyal
Uttar Pradesh	Agra	Space Consultancy & Services	UG.1 & 2, Opp. Jalhind Hotel, Merchant Chamber, Sadar Bazar, Agra	9358504140	Kapil Sharma / Rohan Pervej
Uttar Pradesh	Aligarh	Infocare	17, Vikram Arcade, Railway Road, Aligarh -	9359588880	Kamal Jain / Prabal bansal
Uttar Pradesh	Aligarh	A.V.Computer Services	City Enclave opp.Kumar Nursing Home Ramghat Road	9412274391	Vaivhar Gupta
Uttar Pradesh	Allahabad	RADIO CENTRE	SHOP NO-3 1ST FLOOR MEENA BAZAR, Allahabad	3292488	MR. MANISH KHANNA
Uttar Pradesh	Allahabad	B.P.Electronics	28, M.C.Marg, opp Rama Jewlers Civil lines, Allahabad-211001	3290315	Mr. Umesh Aggarwal
Uttar Pradesh	Allahabad	MICRONET SOLUTION	B.38/1 .SHOP NO. FF3 VISHASTHA VINAYAK TOWER, TASHKAND MARG, CIVIL LINES, ALLAHABAD	933559183	Mr. Hashmi
Uttar Pradesh	AMROHA	SHREE JEE TRADERS	KALSA ROAD NEAR MODABADI GATE, AMROHA	9319075289	SIDHARTH AGARWAL
Uttar Pradesh	AZAMGARH	RAJASTHALI	ASIF GANJ, CHOWK, AZAMGARH-276001	223644	MR.TRILOKI NATH/JALAIN
Uttar Pradesh	Badlyn	Customer Care Services.	Plaza Market 1st Floor Near Chantaghar siroad Badlyn.	9319086944	Mr. Nazim
Uttar Pradesh	BANIA	Sankatha Communications	Mall Godam Road Dr.S. N.Pandey Clinic Chowk Balia-277001. UP	9336635533	Mr. Manish
Uttar Pradesh	Bareilly	JAI INFOTECH	SA-96 DEENDAYAL PURAM BAREILLY	0581-3208484	Mr Rohit Tandon
Uttar Pradesh	Bareilly	Sapan Infotech	G - 64 A Kumar Complex, Near Gupta Watch Co,116 Civil Lines, Bareilly	9359102467	Mr. Dhivendra Negi
Uttar Pradesh	Basti	Royal Enterprises	Shop No.12 Nagar Palika Market, Company Bagh, Basti	9336784054	Sunil Kumar
Uttar Pradesh	BHADOI	Kislay Communication	VINDA MARKET NEAR TEHSIL, BHADOI-224101	9235506029	KISLAY
Uttar Pradesh	Bijnor	Konark Service Centre	Shop No.7,1st Floor, Near Ajaz Ali Hall, Nagar Palika Complex, Bijnor.	9358364067	Mr.Pratyush Gupta
Uttar Pradesh	Bulandshar	MN Telecom	Shop No-1 BHARAMAPUTRA COMPLEXKALA AAM, BULANDSHAR	9.358.011.688	Mr Tasbir Khan

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Uttar Pradesh	CHANDOUSI	OM TECHNOLOGIES	697, SITA ROAD,NEAR GANESH MANDIR, CHANDOUSI	9359986766	SACHIN GUPTA
Uttar Pradesh	DEORIA	ATHARAY COMMUNICATION	SHOP NO 5,SHANTI COMPLEX, HANUMAN MANDIR ROAD	9305012566	K.N.GUPTA
Uttar Pradesh	Etah	Triveni Computer Service	688/1 Vijay Nagar,Infront of Shradha Cinema, Thandi Sadak, Etah-207001	9719398761	Vinod Kumar
Uttar Pradesh	Etawah	Frontline Computer	132, Sivil Lines, Pakka Talab X-ing, Opp. HeroHonda Showroom, Etawah-206001	9219404194	Mr.Puneet Kaushik
Uttar Pradesh	FARRUKHABAD	WAVE TECHNOLOGIES	2 B./122 AVAS VIKAS, LOHIA PURAM, FARRUKHABAD-209625	9335921175	DHAMMEER
Uttar Pradesh	Ghaziabad	Charu Enterprises	Shop No.15,Opp. Sales Tax Check Post. G.T.Road,Mohan Nagar	0120-3223417	Mr.Chander Shekher
Uttar Pradesh	Ghaziabad	Concessionair Documentation India Pvt Ltd (CDLI)	C-83, Rajnagar District Center (RDC), Ghaziabad	0120-3292011, 4102418	Anil Tiwari
Uttar Pradesh	Ghaziabad	AZURE SYSTEMS	F-28 Konark Building, RDC, Raj nagar GZB	0120-2700717	Mr. Aseem Saraswat
Uttar Pradesh	Gorakhpur	Eternal Electronics	Shop No.11, Pandey Complex, 33, Kasya Road, Opp DIG Banglow, Gorakhpur -273001	3250395	Mr. Ajith
Uttar Pradesh	Gorakhpur	MM Communication	Udai Trade Centre, Opp Dr H.N.Singh Medical College, Basharatpur, Gorakhpur	3250395	Mr.Ashwani
Uttar Pradesh	Hapur	SMART SOLUTIONS	10, 1st Floor, City Plaza , Hapur, Ghaziabad - 388001	9319384063	Mr.Rajkumar Kanaoja
Uttar Pradesh	Hathras	Arya Electricals	Bldg No.2206.Near Mayfair Hotel, Kamlu Bazar, Hathras-204101	9319338655	Mr.Suneet Arya
Uttar Pradesh	Jaunpur	Shubham Postakalya	Mandi Naseeb Khan, Near Siya College,Jaunpur	9336510130	Sudhir/Sanjay
Uttar Pradesh	Jaunpur	SUPREME COMMUNICATION	J.P. Complex, Oland Ganj, Jaunpur	9235407278	Mr.Mahatab Raja beg
Uttar Pradesh	Kannoj	DOXIT MOBILE LAB	SHOP NO. A1 WARSI COMPLEX, LAKHAN TIRAHA, KANNOJ	9335042373	SUNIL DIXIT
Uttar Pradesh	Khatauli	Sigma Systems	A-6,Shivlok Market,Near Indra Murti, G.T.Road, Khatauli	9412582668	Mr.Alok Kumar
Uttar Pradesh	Mainpuri	Raj Communication	1002, Sadar Bazar, Near PNB , Mainpuri-205001 (LJP)	9358090251	Mr.Rishabh Khirbat
Uttar Pradesh	Mathura	R K Infocare	G-1, Athiya Palace, Sorkh Adda, Junction Road, Mathura-	9319999666	Alok Gupta
Uttar Pradesh	Meerut	Care Centre	G-19, Vandaman Plaza, Carh Road, Meerut.	0121-3249666	Mr.Ajay Mittal
Uttar Pradesh	Meerut	Systech Computers	F-124/125 1st floor Ganga Plaza, Begum Bridge Road, Meerut.	0121-4003194	Vinod Goyal
Uttar Pradesh	Meerut	CONCAP SERVICES	Labour Compound, Above Allahabad Bank,Near Akash Ganga Jewellers, Begum Bridge, Meerut	0121-2667942	Atul Mittal
Uttar Pradesh	Meerut	Essar Services	F-122/123 1st floor Ganga Plaza, Begum Bridge Road, Meerut.	4024894	Rajiv Gupta
Uttar Pradesh	MIRZAPUR	MOBILE ZONE	RAM MARKET, PASARHATTA BAZAR, MIRZAPUR-231001.	9335785979	MR.Anup
Uttar Pradesh	Modinagar	ANANYA COMMUNICATIONS	24,K.N.MODI COMPLEX, Modinagar-201204	01232-325424	Mr.Nitin
Uttar Pradesh	Moradabad	Bhavya Technologies	A12, 1st Floor, Rampur Road, Gandhi Nagar, Moradabad	0591-3292318	Vivek Kumar Singh

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
Uttar Pradesh	MUGSARA	SKY MOBILE WORLD	SUPER MARKET,MUGALSARA	255505	VIBHUTI JAISWAL
Uttar Pradesh	Muzaffarnagar	ADVANCE SERIES	Shop No-15 prakash chowk Muzaffarnagar-251001	09412210142	Mr. Rajiv
Uttar Pradesh	Muzaffarnagar	Jai Computers	Shop No. 4, 1st Floor, Roorkee road, Near Shiv Chowk,Central Bank Mit, Muzaffarnagar-251001	0131-3294447	Manohar Singh
Uttar Pradesh	Noida	M R Telecom	D-329, Sector 10, Noida, (Corner Building, Noida Stadium - Jhundpura Main Road)	0120-4312715	Kailash Aggarwal
Uttar Pradesh	Pilibhit	Kamal Electronics	Station Road, Pilibhit	9319911226	Mr. M A Jillani
Uttar Pradesh	PRATAPGARH	CHANDRA PRATAP VEER & CO	KATCHERY ROAD, CHOWK BAZAR, PRATAPGARH -230001	9335048271	RAJESH AGARWAL
Uttar Pradesh	RAMPUR	MAMTA TECHNOLOGIES	OPP JILA PANCHAYAT OFFICE, RAHE RAZA, RAMPUR	9319347583	RAJEEV YADAV
Uttar Pradesh	Saharanpur	Maharaj Communications	Near Maharaja Palace,Delhi Road, Saharanpur	0132-2720881	Pankaj Malhotra
Uttar Pradesh	Shahjahanpur	Sunny Mobile Point	258 B TARIN BAHADURGANJ, SHAHJANPUR	9335019616	Rajaram Maurya
Uttar Pradesh	Varanasi	Jaiswal Electronics	56/107 KACHAHRU CROSSING,NEAR COURT, VARANSI	3200375	Mr.Sujeet
Uttar Pradesh	Varanasi	Shivam Mobile Distributers	Shop No.5.B37/115-B-1 Baradari Complex, Rathaytra Crossing, Varansi Pin 221010	9335400000	Rishi Mohan
Uttaranchal	Almora	Kumar Telecommunications	Paltan Bazaar, Almora	9411525789	Mr. S Kumar
Uttaranchal	Dehradun	Krishna Communication	Shop No 15A, Meedo Plaza, Rajpur Road, Dehradun,Uttaranchal.	0135 3290895	Vinod
Uttaranchal	Dehradun	PROMPT SERVICES-DEH	133, Old Connaught Place, Dehradun	9359903573	Mr. Bipin
Uttaranchal	Haldwani	Fairdeal Agencies	1st Floor,Nainital Road,Uttaranchal Trade Centre,Tikonia Chouraha, Tikonia, Haldwani	09359136000	Mr.Ajay Gupta
Uttaranchal	Haridwar	Maharaj Computer Services	B-7, Royal Plaza, Ranipur Mod, Haridwar	9359209901	Mr. Kamal Sachdeva
Uttaranchal	Kashipur	Tripti Communications	Station Road, Main Market, Udamsingh Nagar, KASHIPUR	9837005991	Mr.Ajay Gupta
Uttaranchal	Roorkee	Geetanjali Telecom	Shop No.6, Shyam Market, BSM Tiraha, NehruNagar, Dehradun Road, Roorkee.	01332-326510	Mr. Manish Kumar
West Bengal	Assansol	Sky Computer & Telecom	Islam Market, Naruddin Road, Assansol-713301	2207719	Syed Ashad Ali
West Bengal	Besihut	Telelink	Beshihut Old Market(Bowbazar),Beshihut Dist,North 24pgs,Pin-743411	9332511610, 03217-325499	Mr. Sulanta Debnath.
West Bengal	Behrampur	CHAITANNYA ENTERPRISE	152, B B Sen Road, Sadar bazar, PO Behrampur, Distt Murshidabad,pin-742101	9333310161	SUBHAS CHANDRA BASAK
West Bengal	Bolpur	CYBER WORLD	59, SUPER MARKET, SANTINIKETAN ROAD, BOLPUR - 731204	9333759783	Mr.KISHOR KUMAR MUKHERJEE
West Bengal	Bongaon	MOLINA TRADERS	Jessore Road, Bongaon, Dist- North 24 th Pargana, PIN-743235	9332410022	Mr. Subir Dutta
West Bengal	Burdwan	San Infosys	27/1 G.T Road , East End, Burdwan -713103.	3290265	Sanjit Debnath
West Bengal	Durgapur	Digitech Service	Ashok Bhawan J.K.Pal Lane,Benachity, Durgapur-713213	3293600	Mr.Pintu Chatterjee

Slate	City	ASC Name	ASC Address	Phone No.	Contact Person
West Bengal	Habra	JOYRAM INFOTECH	51 Jessore Road, Habra Bazar, Des Market, Dist- 24th Pargana(North), PIN-743263	237608	Mr. Malay Das
West Bengal	Haldia	DIGITRONIX	Holding no -25 ,PO Kharjanchak, PS Durgachak, Haldia, Dist- East Medinipur-721602	9332987527	Suman Jana
West Bengal	Katwa	Devarshi Mobile Communication	Bhutrath Tala, Besides Ram Bhavan, Post - Katwa, Bardwan - 713130	03453-255197	Devananda Dutta
West Bengal	Kharagpur	S. J. Comnication	Inda Main Road, Khudram Ram Market, Kharagpur, Shop No-53, Pin -721305	9333745553	Mr.Suman Jana
West Bengal	Kolkata	Benma Infosol Pvt Ltd.	P-168/1 CIT Road, Scheme VIII, KOLKATA 700 067	033-32943176-7	Arun Surana
West Bengal	Kolkata	Friends Communication	32(8) Barasat Road,N/L 15 no railgate,PO-nonachandarpukur, PS-Titagarh, Barrackpore, Dist- North 24PCS, PIN-743102	033-25921263	Arup Sarkar & Tarasankar Mukherjee
West Bengal	Kolkata	Jakson Engineering Pvt Ltd	Block-A, Shop-1, Ambika Vihar,1/1 Hardutrai Chamaria Road,Howrah-711001	033-32950383	P.Mukherjee
West Bengal	Kolkata	JP Computers	5B Eidalia Place, Kolkata - 700019	033-24401923	Somim Kabir
West Bengal	Kolkata	Skylink	8/1A, Little Russel Street, Calcutta-700071	033-32903814	H R Molla
West Bengal	Kolkata	SOURAV TELECOM	195 BLOCK-J NEW ALIPUR, N/L New Alipur State Bank, KOLKATA-700053.	033-32511256	Amit Ghosh
West Bengal	Kolkata	Sun Mobile Service	15 B.T. Road, N/L Pelipara Bus Stop, Kolkata -700002	033-32505444	VIVEK KUMAR GUPTA
West Bengal	Kolkata	Sagnik	10A HO CHI MINH SARANI , KOLKATA-71	9830880150	RATHIN PAL CHOWDHURY
West Bengal	Krishnagar	ADDYA ELECTRONICS	13 MOHITOSH BISWAS STREET, P.O.KRISHNANAGAR, DIST: NADIA, PIN. 741101.	03472253031	MR ARJIT SEN
West Bengal	Malda	Classic Services	3 No Govt Colony, Near B.B. Medecine , Malda, Pin-732101	9332293622	Mr. S.P Garguly
West Bengal	Ranaghat	PRAYASH	30 SWAMI VYAKNANDA SARANI, RANAGHAT, DIST-NADIA	09333515949	Mr. Anar Nath Malick
West Bengal	Serampore	Sri Guru Mobile Service	87 B/15 G.T.Road (West), Hooghly Pin-712203	033-32528581	Shyamal Kumar Das
West Bengal	Siliguri	CARE	AT Mukherjee Road, Subhish Paly (PRANTIK), Near SILIGURI COLLEGE, PO- Siliguri, Dist - Deerjeeling.	9332211009	Mr.Sreyoj Datta
West Bengal	Tamluk	ZEROBIT	VII- Parbatipur, P.O.-Tamluk, Dist- Purba Midnapur,PIN-721636	9434110802	Mr. Chanalya Sengupta


LG | SERVICE



1800-180-9999*

**** 39-01-0909****

* MTNL / BSNL
** Prefix STD Code

