



KC910 User Guide

LG ELECTRONICS INC.

KC910 User Guide

ENGLISH

CE 0168 

P/N : MMBB0321304 (1.0) H

Bluetooth QD ID B014448



Some of the contents in this manual may differ from your phone depending on the software of the phone or your service provider.

KC910 User Guide



Congratulations on your purchase of the advanced and compact KC910 phone by LG, designed to operate with the latest digital mobile communication technology.

Set up	01
Your home screen	02
The basics	03
Get creative	04
Get organised	05
The web	06
Settings	07
Accessories	08

Contents

Set up

Getting to know your phone	8
Open view	10
Installing the USIM and battery	11
Memory card	14
Menu map	16

Your home screen

Touch screen tips	17
The quick keys	18
The status bar	19
Changing your status from the status bar	20
Using the Multitasking function	20

The basics

Calls	21
Making a call or video call	21
Making a call from your contacts	21
Answering and rejecting a call	22
In-call options	23
Adjusting the call volume	24
Speed dialling	24
Making a second call	24
Turning off DTMF	25
Viewing your call logs	25
Using call divert	26
Using call barring	26

Changing the common call setting	27
Changing your video call settings	28
Contacts	29
Searching for a contact	29
Adding a new contact	29
Contact options	30
Creating a group	31
Changing your contact settings	31
Viewing information	33
Messaging	34
Messaging	34
Sending a message	34
Entering text	35
T9 predictive	35
Abc manual	35
Keyboard	36
Handwriting recognition	36
Setting up your email	39
Retrieving your email	41
Sending an email using your new account	41
Changing your email settings	42
Message folders	43
Managing your messages	43
Using templates	44
Using emoticons	44
Changing your text message settings	44

Changing your multimedia message settings.....	45	Changing the video image size.....	61
Changing your other settings.....	46	Choosing a colour tone.....	62
Get creative		Using the inner video camera.....	62
Camera	47	Watching your saved videos	63
Taking a quick photo	47	Watching your videos on your TV	63
After you've taken your photo.....	48	Your photos and videos	64
Getting to know the viewfinder.....	49	Viewing your photos and videos.....	64
Using the flash.....	50	Using zoom when viewing a video or photo	64
Choosing a shot mode	50	Adjusting the volume when viewing a video	64
Adjusting the exposure.....	51	Capturing an image from a video	65
Taking a continuous shot	51	Viewing your photos as a slide show.....	65
Taking a panoramic shot	52	Setting a photo as wallpaper	66
Using the advanced settings.....	52	Editing your photos.....	66
Preview settings.....	52	Adding text to a photo.....	67
Other settings.....	53	Adding an effect to a photo	68
Changing the image size.....	55	Crop a photo	69
Choosing a colour effect.....	55	Morphing a photo.....	69
Using the inner camera.....	56	Adding a colour accent to a photo	69
Viewing your saved photos	56	Swapping the colours in a photo	70
Video camera	57	Editing your videos.....	70
Shooting a quick video	57	Trimming the length of your video...70	
After you've shot your video	58	Merging two videos together.....	71
Getting to know the viewfinder.....	59	Merging a photo with a video	71
Adjusting the exposure.....	60	Adding text to a video	72
Using the advanced settings.....	60	Overlaying a photo	73
Preview settings.....	60		
Other settings.....	61		

Converting a unit.....	94	Using your phone as a modem.....	102
Using the stopwatch.....	94	Settings	
Adding a city to your world time.....	95	Changing your screen settings.....	104
Jogging Buddy.....	95	Personalising your profiles.....	104
PC Sync.....	96	Changing your phone settings.....	105
Installing LG PC Suite on your computer.....	96	Changing your touch settings.....	106
Connecting your phone and PC.....	97	Changing your connectivity settings.....	107
Backing up and restoring your phone's information.....	97	Using memory manager.....	108
Viewing your phone files on your PC.....	97	Using flight mode.....	109
Synchronising your contacts.....	97	Sending and receiving your files using Bluetooth.....	109
Synchronising your messages.....	98	Pairing with another Bluetooth device.....	111
Using your phone as a mass storage device.....	98	Using a Bluetooth headset.....	111
DivX Converter.....	99	Wifi.....	112
The web		Accessories.....	113
Browser.....	100	Network service.....	114
Accessing the web.....	100	Technical data.....	114
Adding and accessing your bookmarks.....	100	Guidelines	
Using RSS reader.....	101	Guidelines for safe and efficient use.....	116
Saving a page.....	101	Trouble Shooting.....	122
Accessing a saved page.....	102		
Viewing your browser history.....	102		
Changing the web browser settings.....	102		

Getting to know your phone

Inner camera lens

Proximity Sensor


End/Power key

Ends or rejects a call.
Turns the phone on/off.
Press once to return to
the home screen.

Multitasking key

Call key

Dials a phone number and
answers incoming calls.

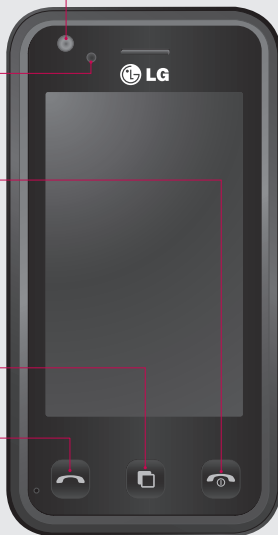

⚠ WARNING: Placing a heavy object on the phone or sitting on it while it is in your pocket can damage the phone's LCD and touch screen functionality.



Charger, Cable, Handsfree connector

TIP: To connect the USB cable, wait until the phone has powered up and has registered to the network.

Micro SD memory card socket



Side keys

- **When the screen is idle:** volume of key tone.
- **During a call:** volume of the earpiece.
- **When playing a BGM track:** controls volume continuously.

Lock/ Unlock key (image stabilization key in camera)

Capture button

01

02

03

04


05

06

07

08

Open view

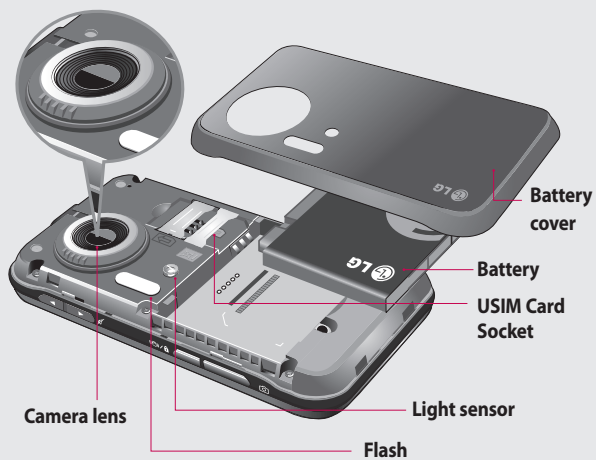

Installing the USIM and battery

1 Remove the battery cover

Press and hold down the battery release button at the top of the phone and lift off the battery cover.



WARNING: Do not use your fingernail when removing the battery.

WARNING: Do not remove the battery when the phone is switched on, as this may damage the phone.

2 Remove the battery

Hold the top edge of the battery and lift it from the battery compartment.



01

02

03

04

05

06


07

08

Installing the USIM and battery

3 Install the USIM card

Slide the USIM card into the USIM card holder. Make sure that the Golden contact Area on the card is facing downwards. To remove the USIM card, pull it gently in the opposite direction.

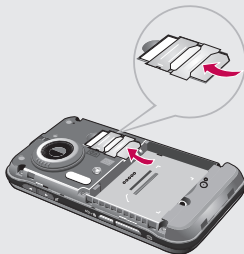


4 Install the battery

Insert the top of the battery first into the top edge of the battery compartment. Ensure that the battery contacts align with the terminals on the phone. Press down the Battery Until it clicks into place.



5 Charging your phone

Open up the cover of the charger socket on the side of your KC910. Insert the charger and plug into a mains electricity socket. Your KC910 will need to be charged until a message reading "Battery full" appears on screen.

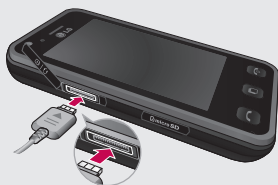

01

02

03

04

05

06

07

08


Memory card

Installing a memory card

You can expand the memory space available on your phone using a memory card. The KC910 will support up to a 8GB memory card.

NOTE: A memory card is an optional accessory.


- 1 Open the memory card cover.
- 2 Slide the memory card into the slot, until it clicks into place. Make sure that the gold contact area is facing downwards.



- 3 Close the memory card cover.

Formatting the memory card

Your memory card may already be formatted. If your card isn't formatted, you will need to format it before you can begin using it.

- 1 From the home screen select  then touch **Settings** and choose **Phone settings**.
- 2 Touch **Memory manager** then choose **External memory**.
- 3 Touch **Format** and then confirm your choice.
- 4 Enter the password, if one is set, and your card will be formatted and ready to use.

TIP! To change your default storage destination, open Memory manager from the Phone settings menu and select Primary storage settings.

NOTE: If your memory card has existing content on, it will automatically be filed in the correct folder, for example, videos will be stored in the My Videos folder.

Transferring your contacts

To transfer your contacts from your USIM to your phone:

- 1 From the Communicate tab, select **Contacts** and choose **Contact settings**.
- 2 Touch **Copy**.
- 3 Choose **USIM to Handset**.
- 4 Choose **Select all** or choose names one by one and touch **Done**.

01

02

03

04


05

06

07

08

Menu map

Touch  in the home screen to open a **Top menu**. From here you can access further menus: **Communicate**, **Entertainment**, **Utilities** and **Settings**.



Communicate



Dialling



Speed dials



Contacts



Call history



New message



New Email



Messaging



Entertainment



Gallery



My stuff



Camera



Video camera



Muvee Studio



Music



FM radio



Games & apps



Utilities



Browser



Google



Organiser



Alarms



Memo



Voice recorder



Tools



USIM Services



Settings



Profiles



Screen settings



Phone settings



Call settings



Touch settings



Connectivity



Bluetooth



Wi-Fi

Your home screen

Whenever your KC910 is not in use it will return to your home screen. From here you can access all menu options, make a quick call and view the status of your phone - as well as many other things.

Touch screen tips

The home screen is also a great place to get accustomed to the touch screen.


To select an item, touch the icon accurately. Your KC910 will vibrate slightly when it recognises you've touched an option.

To scroll through lists, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

- There's no need to press too hard, the touchscreen is sensitive enough to pick up on a light yet firm touch.
- Use the tip of your finger to touch the option you require. Be careful

not to touch any other keys.

- When the screen light is off, press and hold the Unlock/Lock key on the left hand side to restore the home screen.
- Don't cover the phone with a case or cover as the touch screen will not work with any material covering it.
- When you touch **W** the mobile widget shows up. You can drag and click what you need right away.



Quick keys

01

02

03

04

05

06

07


08


Your home screen

The quick keys

The quick keys on your home screen provide easy, one-touch access to your most used functions.



Touch to bring up the touch dialling pad to make a call. Input the number as you would using a normal key pad and touch **Call** or press the  hard key.

To initiate a video call with the number, press  after inputting the number and choose **Make Video call**. See page 21 for details.



Touch to open your contacts. To search for the number you want to call. Enter the name of the contact using the touchpad. You can also create new contacts and edit existing ones. See page 30 for details.



Touch to access the Messaging options menu. From here you can create a new SMS. See page 34 for details.


























Touch to open the full Top menu which is separated into four sub-menus. Touch the vertical tabs to view further options.

The status bar

The status bar uses various icons to indicate things like signal strength, new messages and battery life as well as telling you whether your Bluetooth or GPRS is active.

Below is a table which explains the meaning of icons you're likely to see in the status bar.

Icon	Description
	Multitasking
	Network signal strength (number of bars will vary)
	No network signal
	Remaining battery life
	Battery empty
	New text message
	New voice message
	Message inbox is full
	Message sending failed
	An alarm is set

Icon	Description
	Normal profile in use
	Outdoor profile in use
	Silent profile in use
	Headset profile in use
	Calls are diverted
	EDGE in use
	Roaming
	Flight mode is on
	Bluetooth is active
	Wifi connected
	GPS on (Geo-tagging, Jogging buddy)
	Memory card inserted
	Browser Connected

01

02

03

04

05

06


07

08

Your home screen

Changing your status from the status bar


Touch the current status icon that represents your current setting in the status bar to open the Status Summary. It shows the current Time, Network, SVC ID, Battery, Handset memory, External Memory, Profile, MP3, Bluetooth and Wifi status. You can set Profile type, play/pause MP3 and activate/deactivate Bluetooth and Wifi.



Using the Multitasking function

Press the multitasking hard key to open the Multitasking menu. From here you can view all the applications you have running and access them with one touch.




From any application, press the Multitasking key and select Home screen to return to the home screen without exiting or closing the application.


When you have an application running in the background (e.g. a game or the FM radio),  will appear in the status bar.

When you press this key from the home screen, you can view a short cut menu to some commonly used functions, including **New message** and **Alarms**.


Calls


Making a call or video call

- 1 Touch  to open the keypad.
- 2 Key in the number using the keypad. To delete a digit press the clear key.
- 3 Touch the  hard key to initiate the call.
- 4 To end the call press the  hard key.


TIP! To enter + for making an international call, touch  twice.


TIP! Press the lock/unlock button on the right side of the handset to lock the touchscreen to prevent calls being made by mistake.

TIP! To bring up the keypad during a call, touch the  key.

TIP! You can **Make video call**, **Send message**, **Save number** or **Search contacts** by tapping .

Making a call from your contacts

- 1 From the home screen touch  to open Contacts.
- 2 Touch Name and enter the first few letters of the contact you would like to call.
- 3 From the filtered list, touch the contact you'd like to call and select the number to use if you have more than one saved.
- 4 Touch **Call**.

TIP! Press  and you can choose from **Add contact**, **Send message**, **Delete**, **Speed dials**, **My business card** and **Search by group**.

01

02

03

04


05

06


07


08



Calls

TIP! You can search your contacts from the call screen. Touch  in right lower column of screen Scroll through your contacts or enter the first few letters of a name to filter the list.


Answering and rejecting a call


When your phone rings press the  hard key to answer the call.


Tap  to mute the ringing. This is great if you've forgotten to change your profile to Silent for a meeting.

Press the  hard key to reject an incoming call or touch  on the screen.


In-call options





Speaker - Touch  to turn on the speaker phone.

Mute - Touch  to turn off the microphone so the person you are talking to cannot hear you.

Options - Choose from a list of further in-call options, including Create new memo and Go to messages, so you can check your messages and add contacts during a call. You can also end the call from here by touching End call.

 - Choose to search your contacts during a call.

 - Choose to add another person to the call.

 - Touch to open a numerical keypad for navigating menus with numbered options. For example, when dialling call centres or other automated telephone services.

TIP! To scroll through a list of options or your list of contacts, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

01

02

03

04

05

06

07

08



Calls


Adjusting the call volume

To adjust the volume during a call, use the up and down button on the right side of the phone.

Speed dialling





You can assign a frequently-called contact to a speed dial number.

- 1 From the home screen touch  to open Contacts.
- 2 Touch  and choose **Speed dials**.
- 3 Your voicemail is already set to speed dial 1. You cannot change this. Touch any other number to assign it a speed dial contact.
- 4 Your contacts will open. Select the contact you'd like to assign to that number by touching the phone number once.

To call a speed dial number, touch  from the home screen then press and hold the assigned number until the contact appears on screen.

The call will initiate automatically, there's no need to press **Call**.


Making a second call

- 1 During your initial call, touch  and select the number you want to call.
- 2 Dial the number or search your contacts (see **Making a call** on page 21 for details).
- 3 Press  to connect the call.
- 4 Both calls will be displayed on the call screen. Your initial call will be locked and the caller put on hold.
- 5 To change between the calls, touch  and choose **Swap call** or press the number of the held call.
- 6 To end one or both calls press  and select **End** followed by **All**, **Held** or **Active**.

NOTE: You will be charged for each call you make.


Turning off DTMF

DTMF allows you to use numerical commands to navigate menus within automated calls. DTMF is switched on as default.

To turn it off during a call (to make a note of a number for example) touch  and select DTMF off.

TIP! To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

Viewing your call logs

Touch  and select **Communicate** and tap **Call history**.


Choose to view:

All calls - View a complete list of all dialled, received and missed calls.

Dialled calls - View a list of all the numbers you have called.

Received calls - View a list of all the numbers that have called you.

Missed calls - View a list of all the calls you have missed.

TIP! From any call log touch  and **Delete all** to delete all the recorded items.

TIP! Touch any single call log entry to view the date, time and duration of the call.

01

02

03

04

05


06

07

08

Calls

Using call divert

- 1 Touch , select **Settings** and choose **Call settings**.
- 2 Touch **Call divert** and choose **Video calls** and/or **Voice calls**.
- 3 Choose whether to divert all calls, when the line is busy, when there is no answer or when you are not reachable.
- 4 Input the number you'd like to divert to.
- 5 Touch **Request** to activate.

NOTE: Charges are incurred for diverting calls. Please contact your network provider for details.


TIP! To turn off all call diverts, choose **Deactivate all** from the **Call divert** menu.

Using call barring

- 1 Touch , select **Settings** and choose **Call settings**.
- 2 Touch **Call barring** and choose **Video calls** and/or **Voice calls**.
- 3 Choose any or all of the five options:
 - All outgoing**
 - Outgoing international**
 - Outgoing international calls except home country**
 - All incoming**
 - Incoming when abroad**
- 4 Enter the call barring password. Please check with your network operator for this service.

TIP! Select **Fixed dial number** to turn on and compile a list of numbers which can be called from your phone. You'll need your PIN2 code from your operator. Only numbers included in the fixed dial list can be called from your phone.

Changing the common call setting

- 1 Touch , select **Settings** and choose **Call settings**.
- 2 Touch **Common settings**. From here you can amend the settings for:
 - Call reject** - Slide the switch left to highlight the Reject list. You can touch the text box to choose from all calls, specific contacts or groups, or those from unregistered numbers, No caller Id (those not in your contacts). Touch **Save** to change the setting.
 - Send my number** - Choose whether your number will be displayed when you call someone.
 - Auto redial** - Slide the switch left for **On** or right for **Off**.
 - Answer mode** - Choose whether to answer the phone using the send key or any key.

Minute minder - Slide the switch left to **On** to hear a tone every minute during a call.

BT answer mode - Select **Hands-free** to be able to answer a call using a Bluetooth headset, or select **Handset** to press a key on the handset to answer a call.

Save new number - Select **Yes** to save a new number.

TIP! To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

01

02

03

04

05

06

07

08

Calls

Changing your video call settings



- 1 Touch , select **Settings**, **Call settings** choose **Video call settings**.
- 2 Choose the settings for your video calling. Determine whether to Use private picture and select one, and/or switch on the mirror to see yourself on screen when making a video call. Switch on the mirror to show the mirror effect on the video caller screen


Contacts

Searching for a contact

There are two ways to search for a contact:

From the home screen

- 1 From the home screen touch  to open Contacts. Touch Name and enter the name of the contact using the key pad.
- 2 Touch **Call** or the  hard key to initiate the call.

TIP! You can search by group by touching  and selecting **Search by group**. This will bring up a list of all your groups.


From the main menu


- 1 Touch , select **Communicate**.
- 2 Touch **Contacts** and **Search**.

TIP! The alphabetical keypad is displayed once you tap Name.

TIP! To scroll through your list of contacts, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

Adding a new contact

- 1 From the home screen touch  then select **Add contact**.
- 2 Choose whether to save the contact to your **Handset** or **USIM**.
- 3 Enter the first and last name of your new contact. You do not have to enter both, but you must enter one or the other. You can add only number in Contacts without name also.

TIP! Once you have typed in a name, press  to edit the rest of the information for your contact.

01

02

03

04

05

06

07

08


Contacts

- 4 Enter up to five different numbers and assign a type for each. Choose from **Mobile, Home, Office, Pager, Fax, VT and General.**
- 5 Add an email address.
- 6 Assign the contact to one or more groups. Choose from **No group, Family, Friends, Colleagues, School** or **VIP.**
- 7 You can also add a **Ringtone, Birthday, Anniversary, Homepage, Home address, Company name, Job title, Company address** and a **Memo.**
- 8 Touch **Save** to save the contact.

TIP! You can create customised groups for your contacts, see **Creating a group** on page 32.

Contact options



There are many things you can do when viewing a contact. Here's how to access and use the options menu:

- 1 Open the contact you'd like to use. See **Searching for a contact** on page 29.
- 2 You can call or send a message directly from here.
- 3 Press  to open the list of options. From here you can:
 - Make a video call** - Video call the contact.
 - Edit** - Change any of the contact's details.
 - Delete** - Delete the contact. Touch **Yes** if you are sure.
 - Copy or Move to USIM/Handset** - Choose to move or copy to the USIM card or handset (depending on where you originally saved the contact).


Send business card - Send the contact's details to another person as a business card. Choose to send as a **Text message**, **Multimedia message**, **Email** or via **Bluetooth**.

TIP! Message - Send a message to the contact. See page 34 for details on how to send messages.

Creating a group

- 1 From the home screen touch  and select the **Communicate** tab. Touch **Contacts** and select **Groups**.
- 2 Touch .
- 3 Select **Add group**.
- 4 Enter a name for your new group.
- 5 Select **Add a Ringtone** and choose.
- 6 Touch **Save**.

NOTE: If you delete a group, the contacts which were assigned to that group will not be lost. They will remain in your contacts.

TIP! You can edit an existing group by highlighting it and touching . Choose to Add contacts, Rename the group, Delete a group, Add members or assign a Group ringtone.

Changing your contact settings

You can adapt your contact settings so that your Contacts suits your own preferences.

TIP! To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

01

02

03

04

05

06

07


08

Contacts

1 From the Communicate tab touch **Contacts** and select **Contacts settings**.

2 From here you can adjust the following settings:

Contact list settings - Choose whether to view contacts saved to both your **Handset & USIM**, **Handset** only or **USIM** only.

You can also choose to show the first name or last name of a contact first. You can display with quick command key among Make voice call, Make video call or Send a message. In contact list touch  to call directly. You can change this setting. (Make voice call/ Make video call/ Send message/ Do not display)

Synchronise contacts - Connect to your server to synchronise your contacts. See **Synchronising your contacts** on page 108.

Copy - Copy your contacts from your USIM to your handset or from your handset to your USIM. Choose to do this one at a time, or all at once. If you select one at a time, you'll need to select each contact to copy one by one.

Move - This works in the same way as Copy, but the contact will only be saved to the location you've moved it to. So, if you move a contact from the USIM to the handset it will be deleted from the USIM memory.

Send all contacts via Bluetooth - Send all of your contacts to another device using Bluetooth. You will be prompted to turn on Bluetooth if you select this option.

Backup contacts - See **Backing up and restoring your phone's information** on page 97.

Restore contacts - See **Backing up and restoring your phone's information** on page 97.

Clear contacts - Delete all your contacts. Touch **Yes** if you are sure you want to wipe your contacts.

Viewing information

- 1 From the Communicate tab touch **Contacts** and **Information**.
- 2 From here you can view your **Service dial numbers**, your **Own number**, your **Memory info.** (how much memory space you've got left) and **My business card**.

TIP! If you've yet to add a business card for yourself, select **My business card** and enter all your details as you would for any contact. Touch **Save** to finish.

01

02

03

04

05

06

07


08

Messaging

Messaging

Your KC910 combines SMS, MMS and email into one intuitive and easy to use menu.


There are two ways to enter the messaging centre:


- 1 From the home screen, touch  or touch , then select **Communicate** and choose **Create new message**.

Sending a message

- 1 Touch  then **Create new message** to open a blank message.
- 2 From here you can choose **Message** to send an SMS or MMS, or choose Email to send an email. See page 41 for details.
- 3 Touch **Insert** to add an image, video, sound, New slide, Subject or More (Business card, Calendar, Memo, Task, My business card, Template, Emoticon, Name & Number AND document).

- 4 Touch Recipient to enter the recipient's number, or touch the search icon to open your contacts. You can add multiple contacts. When you are finished, touch **Send**.

 **WARNING:** You will be charged per 160 character text message for each person that you send the message to.

 **WARNING:** If an image, video or sound is added to an SMS it will be automatically convert to an MMS and you will be charged accordingly.

TIP! Quick reply - Send a reply promptly to the selected message using a template.


You can send your message by selecting group at a time. Also you can send the scheduling message, for the detail refer to in 90 page.


Entering text


There are five ways to enter text:


Keypad, Keyboard, Handwriting-Screen, Handwriting-Box, Handwriting-Double Box.

Tap the screen once, then the keyboard shows up.

 Touch to turn on T9 predictive text.


 You can change the writing languages.

 Tap to change between the numbers, symbols and texts keypads.

Use  to scroll through the different text entry mode (for example, capitals or lowercase).

To enter a space touch .

T9 predictive

In T9 mode you will see .

T9 mode uses a built-in dictionary to recognise words you're writing based on the key sequences you touch. Simply touch the number key

associated with the letter you want to enter, and the dictionary will predict the word you want to use.

For example, press 8, 3, 5, 3, 7, 4, 6, 6, 3 to write 'telephone'.

If the word you want doesn't appear, touch **Spell**. If you touch **Spell** you can then enter the word using Abc manual mode and your word or name will be added to the dictionary.

Abc manual

In Abc mode you will see .

In Abc mode you must touch the key repeatedly to enter a letter. For example, to write 'hello', touch 4 twice, 3 twice, 5 three times, 5 three times again, then 6 three times.

01

02

03

04

05

06

07

08

Messaging

Keyboard

In Keyboard mode the screen flips to landscape and a full keyboard appears on screen.

Simply touch each letter to write your message and press:

▲ to switch to upper case

TIP! Keyboard mode predicts and shows what it thinks you will type next. These words are predicted based on the sentences you have typed in so far. If you do not wish to use the suggested words, keep typing in new words.

Handwriting recognition

In Handwriting mode you simply write on the screen and your KC910 will convert your handwriting into your message. Select **Screen** or **Box** depending on your preferred view. (Handwriting- Screen, Handwriting-Box, Handwriting-Double Box.)

Handwriting-Screen enables you to input one letters continuously on the full screen.

Handwriting-Box enables you to input a letter at a time. There is a separate area to input symbols, numbers and letters.

Handwriting-Double Box has two boxes to input letters alternately so you can input letters continuously.

⚠ WARNING: You may find it easier to use a stylus in this mode, please remember to press lightly to protect your screen from damage.

Handwriting recognition translates stylus gestures into letters, numbers or other character, and displays these characters as text. Handwriting recognition is only active where text can be entered.

Note: Most letters can be written using different stroke styles. See the tables below. The arrow selects whether the letter is upper or lower case, not the style of writing.

Alphabet

If you select capital letter mode (ABC), letters you type will be inserted as capital letters even if you write in small letters, and vice versa.

Letter	Strokes
A	A A' a a'
B	B B b b'
C	C C
D	D D d d'
E	E E e E'
F	F F f F'
G	G G g G'

Letter	Strokes
H	H H h h'
I	I I i i'
J	J J j j'
K	K K k k'
L	L L l l'
M	M M m m'
N	N N n n'
O	O O o o'
P	P P p p'
Q	Q Q q q'
R	R R r r'
S	S S s
T	T T t t'
U	U U u u'
V	V V v v'
W	W W w w'
X	X X x x'
Y	Y Y y y'
Z	Z Z z z'
ß	ß

01

02

03

04

05

06

07

08

Messaging

Accented characters


Accent	Strokes
Space	
Backspace	
Enter	
Switching the text mode	

Punctuation marks

Mark	Strokes
Full stop	
At @	

Note: Start each stroke at the dot.

Numbers

Touch  to switch from text entry to number entry.

Number	Strokes
0	
1	
2	
3	
4	

5	
6	
7	
8	
9	

Accented letters

Write the character as described above, then write the accent above the entered letter. Other such characters, for example, ö and ü, follow the same principle.

grave		
acute		
circumflex		
tilde		
ring		
dieresis		
cedilla		

Setting up your email

You can stay in touch on the move using email on your KC910. It's quick and simple to set up a POP3 or IMAP4 email account.

TIP! To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

- 1 Touch  from the home screen, and touch **Messaging**.
- 2 Select **Message settings** then **Email**.
- 3 Select **Email accounts** then touch **Add new**.
- 4 You can now choose how your account works:
Username - Enter the account's username.
Password - Enter the account's password.

Email address - Enter the account email address.

Reply email address - Enter the 'reply to' email address.

Outgoing mail server - Enter the outgoing email server address

Incoming mail server - Enter the incoming email server address

Maximum receive size - Choose the size limit of your emails, the maximum is 2MB.

Mailbox type - Enter the mailbox type, POP3 or IMAP4.

Save to server - Choose whether to save your emails to the server. For IMAP4 accounts copies are always saved.

01

02

03

04

05

06

07

08

Messaging

Save sent mail into - Select whether to save sent emails (when the mailbox type is set to IMAP4). When the mailbox type is POP3, sent mails are always saved into handset.

Retrieve only new - Choose whether to discard emails already downloaded.

Access point - Choose your Internet access point.

Email to retrieve - Choose the way to download emails. Choose from Header only or All including body for POP3, header only, header + body, or all for IMAP4.

Auto retrieve - Choose whether to retrieve your new emails automatically.

Advanced settings - Choose whether to use the advanced settings.

SMTP port number - Normally, this will be 25.

SMTP TLS/SSL - Choose whether to use TLS/SSL for outgoing server.

Incoming server port - Normally, this is 110 for POP3 accounts and 143 for IMAP4 accounts.

Incoming TLS/SSL - Choose whether to use TLS/SSL for incoming server.

SMTP authentication - Choose the security settings for the outgoing mail server

SMTP Username - Enter the SMTP username.

SMTP Password - Enter the SMTP password.



APOP secure login - Choose to activate APOP secure login for a POP3 account. IMAP4 accounts are always set to off.

Now your account is set up, it will appear in the list of accounts in your Email folder.


Retrieving your email

You can automatically or manually check your account for new emails. See **Change your email settings** on page 42 to check automatically.

To check manually:

- 1 Touch  then **Messaging**.
- 2 Select **Mailbox**.
- 3 Touch the account you want to use then .
- 4 Choose **Retrieve** and your KC910 will connect to your email account and retrieve your new messages.

Sending an email using your new account

- 1 Touch  in the Communicate menu to open a new blank message.
- 2 You can enter the recipient's address and write your message. You can also attach images, videos, sounds or other file types.
- 3 Touch **Send** and your email will be sent.

TIP! You can upload Word, Excel, PowerPoint and PDF documents to your KC910 so you can review them on the move.

01

02

03

04

05

06

07


08

Messaging

Changing your email settings

You can change your email settings according to your own preferences.

TIP! To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

- 1 Touch  from the home screen, and choose **Messaging** and **Message settings**.
- 2 Select **Email**.
- 3 You can adapt the following settings:
 - Email accounts** - Manage your email accounts.
 - Allow reply Email** - Choose to allow the sending of read confirmation messages.
 - Request reply Email** - Choose whether to request read confirmation messages.
 - Retrieve interval** - Choose how

often your KC910 checks for new email messages.

Retrieve amount - Choose the number of emails to be retrieved at one time.

Include message original - Choose to include the original message in your reply.

Include attachment - Choose to include the original attachment in any reply.

Auto retrieval in Roaming - Choose whether to retrieve your messages automatically when abroad (roaming).

New email notification - Choose whether to be alerted to new emails.

Signature - Create an email signature and switch this feature on.

Priority - Choose the priority level of your email messages.

Mail sending size - Choose the size of email you send.

Message folders

You'll recognise the folder structure used on your KC910, which is fairly self-explanatory.

Create new message - Open a new blank message.

Inbox - All the messages you received are placed into your inbox. From here you can view, delete and do more, see **Managing your messages** below for details.

Mailbox - All the emails you receive on your KC910 will be placed in your mailbox.

Drafts - If you don't have time to finish writing a message, you can save what you've done so far here.

Outbox - This is a temporary storage folder while messages are being sent.

Sent items - Messages you send are placed in this folder.

My Folders - Create folders to store your messages.

Templates - Use a list of commonly used text and multimedia message templates.



Emoticons - Add and insert emoticons for your messages.

Message settings - Change the settings for your text and multimedia messages.

Managing your messages

You can use your Inbox to manage your messages.

TIP! To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

- 1 Touch  then **Inbox**.
- 2 Touch  and then choose to:
Delete - Delete marked messages.
Create new message - Open a new blank message.

01

02

03

04

05

06

07

08

Messaging

Move to My folders - Move the marked messages to My folders.

Search - Search the messages using a date and /or a phone number.

Filter - View your message by type. This will group SMS separately from MMS.



Delete all - Delete all of the messages.

If you see the message **No space for USIM messages** you should delete some messages from your inbox.

If you see the message **No space for messages** you can delete either messages or saved files to create space.



Using templates

Create templates for the SMS and MMS messages you send most frequently. You'll find some templates already on your phone, you can edit these if you wish.

- 1 Touch  then choose **Templates**.
- 2 Choose **Text templates** or **Multimedia templates**. You can then touch  to **Add template**, **Edit**, **Delete** or **Delete all** templates. To edit a message just select it, make your changes and touch **Save**.

Using emoticons

Liven up your messages using emoticons. You'll find some commonly used emoticons already on your phone.


- 1 Touch  then choose **Emoticons**.
- 2 Touch **Add new**, or touch , **Delete** or **Delete all** emoticons.

Changing your text message settings

Your KC910 message settings are pre-defined so that you can send messages immediately. These

settings can be changed according to your preferences.

TIP! To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

Touch  then choose **Messaging settings** and **Text message**. You can make changes to:

Text message centre - Enter the details of your message centre.

Delivery report - Slide the switch left to receive confirmation that your messages have been delivered.

Validity period - Choose how long your messages are stored at the message centre.


Message types - Convert your text into **Voice**, **Fax**, **X.400** or **Email**.

Character encoding - Choose how your characters are encoded. This impacts the size of your messages and therefore data charges.

Send long text as - Choose to send long messages as Multiple SMS or as MMS.

Changing your multimedia message settings

Your KC910 message settings are pre-defined so that you can send messages immediately. These settings can be changed according to your preferences.

Touch  then choose **Message settings** and **Multimedia message**. You can make changes to:

Retrieval mode - Choose **Home** or **Roaming network**. If you then choose Manual you will receive only notifications of MMS and you can then decide whether to download them in full.

Delivery report - Choose to allow and/or request a delivery report.

Read reply - Choose to allow and/or send a read reply.

01

02

03

04

05

06

07

08

Messaging

Priority - Choose the priority level of your MMS.


Validity period - Choose how long your message is stored at the message centre.


Slide duration - Choose how long your slides appear on screen.


Delivery time - Choose how long before a message is delivered.

Multi msg centre - Enter the details of your message centre.

Changing your other settings

Touch , choose **Message settings** then:

Videomail - Touch **Add new** or  to add a new Videomail service. Contact your network operator for more information on the service they provide.

Voicemail - Touch **Add new** or  to add a new Voicemail service. Contact your network operator for more information on the service they provide.


Service message - Choose to receive or block service messages. You can also set your message security by creating trusted and untrusted lists of senders.

Info. service - Choose your reception status, language and other settings.

Camera

Taking a quick photo

TIP! The camera lens has its own cover. Twist the cover open to use the camera and quickly open the viewfinder.

- 1 Press the  key on the right side of the phone.
- 2 You will be prompted to open the lens cover. The viewfinder will appear on screen.
- 3 Holding the phone horizontally, point the lens towards the subject of the photo.
- 4 Slightly press the capture button, a focus box will appear in the centre of the viewfinder screen.
- 5 Position the phone so you can see the subject of your photo in the focus box.
- 6 When the focus box turns green, the camera has focused on your subject.
- 7 Press the capture button fully.

TIP! Touch Shot

You can take a photo by touching screen also. After selecting an object with touch, you can see the subject in the focus box. When the focus box turns green you can take a photo simply by removing their finger from the screen.

TIP! Face Tracking

Automatically detects and focuses on human faces to help you to take clear Pictures.

01

02

03

04

05

06

07


08


Camera


After you've taken your photo


Your captured photo will appear on screen. The name of the image runs along the bottom of the screen together with six icons down the right side.





 Touch to take another photo straightaway. Your current photo will be saved.

 Touch to view a gallery of saved photos.


 Touch to send the photo as a **Message, Email, or Bluetooth**. See page 34 for Sending a message, and page 109 for Sending and receiving your files using Bluetooth.

 Touch to upload to your Blogger account.

 Touch to set the picture you have taken as Wallpaper.

 Touch to delete the photo you have just taken and confirm by touching **Yes**. The viewfinder will reappear.

Getting to know the viewfinder

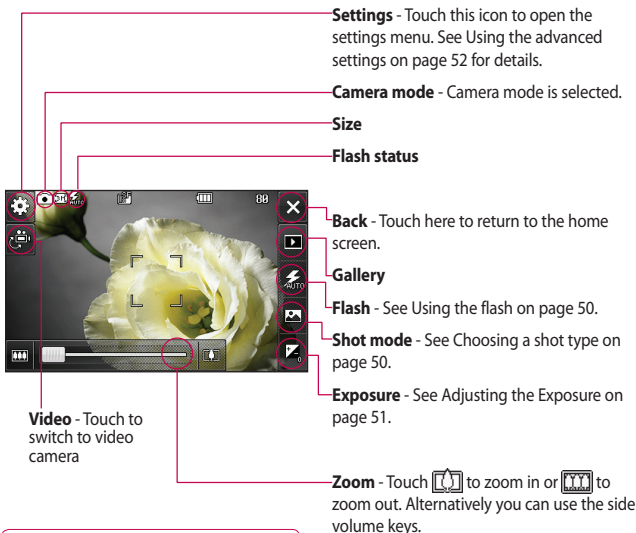

TIP! You can close all the shortcut options for a clearer viewfinder screen. Simply touch the centre of the viewfinder once. To recall the options touch the screen again.

01

02

03

04

05

06


07

08



Camera

Using the flash

The flash is set to auto as default, but there are other options.

- 1 Select  from the right side of the viewfinder to enter the flash sub-menu.
- 2 There are three flash options:
Auto - Your camera will assess the lighting needed to take a good picture and use the flash as necessary.
Red-eye reduction - The camera will flash twice in order to reduce red eye.
Always off - The camera will never flash. This is useful if you want to save battery power.
- 3 When you touch the option you want to use the flash menu will automatically close, ready for you to take your picture.
- 4 The flash status icon in the viewfinder will change according to your new flash mode.

Choosing a shot mode

- 1 Touch  to open the available shot mode.
- 2 Choose from seven options:
Normal shot - This is the default shot type, the photo will be taken in the normal way, as outlined in taking a quick photo.
Smile shot - This shot type is great for taking a photo of people. Focus on the subject and press  then the photo will be taken automatically when it smile.
Beauty shot - This enables you to take a photo of person's face clearly and brightly. Especially useful when you are close up.
Art shot - Choose different picture effects. (Original, Black&White, Warm, Cold.)

Continuous shot - This enables you to take seven shots automatically in very quick succession. See **Taking a continuous shot** on page 51 for details.



Panorama - This shot type is great for taking a photo of a large group of people or for capturing a panoramic view. See **Taking a panoramic shot** on page 52 for more details.

Frame shot - Choose from one of the fun frames to transform your friend or just decorate their surroundings.



Adjusting the exposure

Exposure defines the difference between light and dark in an image. A low contrast image will appear foggy, whereas a high contrast image will appear much sharper.

1 Touch .

2 Slide the contrast indicator along the bar, towards  for a lower exposure, hazier image or towards  for a higher exposure, sharper image.

Taking a continuous shot

- 1 Touch  to open the available shot types and select Continuous shot.
- 2 Position the subject in the viewfinder and press the capture button as you would to take a normal photo.
- 3 The camera will take seven shots in quick succession and display the first with seven thumbnails shown on the left side of the screen.
- 4 Once you have highlighted the image you want to keep, touch . You will be given a chance to save more than one of the images.

01

02

03

04

05

06

07

08

Camera


Taking a panoramic shot

Capture life as it appears using a panoramic shot. The camera will let you take three photos, all aligned, and combine them into one wide angle image.

- 1 Touch  to open the available shot types and select **Panorama shot**.
- 2 Take the first photo as normal. A ghosted version of the right side of the image will appear in the viewfinder.
- 3 When you take the second and third photo, line the ghost of the previous image up with the image in the viewfinder.
- 4 In the photo gallery, the photos will be saved as one panoramic image.

NOTE: Due to the image size the panoramic photo will appear slightly distorted in the Gallery view. Touch it twice to view it properly.

Using the advanced settings

From the viewfinder touch  to open all the advanced settings options.

Preview settings

Size - Change the size of the photo to save on memory space or take a picture preset to the correct size for contact. See **Changing the image size** on page 55.

Scene mode - Set the camera to adjust to the environment. Choose from **Auto, Portrait, Landscape, Night, Beach** and **Sport**.

Colour Effect - Choose a colour tone to apply to the photo you're taking. See **Choosing a colour effect** on page 55.

Blink detection - This enables the camera to stop taking a photo when it detects the blink of an eye.

White balance - Choose from Auto, Incandescent, Sunny, Flourescent or Cloudy.

Macro - Switch on to take close up shots.

Self-timer - The self-timer allows you to set a delay after the capture button is pressed. Choose from **Off, 3 seconds, 5 seconds** or **10 seconds**. Great for that group photo you want to be part of.

ISO - ISO determines the sensitivity of the camera's light sensor. The higher the ISO, the more sensitive the camera will be. This is useful in darker conditions when the flash can't be used. Choose an ISO value

from **Auto, ISO 100, ISO 200, ISO 400, ISO 800** or **ISO1600**.

Quality - Choose between **Super fine, Fine** and **Normal**. The finer the quality the sharper a photo will be, but the file size will increase as a result, which means you'll be able to store fewer photos in your memory.

Back light compensation - when you take a photo with a bright background, the subject may appear dark. Turn this function ON to compensate for this. The subject of the photo will be brighter.

Inner/Outer Camera - For self portraits, switch to the LG KC910's inner camera. See **Using the inner camera** on page 55 for details.

Other settings

Memory - Choose whether to save your photos to the Handset memory or to the External memory.

01

02

03

04

05

06

07

08

Camera

Geo-Tagging - Choose to switch on the EXIF information for the photo to write GPS information.

Zoom - Choose zoom from 4X, 8X or 16X.

Image stabilization - Enables you to take a photo without camera instability or shake.

Focus - Select the way the camera will focus. Choose from Auto, Manual or Face tracking.

Shutter sound - Select one of the three shutter sounds.

Grid screen - Choose from Off, Simple cross or Trisection.


Reset settings - Reset all the camera settings.

TIP! When you exit the camera all your settings will return to default, except image size and image quality. Any non-default settings you require will need to be reset, for example colour tone and ISO. Check them before you shoot your next photo.


TIP! The settings menu is superimposed over the viewfinder, so when you change elements of the image colour or quality you'll be able to see the image change in preview behind the settings menu.

Changing the image size

The more pixels, the larger the file size, which in turn means they take up more of your memory. If you want to fit more pictures on to your phone you can alter the pixel number to make the file size smaller.

- 1 From the viewfinder touch  in the top left corner.
- 2 Select **Size** from the Preview menu.
- 3 Select a pixel value from the six numerical options (**8M: 3264 X 2448, 5M: 2592x1944, 3M: 2048x1536, 2M: 1600x1200, 1M: 1280x960, 640x480, 320x240**) or choose the preset: **Contacts** - This sets the camera to take a photo the perfect size to be added to a phone contact.

Choosing a colour effect

- 1 From the viewfinder touch  in the top left corner.
- 2 Select **Colour Effect** from the Preview menu.
- 3 There are five colour tone options: **Off, Black & White, Negative, Sepia** or **Posterize**.
- 4 When you've made your selection the colour tone menu can be closed by selecting the back icon, ready for you to take your picture.

TIP! You can change a photo taken in colour to black and white or sepia after it's taken, but you cannot change a picture taken in black and white or sepia back to colour.

01

02

03

04

05

06


07


08

Camera


Using the inner camera

Your LG KC910 has a 640x480 inner camera, not just for video calling but for taking pictures too.


- 1 To switch to the inner camera touch  then select **Inner Camera** from the Preview menu.
- 2 After a few seconds you'll see yourself in the viewfinder. To capture the image press the capture button as normal.

TIP! The inner camera has fewer settings as it has no flash or ISO. You can still alter the image size, scene mode, colour effect, image quality, white balance and set the self-timer by touching  in the same way as when using the main camera.

- 3 After you've taken the photo you'll be offered all the same options available for an image taken with the main camera.


- 4 To return to the main camera touch  and then select **Outer Camera** from the Preview menu.

Viewing your saved photos




- 1 You can access your saved photo's from within the camera mode. Simply touch  and your gallery will appear on screen.

Video camera

Shooting a quick video

- 1 Press and hold the camera key on the right side of the phone.
- 2 Alternatively, touch  in the view finder in camera mode to switch to video mode.

TIP! Quickly open the video camera by pressing and holding the camera key.

- 3 The video camera's viewfinder will appear on screen.
- 4 Holding the phone horizontally, point the lens towards the subject of the video.
- 5 Press the capture button once to start recording.
- 6 **Rec** will appear at the top of the viewfinder and a timer at the bottom showing the length of your video.
- 7 To pause the video touch  and resume by selecting .
- 8 Touch  on the screen or press the capture button a second time to stop recording.

01

02

03

04

05

06

07


08


Video camera


After you've shot your video


A still image representing your captured video will appear on screen. The name of the video runs along the bottom of the screen together with six icons down the right side.





 Touch to shoot another video straight away. Your current video will be saved.

 Touch to play the video.


 Touch to send the video as a message, by **Email** or by **Bluetooth**. See page 34 for **Sending a message**, or page 109 for **Sending and receiving your files using Bluetooth**.

 Touch to upload to your youtube account.

 Touch to view a gallery of saved videos and pictures.

 Touch to delete the video you have just made and confirm by touching **Yes**. The viewfinder will reappear.

Getting to know the viewfinder

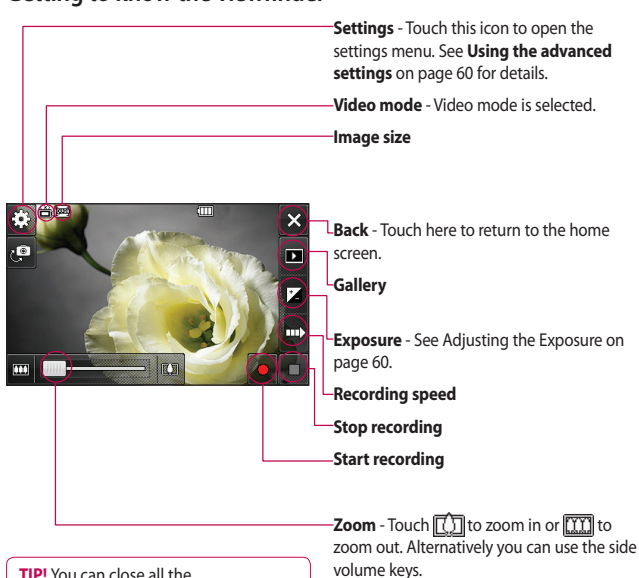

TIP! You can close all the shortcut options for a clearer viewfinder screen. Simply touch the centre of the viewfinder once. To recall the options touch the screen again.

01

02

03

04

05

06




07

08

Video camera

Adjusting the exposure

Exposure defines the difference between light and dark in an image. A low contrast image will appear foggy, whereas a high contrast image will appear much sharper.

- 1 Touch .
- 2 Slide the exposure indicator along the bar, towards  for a lower exposure, hazier image, or towards  for a higher contrast, sharper image.

Using the advanced settings

From the viewfinder touch **Settings** to open all the advanced settings options.

Preview settings

Video size - Change the size of the video to save on memory space. See **Changing the video image size** on page 61.

Scene mode - Choose from Auto or Night.

Colour Effect - Choose a colour tone to apply to the video you're taking. See **Choosing a colour tone** on page 62.

White balance - The white balance ensures that any white in your videos is realistic. In order for your camera to correctly adjust the white balance you may need to determine the light conditions. Choose from **Auto, Incandescent, Sunny, Fluorescent** or **Cloudy**.

Quality - Choose between **Super fine, Fine** and **Normal**. The finer the quality the sharper a video will be. The file size will increase as a result, which means you'll be able to store fewer videos in the phone's memory.

Duration - Set a duration limit for your video. Choose from **Normal**, or **MMS** to limit the size to be able to send the video as an MMS.

TIP! If you choose MMS duration, try choosing a lower image quality to enable you to shoot a longer video.

Inner/Outer camera - Switch to your LG KC910's inner camera to record a video of yourself. See **Using the inner video camera** on page 62 for details.


Other settings


Memory - Choose whether to save your videos to the Handset memory or to the External memory.


Reset settings - Reset all the video camera settings.

Changing the video image size

The more pixels, the larger the file size, which in turn means they take up more memory. If you want to fit more videos on to your phone you can alter the pixel number to make the file size smaller.

- 1 From the viewfinder touch  in the top left corner.
- 2 Select **Video size** from the Preview menu.
- 3 Select a pixel value from the five options:

 **640x384(W)** - The highest quality widescreen option.

 **400x240(W)** - This is also widescreen, but of a lower resolution.

 **640x480** - Standard sized VGA.

01

02

03

04

05

06

07

08

Video camera



320x240 - Smaller image size, therefore smaller file size. Great for saving on memory space.



176x144 - Smallest image size and therefore smallest file size.


- 4 Touch the back icon to return to the viewfinder.



WARNING: The great editing software on your LG KC910 is compatible with all video types except 640x384 and 640x480. Don't record in this format if you plan to edit your video.


TIP! For video format conversion software, see the CD you received with your KC910.


Choosing a colour tone

- 1 From the viewfinder touch  in the top left corner.
- 2 Select **Colour Effect** from the Preview menu.
- 3 There are five colour tone options, **Off** (colour), **Black & White**, **Negative**, **Sepia**, **Posterize**.
- 4 Touch the colour tone you'd like to use.

Using the inner video camera


Your LG KC910 has a 320x240 inner camera, not just for video calling but for recording videos too.

- 1 To switch to the inner camera touch  then select **Inner Camera** from the Preview menu.
- 2 After a few seconds you'll see yourself in the viewfinder. To start recording the image press the capture button as normal, press a second time to stop recording.

- 3 After you've shot the video you'll be offered all the same options available for a video shot using the main camera.
- 4 To return to the main camera touch  and then **Outer Camera**.

TIP! You can still alter the image size, scene mode, colour effect, white balance and quality by touching **Settings** in the same way as when using the main camera.


Watching your saved videos

- 1 In the viewfinder touch .
- 2 Your gallery will appear on screen.
- 3 Touch the video you want to view once to bring it to the front of the gallery. It will automatically begin to play.

Watching your videos on your TV

Connect your KC910 to your TV using the TV output cable. During video playback, select options, from drop down menu select TV Out. This will allow you to play the video on your TV.

NOTE: The TV output cable is available for purchase separately. If in Option menu TV Out function is not present, please note that the video file you are playing is not compatible with TV Out.

 **WARNING:** All formats except 320x240 and 176x144 are compatible with watching on TV.

01

02

03

04

05


06

07

08


Your photos and videos

Viewing your photos and videos

- 1 Touch  on your camera preview screen.
- 2 Your gallery will appear on screen.
- 3 Touch the video or photo to open it fully.



TIP! Flick left or right to view other photos or videos.

TIP! To delete a photo or video, open it and select . Touch **Yes** to confirm.




Using zoom when viewing a video or photo


To zoom in press **+** repeatedly.
To zoom out press **-**. Use the thumbnail in the bottom right corner to move the focus area.

Adjusting the volume when viewing a video

To adjust the volume of the audio on a video whilst it is playing, touch the volume bar on the left side of the screen. Alternatively, use the volume keys on the side of the phone.


Capturing an image from a video

- 1 Select the video you would like to capture an image from.
- 2 Touch **||** to pause the video on the frame you'd like to convert to an image. Select  from the right side of the screen.
- 3 The image will appear on screen, with its assigned image name.
- 4 Select .
- 5 Touch the image then  to return to the gallery.
- 6 The image will be saved in My folders and appear in the gallery. You need to exit the gallery and then re-open it for this to appear.

 **WARNING:** Some functions will not work properly if the multimedia file has not been recorded on the phone.

Viewing your photos as a slide show

Slideshow mode will show all the photos in your gallery one at a time as a slideshow. Videos can not be viewed as a slideshow.

- 1 Touch the photo you would like to begin the slideshow to open it.
- 2 Select .
- 3 The slideshow will begin.



01

02

03

04

05

06

07

08

Your photos and videos

There are options within slideshows:



Touch to skip photos.



Touch to pause the slideshow on a particular photo.





Touch again to resume playback.




Touch to increase or decrease the speed of the slideshow.

Setting a photo as wallpaper

- 1 Touch the photo you would like to set as wallpaper twice to open it.
- 2 Touch the screen to open the options menu.
- 3 Touch .
- 4 The screen will switch to portrait mode. You can zoom in and out on the picture and move the cropped section using a thumbnail at the bottom of the screen.
- 5 When you are happy with the picture touch .

Editing your photos

There are loads of great things you can do to your photos to change them, add to them or liven them up a little.

- 1 Open the photo you'd like to edit and touch  to bring up the options.
- 2 Touch the icons to adapt your photo:




Crop your photo. Choose a square or circular crop area and move your finger across the screen to select the area.




Draw something on your photo freehand. Select the thickness of the line from the four options and the colour you would like use.





Put writing on the picture. See **Adding text to a photo** on page 67.


 Decorate your photo with stamps. Choose from the different stamps available and touch your photo wherever you'd like them to be.


 Erase the editing you have added to the picture. You can choose the size of eraser that you use.


 Save the changes you have made to the photos. Select to save the changes over the **Original file**, or as a **New file**. If you select **New file** enter a file name.

 Undo the last **Effect** or edit you made to the photo.

 Touch to open further effect options including **Rotate**. There are also more advanced editing options. See **Morphing a photo**, **Adding a colour accent** and **Swapping the colours in a photo** on page 69.

 See **Adding an effect to a photo** on page 68.

 It helps to adjust the picture taken using Auto color, brightness etc.

 Touch to return to the gallery.



Adding text to a photo

- 1 From the editing screen, touch **T**.
- 2 Select **Signature** to add unframed text or choose one of the speech bubble shapes.
- 3 Enter your text using the keypad and touch **Done**.

01

02

03

04

05

06

07

08

Your photos and videos

- 4 Move the text by touching it and sliding it to the place you'd like it to be.

Adding an effect to a photo

- 1 From the editing screen, touch



- 2 Choose to apply any of the eighteen options to the photo

Face beautify - Automatically detect a face in the image and brighten it up.

Tunnel effect - Make your picture look like it has been taken using an old Lomo film camera!


Colour negative - Colour negative effect.

Black and white - Black and white colour effect.

Sepia - Sepia effect.

Blur - Apply a blurred effect.

Sharpen - Move the marker along the bar to sharpen the focus of the photo. Select the **OK** icon to

apply the changes or choose  to cancel.

Mosaic blur - Touch to apply a blurred pixelated effect to the photo.

Oil painting - Oil painting effect.

Sketch - Apply an effect to make the picture look like a sketch.

Emboss - Emboss effect.

Solarize - Change the effect of exposure to the light.

Vivid - An effect of clearness and brilliance.

Moonlight - Change the light to look like moonlight.

Antique - An old photo effect.

Glow - A light beam effect.

Cartoon - A cartoon effect.



Water color - Make the picture look like a water colour painting.

- 3 To undo an effect simply touch




TIP! You can add more than one effect to a photo.

Crop a photo


- 1 From the editing screen touch .
- 2 Choose the shape you would like to use to crop the picture.
- 3 Drag the box over the area you would like to crop.
- 4 When you are happy with your selection, touch .

Morphing a photo



Morphing a photo is great for changing the facial expressions of friends, or just for distorting a photo for artistic effect.

- 1 From the editing screen touch .
- 2 Choose **Morphing** and four crosses will appear on the photo.
- 3 Move the crosses around the photo so they are on the parts

you'd like to morph. For example, if you are morphing a face, place a cross on the outside corner of each eye and one each side of the lips.

- 4 Select a face to represent how you'd like to morph the photo.
- 5 Select  to save the changes.

Adding a colour accent to a photo

- 1 From the editing screen, touch .
- 2 Choose **Colour accent**.
- 3 Select part of the photo. A traced line will appear around everything in that area which is of the same or similar colour. For example, someone's hair or jumper.
- 4 Alter the intensity of the accenting by touching  and then sliding the marker up or down the intensity bar.

01

02

03

04


05

06

07

08

Your photos and videos

- 5 Touch **OK**.
- 6 All colour will be removed from the photo, apart from the section marked for colour accenting.
- 7 Select  to save the changes.

Swapping the colours in a photo








- 1 From the editing screen, touch .
- 2 Choose **Colour swapping**.
- 3 Select part of the photo. A traced line will appear around everything in that area which is of the same or similar colour. For example, someone's hair or jumper.
- 4 Touch  and select a colour.
- 5 Press **OK**.
- 6 The part of the photo selected for colour accenting will change to the selected colour.
- 7 Select  to save the changes.

Editing your videos

The editing features are available for all video types except 640X384 and 640x480.

Don't record in these formats if you plan to edit your video.

Trimming the length of your video

- 1 Open the video you'd like to edit, select  and touch the screen to bring up the options.
- 2 Select  and choose **Trim**.
- 3 Touch  and mark the new start and end points using .
- 4 Touch  to ensure you are happy with the new cut.
- 5 Touch  or, alternatively, touch  to return to the gallery and discard the changes.



Merging two videos together

- 1 Open the video you'd like to edit, select and touch the screen to bring up the options.
- 2 Select and choose **Video merge**.
- 3 The My videos folder will open. Choose the video you would like to merge.
- 4 Touch to choose how the videos merge together: **None, Fade out, Pan zoom, Oval, Uncover, Blind, Checker board, Dissolve, Split** or **Shape diamond**.

- 5 Press followed by **Yes** to save the new merged video. Choose to save over the original file or as a new file.
- 6 Repeat these steps to merge more videos.

Merging a photo with a video

- 1 Open the video you'd like to edit, select and touch the screen to bring up the options.
- 2 Select and choose **Image merge**.
- 3 The My images folder will open. Choose the photo you would like to merge into your video and touch **Select**.

01

02

03

04


05

06



07



08


Your photos and videos




- 4 Touch and slide the photo to merge it to the end or the beginning of the video.
- 5 Touch  to choose how the photo and video merge together: **None, Fade out, Pan zoom, Oval, Uncover, Blind, Checker board, Dissolve, Split or Shape diamond.**
- 6 Press **Save** followed by **Yes**. Choose to save over the original file or as a new file.
- 7 Repeat these steps to merge more photos.

Adding text to a video

- 1 Open the video you'd like to edit, select  and touch the screen to bring up the options.
- 2 Select  and choose **Text overlay**.
- 3 Enter your text using the keypad and select **Save**.


- 4 Touch  and mark when you'd like the text to appear using .
- 5 Touch the area of the screen you'd like the text to appear in.





- 6 Touch  to mark when you'd like the text to disappear.
- 7 Touch  to ensure you are happy with the text overlay.
- 8 Touch  followed by **Yes**. Choose to save over the original file or as a new file.
- 9 Repeat these steps to add more text.

Overlaying a photo

- 1 Open the video you'd like to edit, select  and touch the screen to bring up the options.
- 2 Select  and choose **Image overlay**.
- 3 The My images folder will open. Choose the photo you would like to overlay your video.
- 4 Touch  and mark when you'd like the photo to appear using .
- 5 Touch the area of the screen you'd like the photo to appear in. If the photo is too big it will overlay the whole screen, not just the area selected.
- 6 Touch  to mark when you'd like the photo to disappear.
- 7 Touch  to ensure you are happy with the photo overlay.

- 8 Touch  followed by **Yes**. Choose to save over the original file or as a new file.
- 9 Repeat these steps to add more photos.

Adding a voice recording

- 1 Open the video you'd like to edit, select  and touch the screen to bring up the options.
- 2 Select  and choose **Voice recording**.
- 3 The quality of the original audio will be affected by adding a voice recording. Touch **Yes** to continue.
- 4 Touch  to view your video. When you get to the part you'd like to record your voice over, press .

01

02

03

04

05




06

07



08

Your photos and videos





- 1 Press  to stop recording and playback.
- 2 Touch  to ensure you are happy with the voice recording.
- 3 Touch  followed by **Yes** to save. Choose to save over the original file or as a new file.
- 4 Repeat these steps to add more voice recordings to the video.

Adding a soundtrack to your video



- 1 Open the video you'd like to edit, select  and touch the screen to bring up the options.
- 2 Select  and choose **Audio dubbing**.

- 3 The My sounds folder will open. Choose the track you would like to add to your video.
- 4 The original audio of your video will be erased. Touch **Yes** to continue.
- 5 If the audio is shorter than the video choose whether to play **Once** or to **Repeat** it.
- 6 Choose to save over the original file or as a new file.

Changing the speed of your video

- 1 Open the video you'd like to edit, select  and touch the screen to bring up the options.
- 2 Select  and choose **Time scaling**.
- 3 Select one of the four speed options: **x4**, **x2**, **x1/4**, **x1/2**.
- 4 Choose to save over the original file or as a new file.

Adding a dimming effect

- 1 Open the video you'd like to edit, select  and touch the screen to bring up the options.
- 2 Select  and choose **Dimming Effect**.
- 3 Choose to save over the original file or as a new file.
- 4 Your video will now fade in at the start and fade out at the end.

01

02

03

04

05

06

07

08

Multimedia

You can store any multimedia files into your phone's memory so that you have easy access to all of your pictures, sounds, videos and games. You can also save your files to a memory card. The advantage of using a memory card is that you can free up space on your phone's memory.

To access the Multimedia menu, touch  then **Entertainment**. Touch **My stuff** to open a list of folders storing all of your multimedia files.

Pictures

My images contains a list of pictures including default images pre-loaded onto your phone, images downloaded by you and images taken on your phone's camera.

My images options menu

The options which are available to you in **My images** depend on what type of image you have selected. All of the options will be available for pictures you have taken on the phone's camera, but only the **Use as, Print, Sort by** and **Memory manager** options are available for default images.

Send - Send the image to a friend.

Edit - Edit the image.

Move - Move an image from the phone memory to a memory card or vice versa.

Copy - Copy an image from the phone memory to a memory card or vice versa.

Use as - Choose from Main screen theme, Contacts image, Incoming call, Outgoing call, Switch on or off image.

Rename - Rename an image.


Smart Light - Change the lighting of your picture to improve it automatically.

Print - Print the selected image using a printer supported by Pictbridge or Bluetooth.

Slide show - View your images as a slide show.

File info. - View the file information.



Sending a photo

- 1 Touch  then **Entertainment**.
- 2 Touch **My stuff** then **My images**.
- 3 Select the picture you want to send, and touch **Send**. Choose from **Message, Email, Bluetooth**, or **Blog this**.

- 4 If you choose **Message** or **Email**, your photo will be attached to a message and you can write and send the message as normal. If you choose **Bluetooth**, you will be prompted to turn Bluetooth on and your phone will search for a device to send the picture to.

Using an image

You can choose images to use as wallpapers and screensavers or even to identify a caller.

- 1 Touch  then **Entertainment**.
- 2 Touch **My stuff** then **My images**.
- 3 Select an image and touch .
- 4 Touch **Use as** and choose from:

Wallpaper - Set a wallpaper for the home screen.

Contacts image - Allocate an image to a particular person in your contacts list so that the picture shows when they call you.

01

02

03

04

05

06

07

08

Multimedia

Incoming call - Set an image to appear during incoming calls.


Outgoing call - Set an image to appear during outgoing calls.

Start-up - Set an image to appear when you switch the phone on.



Shut down - Set an image to appear when you switch the phone off.

Marking up your images

A low-light photo can be adjusted without lowering the quality of the picture.

- 1 Touch  then **Entertainment**.
- 2 Touch **My stuff** then **My images**.
- 3 Select an image and touch  then touch **Smart Light**.
- 4 The light will automatically be changed, and you will have an option to save the new image.



Printing an image

- 1 Touch  then **Entertainment**.
- 2 Touch **My stuff** then **My images**.
- 3 Select an image and touch .
- 4 Touch **Print** then choose between **Bluetooth** and **PictBridge**.

TIP! You can to print via bluetooth or by connecting to a PictBridge printer.



Moving or copying an image

You can move or copy an image between the phone memory and the memory card. You might want to do this to either free up some space in one of the memory banks or to safeguard your images from being lost.

- 1 Touch  then **Entertainment**.
- 2 Touch **My stuff** then **My images**.
- 3 Select an image and touch .
- 4 Select **Move** or **Copy**.



Creating a slide show

If you want to look at all of the images on your phone, you can create a slide show to save you from having to open and close each individual image.

- 1 Touch  then **Entertainment**.
- 2 Touch **My stuff** then **My images**.
- 3 Touch  then **Slide show**.

Checking your memory status

You can check to see how much of your memory space you have used and how much you have left to use.

- 1 Touch  then **Entertainment**.
- 2 Touch **My stuff** then **My images**.
- 3 Touch  then **Memory manager**.
- 4 Choose **Handset memory** or **External memory**.

NOTE: If you do not have a memory card inserted, you will not be able to select External memory.

Sounds

The **My sounds** folder contains the Downloaded sounds, **Default sounds** and **Voice recordings**.

From here you can manage, send or set sounds as ringtones.

Using a sound

- 1 Touch  then **Entertainment**.
- 2 Touch **My stuff** then **My sounds**.
- 3 Select **Default sounds** or **Voice recordings**.
- 4 Select a sound and and it will begin to play.
- 5 Touch  and select **Use as**.
- 6 Choose from **Voice ringtone**, **Video ringtone**, **Message tone**, **Start-up** or **Shut down**.

01

02

03

04

05

06

07


08

Multimedia

Videos


The **My videos** folder shows a list of downloaded videos and videos you have recorded on your phone.

Watching a video

- 1 Touch  then **Entertainment**.
- 2 Touch **My stuff** then **My videos**.
- 3 Select a video to play.

TIP! KC910 supports both DivX & Xvid video format playback to ensure greater content availability. Refer to page 99 in detail.

Using options while video is paused

Touch  while in pause mode and choose from:

- Capture** - Capture the frozen frame as a picture.
- Send** - Send the video in a message, email, via Bluetooth or YouTube.
- Delete** - Delete the video.

Use as - Enables to set Voice ringtone or Video ringtone. (This can be limited by Video frame size.)

Edit - You can edit the file name.

File info. - View the Name, Size, Date, Time, Type, Duration, Dimension, Protection and Copyright details.


NOTE: The TV output cable is available for purchase separately.

Sending a video clip

- 1 Select a video and touch .
- 2 Touch **Send** and choose from **Message, Email** or **Bluetooth**.
- 3 If you choose **Message** or **Email**, your video clip will be attached to the message and you can write and send the message as normal. If you choose **Bluetooth**, you will be prompted to turn Bluetooth on and your phone will search for a device to send the video to.


Games and Applications

You can download new games and applications to your phone to keep you amused when you have time to spare.

TIP! To delete any file in My stuff, touch  then **Delete**.

Note: An additional cost is incurred when connecting to this service and downloading content. Check your data charges with your network provider.

Playing a game

- 1 Touch  then **Entertainment**.
- 2 Touch **Games & apps**, then **My games & apps** and **Games**.
- 3 Choose and touch a game to launch.

Using the games options menu

From the Games & apps folder, the following options are available:

Create new folder – Create a folder within **Games & apps**.

Sort by - Sort the games and applications by **Date**, **Size** or **Name**.

Memory manager - View the memory status.

File info. - View the game information.

01

02

03

04

05

06

07


08

Multimedia

Flash contents

The Flash contents folder contains all of your default and downloaded SWF files.

Viewing an SWF/ SVG file

- 1 Touch  then **Entertainment**.
- 2 Touch **My stuff** then **Flash contents**.
- 3 Select the file to view.

Using options viewing the SWF/ SVG file

Touch  and choose from:

Mute - Switch the sound off.

Send - Send the file as a **Message**, **Email** or via **Bluetooth**.


Wallpaper - Set the file as your wallpaper.

File info. - View the Name, Size, Date, Time, Type and Protection of the file.

Documents

From Documents in My stuff, you can view all of your document files. From here you can view Excel, Powerpoint, Word, Text and pdf files.

Viewing a file

- 1 Touch  then **Entertainment**.
- 2 Touch **My stuff** then **Documents**.
- 3 Select a document and touch **View**.

Transferring a file to your phone

Bluetooth is probably the easiest way to transfer a file from your computer to your phone. You can also use LG PC Suite via your sync cable, see page 108 for details.



To transfer using Bluetooth:

- 1 Make sure your phone and computer have Bluetooth switched on and are visible to one another.
- 2 Use your computer to send the file via Bluetooth.
- 3 When the file is sent you will have to accept it on your phone by touching **Yes**.
- 4 The file should appear in your **Documents** or **Others** folder.

Others

The **Others** folder is used to store files which are not pictures, sounds, videos, games or applications. It is used in the same way as the **Documents** folder. You may find that when you transfer files from your computer to your phone that they appear in the **Others** folder rather than the **Documents** folder. If this happens you can move them.

To move a file from Others to Documents:

- 1 Touch  then **Entertainment**.
- 2 Touch **My stuff** then **Others**.
- 3 Select a file and touch .
- 4 Touch **Move**, then touch **Move** again.

01

02

03

04

05



06


07

08


Multimedia

Creating a movie

- 1 Touch  then **Entertainment**.
- 2 Touch **Muvee Studio**.
- 3 Touch  to add an image. Touch the images you want to include then select **Insert**.
- 4 Touch the style tab across the top to choose a movie style.
- 5 Touch the sound tab at the bottom of the screen to change the sound, such as a voice recording.
- 6 Touch the **Play** button to see what you've created.
- 7 Touch  then **Play Order** to change the order.
- 8 Touch  then **Save Location** to choose where to save the movie, and touch **Duration** to choose between long and short.
- 9 To save your movie, press play and then touch the save icon in the top left corner.



Music

Your LG KC910 has a built-in music player so you can play all your favourite tracks. To access the music player, touch  then **Entertainment** and **Music**. From here you can access a number of folders:

Recently played - You can see the list recently played.

All tracks - Contains all of the songs you have on your phone.

Artists - Browse through your music collection by artist.

Albums - Browse through your music collection by album.

Genres - Browse through your music collection by genre.

Playlists - Contains any playlists you have created.

Shuffle tracks - You can listen to the music randomly.

Transferring music onto your phone

The easiest way to transfer music onto your phone is via Bluetooth or your sync cable.

You can also use LG PC Suite, see page 108 for details. To transfer using Bluetooth:

- 1 Make sure both devices have Bluetooth switched on and are visible to one another.
- 2 Select the music file on the other device and choose to send it via Bluetooth.
- 3 When the file is sent you will have to accept it on your phone by touching **Yes**.
- 4 The file should appear in **Music > All tracks**.

01

02

03

04

05






06


07

08

Multimedia

Playing a song

- 1 Touch  then **Entertainment**.
- 2 Touch **Music**, then **All tracks**.
- 3 Select the song you want to play and touch **Play**.
- 4 Touch  to pause the song.
- 5 Touch  to skip to the next song.
- 6 Touch  to skip to the previous song.
- 7 Touch  to return to the **Music** menu.



TIP! KC910 is the first worldwide handset to apply Dolby Mobile for music, Providing trademark Dolby sound quality to your mobile phone.

Using options while playing music

Touch  and choose from:

Minimize - Make the music player screen disappear so that you can continue using your phone as normal.

Go to my music - Return to the Music menu.

Visualization - Select a visual effect.
Add to playlist - Add the track to one of your playlists.

Send - Send the song as a message or via Bluetooth.

Delete - Delete the song.

Use as - Use the song as a Voice ringtone, Video ringtone, Message tone, Start-up or Shut down.

File info. - View information including the Name, Size, Date, Time, Type, Duration, Protection and Copyright of the song.

TIP! To change the volume while listening to music, touch




Creating a playlist

You can create your own playlists by choosing a selection of songs from the **All tracks** folder.



- 1 Touch  then **Entertainment**.
- 2 Touch **Music**, then **Playlists**.
- 3 Touch **Add New playlist**, enter the playlist name and touch **Save**.
- 4 The All tracks folder will show. Touch all of the songs that you would like to include in your playlist; a tick will show next to the track names.
- 5 Touch **Done**.

To play a playlist, select it and touch Play.

NOTE: To add a second playlist, touch  then Add new playlist.

Editing a playlist

From time to time, you may want to add new songs or delete songs from a playlist. When you want to do this, you can edit the playlist.

- 1 Touch  then **Entertainment**.
- 2 Touch **Music**, then **Playlists**.
- 3 Select the playlist.
- 4 Touch  and select:

Add new songs – To add more songs to the playlist. Mark the ones you want and touch **Done**.

Move down – Move the song down the list to change the playing order.

Change list order - Change the playing order of the playlist.

01

02

03

04

05

06

07

08

Multimedia



Send – Send a song as a message or via Bluetooth.

Remove from list – Remove a song from the playlist. Touch **Yes** to confirm.

Memory info. - View the memory status.

Remove all - Remove all tracks from the playlist.

Deleting a playlist

- 1 Touch  then **Entertainment**.
- 2 Touch **Music**, then **Playlists**.
- 3 Touch  then **Delete** or **Delete all** to delete all of the playlists.

Using the radio



Your LG KC910 has an FM radio, so you can tune into your favourite stations and listen to them on the move.

NOTE: You will need to insert your headphones in order to listen to the radio. Insert them into the headphone socket (this is the same socket that you plug your charger into).



Searching for stations

You can tune radio stations into your phone by searching for them either manually or automatically. They will then be saved to specific channel numbers so you don't have to keep re-tuning. You can save up to 50 channels in your phone.



To auto tune:

- 1 Touch  then **Entertainment**.
- 2 Touch **FM radio** then .


- 3 Touch **Auto scan** then **Yes**. The stations found will automatically be allocated to channel numbers in your phone.

NOTE: You can also manually tune into a station by using  and  displayed next to the radio frequency.

Resetting channels

- 1 Touch  then **Entertainment**.
- 2 Touch **FM radio** then .
- 3 Choose **Reset** to reset the current channel or choose **Reset all** to reset all of the channels. Each channel will return to the starting 87.5Mhz frequency.

Listening to the radio

- 1 Touch  then **Entertainment**.
- 2 Touch **FM radio** then touch the channel number of the station you would like to listen to.

TIP! To improve the radio reception, extend the headset cord, which functions as the radio antenna.

01

02

03

04

05

06

07


08

Organiser


Adding an event to your calendar

- 1 From the home screen select  then touch **Utilities** and choose **Organiser**. Select **Calendar**.
- 2 Select the date you would like to add an event to.
- 3 Touch  then **Add event**.
- 4 Touch **Category** then choose from **Appointment**, **Anniversary** or **Birthday**. Check the date and enter the time you would like your event to begin.
- 5 For appointments and anniversaries enter the time and date your event finishes in the lower two time and date boxes.
- 6 If you would like to add a subject or a note to your event, touch **Note** and type in your note.
- 7 Set **Alarm** and **Repeat**.
- 8 Select **Save** and your event will be saved in the calendar. A square colour cursor will mark the day

that any events have been saved to and a bell will ring at the start time of your event, so that you can stay organised.


TIP! You can set a holiday in your calendar. Touch each day you are on holiday one at a time, then touch  and select **Set holiday**. Each day will be shaded green.

Adding a scheduled Message


- 1 From the home screen select  then touch **Utilities** and choose **Organiser**. Select **Calendar**.
- 2 Select the date you would like to add a scheduled message.
- 3 Touch then **Scheduled Message**.
- 4 Touch and input Date, Time, Recipient and Message you want. (e.g. Happy birthday)
- 5 Touch **Save**.

You can view scheduled message list by selecting Scheduled Message List from Option menu.



Changing your default calendar view

- 1 From the home screen select  then touch **Utilities** and choose **Organiser**. Select **Organiser settings**.
- 2 Touch **Calendar settings** and choose either **Month view** or **Week view**.
- 3 Set **week starts on**.
- 4 Press **Save** to confirm your choice.

Adding an item to your To do list

- 1 From the home screen select  then touch **Utilities** and choose **Organiser**.
- 2 Select **To do** and touch **Add to do**.
- 3 Set the date for the task, add notes and select a priority level: **High**, **Medium** or **Low**.
- 4 Save your task by selecting **Save**.

Sharing a To do task

- 1 From the home screen select , then **Utilities** and choose **Organiser**. Select **To do**.
- 2 Select the task you would like to share, then touch .
- 3 Select **Send**. You can choose to share your to do item by **Text message**, **Multimedia msg.**, **Email** or **Bluetooth**.

TIP! You can back up and synchronise your calendar with your computer. See PC Sync on page 96.

Using date finder

Date finder is a handy tool to help you calculate what the date will be after a certain amount of days has passed. For example, 60 days from 10.10.07 will be 09.12.2007. This is great for keeping tabs on deadlines.

01

02

03

04


05

06

07


08

Organiser

- 1 From the home screen select  then touch **Utilities** and choose **Organiser**.
- 2 Select **Date finder**.
- 3 In the **From** tab set your required date.
- 4 In the **After** tab set the number of days.
- 5 The **Target date** will be shown below.

Setting your alarm


- 1 From the home screen select  then touch **Utilities** and choose **Alarms**.
- 2 Touch **Add alarm**.
- 3 Set the time you would like the alarm to sound and touch **Save**.
- 4 Choose whether you would like your alarm to Not repeated, Daily, Mon-Fri, Mon-Sat, Sat-Sun, Except holiday, Choose weekday options are there in phone under Repeat. The icons indicate the weekday you select.

- 5 Select **Alarm type** to select a type for your alarm.
- 6 To change your alarm sound, touch the Alarm bell box and select a new sound. To preview press .
- 7 Add a memo for the alarm.
- 8 Finally you can set the snooze interval at 5, 10, 20, 30 minutes, 1 hour or off.
- 9 Once you have set your alarm, touch **Save**.
- 10 To power off the alarm, you can choose snooze or stop.

NOTE: You can set up to 5 alarms.

TIP! Touch on/off icon on the right hand side of the alarm.

Adding a memo



- 1 From the home screen select  then touch **Utilities** and choose **Memo**.
- 2 Touch **Add memo**.

- 3 Type your memo, followed by **Save**.
- 4 Your memo will appear on screen next time you open the **Memo** application.





TIP! You can edit an existing memo. Select the one you want to edit and type your changes.


Voice recorder

Use your voice recorder to record voice memos or other sounds.


- 1 Touch  then **Utilities**.
- 2 Touch **Voice recorder** then  and choose from:
 - Duration** – Set the recording duration. Choose from **MMS msg. size, 1 min** or **No limit**.
 - Quality** – Select the sound quality. Choose from Super Fine, Fine or Normal.
 - Go to my sounds** – Open the Voice recordings folder in **My sounds**.

Recording a sound or voice

- 1 Touch  then **Utilities**.
- 2 Touch **Voice recorder**.
- 3 Touch  to begin recording.
- 4 Touch  to end recording.
- 5 Touch  to listen to your recording.



Sending the voice recording

- 1 Once you have finished recording, touch .
- 2 Touch **Send** and choose from **Message, Email** or **Bluetooth**. If

01

02

03

04

05


06

07



08

Organiser

you choose **Message** or **Email**, the recording will be added to the message and you can write and send it as normal. If you choose Bluetooth, you will be prompted to turn Bluetooth on.


NOTE: After you have finished recording, touch  and choose **Send, Files, Delete, Use as** (to use the recording as your ringtone), **Duration, Quality**, or **Go to my sounds**.

Using your calculator


- 1 From the home screen select , then touch **Utilities** and choose **Tools**.
- 2 Select **Calculator**.
- 3 Touch the numeric keys to input numbers.
- 4 For simple calculations, touch the function you require (+, -, x, ÷), followed by =.
- 5 For more complex calculations, touch  and choose from **sin**,

cos, tan, log, ln, exp, sqrt, deg or **rad** etc..

Converting a unit

- 1 From the home screen select , then touch **Utilities** and choose **Tools**.
- 2 Select **Converter**.
- 3 Choose whether you would like to convert **Currency, Surface, Length, Weight, Temperature, Volume** or **Velocity**.
- 4 You can then select the unit, and enter the value you would like to convert from, followed by the unit you would like to convert to.
- 5 The corresponding value will appear on the screen.

Using the stopwatch

- 1 From the home screen select , then touch **Utilities** and choose **Tools**.
- 2 Select **Stopwatch**.
- 3 Touch **Start** to begin the timer.

- 4 Touch **Lap** if you want to record a lap time.
- 5 Touch **Stop** to end the timer.
- 6 Touch **Resume** to restart the stopwatch at the time you stopped it at, or touch **Reset** to begin the time again.


Adding a city to your world time

- 1 From the home screen select  then touch **Utilities** and choose **Tools**.
- 2 Select **World clock**.
- 3 Touch the  icon, followed by **Add city**. Start typing the name of the city you require and it will show at the top of the screen.
- 4 Touch the city to select it, and it will be added to your World time list.

Jogging Buddy

Whether walking, running or jogging, KC910 provides up-to-

the-second information including distance and time, and keeps an exercise log for you by using advanced GPS technology.

- 1 From the home screen select  then touch **Utilities** and choose **Tools**.
- 2 Select **Jogging buddy**.
- 3 Touch << >> to set Distance or Time for your jog.
- 4 You can switch Regular beep on or off.
- 5 Once GPS is connected, the start button will light up. Touch  to start.

 - Reset button

Regular beep - The phone beeps at distance or time intervals to help you keep track without having to keep looking at the screen.

 - Start button

 - Pause button

 - Stop button

01

02

03

04

05

06

07

08


PC Sync

Always ask mode

If you set the “Always ask mode” as default, the phone will always prompt you to select a type of USB connection mode each time you connect the phone to a PC via the data cable. If you disable the “Always ask mode”, the connection mode will be the one you have manually set in Menu - Settings - Connectivity - USB Mode and one of the options Mass Storage, PC Suite or Music sync.

You can synchronise your PC with your phone to make sure all your important details and dates match, but also to backup your files to put your mind at ease.

Installing LG PC Suite on your computer

- 1 From the home screen select  then select **Settings** and choose **Connectivity**.
- 2 Select **USB connection** mode and select **PC suite**.
- 3 Insert the supplied CD into your PC. Click on the LG PC Suite Installer which will appear on your screen.
- 4 Select the language you would like the installer to run in and click **OK**.
- 5 Follow the instructions on the screen to complete the LG PC Suite Installer wizard.
- 6 Once installation is complete, the LG PC Suite icon will appear on your desktop.

Connecting your phone and PC

- 1 Connect the USB cable to your phone and your PC.
- 2 Double click on the **LG PC Suite** icon on your desktop.
- 3 Click on **Connection Wizard**, then **USB**.
- 4 Click on **Next**, then **Next** again, then **Finish**. Your phone and PC are now connected.

Backing up and restoring your phone's information

- 1 Connect your phone to your PC as outlined above.
- 2 Click on the **Backup** icon, and select **Backup** or **Restore**.
- 3 Choose to back up **Contents Data** and/or **Phonebook/Schedule/ToDo/Memo Data**. Select the location you would like to backup information to, or restore information from. Click **OK**.

- 4 Your information will be backed up.

Viewing your phone files on your PC

- 1 Connect your phone to your PC as outlined above.
- 2 Click on the **Contents** icon.
- 3 All of the documents, flash contents, images, sounds and videos you have saved onto your phone will be displayed on the screen in the LG Phone folder.

TIP! Viewing the contents of your phone on your PC helps you to arrange files, organise documents and remove contents you no longer need.

Synchronising your contacts

- 1 Connect your phone to your PC.
- 2 Click on the **Contacts** icon.
- 3 Your PC will now import and display all contacts saved to your USIM card and handset.

01

02

03

04

05

06

07

08

PC Sync

- 4 Click on **File** and select **Save**. You can now select where you would like to save your contacts to.

NOTE: To backup contacts saved to your USIM card, click on the SIM card folder on the left side of your PC screen. Right click on one of your contacts and choose **Select all**, then **Copy** or **Move to phone memory**.

Right-click your contacts and select **Copy to contact**. Now click on the **Handset** folder on the left of your screen and all your numbers will be displayed.

Synchronising your messages

- 1 Connect your phone to your PC.
- 2 Click on the **Messages** icon.
- 3 All of your USIM and phone messages will be displayed in folders on your screen.
- 4 Use the tool bar at the top of your screen to edit and rearrange messages.

Using your phone as a mass storage device

Your phone can only be used as a mass storage device if you have a memory card inserted.

- 1 Disconnect your phone from your PC.
- 2 From the home screen select , then touch **Settings**.
- 3 Select **Connectivity**, then **USB connection** mode.
- 4 Touch **Mass storage**.
- 5 Connect your phone to your PC. Your phone will read: **Connecting as Mass Storage...** followed by **Connected as Mass Storage Mode**. Do not disconnect during transfer.
- 6 A removable disk folder will open automatically on your computer, two if you have a memory card inserted, showing all the folders on your phone or memory card.

NOTE: Your phone must be unplugged from your PC to initiate Mass Storage.

NOTE: Mass storage backs up content saved on your memory card only, not your handset memory. To transfer the content of your handset memory (e.g. contacts) you'll need to synchronise using PC Sync.

DivX Converter

Install the DivX converter which is supplied on the same CD as the PC Sync software. DivX will convert media files on your PC to a format that enables you to upload and view them on your phone.

Once installed select **DivX** from the Program Files on your PC, then **DivX converter** followed by Converter.

Use the arrows in the application to change the conversion format to Mobile. If you right click on the application box and select

Preferences, you can change the location of where the converted files are saved.

Drag and drop the files into the application for initial analysis. Then select **Convert** for the process to begin. When the process is finished a Conversion complete pop up will be displayed.

The converted file can now be transferred to your phone, using the Mass Storage functionality (see page 98 for details) or Upload contents using the PC Sync software (see page 97 for details).

01

02

03

04

05

06

07


08

The web

Browser

Browser gives you a fast, full colour world of games, music, news, sport, entertainment and loads more, straight to your mobile phone. Wherever you are and whatever you're into.

Accessing the web

- 1 From the home screen select  then touch **Utilities** and choose **Browser**.
- 2 To access the browser homepage directly, select **Home**. Alternately select **Enter address** and type in your desired URL, followed by **Connect**.

NOTE: An additional cost is incurred when connecting to this service and downloading content. Check your data charges with your network provider.

Adding and accessing your bookmarks


For easy and fast access to your favourite websites, you can add bookmarks and save web pages.

- 1 From the home screen select , then touch **Utilities** and choose **Browser**.
- 2 Select **Bookmarks**. A list of your Bookmarks will appear on the screen.
- 3 To add a new bookmark, select  and touch **Add new**. Enter a name for your bookmark followed by the URL.
- 4 Touch **Save**. Your Bookmark will now appear in the list of bookmarks.
- 5 To access the bookmark simply touch the bookmark and then touch connect. You will be connected to your bookmark.

Using RSS reader

RSS (Really Simple Syndication) is a family of web feed formats used to publish frequently updated content such as blog entries, news headlines or podcasts. An RSS document, which is called a feed, web feed, or channel, contains either a summary of content from an associated web site or the full text. RSS makes it possible for people to keep up with their favourite web sites in an automated manner that is easier than checking them manually. The user subscribes to a feed by entering the feed's link into the reader or by clicking an RSS icon in a browser that initiates the subscription process. The reader checks the user's subscribed feeds regularly for new content, downloading any updates that it finds.

Saving a page

- 1 Access a webpage as described above.
- 2 Touch  and select **Save this page**.
- 3 Enter a name for the webpage so you can easily recognise it.
- 4 Touch **Save**.

TIP! This menu will also allow you to edit titles of saved pages, protect or unprotect the screen memo, and delete saved pages.

01

02

03

04

05


06

07


08

The web


Accessing a saved page

- 1 From the home screen select  then touch **Utilities** and choose **Browser**.
- 2 Select **Saved pages**.
- 3 Select the page you would like to view and it will open.

Viewing your browser history

- 1 From the home screen select  then touch **Utilities** and choose **Browser**. Select **History**.
- 2 The web page you have accessed recently will be displayed. To access one of these pages, simply select the item required.

Changing the web browser settings

- 1 From the home screen select  then touch **Utilities** and choose **Browser**. Select **Browser Settings**.
- 2 You can choose to edit **Profiles**, **Appearance settings**, **Cache**, **Cookies**, **security**, or **Reset Settings**.
- 3 You can simply set these to on or off by touching the switch icon.

Using your phone as a modem

Your KC910 can double as a modem for your PC, giving you email and internet access. You can use either the USB cable or Bluetooth.

Using the USB cable:

- 1 Ensure you have the LG PC Suite installed on your PC.
- 2 Connect your KC910 and your PC using the USB cable and launch the LG PC Suite software.
- 3 Click **Internetkit** on your PC. Then click **Settings** and select **Modem**.
- 4 Choose **LG Mobile USB Modem** and select **OK**. It will now appear on screen.
- 5 Click **Connect** and your PC will connect through your KC910.
NOTE: For more information on synchronising using the LG PC Suite see page 96 or refer to Help Menu in PC Sync software if you need further information.

Using Bluetooth:

- 1 Ensure Bluetooth is switched **On** and **Visible** for both your PC and KC910.
- 2 Pair your PC and KC910 so that a passcode is required for connection.
- 3 Use the **Connection wizard** on your LG PC Suite to create an active Bluetooth connection.
- 4 Click **Internetkit** on your PC. Then click **Setting**.
- 5 Click **Modem**.
- 6 Choose **Standard Modem over Bluetooth link** and click **OK**. It will now appear on screen.
- 7 Click **Connect** and your PC will connect through your KC910.
NOTE: For more information on Bluetooth see page 110.

01

02

03

04

05

06

07


08

Settings

Within this folder you can adapt your settings to make your KC910 personal to you.

NOTE: For information on call settings see page 27.

Changing your screen settings

- 1 Touch  then choose **Settings**.
- 2 Touch **Screen** and then choose from:

Wallpaper - Choose the theme for your home screen.

Dialling - Adjust the number size and colour.

Font - Adjust the font size.

Backlight - Choose how long the backlight remains on for.

NOTE: The longer the backlight is on for, the more battery power is used and you may need to charge your phone more often.

Brightness - Adjust the screen brightness.

Theme - Quickly change the whole look of your screen.

Greeting message - Choose on or off and fill in the greeting message.

Choose an image for **Incoming calls, Outgoing calls, Start-up** and **Shut-down**.


Reset main menu - To reset the main menu, touch **Yes**.

- 3 Touch **Save** to save your settings.

Personalising your profiles

You can quickly change your profile on the home screen. Simply touch the status summary icon on the top and touch the profile tab.

Using the settings menu you can personalise each profile setting.


- 1 Press  and then choose **Settings**.
- 2 Touch **Profiles** and then choose the profile you want to edit.
- 3 You can then change all of the sounds and alert options available in the list, including your **Voice/ Video ringtone** and **Volume**,

Message alerts and more.

Changing your phone settings

Enjoy the freedom of adapting how your KC910 works to your own preferences.

TIP! To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

- 1 Touch  then choose **Settings**.
- 2 Touch **Phone settings** then choose from the list below.

Date & Time - Adjust your date and time settings or choose to auto update the time when you travel or for daylight saving.

Power save - Choose to switch the factory set power saving settings **On**, **Off** and **Auto**.

Languages - Change the language of your KC910's display.

Auto key lock - Lock the keypad automatically in home screen.

Security - Adjust your security settings, including PIN codes and handset lock. (The default security code is 0000)

Lock Personal Contents - Customized folder lock is a feature provided to the user to prevent user's personal contents (Contacts/Images/video/Sounds/messages) from unauthorized access. The access will be given only if the user gives the correct security code.

Anti-theft Mobile tracker - When the handset is stolen, handset sends the SMS to the numbers configured by real owner. User has to configure the ATMT settings with Owner Name, Alternate no (1), Alternate no (2) etc. Default ATMT code is "000000" - ATMT SMS will contain information about the stolen phone IMEI, current location &

01

02

03

04

05

06

07

08

Settings

number of the person who is using that handset.

Remote Mobile Management

- Touch **Security** and **Remote Mobile Management**. This feature enables user to connect his/her mobile remotely. So user can access his/her personal information (Phone book, SMS, ToDo, Calendar), can take backup of all his/her personal information, can reset, lock his/her handset and can activate call divert, call barring remotely. User can do so by just sending a SMS (#RMM#PASSWORD#) from any other mobile to his/her mobile.

How to Activate/Deactivate RMM:

Set Password as following

1. Enter Current RMM password
2. Enter new password
3. Re-enter new password
4. Click **Activate** -> Enter password

A popup will appear on screen mentioning a format

("#RMM#PASSWORD#") with which user can start a RMM session with his/her mobile. User's remote handset will inform user about the available services through SMS.

Deactivation:

Click **Deactivate** -> Enter password


NOTE: Default RMM password is "0000"

Memory manager - See **Using memory manager** on page 108 for more information.

Reset settings - Reset all the settings to their factory definitions.

Information - View the technical information for your KC910.


Changing your touch settings

Touch  then **Settings**. Choose **Touch settings**. To reset the touchpad and make it easier to use, select **Touchpad calibration** and touch the crosses. Save the settings when you are happy with them.

Select **Touchscreen effect** to reset touch **Type, Tone** and **Vibration**.

Changing your connectivity settings

Your connectivity settings have already been set up by your network operator, so you can enjoy your new phone from the start. If you want to change any settings, use this menu.

Touch  then **Settings**. Touch **Connectivity**.

Network settings - Your KC910 connects automatically to your preferred network. To change these settings use this option.

Internet profile - Set the profiles for connecting to the internet.

Access point - Your network operator has already saved this information. You can add new access points using this menu.

GPS type - Choose either **Assisted GPS** or **Stand alone**.

GPS

- GPS technology uses information from earth-orbiting satellites to find locations.
- A receiver estimates the distance to GPS satellites based on the time it takes for signals to reach it, then uses that information to identify its location.
- It may take from a couple of seconds to several minutes.
- Assisted GPS(A-GPS) on this mobile is used to retrieve location assistance data over packet data connection.
- The assistance data is retrieved from the Service server only when you needed.
- Take pictures of where you are and have the pictures tagged with information about your location.

Note : Use of GPS Receiver requires an application that may not be included in software provided by your service provider.

01

02

03

04

05

06

07

08

Settings

Note : GPS service has an error tolerance and it is unable to work in buildings or underground.

USB connection mode -

Synchronise your KC910 using the LG PC Suite software to copy files from your phone. See page 96 for more information on synchronisation.

If you use Music sync with Windows Media Player, select Music sync in this menu. Music sync is available for only music contents. If you want to synchronize with external memory, you can use 'Mass storage.'

Server Sync - The Server sync function synchronises the data in a phone and the data on a server such as contact address information, schedule items, to do items and memo items via a wireless network.

Streaming settings - Your network operator has already saved this information. You may edit it if you'd like to make changes.

TV out - Choose **PAL** or **NTSC** for connecting your KC910 to a TV.


NOTE: The TV output cable is available for purchase separately.

Java settings - Allows you to set Profiles.

Divx VOD registration: Generate a DivX VOD registration code. Please visit <<http://vod.divx.com/>> for registration and technical support.

Using memory manager

Your KC910 has three memories available: the phone, the USIM Card and an external memory card (you may need to purchase the memory card separately). You can use memory manager to determine how each memory is used and see how much space is available.

Touch  followed by **Settings**.
Select **Phone settings** then
Memory Manager.

Handset common memory - View the memory available on your KC910 for Pictures, Sounds, Video, Flash, MMS, Email, Java applications and others.

Handset reserved memory - View the memory available on your handset for SMS, Contacts, Calendar, To do list, Memo, Alarm, Call history, Bookmarks and Miscellaneous items.


USIM memory - View the memory available on your USIM Card.

External memory - View the memory available on your external memory card (you may need to purchase the memory card separately).

Primary storage settings - Choose the location you prefer items to be saved to.

TIP! See page 14 for information on **Installing a memory card**.

Using flight mode


Turn on flight mode by selecting  then **Settings**. Touch **Profiles** and choose **Flight mode**.

Flight mode will not allow you to make calls, connect to the Internet, send messages or use Bluetooth.

Sending and receiving your files using Bluetooth

Bluetooth is a great way to send and receive files as no wires are needed and connection is quick and easy. You can also connect to a Bluetooth headset to receive calls.

To send a file:

- 1 Open the file you want to send, typically this will be a photo, video or music file.
- 2 Touch  and choose **Send**.
Choose **Bluetooth**.

01

02

03

04

05

06

07

08

Settings

- 3 Touch **Yes** to turn Bluetooth on.
- 4 If you have already paired the Bluetooth device, your KC910 will not automatically search for other Bluetooth devices. If not, your KC910 will search for other Bluetooth enabled devices within range.
- 5 Choose the device you want to send the file to and touch **Select**.
- 6 Your file will be sent.



TIP! Keep an eye on the progress bar to make sure your file is sent.

To receive a file:

- 1 To receive files your Bluetooth must be both **On** and **Visible**. See **Changing your Bluetooth settings** below for more information.
- 2 A message will prompt you to accept the file from the sender. Touch **Yes** to receive the file.

- 3 You will see where the file has been saved and you can choose to **View** the file or **Use as wallpaper**. Files will usually be saved to the appropriate folder in your My stuff.

Changing your Bluetooth settings:

- 1 Touch  and choose **Settings**.
- 2 Choose **Bluetooth** then touch  and choose **Settings**.

Make your changes to:

My device visibility - Choose to be **Visible** or **Hidden** or **Visible for 1 min**.

My device name - Enter a name for your KC910.

Supported services - Choose how to use Bluetooth in association with different services. See **Using your phone as a modem** on page 103 or **Using a Bluetooth headset** on page 111.

My address - Show your Bluetooth address.

Pairing with another Bluetooth device

By pairing your KC910 and another device, you can set up a passcode protected connection. This means your pairing is more secure.

- 1 Check your Bluetooth is **On** and **Visible**. You can change your visibility in the **Settings** menu.
- 2 Touch **Search**.
- 3 Your KC910 will search for devices. When the search is completed **Refresh** will appear on screen.
- 4 Choose the device you want to pair with and enter a passcode, then touch **OK**.
- 5 Your phone will then connect to the other device, on which you should enter the same passcode.

- 6 You passcode protected Bluetooth connection is now ready.

Using a Bluetooth headset

- 1 Check your Bluetooth is **On** and **Visible**.
- 2 Follow the instructions that came with your headset to place your headset in pairing mode and pair your devices.
- 3 Touch **Ask always** or **Allow without ask** and touch **Yes** to Connect now. Your KC910 will automatically switch to Headset profile.

TIP! See page 27 for details on **BT answer mode** so that you can control how you answer calls when your Bluetooth headset is connected.

01

02

03

04

05

06

07

08

Wifi

Wi-Fi allows the phone to connect to local wireless networks, or access the Internet wirelessly. Wi-Fi is faster and has a greater range than Bluetooth wireless technology.

NOTE: KC910 supports WEP, WPA-PSK/2 encryption not EAP, WPS encryption. If your Wi-Fi service provider or network administrator sets the encryption for network security, you should fill in the key in the pop-up window. If the encryption is not set, this pop-up window is not shown. If you don't know the key, you need to ask for it from your Wi-Fi service provider or network administrator.

Software Upgrade

LG Mobile Phone Software Upgrade Program

For more information on installing and using this program, please visit <http://update.lgmobile.com>.

This feature allows you to upgrade

your software to the latest version quickly and conveniently on the Internet without needing to visit our service centre.

As the mobile phone software upgrade program requires the user's full attention for the duration of the upgrade process, please be sure to check any instructions and notes that appear at each step before proceeding. Please note that removing the USB data communication cable or batteries during the upgrade may seriously damage your mobile phone. As the manufacturer takes no responsibility for loss of data during the upgrade process, you are advised to note down any important information in advance for safekeeping.

Accessories

These accessories are available to use with your KC910.

Charger



Battery



Stylus and carry strap



headset



Data cable and CD

Connect and synchronise your KC910 and PC.



User Guide

Learn more about your KC910.



01

02

03

04

05

06

07

08

NOTE:

- Always use genuine LG accessories.
- Failure to do this may invalidate your warranty.
- Accessories may be different in different regions; please check with your retailer or contact LG on 1800 638 080.

Network service

The wireless phone described in this guide is approved for use on the GSM and W-CDMA network.

A number of features included in this guide are called Network Services. These are special services that you arrange through your wireless service provider. Before you can take advantage of any of these Network Services, you must subscribe to them through your service provider and obtain instructions for their use from your service provider.

Technical data

General

Product name : KC910

System : GSM / W-CDMA

Ambient Temperatures

Max : +55°C (discharging),
+45°C (charging)

Min : -10°C

Battery Specification

Battery : 1000mA, Li-Ion

2G Talk time : 220min

2G Standby time : 320hr

3G Talk time : 200min

3G Standby time : 350hr

Note

Variation in operation time may occur depending on SIM card, network condition, usage style, usage setting and environment.

Declaration of Conformity



LG Electronics

Suppliers Details

Name

LG Electronics Inc

Address

LG Electronics Inc, LG Twin Towers 20,
Yeouido-dong, Yeongdeungpo-gu, Seoul, Korea 150-721

Product Details

Product Name

GSM/ W-CDMA Terminal Equipment

Model Name

KC910

Trade Name

LG

CE 0168



Applicable Standards Details

R&TTE Directive 1999/5/EC
EN 301 489-01 V1.6.1, EN 301 489-07 V1.3.1
EN 301 489-17 V1.2.1, EN 301 489-24 V1.3.1
EN 301 511 V9.0.2
EN 301 908-1 V3.2.1 EN 301 908-2 V3.2.1,
EN 300 328 V1.7.1
EN 50360/EN 50361:2001
EN 60950-1 : 2001

Supplementary Information

The conformity to above standards is verified by the following Notified Body(BABT)

BABT, Balfour House, Churchfield Road, Walton-on-Thames, Surrey, KT12 2TD, United Kingdom
Notified Body Identification Number : 0168

Declaration

I hereby declare under our sole responsibility that the product mentioned above to which this declaration relates complies with the above mentioned standards and Directives

Name

Issued Date

Seung Hyoun, Ji / Director 29.Aug. 2008

Signature of representative

LG Electronics Inc, Amsterdam Office
Veluwezoom 15, 1327 AE Almere, The Netherlands
Tel : +31 - 36 - 547 - 8940, e-mail : seokim @ lge.com

Guidelines for safe and efficient use

Please read these simple guidelines. Not following these guidelines may be dangerous or illegal.

Exposure to radio frequency energy

Radio wave exposure and Specific Absorption Rate (SAR) information
This mobile phone model KC910 has been designed to comply with applicable safety requirements for exposure to radio waves. These requirements are based on scientific guidelines that include safety margins designed to assure the safety of all persons, regardless of age and health.

- The radio wave exposure guidelines employ a unit of measurement known as the Specific Absorption Rate, or SAR. Tests for SAR are conducted using standardised methods with the phone transmitting at its highest certified power level in all used

frequency bands.

- While there may be differences between the SAR levels of various LG phone models, they are all designed to meet the relevant guidelines for exposure to radio waves.
- The SAR limit recommended by the International Commission on Non-Ionizing Radiation Protection (ICNIRP) is 2W/kg averaged over 10g of tissue.
- The highest SAR value for this model phone tested by DASY4 for use at the ear is 0.590 W/kg (10g) and when worn on the body is 0.492 W/Kg(10g).
- SAR data information for residents in countries/regions that have adopted the SAR limit recommended by the Institute of Electrical and Electronics Engineers (IEEE), which is 1.6 W/kg averaged over 1g of tissue.

Product care and maintenance

WARNING

Only use batteries, chargers and accessories approved for use with this particular phone model. The use of any other types may invalidate any approval or warranty applying to the phone, and may be dangerous.

- Do not disassemble this unit. Take it to a qualified service technician when repair work is required.
- Keep away from electrical appliances such as TVs, radios, and personal computers.
- The unit should be kept away from heat sources such as radiators or cookers.
- Do not drop.
- Do not subject this unit to mechanical vibration or shock.
- Switch off the phone in any area where you are required by special regulations. For example, do not use your phone in hospitals as it may affect sensitive medical equipment.
- Do not handle the phone with wet hands while it is being charged. It may cause an electric shock and can seriously damage your phone.
- Do not to charge a handset near flammable material as the handset can become hot and create a fire hazard.
- Use a dry cloth to clean the exterior of the unit (do not use solvents such as benzene, thinner or alcohol).
- Do not charge the phone when it is on soft furnishings.
- The phone should be charged in a well ventilated area.

Guidelines for safe and efficient use

- Do not subject this unit to excessive smoke or dust.
- Do not keep the phone next to credit cards or transport tickets; it can affect the information on the magnetic strips.
- Do not tap the screen with a sharp object as it may damage the phone.
- Do not expose the phone to liquid or moisture.
- Use the accessories like earphones cautiously. Do not touch the antenna unnecessarily.

Efficient phone operation

Electronics devices

All mobile phones may get interference, which could affect performance.

- Do not use your mobile phone near medical equipment without requesting permission. Avoid placing the phone over pacemakers, for example, in your breast pocket.
- Some hearing aids might be disturbed by mobile phones.
- Minor interference may affect TVs, radios, PCs, etc.

Road safety

Check the laws and regulations on the use of mobile phones in the area when you drive.

- Do not use a hand-held phone while driving.
- Give full attention to driving.

- Use a hands-free kit, if available.
- Pull off the road and park before making or answering a call if driving conditions so require.
- RF energy may affect some electronic systems in your vehicle such as car stereos and safety equipment.
- When your vehicle is equipped with an air bag, do not obstruct with installed or portable wireless equipment. It can cause the air bag to fail or cause serious injury due to improper performance.
- If you are listening to music whilst out and about, please ensure that the volume is at a reasonable level so that you are aware of your surroundings. This is particularly imperative when near roads.

Avoid damage to your hearing

Damage to your hearing can occur if you are exposed to loud sound for long periods of time. We therefore recommend that you do not turn on or off the handset close to your ear. We also recommend that music and call volumes are set to a reasonable level.

Glass Parts

Some parts of your mobile device are made of glass. This glass could break if your mobile device is dropped on a hard surface or receives a substantial impact. If the glass breaks, do not touch or attempt to remove. Stop using your mobile device until the glass is replaced by an authorized service provider.

Guidelines for safe and efficient use

Blasting area

Do not use the phone where blasting is in progress. Observe restrictions, and follow any regulations or rules.

Potentially explosive atmospheres

- Do not use the phone at a refueling point.
- Do not use near fuel or chemicals.
- Do not transport or store flammable gas, liquid, or explosives in the same compartment of your vehicle as your mobile phone and accessories.

In aircraft

Wireless devices can cause interference in aircraft.

- Turn your mobile phone off before boarding any aircraft.
- Do not use it on the ground without permission from the crew.

Children

Keep the phone in a safe place out of the reach of small children. It includes small parts which may cause a choking hazard if detached.

Emergency calls

Emergency calls may not be available under all mobile networks. Therefore, you should never depend solely on the phone for emergency calls. Check with your local service provider.

Battery information and care

- You do not need to completely discharge the battery before recharging. Unlike other battery systems, there is no memory effect that could compromise the battery's performance.
- Use only LG batteries and chargers. LG chargers are designed to maximize the battery life.

- Do not disassemble or short-circuit the battery pack.
- Keep the metal contacts of the battery pack clean.
- Replace the battery when it no longer provides acceptable performance. The battery pack maybe recharged hundreds of times until it needs replacing.
- Recharge the battery if it has not been used for a long time to maximize usability.
- Do not expose the battery charger to direct sunlight or use it in high humidity, such as in the bathroom.
- Do not leave the battery in hot or cold places, this may deteriorate the battery performance.
- There is risk of explosion if the battery is replaced by an incorrect type.
- Dispose of used batteries according to the manufacturer's instructions. Please recycle when possible. Do not dispose as household waste.
- If you need to replace the battery, take it to the nearest authorized LG Electronics service point or dealer for assistance.
- Always unplug the charger from the wall socket after the phone is fully charged to save unnecessary power consumption of the charger.

Trouble Shooting

This chapter lists some problems that you might encounter while using your phone. Some problems require that you call your service provider, but most of problems you encounter are easy to correct yourself.

Message	Possible causes	Possible Corrective measures
SIM error	There is no SIM card in the phone or you may have inserted it incorrectly.	Make sure that the SIM card is correctly inserted.
No connection to the network	Signal weak Outside GSM network	Move higher to a window or open space. Check service provider coverage map.
Codes do not match	When you want to change a security code you have to confirm the new code by entering it again. The two codes that you have entered do not match.	Contact your Service Provider.
Function cannot be set	Not supported by Service Provider or registration required	Contact your Service Provider.
Calls not available	Dialling error New SIM card inserted Charge limit reached	New network not authorised. Check for new restrictions. Contact Service Provider or reset limit with PIN 2.
Phone cannot be switched on	On/Off key pressed too briefly Battery empty Battery contacts dirty	Press On/Off key for at least two seconds. Charge battery. Check charging indicator in the display. Clean contacts.

Message	Possible causes	Possible Corrective measures
Charging error	Battery totally empty	Charge battery.
	Temperature out of range	Make sure the ambient temperature is right, wait for a while, and then charge again.
	Contact problem	Check power supply and connection to the phone. Check the battery contacts, clean them if necessary.
	No mains voltage	Plug in to a different socket or check voltage.
	Charger defective	If the charger does not warm up, replace it.
	Wrong charger	Only use original LG accessories.
	Battery defective	Replace battery.
Phone loses network	Signal too weak	Reconnection to another service provider is automatic.
Number not permitted	The Fixed dial number function is on.	Check settings.

LG Mobile



WARRANTY CARD


This LG handset and charger comes with a 12-month warranty from date of purchase or 15 months from manufacturing date of corresponding IMEI No. Of the unit whichever is earlier, against defect in material or workmanship. In case of a defect, LG Electronics India Pvt. Ltd. undertakes to get the set repaired free of charge through its authorised service centre (ASC) or service dealer subject to following conditions:

Terms and Conditions

1. This warranty is applicable to the first purchase and in no case it can be transferred or extended.
2. Repair of this product will be carried out on a carry in basis to the nearest ASC.
3. While the company will make every effort to carry out repairs at the earliest, it however is made explicitly clear that the company is under no obligation to do so in a specified period of time.
4. The company or its authorised ASC/ service dealer reserves the right to retain any parts of the component/s replaced at its discretion. In the event of a defect being noticed in the equipment during the warranty period.
5. This warranty entitles the purchaser to free of cost repairs of the unit within warranty period and does not entitle for replacement or refund of entire unit. Claims, if any, to this warranty shall in no case exceed the purchase price of the unit.
6. In case of any software upgradation of the phone, no warranty is provided on phone memory or phone book.
7. The warranty is void in case the serial no./ IMEI no. is tampered / disfigured or details in the warranty card are not properly filled up at the time of purchase.
8. This warranty is not valid for damages resulting due to negligence, mishandling, improper use, tampering, breakage, soaking, fire, unauthorised repair and failure due to network upgrades.
9. Batteries are covered under warranty for a period of 6 months from date of purchase or 9 months from date of corresponding IMEI no. of the unit whichever is earlier
10. Warranty does not cover accessories external to the equipment supplied by the dealer.
11. The Delhi / New Delhi courts shall have the jurisdiction to try any dispute and /or suits related to or arising out of this agreement.

Customer Information Center/ Call Center Number

For any query related to the after sales service and customer support please contact us at the numbers listed below.

LG	SERVICE
	1800-180-9999*
*MTNL / BSNL **Prefix STD Code	39-01-0909**

BRANCH ADDRESSES

S. No.	Branch	Branch Office Address	STD Code	Phone No.
1	Ahmedabad	LGEIL 233-234 Platinum Plaza, Judges Bungalow Road, Bodakdev Road, Ahmedabad - 51	079	40040013 / 14
2	Asansol	LGEIL Block-E 1st Floor, P C Chattarjee Market, Rambanndu Tala, G.T Road (E) Asansol - 713303	0341	3200009 / 32092010
3	Aurangabad	LGEIL 302 CIDCO No 3, Opp Hotel Ramgiri, Jaina Road, Aurangabad - 431003	0240	2474005 / 32095436 / 32095437 / 32095438
4	Bangalore	LGEIL, No. 914, 2nd Floor, Sri Venkateshwara Complex, Opp. IBP Petrol Bunk, 80ft Road, 6th Block, Koramangala - Bangalore - 560095	080	41145145 / 41144750 / 41144751 / 30910754 / 30910753
5	Bhopal	13 A Vignes Warehousing Corporation Sector-G Govindpura Industrial Area J K Road Bhopal	0785	4062000 / 3092938 / 3956804
6	Bhubaneswar	LGEIL, Plot No.02,1st Flr. Bajpuri Nagar, Bhubaneswar - 751009	0674	2531430 / 2534280 / 3966525 / 3966526
7	Chandigarh	LGEIL, SCO No. 142-143, 3rd Floor Sector-34A Chandigarh. - 160002	0172	5087389 / 90 / 5089107 / 3256001 / 3256003
8	Chennai	LGEIL, AA11, 2nd Avenue, Falima Tower, Anna Nagar West, Chennai - 600040	044	65510501 - 04
9	Cochin	LGEIL, 4011270, Vasudeva Buildings, T.D. Road, Ernakulam Cochin - 682011	0484	2368743 / 2370744 / 2370484 / 4027444 / 4027555
10	Coimbatore	LGEIL, 250a, Sangarun Main Road, Kannappa Nagar, Coimbatore - 641027	0422	2332197 / 2332195 / 2332506 / 3094813 / 3094573
11	Dehradun	LGEIL, M - 22, Mobbewala, Tata Commercial Compound, Dehradun Saharanpur Road, Dehradun	0135	2644213 / 283
12	Delhi	LGEIL, A-27, Mohan Co-operative, Industrial Estate, New Delhi	011	2699411 / 12 / 13
13	Ghaziabad	LGEIL, J-10, RDC Rajnagar Ghazabad - 201001	0120	9811354152 / 3 / 64 / 65
14	Goa	LGEIL, Plot No-D-3&D-4 Rego Baug, Alto Santaroz, Bambolim, Goa - 403	0832	3294955 / 3294956 / 3294759
15	Gurgaon	LGEIL, II nd Flr, A Block, Centre Point Bldg, Sushant Lok, PH-1, Gurgaon - 122001	0124	4047461 / 62 / 63 / 4272667 / 4047460
16	Guwahati	LGEIL, Shantiner Bhawan, C K Aggarwal Path, Chenkuruthi, Guwahati - 781003	0361	2663895 / 2666958 / 2665983 / 2669884
17	Huzli	LGEIL, 603/B, Ravi Nagar Road, Behind Ramjua Petrol Pump, Gokul Road, Huzli - 580030	0836	4250251 / 52 / 2337251 / 52
18	Hyderabad	LGEIL, 1st Floor, Survey No 54, Pulla Reddy Building, Vikarampuri Main Road KhanRanchi, Secunderabad - 500004	040	27811732 / 33 / 34
19	Indore	LGEIL, 3rdflr, 304 Bans Road Centre, 58115 M.G.Road, Indore - 452003	0731	4085523 / 24 / 40822157
20	Japur	LGEIL, B-71, Satekar Marg, Lal Kothi Scheme, Japur - 302015	0141	51111 / 18 / 5113028 / 5105392
21	Jalandhar	LGEIL, Village Kajarua Near Haweli Restaurant, Jalandhar, Phagwara Highway, G T Road, Jalandhar	01634	3026987 / 5080263 / 5026988
22	Jammu	LGEIL, Plot No.-52, Yard No. 5, Transport Nagar, Nawal, Jammu - 180006	0191	2477420 / 2477419 / 2474396 / 2474384
23	Jodhpur	LGEIL, 221-4V212-B/2, RICO Heavy Industrial Area, Jodhpur - 342003	0291	2742384 / 399
24	Kolkata	LGEIL, 1, Ho-Ch-Min-Saran, 6th Floor, Metro Towers Kolkata - 700071	033	23883201 / 51 / 52
25	Kundi	LGEIL, Sunshine Enterprises, Sunder Cold Storage, GI Kamal Road, Kundi - Sonapat	0130	2219201 / 02 / 03
26	Lucknow	LGEIL, B-537, Hari Kunj, Keshav Nagar, Sitapur Road Lucknow - 226020	0522	2757339 / 39 / 2759121
27	Ludhiana	LGEIL, Village Jhande Near Badwal Railway Station, Opp ferozpur Road Ludhiana	0161	2904413 / 19
28	Mumbai	LGEIL, Trade Star, 4th Floor, A Wing, J B Nagar Anandhi Kuria Road, Anandhi (E) Mumbai - 400059	022	26323862 - 2887
29	Nagpur	LGEIL, 5a, Road No 13, Behind Merit Workshop, MIDC Hinga, Nagpur - 440016	07104	235120 / 235122
30	Patna	LGEIL, 2nd Floor, Ankit Chandra Deep Complex, Bander Bageecha, Near Samrat Hotel, Patna - 800001.	0672	3298156
31	Pune	LGEIL, 105/106, Premium Point, GM Road, Opp Modern High School IIIrd Floor Shivaji Marg, Pune - 411005	020	6603010 / 732
32	Rajpur	LGEIL, Nathani Compound, Shyam Nagar, Katora Talab, Rajpur (C.G)	0771	4053171 / 4037470 / 4048745
33	Ranchi	LGEIL 402, Commerce Tower, Opp. Gai Church Complex, Main Road, Ranchi	0661	3294026 / 2331815 / 3094026
34	Surat	LGEIL 1001-1004, Ascon Plaza, IInd Flr, Anand Mahal Road, Behind Bhukia Bhavan School, Adajan, Surat - 395009	0261	2739092 / 83 / 84
35	Thane	LGEIL, Gall Shop No - 206, 207, 2nd Floor, Sai Plaza, Above Vijay Sales Opp. Cine Wonder Mall, Ghobunder Road, Thane(West) - 400607	022	2542633 / 2637
36	Varanasi	LGEIL, Parma Complex, DLW, Lahartara Road, Shivdaspur/Mandudith, Varanasi UP - 221002	0542	2373432 / 36 / 37
37	Vijaywada	LGEIL, Door No 32-21-7, Ratnamamba Street, Prjassaki Nagar, Vijaywada - 520010, Andhra Pradesh	0866	2497283 / 87
38	Warangal	LGEIL,HOUSE No. 1-8-5861 FIRST FLOOR, BESIDE HDFC BANK NAKKALGUTTA, HANAMAKONDA-506001 (WARANGAL)	0870	2551453

Dealer name with Stamp Dealer address

IMEI No. Date of sale Serial no.

LG Electronics India Pvt. Ltd., Plot No. 51, Udyog Vihar Surajpur Kasna Road, Greater Noida, U.P.

SERVICE CENTER LIST



SERVICE



*MTNL / BSNL
**Prefix STD Code

1800-180-9999*
39-01-0909**

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Adhoni	RS CDMA	Z1/490, Arts & Science College Road, Near Devi Nursing home, Adhoni-518301	9346490905	McMohan
Andhra Pradesh	Adilabad	Kiran Mobile World	7-14-78/A, Near Nethaji Chouk, Cinema Road, Adilabad-504001	9346358181	McKiran Kumar
Andhra Pradesh	Amalapuram	Sandesh Cellular	D.No-4-2-14, Opp: S.K.B.R Collage AMLAPURAM-533201	9346398838	Mr.Ravi Kumar
Andhra Pradesh	Ananthapur	RK LG CDMA	Shop No 3, Cellular, Pallavi Towers, Opp to Canara Bank, Subash Road, Ananthpur-515001	241450,	Mr. Sridhar
Andhra Pradesh	Armoor	Sai Sri Electronics	Shop.no.2, mahalakshmi road, Armoor - 503224	9392622038	Mr.Srinivas
Andhra Pradesh	Bapatla	Vijaya Communications	Opp: Old Indian Gas Company, Sikaram Vari Street, G.B.C.Road, Bapatla	9346206305	Mr.B.Siva
Andhra Pradesh	Bhimavaram	Gopi Krishna Communications	J.P Road Near Mohan Service Center Bhimavaram Pin- 534202	9394071036	Mr.Siva
Andhra Pradesh	Chirala	Lakshmi Infocomm	Shop No.17&18 Banam Plaza, Munthavari Center, Chirala-523155	326000	Ms.Shakeena
Andhra Pradesh	Chittoor	CMT Computer Services	18-162, High Road Opp.Bishnu Bhavan Hotel, Chittoor	222733	Mr.Gopi
Andhra Pradesh	Cuddapah	Srinivasa Communication	Shop No.4, Siddapriya Complex, Opp. HP Petrol Pumping Point, Cuddapah	9346350224	Mc.Sahadeva Reddy
Andhra Pradesh	Dharmavaram	Siddharta Communications	Opp to Sathya Lodge, NPR Circle, Dharmavaram	9347064101	Mr.Shiva Rankrishna
Andhra Pradesh	Eluru	S.S.Computers	DoorNo238-4-8/3, Ayyapa Complex, Beside Kanuri Madhavi Hospital, Subbama Devi School Road, R.R.Pet, Eluru-534002.	329294	Mr.Divaker
Andhra Pradesh	Guduvada	Kanakadurga-communications	Opp: Alankar Family Restaurant, Eluru Road, Nehru Chowk Center Guduvada	9394220688	Mr.Kumar
Andhra Pradesh	Gudur	Srinivasa Electronics	1st floor, Airtel Building, Kummari Veedhi, Gudur - 524101, Nellore (Dt).	645644	Mr.Suman
Andhra Pradesh	Guntur	Vasavi Associates	Door No.6-7-36, V.S.N.Complex, 8th Line, Arundelpet, Guntur-522 002.	325789	Mc.Satyam

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Hazuragar/ Kodad	Sri Pavan Electronics	Malika Towers, Besides Reliance Web World, Kodad - 508206	9346901519	Mr Narasimha Rao
Andhra Pradesh	Hindupuram	S.VA Cellular	Shop.no:3, Vinayaka Lodge, Railway Road, Hindupur - 515201	320777	Mr.D.B.Ravindra Nath
Andhra Pradesh	Huzurabad	Bhargavi Communications	Shp No E-2, DCMs Complex, Near Bus Stand, Main Road, Huzurabad-505122	9391755619	Mr.T.Vishnu Vardhan
Andhra Pradesh	Hyderabad	Bhagya Communications	Shop no:109, Upper Ground Floor, #12-2-825, S.G.M. Mall, Mehdipatnam, Hyderabad-500028.	32972308 / 32001406	Mr.Suresh
Andhra Pradesh	Hyderabad	JVR Communication	Shop No.8, Vanija Vihar, Nalanda Building, Dilsakh Nagar Main Road, Hyderabad- 500060	66109604	Mr.A.Venket nariyan reddy
Andhra Pradesh	Hyderabad	Primus Infomatic & Software Pvt Ltd	# 18/A, Methodist Complex, 5-9-190, Lane Opp to Chermas, Abids, Hyderabad	66755111	Mr.Govind Kabra
Andhra Pradesh	Hyderabad	LG Direct Service Centre	MCH No 6-3-852/3/A Ground floor, Vishwa Central, Nizamia Observatory Road, Ameerpet Hyderabad	40033769 / 70	Mr.Tarun Dandavate
Andhra Pradesh	Hyderabad	Reliable Communication	G-8, 3-6-561, AALTO'S A & M Trade Centre, HIMAYATNAGAR, HYDERABAD - 500029	9346320705	Mr.Sandeep Soni
Andhra Pradesh	Hyderabad	S V Electronics	Shop No. 41, Nilagiri Block, Aditya Enclave, Ameerpet Main Road, Hydrabad-500038	9346449323	Mr.Pradeep
Andhra Pradesh	Hyderabad	Shweta Communications	Shop No.9, Ground Floor, Pavani Ansuya Complex, Opp. Huda Complex, Tarnaka, Hyderabad	32968162	Mr. Sandeep Heda
Andhra Pradesh	Hyderabad	Shweta Computers	# 1-7-69/1 & 2, OPP Aditya Delux Hotel, Near Paradise circl, Sarojini Devi Road, Secunderabad - 500003	27721076 / 32977548	Mr.Sandeep
Andhra Pradesh	Hyderabad	Sreenivasa Technologies	SAI VIKRAM TOWERS, SHOP NO -4, RELIANCE WEB WORLD BUILDING, Balaji Nagar Kukatpally	32961479	Mr.Praveen
Andhra Pradesh	Hyderabad	Sri Surya Communications	#Madhu Enclave, Street no 06, Shyamali Buildings, Begumpet, Hyderabad	32961127	Mr.Nageswara Rao
Andhra Pradesh	Hyderabad	Sri Varun Electronics	D.No 5-8-344/1, " DHAN BHAGYA ESTATE "; Chigali Ali Lane, Abids, Next to Raghava Ratna Towers, Hyderabad - 500 001	32900909 / 55781999	Mr.Alok Mohan
Andhra Pradesh	Hyderabad	Sunbeam Technologies	120, Cheney Trade Centre, Parklane, Near Paradise, Secunderabad -500003	40200193 / 66383193	Mr.Suresh
Andhra Pradesh	Jagtiyal	SS Communications	Opp Kanti Bhavan Lane, Duwarka Nagar, Jagtiyal	9391533535	Mr.Hari
Andhra Pradesh	Jangaon	Sky Win Communications	# 2-7-134, Beside Bharat Gas, Bus stand Road, Jangaon-506167.	9390102839	Mr. Varun

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Jangareddygudem	Sri Devi Communication	Near Gangallama Temple, Opp. Andhra Bank, Jangareddygudem	227297	Mr. Prasanna Lakshmi
Andhra Pradesh	Kakinada	Delta Infotech	Door No. 6-1-29, Opp. Swami Vivekananda Park, Jawahar Street, Surya Rao Pet, Kakinada - 533001	5593533	Mr. Shivanand
Andhra Pradesh	Kamareddy	Pager King Communication	Sircilla Road, Kamareddy, Dist. Nizamabad - 503 111.	9397366633	Mr. Moizuddin
Andhra Pradesh	Karimnagar	SS Marketers	2-8-40, Mukarampura, Near Circus Grounds, Karimnagar	9391552223	Mr.Cheekradhar
Andhra Pradesh	Kavali	Sree Balaji Infotech	Prasad Complex Trunk Road, Near Ongole Bus Stand, Kavali	6329567	Mr. C. Sri Sai Charan
Andhra Pradesh	Khammam	Sriven Technologies	D.No:11-2-37, Shop No.3, D.V.Krishna Complex, Beside Baburao Petrol Bunk, Balaji Nagar, Wyra Road, Khammam-507002	9396698866	Mr:Bhaskar Reddy
Andhra Pradesh	Kothagudem	S.Swathi CDMA Service Center	9-3-3, Above Sindhura Electronics, Near RTC BUS Stand, Kothagudem-507101	9391552228	Mr:Niaz Ahmed
Andhra Pradesh	Kuppam	Sagar Computer Services	14-204, PALACE ROAD, KLUPPAM-517425	9391862436	Mr.Sagar
Andhra Pradesh	Kurnool	R K LG CDMA	Shop no.26, 27, 1st floor, UCON Plaza, Kurnool-518001	220201	Mr:G Rama Krishna
Andhra Pradesh	Machilipatnam	Om Sree Sai Communications	25/276, Kota Vari Tulla Center, Jaganadhapuram, Machilipatnam	9347741777	Mr:Rafee
Andhra Pradesh	Madanapalle	Sri Balaji Computers	Shop No:2, 1st floor, Sri sai Complex, CTM Road, Madanapally - 517325	9390025204	Mr:Manohar
Andhra Pradesh	Mahabubnagar	Sri Chakra Mobile Care Centre	Shop.no:15, Shareef Complex, Near Bus stand, Mahbubnagar - 509002	9396348999	Mr:Anil
Andhra Pradesh	Mancherial	SS CDMA Service Centre	Shop no.7, Mounika Complex, BPL Chourasta, Mancherial-504208	9394552223	Mr:Rajesh
Andhra Pradesh	Medak	Balaji Communications	Door:No:1-3-77/5, Opp to State bank of Hyderabad, Main Branch, Main road, Medak	9346439961	Mr:Sudhakar
Andhra Pradesh	Medchal	Khan Electronics	Sanjeeva Reddy Complex, Besides RTC Bus Depot, Medchal - 501 401	9347220288	Mr. Jaleel Khan
Andhra Pradesh	Miryalguda	Needs Electronics	Jagamath Complex, Opp Bus Stand, Miryalguda - 508207	9394645696	Mr Ravi Kumar
Andhra Pradesh	Nalgonda	Quintessence Electronics	Shop No :5, Srinivasa complex, Opp to market office, HYD road, Nalgonda - 508001	9396610220	Mr. Venkateshwar Rao
Andhra Pradesh	Nandyal	Dharush Systems	Dno:25/165 B, Sanjeev Nagar, Near Ramalayam, Nandyal	9392236699	Mr:Ramesh
Andhra Pradesh	Narasaraopet	Rajendra Infotech	D.No -90-11-10/7, Saradhamba Complex, Arundelpet Near S.B.I ATM Narasaraopet	224136	Mr:Sasi Bhushan

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Nellore	Balaji Watch & Electronics	16/249, Trunk Road, Nellore-524001	2339999	Mr.Rajesh
Andhra Pradesh	Nellore	Trimalaa Electronics	Shop No. 26, 1st Floor, Co-Operative Bank Complex, Near Gandhi Statue, G.N.T. Road, Nellore	3290339	MrPratap
Andhra Pradesh	Nimal	Om Sai Electronics	Shop.no:1, Kala Nagar road, Beside 2 town Police station, Nimal - 504106	9390000024	MrMahendar
Andhra Pradesh	Nizamabad	Saty Electronics	# 7-10-65, Shop no 1, 1 st floor, H.M.H.V Complex, Beside Bus Stand, Nizamabad-503001	326000	McVenu gopal
Andhra Pradesh	Ongole	Tejarsi Communications	37-1-107, Opp: Kerala Bakery, Near Mastan Darga Center, Trunk Road, Ongole	9393026115	McSasi Bhusan
Andhra Pradesh	Peddapalli (Ramagundam)	Abhi Marketers	Shop No:19/8/291, MRK Plaza, Lakshmi Nagar, Godhavari Khani - 505209	9399987773	McNagaraj
Andhra Pradesh	Peddapuram	Devi Infotech	Opp. Veterinary Hospital, Shop No. 1, Santa Market Road, Peddapuram	6593533	McSiva Kumar
Andhra Pradesh	Prodattur	SV Technologies	4-625-3, Gandhi Road, Opp Karur Vyysa Bank, Produttur	9347251806	McRavi Kumar
Andhra Pradesh	Rajamundry	Siri Infotech	Police Welfare Complex, City Hospitals Junction, Darwai Pet Main Road, Rajahmundry	9397925799	Mr Raghendra
Andhra Pradesh	Raychoti	Raju Computer World	Room No 3 Up Stairs Syeedia complex, bustand road, Rayachoty	9346209881	McRaju
Andhra Pradesh	Repalle	Sri Satya Solutions	D.no- 10.14.125 (UP Staires) Municipal Office Road, Railpet, Repalle-522265	9396222993	McSridhar
Andhra Pradesh	Sangareddy	Sri Technologies	Srimaan Complex, Beside Inspection Bunglow, Main Road, Sangareddy. 502001, Medak Dist	9391216573	McAjaz Ahmed
Andhra Pradesh	Sattenapalli	S.S Communications	Opp.Telephone Exchange, Sattenapalli	9397610550	McSai
Andhra Pradesh	Shad Nagar	Sri Gana Electronics	Shop No :- 2, Khajia Veeresam Complex, College Road, Shadnagar - 509216	9392633111	McVigneswar
Andhra Pradesh	Siddipet	Gopala Krishna Communications	SHOP NO:13, FIRST FLOOR, MACCA COMPLEX, , OPP-CITIZEN'S CLUB, M.G ROAD, SIDDIPET - 502103. (A.P)	9392511064	Mc. Nagaraj
Andhra Pradesh	Srikakulam	Venkateshwara Infotech	Raja Commercial Complex, Opp.Electrical Office, Ground Floor, Shop No.10 &11, GT Road, Srikakulam	324577	McKran Kumar
Andhra Pradesh	Srikalahasti	KSV Computer Services	NNR Buildings, d.no:16-582, Panagal road, Srikalahasti 517644	9390044399	McSahadeva Reddy
Andhra Pradesh	Sullurpet	Sai Baba Electronics	S.V.T Street, Opp: Reliance Office, Sullurpet	9346920527	Mc. S. Venkata Krishna

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Tadepalligudem	Sri HariPriya Infotech	Thota Gopi Complex, Police Quarters Lane, Beside Zp High School, Tadepalligudem	9346445720, 08818-210565	Mr.Suresh
Andhra Pradesh	Tanuku	Shivanand Enterprises	Door No. 34-3-3, Main Road, Gamini Compound, Tanuku	9346408640	Mr.Srinivas
Andhra Pradesh	Tenali	Vaishnavi Infotech	D.No:22-11/114, Opp. Kanikacharla Kalyanamadapam, Bose Road, Tenali.	9347651330	Mr.Murali
Andhra Pradesh	Tirupati	CMT Communication	13-7-796/14/3, TUDA OFFICE Road, Tirupati-517501	3296979	Mr.K Vasu Naidu
Andhra Pradesh	Vijayawada	K.L Computer House	39-9-46, Svs Temple Street, Labbipet, Vijayawada	6520461	Mr.Kartik
Andhra Pradesh	Vijayawada	V V Communications	28-23-31/32, Opp.Swarugha Foods, Vijay Talkies Center, Vijayawada	320866-320988	Mr.Rahul
Andhra Pradesh	Vishakapatnam	Jai Bharani Communications	Door No:52-11-7/7 Saphagiri Plaza, Old Resuvanipallem, Vishakapatnam-13	6634666	Mr.PVenkatapathi Raju
Andhra Pradesh	Vishakapatnam	Sri Sai Ganesh Infotech	G5, Ground Floor, Backside of Sangam-Sarat Theatre, 1st Lane, Dwarka Nagar, Vishakapatnam - 530 016.	3258777	Mr.Chandra Shekar
Andhra Pradesh	Vizayanagaram	S R Technologies	D.No:1-9-1/44, Opp: Z.P Office, Railway Station Road, Vizayanagaram.	9346418791	Mr.Balakerisna
Andhra Pradesh	Vuyyuru	Sugreeva Communications	Behind Datta Automobiles, Katturu Road, Vuyyuru	9393033355	Mr.Phani
Andhra Pradesh	Wanaparthy	Sri Ganesh Electronics	Shop No : 16-63, Opp R R Complex, Wanaparthy - 509103, Dist Mahabubnagar	9396800275	Mr.Deva Raj
Andhra Pradesh	Warangal	S S Marketers	6-1-73/1, Sai Bhawan, Sridevi Theatre Road, Hanamkonda, Warangal-506001	2522223	Mr.L.Srinivas Rao
Andhra Pradesh	Zaheerabad	Renuka Technologies	Shop no:123/1, First Floor, Alpur, Zaheerabad.Pin-502220	316143	Mr.Abhiram Joshi
ASSAM	Guwahati	PRACATI SERVICES	2nd Floor, Kiranhangsha Commercial Complex, Dr J.C. Das Road, Harisabha, Panbazar, Guwahati, Assam	2733501	Mr. Pradeep Khaitan
Assam	Silchar	IT ONLINE	N.S.Avenue, Rangirikhani, Silchar, Cachar, Assam	221260	Mr.Sharma
Bihar	Arrah	Surya Services	Sushila Bhawan, Suryapuri colony, By pass road, Arrah	9334538845	Mr.Sanjay Kumar
Bihar	Begusarai	Krishna Communication	Eastwari Complex, Dak Bangla Chowk, Bishnupur, Begusarai, Bihar-851101.	9334341700	Mr.Dinkar Kumar
Bihar	Bhagalpur	Printonix Infosolutions	Ganpati Complex, 1st floor, Patel babu road	9934605864	MrHimansu Shekhar
Bihar	Bhagalpur	S.K.Communication	NEAR RAILWAY STATION, Super Market Complex, Patel Babu Road, BHAGALPUR-812002	9334255275	Mr.Kundan Kumar
Bihar	Biharsharif	Shanya Infotech	Magdha Commerccial Complex, 1st.Floor, Shop.No.5, MG Road, Bharapour, Bihar Sharif, Nalanda Dist. Bihar	9334048037	Mr.Amit Kanchan

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Bihar	Chapra	Ambey Associates	D-23, Hathwa Market, Chapra, Dist. Saran-841413 Bihar.	9334295605	Mr.Jayant Kumar
Bihar	Darbhanga	Prime Computer	Hanuman Nagat, Doner Road, Darbhanga.	9334934065	Mr.Abhinav Kumar Verma
Bihar	Gaya	Louts Enterprises	Opp.Aviva Life Insurance, Kanya High School Road, Ramna, Gaya.	9334492033	Mr.Pankaj Ranjan
Bihar	Muzafarpur	Krish Enterprises	Nr.Kanhoulinaka.no.2, Kachisarai Road, Muzafarpur.	9304410745	Mr.Sanjeev Kumar
Bihar	Patna	Competent Mobile Service	Shop 1, Hotel Lalitha Complex, East Bowring Canal Road, Patna	9334027706	Mr.Mohit Ahluwalia
Bihar	Patna	Infotek Trading Company	1st floor, City Palace, New Dak Bunglow Road, Patna-800001	9334116145	Mr.Sanjay Choubey
Bihar	Patna	Micro Zone-Patna	A.H Complex, # G26, Near Kotak Mahindra Bank, Exhibition Road, Patna	3294696	Mr.Mithlesh Kumar
Bihar	Patna	Synerzy Trading Company	G-01, Chanakya Plaza Complex, Main Road, Kankarabagh, Patna.8000020	2356900	Mr.Vikas Chandra
Bihar	Purnea	Micro Zone-Purnea	Narottam Hata, Opp.Dr.PC.JHA, NH-31, Purnea-854326	9304166633	Mr.Amit Kumar
Bihar	Sasaram	Nandika Enterprises	Hari Complex, Panjab National Bank, Sasaram, Rohtas-821115 (Bihar)	4222008	Mr.Abhinav Gupta
Chattisgarh	Ambikapur	Neha Communication	Ramanuj Ganj road, Opp. Kosa Form, Ambikapur, Surguja, Pin-497001	240427	Mr.Rishi Dubey
Chattisgarh	Bhilai	A B Automation	Shop no. 242, 1st floor Chouhan Plaza, GE Road, Supela Bhilai, Chhatisgarh- 490023	2295989	Mr. Satish Singh
Chattisgarh	Bhilai	Sai Ram Electronics	SHOP-NO-52/90, HIMALAY COMPLEX, AKASH GANGA, SUPELA, BHILAI	4038917	Mr. Balan
Chattisgarh	Bilaspur	Mahamaya Infotech	Shop No 203, Jain Plaza, Ground floor, Link Road, Bilaspur	2413865	Mr. Pawan Kumar
Chattisgarh	Korba	Star Mobile Services	SS PLAZA, FD-13 POWERHOUSE ROAD, KORBA-495678	9300401485	Mr. Anish Menon
Chattisgarh	Raigarh	Blue Chip Computer	Purana Sadar Bazaar, Raigarh, Chhatisgarh.	9972121776	Mr. Ashok Agrawal
Chattisgarh	Raipur	Cybernet Systems	B-2, 1st Floor, Garchaz Complex, Jail Road, Raipur - 492001	406771	Mr Anand Singh
Chattisgarh	Rajnandgaon	Bhavye Services	SHOP NO 5, BELOW SBI, STATE BANK OF INDIA, KAMPTEE LINE, RAJNANDGAON.	324200	Mr. Manish Golcha
Delhi	New Delhi	Aegiss Infotech	UG-25, Ansal Chamber -2, 6, Bhikaji Cama Place, New Delhi-110066	65477740	Mr. Atul Gupta
Delhi	New Delhi	Arham Infotech Services	4737/A 23, Ansari Road, Daryaganj, Delhi-110002	41501124	Mr. Anil Surana

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Delhi	New Delhi	Comhard Systems	D-30, 31, First floor Near Hotel Shipra, Main Vikas Marg, Lakshmi Nagar	32955887	Mr Ravi Kant Gupta
Delhi	New Delhi	Comhard Systems	B-120, Hardev Puri, 100 Feet Main Road, Near MTNL Office, Nathu Colony Chowk, Shahdra, New Delhi - 110 093.	32575507	Mr. Ravi Kant Gupta
Delhi	New Delhi	Connexions And Communications	183, Avtar Enclave, Opposite Nirula's, Pashchim vihar, New Delhi-110063	32451431	Mr. Bhupinder Agrawal
Delhi	New Delhi	Cube Engineers And Consultants Pvt Ltd	A-65, Naraina Industrial Area, Phase-1, New Delhi	65450272 / 4141620	Mr. Arvinder
Delhi	New Delhi	Elcom Trading Company Pvt. Ltd.	G-1, Goverdhan Building, 53-54 , Nehru Place, New Delhi -110019.	64582709	Mr. Somesh Narang
Delhi	New Delhi	Innovative Telecom	304, CDITL Northex Towers, A-09, 3rd Floor, Northex Tower, Netaji Subhash Place, Pitampura, New Delhi-110 088.	32925753 / 65154340	Mr Manoj Garg
Delhi	New Delhi	Nice Telecom	15/19 & 15/21, DDA Complex, Nangal raya, Near D Block, Janakpuri, Delhi - 110046	9350863630	Mr. Ripul Garg
Delhi	New Delhi	Sukriti Communication	101 Patparganj- Mayur Vihar phase -1 - New Delhi -110091	32498011	Mr.Dipendra kumar chaturvedi
Delhi	New Delhi	Teletalk	C-21, First Floor, Near Bus Stand, Bhajan pura, Delhi-11053	9818400551	Mr.B.C.Vashist
Delhi	New Delhi	Touch Tone Telecom	B-52, First Floor, Kalkaji, New Delhi	32939031	Mr. Ashish Dey
Delhi	New Delhi	Ucom Technologies Pvt Ltd.	45, 1st Flr, Corner Mrkt, Malviya Nagar, New Delhi - 110017	41745469	Mr. Neeraj
Goa	Margoa	SKY LARK	SHOP NO 05,CARVALHO APPTS, NEAR RAILWAY CROSSING, COMBA.	2736100	Mr:CHRIS
Goa	Panjim	Mandovi Mobiles	Mohidin Towers Dc. No. AS3 Opp to Hotel Manasanti Dadaravdiya rd Panjim-403001	6452949	Mr. Prakash
Gujarat	Ahmedabad	A Com Technologies	Shop No-37, 1st Floor, Shubh Complex, Near Rajasthan Hospital, Camp Road, Shahibaug, Ahmedabad-380004	32940560	Mr. Vijay S Gohel
Gujarat	Ahmedabad	Mishree Communication	FF-17, RUDRA SQUARE, OPP. JUDGES BUNGALOW, POLICE STATION, BODAKDEV, AHMEDABAD-54.	32508491	Mr. Mitesh Patel
Gujarat	Ahmedabad	Silcon Valley	9, Gokul Palace, Marinagar Cross Road, Marinagar Ahmedabad-380008	30225430	Mr. Rajesh Patel
Gujarat	Ahmedabad	Vision Communication	33, 1st Floor, Sukh Sagar Complex, Opp. Dinesh Chamber, Bapunagar, Ahmedabad -380024	65122522	Mr Ajay Kachhadia
Gujarat	Amreli	Precision Telecom	32, 33 Opera House, Station Road, Amreli	230940	Mr. Kamlesh Tank

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Gujarat	Ankaleshwar	Akshar Telecom	C/1 Keval Shopping Center, old National Highway No.8, GIDC, Ankaleshwar-393001	250860	Mrs. Anita Amin
Gujarat	Bharuch	Akshar Telecom	Pramukh Swami Complex, Panch Batti, Bharuch	2241027	Mr. Hanif Patel
Gujarat	Bhavnagar	Shivshruti Services	981/B, Makvana Building, Down Chowk, Bhavnagar-364001	3296222	Mr. P D Jala/ Sandeep patel
Gujarat	Bhuj	Infotech Computer	2nd Floor, NarNarayan Chambers, Opp Indian Airlines Office, Station Road, Bhuj	324295	Mr. Vasant Mepani
Gujarat	Gandhidham	Vansh Electronics	Shop No. 35, Swami Vivekanand Complex, Near Oslo Circle, Gandhidham	232739	Mr. Siddarth Gajjar
Gujarat	Gandhinagar	Creative Communications	Shop No 102, Suman City, Sector 11, Gandhinagar-382011	23226241	Mr. KJ.Barot
Gujarat	Himmatnagar	Jay Telecommunications	B-F 105, 1st floor, Durga Complex, Near Railway Station, Himmatnagar	329532	Mr. Manibhai Patel / Neeraj patel
Gujarat	Jamnagar	Sudarshan Infosys	"Shradha", Park Colony, Motor House, Near axis Bank, P.N.Marg, Jamnagar-361008	2552696	Mr. Amit Unadkat
Gujarat	Junagarh	KJ.Traders	29/30, Danapith, Junagadh	2627320	Mr. Paresb Rughani
Gujarat	Kalol	Maitree Communication	B/93, Yogi Complex, opp. Mahendra Mill Road, Kalol	325288	Mr. Jignesh Shah
Gujarat	Mehsana	Prime Computer Consumables	15-B, Vimal Super Market, B K Road, S.T.Workshop Road, Mehsana-384002	2325123	Mr. Suketu Patel
Gujarat	Morvi	Pulse Sales And Services	SHOP NO 6 MADHAV MARKET FIRST FLOOR NEAR NEW S.T.STAND SANADA ROAD Morvi-383641	9428565667	Mr. Natubhai Patel
Gujarat	Navsari	Deep Enterprise	10, Upper Level, Diamond Palace, Sayaji Road Sattapir, Navsari-396445	324095	Mr. Vinod Kasundra
Gujarat	Palanpur	Shree Manibhadra Mobile	21-First Floor, aroma arcade, opp jilla panchayat, near kazi tower, Palanpur-385001	300001	Mr. Panchal Sunil D
Gujarat	Patan	Able Infotech	9, Palika Bazar Complex, Rajmahel Road, Near Santokba Hall, Patan	9924256068	Mr. Rakesh Bhai
Gujarat	Porbandar	Varun Infotech	1ST Floor, Garden Cafe Building, Opp.New Fountain, Ncold R.T.O Office, Porbandar - 360575	3290285	Mr. Mitesh Changela
Gujarat	Rajkot	Joshi Telecom	Shop No.8, Kuber Complex, Opp Chandubhai Bhelwala, Dr Yagnik Road, Rajkot	6530707	Mr Jiten Dave
Gujarat	Rajkot	Roopang Infocare	Vinod Nivas, 4, Sardarnagar(West), Nr Astron Cinema, Rajkot-360001	2464485	Mr. Kishore Patel

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Gujarat	Surat	Excel Solutions	H-3, Ruchi Flats, Near Iqara Building, Adajan Hazira Road, Surat-395009	6544500	Mr. Virender Jain
Gujarat	Surat	Om Sai Services	39, Golden Point, Near Science Laboratory, Ring Road, Surat	3231233	Mr. Dhamesh Patel
Gujarat	Surendranagar	Nihaal Computer Services	94 Old Housing Bortd Opp Muni. School No.13, Surendranagar.	320375	Mr. Sikandar
Gujarat	Vadodara	Shreeji Telecom	5B-10, Windsor Plaza, R.C.Dutt Road, Alkapuri, Vadodara - 390002	9328093424	Mr. Jignesh Gohel
Gujarat	Valasad	Klassik Stationo Products	10, Jethalal Mulji Market, Halar Road, Valsad -396001	329363	Mr. Darshan Panchal
Gujarat	Vapi	Klassik Stationo Products	116, Bhanudarshan Co-Op Society, Koparli Road, Near Gunjan Cinema, GiDC, Vapi	3292363	Mr. Avishek Suhasaria
Gujarat	Anand	Zainee Mobile	2nd Floor, Limbuwala Complex, Nr. GPO, Opp. Kavita Shopping Centre, Anand	9375960954	Mr. A. J. Raja
Haryana	Ambala	Bee Ess Aar Communication	26 First floor MC Market Behind Negar Cinema Ambala Cantt-133001	4006229	Mr. Rajiv Gupta
Haryana	Bahadurgarh	Unique Telecom	Shop No.5, Rajaram Market, Main Najafgarh Road, Bahadurgarh, Near Bajaj Showroom	9315873676	Mr. Harinder
Haryana	Bhiwani	Sandeep Electronics	10 th Plot, First Floor, Circular road, Mahem Gate Chowk, Near Kajal's Nursing Home, Near Vodafone Office, Bhiwani, Haryana - 127021	252000	Mr.Sukhveer Saini
Haryana	Faridabad	Comsoft Computers	601/1 Gopi Colony Chowk- Sector-19, Near Prem Prakash Ashram, OLD Faridabad-121002	4104252	Mr. Ashwani Jindal
Haryana	Faridabad	VR Infocomm	Shop No.44, Neelam Fly Over, Neelam Chowk, NIT Faridabad.	4031959	Mr. Vinod Kumar Gupta.
Haryana	Fatehabad	Sky Lark Mobile Point	4, G.T.Road, Near Bus Stand, Marla Colony, Fatehabad	989655244	Mr.Pankaj
Haryana	Gurgaon	Signature Communications	B-100 A, South City -1, Opposite - Huda Gymkhana Club Near Signature Tower - Gurgaon 122001	4102709	Mr. Raj Kumar Garg
Haryana	Gurgaon	Lalji Communication	SCO-31, - First Floor, Above MTNL Sanchar Haat, Main Market, Opp. BSNL Exchange, Sector-12A, OLD Gurgaon -122001.	3200900	Mr.Bharat Bhushan
Haryana	Gurgaon	LG Direct Service Centre	B-36, 37 & 38, Industrial Area, Mehrauli Gurgaon Road, Near Bata Chowk, Gurgaon - 122 001.	3027300	Mr.Deepak
Haryana	Hissar	Pamami Communication	32, Red square Market, Near Dena Bank, Hissar, Haryana-125001	9354332000	Mr.Pradeep Garg
Haryana	Jind	Gaurav Telecom	Shop No.19 Near Rani Talab, Near Bharat Electronics, Jind	325400	Mr. Deepak Garg
Haryana	Kaithal	Mahesh Communication	Shop no.22, Bajrang Bali Market, Near Randhir cinema- Kaithal	9315146000	Mr.Mahesh

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Haryana	Karnal	Mass Communication	Shop No.68, Main Market, Ground Floor, Moughal Canal, Karnal - 132001	3290717	Mr.Davender Yadav
Haryana	Kurukshetra	Bharti Communication	3, Krishna Market, Opp.Purohit Sweet House, Pipri Road, Kurukshetra, Haryana-	9354165077	Mr.Vijay
Haryana	Narnaul	Prime Communication	Shop no.8, 1st Floor Taneja complex, near Nirula Hotel, RewariRoad Narnaul	9355375351	Mr.Naveen
Haryana	Palwal	Shree Ganesh Communications	Basant Apts, Shop No.5, Kithwari Chowk, Mathura Road, Near Saraswathi School, Palwal	321028	MrHarish Chandra
Haryana	Panipat	INS Telecom	2, Bishan Sarup Colony, Opp Bus Stand, Near Hotel Deep, Panipat	9354917110	Mr.Pankaj kumar
Haryana	Rewari	Mahak Tele Services	53-A, Model Town, Near Shreeji restaurant, Rewari	329222	Mr.Gaurav Yadve
Haryana	Rohtak	Telecentre	13, Apna Bazar, Civil Hospital Road, Near Chhotu Ram Chowk, Rohtak-124001	247242	Mr.Mr.Madaan
Haryana	Sirsa	Sirsa Communication	168, Huda Complex, Old Bus Stand, Sirsa	329591	Mr.Rajinder
Haryana	Sonipat	Teleworld	Shop No 20, 1st Floor, M.C.Market, Subhash Chowk, Sonipat, Haryana-138001	3290889	Mr.Vipin Dua
Haryana	Yamuna Nagar	Krishna Communication	Shop No.-24/75, Thapar Colony, OPPOSITE SWANTANTAR FANCY LADIES SUITS, NEAR FOUNTAIN CHOWK, YAMMUNAGAR HARYANA-135001	200610	Mr. Harsh/Mr. Pradeep
Himachal Pradesh	Dharamshala	Deepsun	Near Sharma Studio, opp Mickey tour and travel, kotwali bazar Dharamshala, 176215	9318679122	Mr.Deepak
Himachal Pradesh	Mandi	VM.Communication	NEAR PNB MOTI BAZAAR, MANDI-175001	9318666005	Mr.M Mahender Singh Thakur
Himachal Pradesh	Palampur	Electronic Home	Kallu Di Hatti, PO Maranda Thasil, Palampur, Distt:Kangra-176102	238463	Mr.Ravi Kumar
Himachal Pradesh	Poanta Sahib	Singal Marketing	Badri Nagar, Near LIC Office, Poanta Sahib	9318785134	Mr.Rajesh Singal
Himachal Pradesh	Shimla	Hanu Computers	76/ 9, 2nd floor Lower Bazar Shimla	2650560	Mr.Sandeep Patial
Himachal Pradesh	Solan	Vikas Mobile Repair Center	MOHAN COMPLEX, First Floor Upper Bazar-173212	9816271183	Mr.Vikas
Jammu & Kashmir	Jammu	Mobile Care	608-A Gandhi Nagar Behind Laxmi Narayan Mandir	2436814	Mr.Divit Gupta
Jammu & Kashmir	Srinagar	The Net Surfer	2nd Floor Mohi-ud-Din Building, Polowiew, srinagar	2459549	Mr.Wasim
Jammu & Kashmir	Udhampur	Service Solutions	Ward No. 15 Shakti Nagar Opp. Old ITI Udhampur	276724	Mr.Rakesh

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Jharkhand	Bokaro	Digital Equipment Centre	GB-11, City Palace, Opp.Indian Bank, Bokaro.	9334072270	Mr.Dewashish Ojha
Jharkhand	Daltonganj	Maa Mobiles	Jail Road, Jail Hata, Dalton Ganj-822101	9304285663	McNainn Kc. Kashyap
Jharkhand	Deoghar	Kanan Electronics	Hotel Relax Complex, BLC Road, Deoghar-814112	9304059528	McMahesh Sharma
Jharkhand	Dhanbad	Nirmala Enterprises	Ground Floor, Muskan Complex, NeSubhash Chowk, Dhanbad.	9334027583	McNiraj Sinha
Jharkhand	Godda	Karan Mobilink	Maa Kalyani, Katra, Main Market, Godda, Jharkhand-814133	9334449900	McSaroj Kumar Jha
Jharkhand	Hazaribagh	Digital Services	Plaza Mit, pugmill road, NeKallu Chowk, Hazaribagh.	9334599570	McShish Alam
Jharkhand	Jamshedpur	Prasad Electronics	Ne-Bus stand, Community Center, Kagal Nagar, Jamshedpur.	2226077	McRaju/ Sanitha
Jharkhand	Jamshedpur	Tirupati Teletech	Chakravarti Compound, Near Hotel Castel, Contractors area, Bistupur, Jamshedpur-831001	3293331	McAbhjeet Mukherjee
Jharkhand	Ramgarh	Shreyas Empaire	Bus Stand Complex, Ramgarh-829122	9334085642	McPyush
Jharkhand	Ranchi	Balaji Infotech	Near DcKashyap Eyeclinic, Purulia Road, Ranchi.	3205400	McSanjeev, McSunil Kedia
Jharkhand	Ranchi	Satya Systems & Solutions	158, Opp Hotel Palace, Kadru, Ranchi-834002	3291019	McAmit Rastogi
Karnataka	Anekal	Sri Venkateshwara Communications	# 37, KSRTC COLONY, HOSUR MAIN ROAD, ANEKAL TALLUK, BANGALORE - 562106	320078	McR.Jaganath
Karnataka	Bailhongal	3G Communication	Shop No 4591/2 Near Inchal Cross Belgaum Road Bailhongal-591102	9343815097	McVishwanath
Karnataka	Bangalore	Ascent Communication	No:113, St Johns Church road, Bangalore - 560005	32914856	McKumaresan
Karnataka	Bangalore	CRYSTAL INFOCOM	SRI LAKSHMI VENKATESHWARA COMPLEX, SHOP No. B-5, 33RD Cross, 11 th Main, 4th Block Jayanagar, Bangalore-560010	32710202	McPrasad
Karnataka	Bangalore	LG Direct Service Centre	No: 93, TKN Mansion, KH Road (Double Road), Bangalore	41145145 / 9739983435	McRaju Naik
Karnataka	Bangalore	Optima Mobile Services	24/2, DrRajkumar Road, Near Subramanyanagar Police Station, 2nd Block, Rajajinagar, Bangalore - 560 010.	23131953 / 65722205	McUnni Krishnan
Karnataka	Belgaum	Hello India Telecom	G-4, Maratha Mandir Complex, Khanapur Road, Near Railway Flyover, Belgaum - 590 001.	4211329 / 2420533	McMohan
Karnataka	Bellary	MAKAM ELECTRONICS	# 90 C/16 HIMALAYA BUILDING K.C.COLONY BELLARY 583101	655043	McKrishna Murthy Makam

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Karnataka	BhadraVati	Digital Communication	SR Complex 4th cross B H Road Bhadravathi-577301	9341081291	Mr.Nagabushan
Karnataka	Bhatkal	Vijay Communication	Hussian Complex Bunder road Bhatkal - 581320	300027	Mr.Vittal H.Naik
Karnataka	Bidar	Mayuri Infotech	Ravi complex, shop no: 4, Udgir road, Bidar-585401	225544	Mr.Ravi Halhalli
Karnataka	Bijapur	Turning Point Computers	Khed building, opp Vijaya college, Sholapur road, Bijapur-586103	329318 / 300005	Mr.S.M.Hiremath
Karnataka	Channapatna	C&C Technology	"Ramanujam Nilaya" No.2104, 11 th Cross, Kuvempunagar B M Road, Channapatna - 571501	7251716	Mr.Charan
Karnataka	Chikaballpur	Sri Ram Prasad Enterprises	1st Floor BB Road, Beside State Bank of Mysore, Chikballapur-562101	325567	Mr.Vardharaj
Karnataka	Chikmaglaur	Cell Tec Electronics	Ragavendra complex, NMC circle, Neharu road, Chikmaglaur - 577101	9341013183	Mr.Prem Kumar
Karnataka	Chintamani	Amrutha Mobiles	# 5, Venkatadri Complex, M.G. Road, Opp to Adarsha Theater, Chintamani - 563125	9342262811	Mr.Sudarshan Reddy
Karnataka	Davangere	Kruthika Communication	Shop No: 6, Park View Plaza, (Income Tax Office's Ground Floor), 4th Main, Near Vishweshwaraiah Park, P3, Extension, Davangere-577002	325444	Mr.Sujay
Karnataka	Golak	Cell World	Banshankri Complex, Basaweshwara circle, opp to court Golak - 591307	9343441777	Mr.Shivanand / Chougala
Karnataka	Gulbarga	Aishwarya Communication	C-9, Asian Plaza S.V.P.Chowk Main road Gulbarga-585102	329447	Mr.Mallikarjun
Karnataka	Hassan	Sree Digital Solutions	1380 Mission Hospital road opp Hindbed college - 573201	9343566658	Mr.Vidya Shankar
Karnataka	Hosakote	Exposys Communication	Shop no 1, Mahalatha Devi Complex M V Badavane, College Road, Hoskote-562114	7931229	Mr.Raghunandan
Karnataka	Hubli	Shruti Services	A-115, (Lower Ground Floor), IT PARK, Opp. Glass House, Hubli - 580029.	3290671	Mr.Mahendar
Karnataka	Hunsur	Sriram Infocom	No.6, Municipal complex, H.D.Kote road circle - 571105	253699	Mr.H.H.Pradeep
Karnataka	Kadur	Ashwa Tele Mobiles	Opp. Basaweshara Hospital, T.B Road Kadur	9341033310	Mr.R.Ananda Murthy
Karnataka	Kankapura	Sumukh Communications	Harshitha Complex, Budkere, Bangalore main rd, Near KSTC Bus stand Kanakapura-562117	9342743344	Mr.R.C.Harish
Karnataka	KGF	Global Net Communications	Opp. King George Hall, Geetha road Robetson pet, KGF - 563122	329559	Mr.Shiva Kumar
Karnataka	Kolar	Seanmatrix	No:384, Suguna complex, Near KSRTC bus stand, Arithargange road, Kolar 561001	2228714	Mr.Nithyanada Shetty
Karnataka	Kumta	Krishna Mobiles	938, College road, NH 17 opp RIWW, Kumta - 581343	329607	Mr.D.V.Prabhu

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Karnataka	Madikeri	CM Communications	Shop no. 8, First Floor, M A Complex, Kohinoor Road, Madikeri	9343837555	Mr.Mohamad Sharief
Karnataka	Mandya	C & C Technology	2068, First Cross, Subhash Nagar, Krishna Krupa Nilaya, Mandya-571401	402007	Mr.Charan
Karnataka	Mangalore	Innovative Infocom	15-10-537/11, Jayavama Centre, Mallikatte Circle, Kadri, Mangalore - 575002.	6563244	Mr-Sebastian Fernandes
Karnataka	Moodabidri	Media Guard Technologies	Rajeev Gandhi complex main road Moodabidri - 574227	325909	Mr.Vishwas Kumar
Karnataka	Mysore	K.K.Marketing	1432/9, Tribhuvan Towers, opp Veterinary Hospital, Dewan's Road, Dhanwantri Road Cross, Mysore - 570001	4258613	Mr.Karunakaran.
Karnataka	Nipani	Manusoft Computers	Dumale Complex Chikodi road Nipani - 591257	222005 / 9448148005	Mr. Pavan / Mahesh Dumale
Karnataka	Raichur	Akshay Electronics	Shop No.2 Ground Floor, Hotel UMA Complex, Station Road, Raichur - 584101	225300	Mr.Narasimhu
Karnataka	Ranibennur	Kruthika Communication	OLD LIC Building, Opp Gupta Petrol Bunk, PB Road, Ranebennur-581115	321444	Mr.Sujay
Karnataka	Shimoga	Chetan Electronics	C-5, Kenchappa complex, Durgigudi main road, Shimoga-577201	401889	Mr.Panduranga Rao
Karnataka	Tiptur	Shree Digital Solutions	Nanjappa complex, opp city union bank, BH road, Tiptur - 572201	9343817331	Mr.Ravi
Karnataka	Tumkur	Durga Communication	No.14 CMI Complex, Near Gayatri Theater, Below Navratna Silks & Sarees, B.H.Road Tumkur - 572101	2256184	Mr.Naveen Kumar
Karnataka	Udupi	Sanman Mobile Services	Shop No: 15, Simaz complex, Diana circle, Court road, Udupi-576101.	3255770	Mr.Prakash
Kerala	Alappuzha	Getronics	FIRST FLOOR, KARTHIKA BUILDING, OPP SDV BOYS HIGH SCHOOL, COURT ROAD, ALLEPPY.	3290446	Mr.Omprakash
Kerala	Alathur	Marstek	12/950, Ground Floor, AR Complex, Opp. Munsiff's Court, Alathur, Palakkad Dt.- 678 541	321311	Mr. Rajesh. V.
Kerala	Aluva	Sed Infoys	BUILDING NO 12/57 DOOR NO 8, FIRST FLOOR, POOTHULLIL BUILDING, ALUVA - 683 101.	3235599	Mr.Sudheesh
Kerala	Attingal	AM Technologies	Mamam, Near Dreams Theater, Attingal	3290301	Mr.Saji
Kerala	Badagara	Amarkish Communications	1st Floor, Sarala Complex, Near KVR Motors, N.H. Bypass Road, Nut Street, Vadakara-673101.	3255756	Mr.Jeeju / Mr. Baiju
Kerala	Cherthala	Cherukattu Phones	Krishna Building, Opp govt boys high school, AC road, Cherthali	9388910703	Mr.Mahesh C D

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Kerala	Ernakulam	Guidelines	CC28/902, Ground Floor, Mundukottackal Estates, S A Road, Kadavanthara, Cochin-682020	4000113	MrManoj G
Kerala	Ernakulam	Teletch Systems	20. First Floor, Penta Estate, above Airtel office, Janatha Junction, Palairavallam, Cochin-25	3207554	Mr.Sony Thomas
Kerala	Ernakulam	Zenicon Infocom(P) Limited	Above Syndicate Bank, Opp Cochin Shipyard, M.G.Road, Cochin-15	2359511	MrJaimon Joseph
Kerala	Irinjalakuda	Nice Mobiles	NICE BUILDING, ST. JOSEPH'S COLLEGE JUNCTION, IRINJALAKUDA - 680121	3291515	MrSebastian
Kerala	Kalpetta	Mobi Care	Ground Floor, Rawuthar Building, Opp. Vijaya Bank, Chungam, Kalpetta.	329366	Mr.Thanseer
Kerala	Kanhangad	XN Computers & Datacare	1st Floor, BENGACHERY COMPLEX, OPPVIYAPARA BHAVAN, T B ROAD JN, KANHANGAD.	3259755	Mr.Sandeep
Kerala	Kannur	Sahar Communications	5B-666-C & D, PRESTIGE CENTRE, GROUND FLOOR, SUB REGISTER OFFICE ROAD, KANNUR.	3258585	MrAjai Abhiam
Kerala	Karunagapally	Supreme Enterprises	Opp to KSRTC Bus stand, Karunagapally-690518	2620282	MrRatish / Premkumar
Kerala	Kasargode	XN Computers & Datacare	BENDICHAL COMMERCIAL COMPLEX, PRESS CLUB JN, MG ROAD, KASARGOD.	324755	MrMr.Sandeep
Kerala	Kollam	Digital Infosystems	MC-3087, New Block, Bishop Jeromi Nagar, Chinnakada, Kollem-691001	2760647	MrJohnson Lawrence
Kerala	Kottarakara	Sivashakthi Communications	KP-II/1574, Valiyavila Building, Near Marthoma Girls High School, Pulamon PO, Kottarakara	3298191	Mr.Suresh
Kerala	Kottayam	Svm Technologies	M.P.M COMPLEX, Near Popular Maruti Show Room, M.C ROAD, S.H MOUNT, KOTTAYAM, KERALA- 686 006	2565303	MrRajesh K S
Kerala	Kozhikode	Domain Systems & Services	17/1178E, 1st floor AL FAHAD, SABA school cross road, Putiyara, Kozhikode	2722222 / 3243745	MrMukundan
Kerala	Kunnankulam	V Star Mobiles	ROOM NO 4/289/B2 2nd floor, City complex, Opp Tempo Park, Town Hall road, Kunnankulam.	320009	MrVijumon.K.V.
Kerala	Manjeri	Integrated Computer Systems	Royal Tower, TB Road, Manjeri - 676121	3299686	Mr.Thomason Chacko
Kerala	Mavelikara	Ettutharayil Agencies	GROUND FLOOR, KOIPPALLIL ROYAL ARCADE, PUTHIYAKAVIL, MAVELIKARA-690101	3293340	MrBiji
Kerala	Palai	Cyriac TV Plaza	Vypana Building, Petta Road, Palai.	329746	Mr.Tom Cyriac
Kerala	Palakkad	Orion Techno Solutions	12/310/15, FIRST FLOOR, METRO COMPLEX, HEAD POST OFFICE ROAD, PALAKAD-678001	3200255	MrKhaja Hussain

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Kerala	Pathanamthitta	Melamparambil Agencies	10/264, Main Road, Town, Pathanamthitta - 689645	2225132	Mr.M.V.Francis Commen
Kerala	Thalassery	Sahar Communication	44-1929, 1st Floor, MACKSON MONOR, OPP: PARIS RESIDENCY, LOGANS ROAD, THALASSERY	3208585	Mr.Ajai
Kerala	Thiruvalla	Sangeetha Electronics	524/17, Central Tower, Cross Junction, Thiruvalla	3203000	Mr.Ranjeev Kumar
Kerala	Thiruvananthapuram	Appolo Systems	Thelungu Chetty Complex, Shop No 23-24, Kalpalayam JN Karamana, Thiruvananthapuram 695 002.	2340523	Mr.Santosh
Kerala	Thiruvananthapuram	Smart Mobile	TC 2/3554(5), First Floor, Opp. Petrol Pump, Kesavadasapuram, Trivandrum-695004	3200105	Mr.Krishnakumar P B
Kerala	Thodupuzha	National Electronics	Shop No 5, Aswathy Shopping Complex, Temple Junction, Thodupuzha	220320	Mr.Aneesh M A
Kerala	Thriprayar	Nice Mobiles	382J, 1st floor, Century Plaza, N.H.17, Near Bus Stand, Thriprayar	3240400	Mr.TPSebastian
Kerala	Tirur	Telit Telecom Shop	GROUND FLOOR, AL AMAL COMPLEX, PAN BAZAR, TIRUR	3295623	Mr.Vasan.K.Nair
Kerala	Trichur	Cell Tech	Shop No 5/2, TC23/326, N.P.Tower Curuvayoor Road, Near Bindu Theatre, West Fort, Thrissur.	2387386	Mr.Santom Kallor
Kerala	Vaikom	Vaikundam Electronics	II/ 214C, Mannamkeriel Complex, Bus stand Road, Valiyakavala, Vaikom	32616	Mr.Sreekumar.G
Madhya Pradesh	Balaghat	Shri Computers	Keshar Plaza Complex, Hanuman Chowk, Balaghat	9300632132	Mr.Deepak Bajaj
Madhya Pradesh	Betul	Shivam Electronics	Jiaprakash Chowk, Kotli Bazar, Auto Stand, Betul - 460001	9329099071	Mr.Vivram Motwani
Madhya Pradesh	Bhopal	Akansa Enterprises	25-26, CENTRAL MARKET, ROSHANPURA SQUARE, BHOPAL MP	7553201626	Mr. Dinesh Asija
Madhya Pradesh	Bhopal	GSM Solution	M-2 CHETAK COMPLEX, ZONE -2 M.P NAGAR	4229213	Mr.Neeraj
Madhya Pradesh	Bhopal	Music Mahal Bhopal	SHOP.NO.1 NEW MARKET NEAR HANUMAN MANDIR, BHOPAL	5220725 / 2579178	Mr.Shinu
Madhya Pradesh	Chindwara	Bunty Photoelectronics	Shop No.33, Jiji Bai Complex, Parasia Road, Chindwara	230358	Mr.Ritesh Shukla
Madhya Pradesh	Dewas	New Taj Electronics	4, New Market, Moti Bunglow Main Road, Dewas	220005	Mr.Shabbir Shaikh
Madhya Pradesh	Guna	Mobile Junction	Jai Stambh Chauraha, N:Central Bank, Guna-473001	329277	Mr.Deepak Arya
Madhya Pradesh	Gwalior	Calax Computers	Ground floor, Ganpati Plaza, City Centre, Gwalior	4013311	Mr.Pradeep Dixit
Madhya Pradesh	Gwalior	Versha Sales & Service-Asp	GROUND FLOOR SARAFI BAZAR LASHKAR, GWALIOR	4060444	Mr.Ajit Kumar
Madhya Pradesh	Indore	Ayushi Electronics	UG-10, Ratnamani Complex, 7/1, New Palasia, Indore-452001	3251284	Mr.Santosh Dwivedi

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Madhya Pradesh	Indore	IT Customer Care	UG- 11, B. M TOWER, OPP. LOTUS, SAPNA SANGITA ROAD, INDORE	3207283	Mr. Sanjay Dhankar
Madhya Pradesh	Indore	Pioneer Marketing	Prem Trade center Opp.Gujarati Girls collage, Indore	4006503	Mr.Ritesh
Madhya Pradesh	Itarsi	S.S. Telecommunications	Vijayshree Complex 5, Line Sarafa Bazar, Itarsi - 461111	9300272505	Mr.Akilesh Saxena
Madhya Pradesh	Jabalpur	Sri Sai Communication	C/O MUSKAN CARD GALLERY, 766, SHAHID SMARK MARG, NEAR RANITAL SQUARE, JABALPUR-482001	4046831	Mr.Mohit Sareen
Madhya Pradesh	Jabalpur	IT Solution	Opp Dr.Grover Hospital, Gate No-3, Wright Town, Jabalpur	4014064 / 4064370	Mr.Sanjeev Choubey
Madhya Pradesh	Katni	Excellent Infoyo	20/306, Gununak Road, Katni	406047	Mr.Prafull Agrwal
Madhya Pradesh	Khandwa	Naman Refrigeration	TAPAL CHALL, KHANDWA	2230089	Mr.Yashwant Mali
Madhya Pradesh	Mandsaur	Sky Link Mobile Services	Payas Ice Cream Parlour, 16, Opium Godown Road, Nai Abadi, Mandsaur 458001 (M.P)	243978	Mr.Gaurav B. Mittal
Madhya Pradesh	Morena	Mobile Plaza	M S ROAD, JIWAJI GUNJ, OPP BANK OF INDIA, MORENA	400886	Mr.T C Shivhare
Madhya Pradesh	Neemuch	Shree Balaji Mobiles	Jain Bhawan Road, Near Ganganagar Off. NEEMUCH (M.P)	320033	Mr.Savesh Goyal
Madhya Pradesh	Ratlam	Kirti Telecom	124 Station road Opp.Raj Tower, Ratlam - 457001	239346	Mr.Kirti jain
Madhya Pradesh	Sagar	Neeta Computers	Hanuman Mandir Gali 5, Civil Lines, Sagar -470001	329951	Mr.Ramesh Gupta
Madhya Pradesh	Satna	Akashwani Agencies	OPPCMA SCHOOL, SHOP NO.2, ANNAM CHHAYA, REWA ROAD	416455	Mr.Ajay Sukhramani
Madhya Pradesh	Satna	Maa Sharda Communication	Gali No 1, C/o Shri Gopal Sharan Singh, Pushp Raj Colony, Satna	7672320797	Mr.Prashant Singh
Madhya Pradesh	Shivpuri	Ocean Computer Corporation	1st Floor, Vishnu Mandir Market, Near Panipat Handloom, Shivpuri	225505	Mr.Sameer Saxena
Madhya Pradesh	Ujain	Galaxy Computers & Communication	43/2, Varruchi Marg, Opp Madhav Nagar Police Station, Freerang, Ujain	2515995 / 253999	Mr-Anurag Chhajlhari
Maharashtra	Ahmednagar	T V Spot	B-3, ADARSH SAMRUDHI, NR. CHOLUPATI, KARANJA-414001	2326267	Mr Anil Apte
Maharashtra	Akola	Supra Computers	Ushakiran Complex, Shastri Nagar, Opp. Hotel Surya, Akola.	9326866469	Mr.Prashant
Maharashtra	Amravati	Scorpio Services	Shop No. 84, Ground Floor, Gulshan Towers, Nr. Panchnasheel Cinema, Amravati, Pin-444601	2567302	Mr. Pramod
Maharashtra	Aurangabad	Electronics World	Sahyadri Building, opp. To Shivaji School, Khokadpura, Aurangabad-431001	6454532	Mr. Rauf

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Aurangabad	Unique Telematics	SHOP NO. 108A, FIRST FLOOR, TAPADIYA SUPAR MARKET, NIRALA BAZAR, AURANGABAD -	2356447	MrMahesh
Maharashtra	Beed	Shree Enterprises	Behind Raj Hotel, A H Wadia vachnalay rd, Beed	9373701010	Mr. Rajiv Joshi
Maharashtra	Chalisgaon	Mobile Point	SHOP-22, MOMAYA COMPLEX, NEAR BUS STAND, CHALISGAON	9372712777	Mr. Dashrath Vaishnav
Maharashtra	Chandrapur	Shiv Communications	Rammagar, Near Durga Mata Mandir, Sindhi Colony, Chandrapur-442 401	329546	MrMahesh
Maharashtra	Chinchwad (Pimpri)	Ritz Communication	Shop No 10, "A" wing, Jai Ganesh Vision, Next to Hotel Neelkanth, Near Fam Multiplex, Akurdi, Pune-411033	27485613 / 32661900	Ms Nikita
Maharashtra	Dhule	Pearl Communications	Shop no 3, CKB arcade, Near Devpur Bus stand, Agra rd, Dhule	324666	Mrs. Sonu Atul Bang
Maharashtra	Gondia	M/S V2 Care	Opp. Cofee house, Railboli, Gondia 441614	329322	Mr. Krishna Sargam
Maharashtra	Hatkangale (Ichalkaranji)	Sai Vision Services	T1/236 MOHAN ARCADE SHOP NO B14, STATION ROAD, TAL-HATKANGALE, CITY-ICHALKARANJI-416115	2439989	Mr. Sameer Bhonsale
Maharashtra	Islampur	Solar Shoppay	Kachare Lane Islampur, Distt Sangli	9326777603	Mr. D.H.Patil
Maharashtra	Jalgaon	TelUs Associates	Shop No 16, 'G' Wing 1st Floor Near Tarun Bharat Office, Golani Market, Jalgaon Maharashtra.	9370164545	Mr. Shaikh
Maharashtra	Jalna	Megha Multi Serices	Shop no 04, A wing, Udhan complex, Jalna	9326201408	Mr. Narendra Kulkarni
Maharashtra	Kolhapur	Sms Services	55, Diwan Tower, Opp. Nutan Marathi School, Near Mirajkar Tikky, Kolhapur, Pin -416005.	2541120	Mr. Prakash Patil
Maharashtra	Kopergaon	Om Sai Mobile	Opp. ST Bus Stand, Daharangaon Road, Kopergaon, Dist Ahmednagar.	9373295009	MrMahendra Devkar
Maharashtra	Latur	Hindustan Mobiles Services	Side no, 111, Shop 59, 49 Gandhi Market, Near Bhalchandra Blood Bank, Latur-413512	641111 / 982345500	Mr. Sandeep Parande
Maharashtra	Malegaon	Cell Care	Shop no 59, SR no 57, New Islampur, Malegaon	9326211996	Mr Ansari Mohd Israfil
Maharashtra	Mumbai	Cyber-Gyan Convergence & Services (India) Pvt. Ltd.	43/44, Gold Filled Plaza, Sion Bandra Link Road, Sion, Mumbai-400017	24075939	Mr. Jatin Parekh
Maharashtra	Mumbai	G.PElectronic	Shop No 6 Ambika Cooperative Housing Society, Jawahar Nagar Road No 2, Near Railway Crossing, Goregaon West, Mumbai 400062	2232633960	MrMayur

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Mumbai	Grace Tele Services	Shop no 3, C/1, Manik Nagar Soc, Punjabi lane, Borivali (W). Mumbai 400092	32455033	Mr. Daniel
Maharashtra	Mumbai	Komplex Telecom Corporation	Shop no.A/19, Nootlan Nagar Premises Co. Op. Htg. Society, Near Bandra Fly. Stn., Towards Bandra Talav, Turner Road, Bandra (West) Mumbai 400050	64147153	Mr. Sutar
Maharashtra	Mumbai	LG Service Centre	Shop No.1, 2, 3 Ground Floor, Rajakamal Bldg, Opp.Ram Mandir, Subhash Road, Vile Parle(E) Mumbai 400 057	26134917	Mr. Rakesh / Omkar
Maharashtra	Mumbai	Paras Telecom	2nd floor, Rear Side Capital Cinema Building, Wauddy Road, Opp. Mumbai CST Railway Station, Mumbai	65279042	Mr. Ravindra
Maharashtra	Mumbai	Sai Tele Services	A-110, Satyam Commercial Complex, M.G.Road, Ghatkoper (E), Mumbai - 400 077.	4011264	Ms. Isha
Maharashtra	Mumbai	Sierra Mobiles	Opp Prabhu Darshan, L.J.Road, Shivaji Park, Near Shiv Sena Bhawan, Mumbai 400016	24382200	Mr. Anurag
Maharashtra	Mumbai	Trident Communications	B-A, Vasant Smruti, Dadasaheb Phalke Road, Beside "BharatKhsetra Building", Near Dadar station(E), Dadar -East, Mumbai - 400 014.	65047270	Mr. Kalpesh
Maharashtra	Mumbai	Yash Telecom	Dadarker Tower, Shop no.1, Opp.Film Centre, Near Crossroads, Tardeo, Mumbai - 400 034	23522702	Mr.Girish
Maharashtra	Mumbai	KBs Communications	Shop No.2A, Maharashtra Seva Sangh, Near Apra Bazar, Nehru Road, Mulund (West), Mumbai-400080.	32107410	Ms. Harsha
Maharashtra	Nagpur	Epoch Services	Shope No. UG-9, Bhalati Vihar Complex, Chapru Nagar Square, Lakadgarj, Nagpur -440008	3246777	Mr. Girish
Maharashtra	Nagpur	Shivatronics	B-31 Sai Regency Complex Ravi Nagar Square Nagpur Maharashtra 440044	9300892579	Mr. Ravi Gupta
Maharashtra	Nagpur	Spectrum Marketing	Shop No.2, Dharampeth Towers, West High Court (WHC) Road, Dharampeth, Nagpur - 440010	22527823	Ms. Sonali
Maharashtra	Nanded	Devansh Microtronics	Beside Forest office Nc Ranbidkar Resi.Nanded	249789	Mr. Prashant Palnate
Maharashtra	Nasik	Mobs Associates	SHOP NO. 8A, FIRST FLOOR, 'KAPOTE-MEHER' MARKET, RENUKA NAGAR, WADALA NAKA, DAWRIKA, NASIK	6522613	Mr. Alim Kazi
Maharashtra	New Mumbai	Beekeyen Enterprises	Block No 1, Shop No. 17, Mahaveer Milan, Sector 28, Near Blue Diamond, Hotel, Vashi, New Mumbai	65114304	Mr. Shailesh
Maharashtra	New Mumbai	LG Service Centre- Dak	H Block, Ground Floor, Dhirubhai Ambani Knowledge City, Navi Mumbai-400709	30386032	Mr. Sachin

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Panvel	Oceanic Tele System	Shop No. 3, Sai Arcade, Sector 15, New Panvel (E), Dist. Raigad.	9322217221	Mr. Chetan
Maharashtra	Pen	Skyphone Enterprises	SHOP NO 3, SHREE COMPLEX, OPP UNIQUE BAZAR, PEN KHOPOLI ROAD, PEN, DIST RAIGAD-402107	9373435000	Mr Kuldeep
Maharashtra	Pune	Horizon	32A, Lotus Court, Near Hotel Panchami, Pune Satara Road, Pune.	32501222	Mr. Nilesh Pundye
Maharashtra	Pune	Microchip Solutions	Akshay Chambers 216 Naryan Peth, Near Bhide Bridge, N C Kellar Rd, Pune-411030	24471155	Mr Mahyesh Bhosale
Maharashtra	Pune	Mobile World	G-25, AKSHAY COMPLEX, DHOLE PATIL ROAD, PUNE-411 001	30942268	Mr.Pawan Mantri
Maharashtra	Pune	Wiki Info Technologies	Shop No-4, Amit Complex, 474, Sadashiv Peth, Opp New English School, Tilak Road Pune Maharashtra	24434134 / 9322206000	Mr.Vivek Surve
Maharashtra	Ratnagiri	S P Electronics-Pune	shop no-19, Parasmani Complex, K C Jain Nagar, Nr Maruthi Mandir, Ratnagiri-415612	329556 / 221982	Mr.Santosh Prabhu
Maharashtra	Sangamner	Rajpal Telecom	Yashodhan complex, New Nagar Rd, Near hotel Chaitak, Sangamner	320888	Mr Harish Rajpal
Maharashtra	Sangli	Ramesh Electronics	Dr. C. S. Joshi Banglow, Opp. B.Ed Collage, Rajwada, Sangli., Tq. Miraj, Dist.- Sangli.	2327601 / 09372107601	Mr. Suresh Shegane
Maharashtra	Satara	Shivkal Mobilink	173/6/7 Rawiwarpeth shop no-11, Vithal Lika Complex, Powai Naka, opp Janta Bank, Satara-415002	325212	Mr. Mahesh Shinde
Maharashtra	Shrirampur	Siddharth Infocom	Shop No 1, Hotel Sidhartha Building, Sidhartha Stop, Sagamaner Road, Shirampur-413709	9326611445	Mr. Kedar Fargade
Maharashtra	Solapur	Atharva Electronics Pun	940/2 NORTH SADR BAZAR, GARUD BUNGLOW, SOLAPUR-413003	2317595	Mr. Umesh Kamalapurkar
Maharashtra	Solapur	Jawaharal Radio Service	184, Gold Finch Peth, nr Hotel Ritesh, Solapur - 413007.	2725030	Mr. Prasanna J Chavan
Maharashtra	Thane	Ekadant Corporation	Shop No1, Ground Floor, Laxmi Smruti CHS, Opp Bal Ganesh Temple, Near Makhmal Talao, Eduji Road, Charai, Thane (W) 400602.	32130222	Mr. Paresb
Maharashtra	Thane	E-Link Solutions	Shop No.5, Type C. Bldg no.5/6, Shanti Vihar, Mira Road -E	9322839386	Mr.Omkar
Maharashtra	Kalyan	Sky Lark Associates	Shop: 1, 'X' Wing, Suresh Tower Co-op. Hsg. Soc. Opp. Municipal Vegetable Market, Santoshi Mata Road, Kalyan (W)	3209899	Mr. Pravin
Maharashtra	Bhiwandi	Varad Electronics	SHOP NO2, PRABHU CHAYA BLDG, PRABHU ALI, NEAR OLD GOVT. HOSPITAL, MANDAL, BHIWANDI, DIST THANE	222653	Ms. Swati
Maharashtra	Vashi	Beekeyen Enterprises	Block No 1, Shop No. 17, Mahaveer Milan, Sector 28, Near Blue Diamond, Hotel, Vashi, New Mumbai	65114304	Mrs. Kartiki

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Virar	Siddhivinaayak Tele Services	Shop no 5&6, Vishnu Prasad Complex, Opp Ulkarsha School, Near S.T. Bus stand, PP. Marg., Virar (West)	3258111	Mrs. Vaishali
Maharashtra	Wardha	Libra Electronics	C/o Anand Optical, Soshalist Chowk, Main Road Wardha Maharashtra-442001	2242109	Ms.Manjusha
Maharashtra	Yavatmal	Combine Electronics & Services	Shop No 13, 1st floor, Old Indira Gandhi Market, Azad Maidan Road, Yavatmal-445001	9822200166	Mr. Ajay Shukla
Maharashtra	Yavatmal	I T Services	Nr datey college, C/o Yahoo cyber cafe, Yavatmal 445001	9372610121	Mr.Umesh Gadwe
Maharashtra	Yavatmal	Star Electronics	Near Shyam Talkies Ram Mandir Road Yavatmal Maharashtra 445001	2324106	Mr.Smrajy Chabda
Meghalaya	Shillong	Rhapsody Care	E N COMPLEX, G.S. ROAD, Below Town Pharmacy	2547946	Mr.R.R. Wazi
Orissa	Anugul	Creative Solution	Hanuman Bazar, Near gundicha mandir, Angul-759122	329207	Mr. Tapas Sahu
Orissa	Balasore	Raghunath It Solutions	Azimabad, Proof Road, Balasore-756001	329267	Mr.Sujit K: Sen
Orissa	Berhampur	Rashmi Electronics & Computers	Shop No.19, Sai Complex, Main Road, Gandhi Nagar, Berhampur, Orissa	3290409	Mrs. Rashmi Ranjan Sharma
Orissa	Bhadrak	A B Associates	Nr.Reliance Web World Express, Bypass Road, BHADRAK-756100	9337040450	Mr. Kartik Chandra Rout
Orissa	Bhubaneswar	Miracle Services It Extn.	Plot No. 136, Fr. Lane of Vigilance Office, Beh. Passport Office, Surya Nagar, BBSR.	2532383	Mr.Chaco/ Suprava
Orissa	Bhubaneswar	S.A.Infosys	291 .Bomkihal, Opp.Akamra cinema hall, Bhubaneswar-751010	2573114	Mr. Ashwini K Sahoo
Orissa	Cuttack	O.A.Infotech	Behind Govt Bus Stand, Badambadi, Cuttack -753012	9338912613	Mr. Arabind Rout Ray
Orissa	Puri	Bajinpath Infocomm	At Municipal Mkt, Grand Road, Puri-752001	9337032005	Mr.Ajay/ Sandeep Agrawal
Orissa	Rourkela	Infosys	13, Bira Road, subhadra complex Opp.Choudhary Petrol Pump, Rourkela	9337403999	Mr. Arun Ghosh
Orissa	Sambalpur	A.N.Communication	Inf. Of Zilla School, Pensionpara, Sambalpur-768001	9337660919	Mr. Md. Abdul Aziz
Punjab	Amritsar	Bajaj Telecommunication	87, G Floor, Nehru Complex, Lawrence Road, Amritsar-143001	3258599	Mrs.Suman Bajaj
Punjab	Barnala	Unique Infotech	Mittal Street, Near M C Office, Barnala-148101	238007	Mr.Pankaj Goyal

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Punjab	Batala	Dream Services	Shop No 111 Opp Improvement trust office, Dharamsingh Market, Batala.	9316676018	Sandeep Singh
Punjab	Bhatinda	Lalli's Electronic Gallery	1139-A, First Floor, Amrik Singh Road, Nr Gole Digg, Bhatinda-151005	2239500	Mr.Ashok Katria
Punjab	Chandigarh	New Tech	SCO 495/496 SEC 35C First floor	9814244862	MrPawan
Punjab	Chandigarh	Vignesh Services	S.C.O- 189-90, Sec- 34, Chandigarh	3018028	MrMukesh Arya
Punjab	Hoshiarpur	Kuldip's Mobile Care	Dhobian Wali Gali, Phagwara Road, Hoshiarpur-146001	226906/ 2232906	MrKuldip
Punjab	Jalandhar	Mobile Center	233/1, Saheed Udham Singh Nagar, Backside Hotel Preet, Nakodar Road, Jalandhar-144001.	3292666	MrVikas Sangar
Punjab	Kapurthala	Arun Electronics	217, C Block, Jama Masjid, Shopping Complex-144601	329254	MrArun Khosla
Punjab	Kotkapura	Om Mobile Service Centre	1ST FLOOR DHANU RAM PANSARI, Railway Road-151204	223069 / 9815759239	MrRohit Mittal
Punjab	Ludhiana	Anant Shree Comp	19K Opp PAU Gate no 1 Ferozpur Road	3245386	Ms Moria chaudhary
Punjab	Ludhiana	Shahi Communication	Shop No.5, Revolving Restaurant 4X International, 583 L, Model Town, Ludhiana	3244190	MrAmit Shahi and revival
Punjab	Malaut	Khurana Mobile Solution	SHOP NO 7 OPP. NEW TELEPHONE EXCHANGE G T ROAD MALLIAT PIN NO - 152107	9316940003	MrRamesh Khurana
Punjab	Malerkotla	Prime Infocomm	Opp. Main gate, Govt College, Malerkotla-148023	253899	Mr.Rohit Bansal/ Raj Verma
Punjab	Mandi Gobindgarh	Aditya Infocom	Main Iron Market, custom and eaise office Mandi Gobindgarh	326896	MrNareesh Aggarwal
Punjab	Mansa	Sharma Telecom	Cinema Road NAGINA MARKET OPPPARKASH BOOK DEPOT, Mansa	9316737009	MrLidesh Kumar Sharma
Punjab	Moga	Rashpal Telecom	6, Red Cross Road, Court Road, Near Old Court, Moga-142001	222468	Mr. Rashpal Singh
Punjab	Nabha	Echo Telecom	Opp. Milan Palace Circular Road, NABHA 147201	504501	Mr.Girish Garg
Punjab	Nawasher	Kapoor Electronics	Kothi Road, Opp Kumar Hotel, Nawashahr-144514	508085	MrNarender Pal
Punjab	Pathankot	Leo Comp	Near Tourist hotel, military ground, Pathankot	9814586406	MrMr Kamal
Punjab	Pathankot	Touch Infosys	189 Opp. Guru Nanak Park, Model Town, Pathankot.	3290300	MrNavdeep Singh Bedi

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Punjab	Patiala	Image Services	Shop No.84, First Floor, Leela Bhawan Opp Punjab National Bank, Patiala-147001	2222796 / 9872281524	Mr.Rohit Bansal
Punjab	Phagwara	Bansal Telecom	G T Road, Railway Road Chowk Near Connect Office, Phagwara-144401	461321 / 9888005339	Mr.Mangallesh
Punjab	Rajpura	M K Enterprises	Shop no.6, Gurudwara Singh Sabha Market, Rajpura Town-140401	2652569	Mr.Johny
Punjab	Ropar	Arora Communication	Shop No.1, Lehari Shah Mandir Road, Ropar	9872363032	Mr.Amit Arora
Punjab	Samana	Sangam Mobile Care	Tehsile Road, Near Carg Laboury	505648	Mr.Vaneet Kumar
Punjab	Sangrur	National Computers	SUNAMI GATE, Near Guru Nanak School, SANGRUR PIN NO = 148001	233335 / 9814586196	Mr.Sarabjit Singh
Punjab	Sarhind	A.S. Infocom	Grain Market, Cinema Road Sirhind City-140406	500726	Mr.Jaspreet Singh
Rajasthan	Ajmer	Nehal Infotech	F-3, FIRST FLOOR, AMAR PLAZA, Opp. DALULAT BAGH, AJMER-305001	3291404	Mr.Suresh Sharma
Rajasthan	Ajmer	Prangan	112/10, Civil lines, Ajmer	9828503092	Mr.Pareek
Rajasthan	Alwar	R.K.Telecom	SHOP NO.112, FIRST FLOOR, GANPATI TOWER NEAR NANGLI CIRCLE, Alwar	9351390057	Umesh sharma
Rajasthan	Beawar	Srikrishna Infocom	Chaoni Road, Bhagat Chauraha, Near Roadways Bus Terminus, Beawar	329675	Mr. Dheerendra Agrawal
Rajasthan	Bhilwara	Ajanta Communications	No.3, Bapna Complex, Pur Road, Bhilwara	329549	Rafiq
Rajasthan	Bikaner	Tech Solutions	1st Floor, 222 & 223, Ganpati Plaza, KEM Road, Bikaner	3292423	Mr.Aziz/Vika
Rajasthan	Chittorgarh	Anhant Infotech	A46, Meera Market, Near Rajasthan Patrika Office, Chittorgarh-312001	325933	Mr.Abhishek
Rajasthan	Chomu	Tambi Telelink	Kotwali chabutra, dhan ji ki gali, Sadar Bazar Chomu-303702	9314090400	Mr.Anup Tambi/ Dp Saini
Rajasthan	Dholpur	Tirupati Telecom	14, Bhagwati Market, Near Jagan Cinema hall, Jagan Tiraha, Dholpur	9314014093	Mr.Moshin/ Devender
Rajasthan	Jaipur	Alpha Infotech Systems	F-1, First Floor, Krishna Mall, Lakshmi Mandir Crossing, Tonk Road, Jaipur-302015	3299724	Shatrugan mangal
Rajasthan	Jaipur	Alliance Communication	G6, City plaza, Space Cinema Hall, Jhotwara Road, Jaipur-16	9351371549	Amit/Bhushan
Rajasthan	Jaipur	Solution Computers	Plot No.4 Krishna Nagar StationJanpath Near Hotel Paradise Jaipur	5106388	Mr.Dhreej Mathur
Rajasthan	Jhunjunu	M S Mobile Point	Kaswan Complex, Opp Roadways Bus Stand, Jhunjunu	9314011951	Mr.Abhishek / Mr.Sunil
Rajasthan	Jodhpur	Omega Electronics	Plot No.196 SS Tower, AkhalyaChowaha Jodhpur-342003	3291214	Mr.Pratap Singh

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Rajasthan	Kishangarh	Capital Enterprises	5, Radha Krishan market, Opp. Sardul school, Kishangarh-305801	326550	Mr.Shatrughan
Rajasthan	Kota	Cyber Infosystems	26, Ground floor, Kalawati Palival market, Gumanpara, Kota-324007	2392153	Mr Rajnish
Rajasthan	Kota	Saya Electronics	1-TA-16, Vigyan Nagar, Kota	9828503246	Mr.Lalit
Rajasthan	Kotputli	Isha Communications	11, ground floor, Govardhan plaza, Nehru Bazar, Kotputli	9314140001	Mr.Vijender
Rajasthan	Nagaur	Jam Appex	Shop num.7, Opp. Old power house Ram Poll, Station road, Nagaur	329595	Mr.Amit
Rajasthan	Nathdwara	Geniune Infotech	Shop num.10, Suriya apartments, Opp.Vandana talkies, Bus stand, Nathdwara.	329208	Mr.Gajender/Mr Ashwini Purohit
Rajasthan	Pali	Mansi Mobile	9, Vasant Vihar, Opp. Bangur college, Pali-306401	9352766555	MrAbhishek
Rajasthan	Shriganganagar	Telecare Servecies	33, J Block, Near Birbal Circle, SriGanga nagar	3207687	Abhishek
Rajasthan	Sikar	Rita Computers	Shop No.4, Kabra Market, Shramdan Marg, Sikar-332001	329520	Mr.Saurav Chakravarthy
Rajasthan	Udaipur	Shree Telelinik	31, First floor, Indra prasth complex, Delhi gate, Udaipur-313001	3261777	Tanujay Jain
Tamilnadu	Ambasamudram	A to Z Communications	63-D, KNV Complex, Santhai Bazaar, Ambasamudram -627401	251143	Mr Raja Selvakumar
Tamilnadu	Arkonam	G.M. Marketing	NO.3/4, SUBURAYAN STREET, ARAKKONAM-631001	231395	Mr.Mr.P.Cajjapathi
Tamilnadu	Arni	Digitech Computers	Shop No. 201/82- B1, SM Road, Arani - 623101	223929	Mr.D.Mohan Ram
Tamilnadu	Aruppukottai	The Mercury Computers	607, MADURAI ROAD, NEAR NEW BUS STAND, ARUPPUKOTTAI-626101	222552	Mr. R. Boominathan
Tamilnadu	Attur	VR. Net	VR.Net, Dt:Arumugam complex, salem main road, ATTUR	243585	Mr.Senthil Kumar
Tamilnadu	Batlagundu	Karthik Communications	No 221, Main Road, Batlagundu- 624202	9360019090	Mr Lakshmanan
Tamilnadu	Bhavani	Sri Abirami Electronics	2E, Pavadi Street, Anthyur Corner, Bhavani-638301	230919	Mr Balamurugan
Tamilnadu	Chegalapatu	SKB Electronics	No-42 Devarajanar pillai Street, Vedachalam Nagar, Chengalpet	37406080	Mr.Balaji
Tamilnadu	Chennai	Genesis Communication	63/3, First main road, Gandhi Nagar, Adyar, Chennai-600020	24401188	Mr Suresh
Tamilnadu	Chennai	GS Systems	547/352, F M Towers, Mount Road, Nandanam, Chennai-6000035	24330889	Mr.Nicholus
Tamilnadu	Chennai	Sabisu	82, Golden Enclave, New 275, Old 184, Poonaallee High Road, Kilpauk, CHENNAI 600 010.	26612347	Mr.Palani
Tamilnadu	Chennai	Unicare Infocomm Services	No.293, Arcot Road, Next to Indian Overseas Bank, Kodambakkam Chennai - 24	24724666 / 52047059	Mr.Kartik
Tamilnadu	Chennai	Garage De Telecom	OLD No:30- NEW No:10, KMBF BUILDING, 1ST FLOOR, DURAISAMY ROAD, NEAR POTHYS, TNAGAR, CHENNAI 600017	28143454	

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Chidambaram	Future Tech	Hasan Towers, 1st Floor No. 14, V.G.P Street, Near Hotel Ritz, Chidambaram	222150	Mr.Shaker
Tamilnadu	Coimbatore	Classic Electronics	No 1/1, Alagappa Road, 6th St, Tatabad, Coimbatore - 640012	4374875	Mr Arivadhagan
Tamilnadu	Coimbatore	Fast Track	138-C, TV Swamy Road (West), RS Puram, Coimbatore - 641002	2551155	Mr Anand
Tamilnadu	Coimbatore	Nucom Services	3/61, Master Building, Kattoor Road, Pappa Naicken, Palayam, Coimbatore - 641037.	4351569	MrLithaman
Tamilnadu	Cuddalore	Kasturi Cellular Service	NO: 37 (2C) BHARATHI ROAD, CUDDALORE. 607 001, CUDDALORE DISTRICT, TAMIL NADU.	220183	Mr Raghupati
Tamilnadu	Cumbum	LG Mobile Service Gallery	No 52, Gandhiji Street, CLMBUM-625516	320800	Mr.Senthil Kumar
Tamilnadu	Dharapuram	IT Zone	40-A-1, Bye Pass Corner, Dharapuram-624202	329293	Mr Ramakrishnan
Tamilnadu	Dharmapuri	Calrity Digital Photo&Audio	98/29C KANDASAMY VADIYAR STREET, DHARMAPURI, 636701	329707	Mr.Raj Murugesan
Tamilnadu	Dindigul	Padma Electronics	15, Dudley high School, Dindigul	9367927080	Mr. Murali Chandra
Tamilnadu	Erode	Jans Electronics	29, Sathy Road, Near Hotel Oasis, Erode - 638004	3258526	Mr Kannan
Tamilnadu	Gobichettipalayam	Best Electronics	47a/1, kms complex kachery medu, gobichettipalam	225598	Mr.G.A.Jayakumar
Tamilnadu	Hosur	Suryas Will Of People	R S Towers, Opp Traffic Police Station, Bangalore By Pass Road, Hosur-635109	246687	Mr:Shanmugam
Tamilnadu	Kallikuruchi	New Magestic Cell Sales&Service	OPP TO TELEPHONE EXCHANGE, GANDHI ROAD KALLAKURICHI	228270	Mr. Murugesan
Tamilnadu	Kanchipuram	Classic Mobile Care Centre	Door No.67-A, (Shop No.5), P.S.K. Street, Kancheepuram-631 501	9345636900	MrDamodaran
Tamilnadu	Karaikal	Shree Harini Cellular Service	OPP TO NEW BUS STAND, BHARATHI MAIN ROAD, KARAIKAL-609602	320544	Mr. K. Selvaganapathy
Tamilnadu	Karakudi	Sitiesy Electronics	10 A / 3, Muthulakshmi Complex, Opp to Income Tax Office, Sekkalai, Karakudi - 630002	9362611455	Mr. S. Veerapandian
Tamilnadu	Karur	Aswathi Electronics	No 90 / 102, Old Bye pass Road, Karur-639001	9843045555	Mr. Satish Kumar
Tamilnadu	Kovilpatti	St.Marys Cellphones	No.6, Rajakumari Towers, AKS Theater Road, Kovilpatti	9360533649	MrJyappan
Tamilnadu	Krishnagiri	Madura Care Centre	No 361, Crown Comple, Bangalore Main Road, Krishnagiri-635001	9364258223	Mr Suresh Kumar
Tamilnadu	Kumbakonam	Fargan Electronics	NO.5 VRS COMPLEX, HAJIAR STREET, KUMBAKONAM- 612001.	2401123 / 3290303	Mr. Surbudeen

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Kuzhithurai	Mobile Care	Shop no 211, SM Arcade, Main Road, Marthandam, Kuzhithurai - 629165	270587	Mr Surendra Kumar
Tamilnadu	Madurai	Devaa Electronics	No.4, Thirumakulam North Street, Near Ayyappan koil, Thhalkulam, Madurai-625002	4360995	Mr. Guna
Tamilnadu	Mayiladuthurai	Nrs Mobile City	NO-28 - C/14, R.R.COMPLEX, MAILADUTHURAI	223277	Mr Abdul Rahim
Tamilnadu	Nagercoil	Redeemer Electronics	Shop no 2, Pillars Gate, Balamore Road, Nagercoil-629001	327788	Mr.Dinkar
Tamilnadu	Namakkal	VR Care	77/2, Veera Vilas, Trichy Main Road, Namakkal - 637001	329304	Mr. R Vjyalakshmi
Tamilnadu	Ooty	Mountain Cell Com	NO-302, Band lane, Commercial road, Near Liberty Theatre, Ooty-643001.	2443787	Mc-Sujith & Miss Geetha
Tamilnadu	Palani	Hi-Tech Electronics	No.76, New Dharapuram Road, Opp. ICICI Bank, Palani - 624601	320264	Mr. R. Ramachandran
Tamilnadu	Paramathy Velur	Vishwak Mobiles	No 5, KK High School Building, 98, High school road, Paramathy Velur - 638182	224348	Mr Mohan
Tamilnadu	Pattukottai	Mobile Care	127, BIG STREET, PATTUKOTTAI	9842653921	Mr.Anul Alagan
Tamilnadu	Perambalur	The Best	Vivkanand st., M.P. office opp., Perambalur	275717	Mr.PKumar
Tamilnadu	Perundurai	Sree Baby Electronic	483 mainroad, perundurai	221800	Mr.Shiva Balan
Tamilnadu	Pollachi	Star Mobiles	SHOP NO. 5 Ground Floor, Vasanth Complex, Immamkan Street, POLLACHI.	222230	Mc.Senthil Kumar
Tamilnadu	Pondicherry	Digital Logistics	126/2, Perumal Koil Street (Bharathi Street Cutting), Pondicherry-605001	4210148 / 9843093348	Mr.G Singaravelu
Tamilnadu	Pondicherry	Balaji Electronics	No.21, 3rd CROSS STREET, Annanager, PONDICHERRY,	3090414	
Tamilnadu	Ponneri	Sri Balaji Mobile Care Center	NO. 26, THALUKKA OFFICE ROAD, PONNERI, THIRUVALLUR DIST-601204	27973381	Mr.Balaji
Tamilnadu	Port Blair	Universal Service Care	R.C.T. ROAD, PORT BLAIR, ANDAMAN-744101	329588	Mr.Naveen
Tamilnadu	Pudukottai	Yem Kay Electronics	2, Subabharathi complex, 5378, 79, Alangudi Road, Pudukottai-622001.	9344038441	Mr.Rajesh Kannan
Tamilnadu	Rajapalayam	Sri Vignesh Mobiles	292\1, TENKASI ROAD, OPP BOMBAY LODGE, RAJAPALAYAM-626117	220398	Mr.Ku.C.Mutthiah
Tamilnadu	Ramanathapuram	Zeenath Telecom	13-B/23, PAL LUCKY PLAZA, RAMANATHAPURAM-623501	226750	Mr.M.S.Jahir Hussain

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Ranipet	Unicare Infocom Services	No.36, opp.Gangadhara Muddalar Middle School, MBT Road, Novelpur, ranipet, Vellore Dist.	270806	Mr.Basker/ Mr.Karthik
Tamilnadu	Rasipuram	Sms Care Service	No 179 / 1, Anna Salai, Ground Floor, Rasipuram-637208	9345052553	Mr Manikavasagam
Tamilnadu	Salem	Vishwesh Mobles	Sixer Complex, 121/19A, Sarada College Road, Next to Abi Medical Centre, Salem - 636007	3290535	Mr.Vasudev Nayak
Tamilnadu	Sivakasi	Tele World	78, PARSN PLAZA, OPP.TO.WATER TANK, SIVAKASI-626123	223283	Mr.B.Mathan Kumar
Tamilnadu	Tambaram	Saravanas Infocom Services Pvt Ltd	New No-43, Old No:3A, Mudichur road, Tambaram west, chennai 600045	32915599	Mr.Palani/ Mr.Ranjith
Tamilnadu	Tenkasi	Airtone	1/ 17, KMSS complex, west masi street, Tenkasi. 627811	227980	Mr.M.Nagaraja Sankar
Tamilnadu	Thanjavur	Z M Electronics	1006/1007, South East Rampart, Opp to Municipal Higher Sec School Tanjore - 613001	272595 / 329554	Mr.Ziauddin
Tamilnadu	Tindivanam	Reva Communications	Old No. 117/1, New No. 205/1, Nehru Street, Tindivanam - 604001	225250	Mr.Lakshmi Narayanan
Tamilnadu	Tiruchendur	Ark Mobile Solutions	ARK DTP centre, No. 1 a 7 North car street, Rayan Complex, Tiruchendur. 628215	329380	Mr.Mahesh
Tamilnadu	Tiruchengode	Balaji Electronics	108 s s d road, near lorry stand tiruchengode	325430	Mr.Sekar
Tamilnadu	Tirunelveli	Classic Electronic	39, Trivendrum Road, Opposite Kalmark, Welcome Complex, Palyamkottai, Tirunilveli-627002	2575801 / 3290339	Mr.Erkins
Tamilnadu	Tirupattur	Acal Computer Systems	52/1, kkc complex, krishnagiri road, tirupattur	325385	Mr.Sunder
Tamilnadu	Tirupur	Shri Vasavi Electronics	# 155-303, Mangalam Road, Karuvam palyam, Tirupur -641604	4244009	Mr.L.B. Bala Murail
Tamilnadu	Tiruvarur	Softel Teleservices	No 21, Municipal Complex, Ground Floor, Panagal Road, Tiruvarur-610001.	22110	Mr Ravi
Tamilnadu	Tiruvellore	Yamkarna Computer	38/186 JAWAHARLAL NEHRU ROAD, OPP TO SBI MAIN BRANCH, THIRUVALLUR - 602 001	37600329	Mr. Saravana
Tamilnadu	Trichy	S K Electronics	Raj Complex, 9/A EVR Road, Puthur, Trichy- 620017	277194	Mr.Krishnan
Tamilnadu	Tuticorin	Snows Cell Care	Kala Complex, No 20, B-1, W G C Road, Tuticorin-628002	2334043	Mr.Kennedy
Tamilnadu	Udumalpet	Allwa Electronics	5 Thulava vellar shopping complex, V.O.C. street, UDUMALPET.642126	223047	Mr. Sentamarai Kannan

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Vaniambadi	Reva Communications	No.848/3, Cl. Road, Vaniyambadi - 635 751	395023	Mr.Lakshmi Narayanan
Tamilnadu	Vellore	Matha Communication	4, S.L.N Plaza, Opposite Odai Pillar Koil, Gandhingar, Vello - 632006	2240800	Mr.Cunaa Shekhar
Tamilnadu	Villupuram	Broad Band	No 642, Nehruji Road, VILLUPURAM	222936	Mr.Pagasam
Tamilnadu	Virudhunagar	RBG Electronics	76/9, Lakshmi Complex, Pullalakottai Road, (Opposite Uzhavar sandhai), Virudhunagar-626001.	420160	Mr Karuppuswamy
Tripura	Agartala	VIDEO S R	7Melarmoth, H.G. Basak Road, Agartala, West Tripura, Pin:799001	2328539	Arunabha Saha
Uttar Pradesh	Agra	Ankur Care Centre	27-G/111, Hotel Panchratna Building, Opp. Income Tax Building, Sanjay Place, Agra-282002	9412254152	MrAnkur Goyal
Uttar Pradesh	Aligarh	A.V.Computer Services	City Enclave opp. Kumar Nursing Home Ramghat Road	3200900	Mr.Vaibhav Gupta
Uttar Pradesh	Aligarh	Infocare	T7, Vikram Arcade, Railway Road, Aligarh -202001	3258080	Mr. Prabal Bansal
Uttar Pradesh	Allahabad	Micronet Solution	B 38/1, SHOP NO. FF3 VASHITSTHA VINAYAK TOWER, TASHKAND MARG, CIVIL LINES, ALLAHABAD	9335395183, 3250231	Mr. Hashmi
Uttar Pradesh	Allahabad	Radio Centre	SHOP NO-3 1ST FLOOR MEENA BAZAR, Allahabad	3292488	Mr. Manish Khanna
Uttar Pradesh	Amroha	Shree Jee Traders	Bazar Zaiti, Near Tehsil Mox, J.P.Nagar AMROHA-244221	9319075289	Mr.Arun bhargav
Uttar Pradesh	Azamgarh	Rajasthali	ASIF GANJ, CHOWK, AZAMGARH-276001	223644	Mr.Triloki Nath Jalaan
Uttar Pradesh	Badun	Customer Care Services	Plaza Market 1st floor Near Ghanatghar siroad Badun.	9319697938	Mr. Nazim
Uttar Pradesh	Bala	Sankatha Communications	Mall Godam road DcS. N.pandey Clinic Chowk Bala-277001, UP	9307637850	Mr. Manish
Uttar Pradesh	Barabanki	Yash Enterprises	Rashid Enclave, Mugal Darbar, First Floor, Nagar Palika Road, Barabanki	9336323714	Mr. Ajay Srivastava
Uttar Pradesh	Bareilly	Jai Infotech	SA-24 DEENDAYAL PURAM BAREILLY	3208484	Mr Rohit Tandon
Uttar Pradesh	Bareilly	Sapan Infotech	G - 64 A Kunwar Complex, Near Gupta Watch Co, 116 Civil Lines, Bareilly	3297933	Mr. Dhirendra Negi
Uttar Pradesh	Basti	Royal Enterprises	near ses agency,janta hotel, gandhi nagar, basti	9336784054	Mr. Deepak shrivastav
Uttar Pradesh	Bhadoi	Kislay Communication	Station Road, Near Narmada Girls Inter College, Bhadohi-221401	9235506029	Mr.Kislay
Uttar Pradesh	Bijnor	Konark Service Centre	Shop No.7, 1st Floor, Near Ajaz Ali Hall, Nagar Palika Complex, Bijnor-246701	9358364067	Mr.Pratyush Gupta

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Uttar Pradesh	Bulandshahr	MN Telecom	Shop No-1 BHARAMAPUTRA COMPLEX, KALA AAM, Bulandshahr	935801688	Mr Taukir Khan
Uttar Pradesh	Chandousi	Om Technologies	697, SITA ROAD, NEAR GANESH MANDIR, CHANDOUSI - 202412	9359986766	Mr.Sachin Gupta
Uttar Pradesh	Deoria	Atharv Communication	SHOP NO 5, SHANTI COMPLEX, HANUMAN MANDIR ROAD	9335226799	Mr.K.N.Gupta
Uttar Pradesh	Etah	Triveni Computer Service	688/1 Vijay Nagar, Infront of Shradha Cinema, Thandi Sadak, Etah-207001	9719398761	Mr.Vinod Kumar
Uttar Pradesh	Etawah	Frontline Computer	132, Sivil lines, Pakka Talab X-ing, Opp. HeroHonda Showroom, Etawah-206001	9219404194	Mr.Puneet Kaushik
Uttar Pradesh	Faizabad	Microworld Computer Hardware Lab	1st floor, Baldev Plaza, Rekhahganj, Faizabad	395744	Mr.Kapil/Sunil
Uttar Pradesh	Farrukhabad	Wave Technologies	2 B /122 AVAS VIKAS, LOHIA PURAM, FARRUKHABAD-209625	9335921175	Mr.Dharamveer
Uttar Pradesh	Fatehpur	Trimurti Telecom Services	230, SHADIPUR CHAURAHA, NASEPEER ROAD, FATEHPUR-212601	9336223093	Mr.Sanjay Sachan
Uttar Pradesh	Ghaziabad	Azure Systems	F-28 Konark Building, RDC, Raj nagar GZB	2700717	Mr.Aseem Saraswat
Uttar Pradesh	Ghaziabad	Concessionair Documentation India Pvt Ltd (Cdi)	C-83, Rajnagar District Center (RDC), Ghaziabad	3292011	Mr.Anil Tiwari
Uttar Pradesh	Gonda	Digitech Services	Suraj Complex Malviya Nagar, Ground Floor, In front of Distt. Mahila Hospital, Gonda	9336695719	Mr.Atul Singh Chauhan
Uttar Pradesh	Gorakhpur	Eternal Electronics	Shop No.11, Pandey Complex, 33, Kasya Road, Opp DIG Bungalow, Gorakhpur -273001	9336410222	Mr. Ajith
Uttar Pradesh	Gorakhpur	MM Communication	Udai Trade Centre, Opp Dr H.N.Singh Medical College road, Basharatpur, Gorakhpur	3250395	Mr.Ashwani
Uttar Pradesh	Hapur	Smart Solutions	10, 1st Floor, City Plaza, Hapur, Ghaziabad - 388001	9219659957	Mr.Rajkumar Kanojia
Uttar Pradesh	Hardoi	Shipra Electricals & Appliances	SHOP No.7 RD PLAZA, INFRONT OF VADIK VIDHYA MANDIR, NEAR AGARWAL DHRAMSALA & HOTEL UTSAV, CIRCULAR ROAD, HARDOI-241001	222384	Mr.Gaurav
Uttar Pradesh	Hathras	Arya Electricals	Bldg No.2206, Near Mayfair Hotel, Kamla Bazar, Hathras-204101	9319338655	Mr.Suneet Arya
Uttar Pradesh	Jaunpur	Shubham Pustakalya	Mandi Naseeb Khan, Near Siya College, Jaunpur	9336510150	Mr.Sudhir/Sanjay
Uttar Pradesh	Jaunpur	Supreme Communication	J.P. Complex, Oland Ganj, Jaunpur	9235407278	Mr.Mahatab Raja Beg
Uttar Pradesh	Jhansi	Krishna Enterprises	372/A CIVIL LINES, GWALIAR ROAD, JHANSI-284001	9335090997	Mr.Sujeet

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Uttar Pradesh	Kanauj	Dixit Mobile Lab	SHOP NO. A1 WARSI COMPLEX, LAKHAN TIRAHA, KANNOJ	9335042373	Mr.Sunil Dixit
Uttar Pradesh	Kanpur	Aakarsh Electronics	63/2 C(9)BALAJI COMPLEX, THE MALL, KANPUR	9335360303	Mr.Raman
Uttar Pradesh	Kanpur	LB Infotech	111A/409 1st floor, 80-ft road, ashok nagar, kanpur	3207303	Mr.Deepak Bhatia
Uttar Pradesh	Kasganj	Prem Computer Services	Roop Complex, Nadrai Gate, Kasganj-207123	9837403904	Mr.Vinay Agrawal
Uttar Pradesh	Khatauli	Sigma Systems	A-6, Shivlok Market, Near Indra Murti, C.T.Road, Khatauli-388001	9319666000	Mr.Alok Kumar
Uttar Pradesh	Lakhimpur	S S Electronics	GURDARSHAN BUILDING, KACHEHRI ROAD, LAKIMPUR KHERI, LAKHIMPUR -262701	9335038258	Mr.Saurabh Sinha
Uttar Pradesh	Lucknow	Alfa Electronics	Shop No.GF20 ABC Complex, Kanpur Road, Lucknow	3248730	Mr.Harjinder Singh
Uttar Pradesh	Lucknow	Hitech Communication	55 205, Cross road Plaza, Badshah Nagar Crossing, Lucknow.	9335088061	Mr.Ravi Prakash
Uttar Pradesh	Lucknow	Mobile Dot Com	shop no. 111, 1st floor, Shri Ram Towers, Ashok Marg, Lucknow	9335819202	Mr Anand Jhouri/ Archana
Uttar Pradesh	Lucknow	Net Com	3 way road, City Point, Opp Krishi Bhawan, Lucknow-226024	3294222	Mr.Vinod Sharma
Uttar Pradesh	Lucknow	RR Enterprises	Shop No.3, first floor, Deewan Chand Complex, 292/11 Chowk, Lucknow	3262263	Mr.Rohan/Yogesh
Uttar Pradesh	Mainpuri	Raj Communication	1002, Sadar Bazar, Near PNB, Mainpuri-205001 (U.P)	9358090251	Mr.Rohabh Khirbat
Uttar Pradesh	Mathura	R K Infocare	G-1, Abithya Palace, Sonkh Adda, Junction Road, Mathura-281001	3292274	Mr.Alok Gupta
Uttar Pradesh	Meerut	Care Centre	C-19, Vardaman Plaza, Garh Road, Meerut-250005	3258427 / 4005019	Mr.Ajay Mittal
Uttar Pradesh	Meerut	Coincap Services	Labour Compound, Above Allahabad Bank, Near Akash Ganga Jewellers, Begum Bridge, Meerut	2667942	Mr.Atul Mittal
Uttar Pradesh	Meerut	Essar Services	F-132-1333, 1st Floor, Ganga Plaza, Begum Bridge Road, Meerut-250001.	4025863 / 9837067894	Mr.Rajiv Gupta
Uttar Pradesh	MIRZAPUR	Singh Cyber	IMARTI ROAD, OPP. LIC OFFICE, MIRJAPUR-231001	9335205600	MR.Anup Singh
Uttar Pradesh	Modinagar	Ananya Communications	24, K.N.MODI COMPLEX, Modinagar-201204	325424	Mr.Nitin
Uttar Pradesh	Moradabad	Bhavya Technologies	A12, 1st floor, Rampur Road, Gandhi Nagar, Moradabad	3292518	Mr.Vivek Kumar Singh
Uttar Pradesh	Mugalsarai	Sky Mobile World	SUPER MARKET, MUGALSARAI	9335251754	Mr.Vibhati Jaiswal
Uttar Pradesh	Muzaffarnagar	Advance Series	Shop No-15 prakash chowk Muzaffarnagar-251001	9412210142	Mr. Rajiv

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Uttar Pradesh	Muzaffarnagar	Jai Computers	Shop No. 4, 1st Floor, Roorkee road, Near Shiv Chowk, Central Bank Mkt. Muzaffarnagar-251001	3294447	Mr.Manohar Singh
Uttar Pradesh	Noida	M R Telecom	D-329, Sector 10, Noida, (Corner Building, Noida Stadium - Jhundpura Main Road)	4312715	Mr.Kalash Aggarwal
Uttar Pradesh	Pilibhit	Kamal Electronics	Station Road, Pilibhit	9319911226	Mr. M A Jilani
Uttar Pradesh	Pratapgarh	Chandra Pratap Veer & Co	KATCHERY ROAD, CHOWK BAZAR, PRATAPGARH - 230001	9335053031	Mr.Rajesh Agarwal
Uttar Pradesh	Rai Bareilly	Karuna Enterprises	Shop No.6 & 7, City Complex, Kachary Road, Raebareilly	9336005741	Mr.Vikas
Uttar Pradesh	Rampur	Mamta Technologies	3Fs Shopping Complex, Rahe Murtaza Road, Civil Lines, Rampur-244901	3294923	Mr.Rajeev Yadav
Uttar Pradesh	Saharanpur	Maharaj Communications	1st Floor, Pradeep Hotel Compound, Court Road, Near Indiam bankSaharanpur-247001	3250239	Mr.Pankaj Malhotra
Uttar Pradesh	Shahjahanpur	Sunny Mobile Point	258 B TARIN BAHADURGANJ, SHAHJANPUR	9335019616	Mr.Rajaram Maurya
Uttar Pradesh	Sitapur	Higrade Computers	7, Municipal Market, Sitapur	9936819899	Mr.Sanjeev Goel
Uttar Pradesh	Sultanpur	S S Infocom	SHOP NO. 14&15 NANDINI COMPLEX NEAR SUPER MARKET SUJITANPUR-228001	9335055217	Mr.Sachin Dwivedi/Abhinav
Uttar Pradesh	Unnao	Avipt Infocom	251 Opp Collector Ganj, Unnao-209801	6820020	Mr.Vishnu Pandey
Uttar Pradesh	Varanasi	Jaiswal Electronics	SIDDHARTH COPMPLEX, C-2/10-A, Ramkatora, Near Petrol Pump Lahurabti, Varanasi-221001	9335407000	Mr.Sujeet
Uttar Pradesh	Varanasi	Shivam Mobile Distributers	Shop No.5, B37/115-B-1 Baradari Complex, Rathyatra Crossing, Varansi Pin 221010	9335418998	Mr.Rakesh kumar singh
Uttaranchal	Almora	Kumar Telecommunications	Paltan Bazaar, Almora	9411525789	Mr. S Kumar
Uttaranchal	Dehradun	Krishna Communication	Shop No 15A, Meedo Plaza, Rajpur Road, Dehradun, Uttaranchal-248001	09358112922 / 09358119696	Mr.Vinod
Uttaranchal	Haldwani	Fairdeal Agencies	1st Floor, Nainital Road, Uttaranchal Trade Centre, Tikonia Chouraha, Tikonia, Haldwani	282116	Mr.Ajay Gupta
Uttaranchal	Haridwar	Maharaj Computer Services	B-7, Royal Plaza, Ranipur Mod, Haridwar	9359209901	Mr. Kamal Sachdeva
Uttaranchal	Kashipur	Tirpti Communications	Station Road, Main Market, Udamsingh Nagar	935900000	Mr.Ajay Gupta
Uttaranchal	Roorkee	Greetanjali Telecom	Shop No.6, Styam Market, BSM Tiraha, NehruNagar, Dehradun Road, Roorkee-247667.	326510	Mr. Manish Kumar

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
West Bengal	Asansol	Sky Computer & Telecom	Islam Market, Nuruddin Road, Assansol-713301	2207719	Mr.Syed Arshad Ali
West Bengal	Behrampur	Chaitannya Enterprise	152, B B Sen Road, Sadar bazar, PO Behrampur, Distt Murshidabad, pin-742101	9333310161	Mr.Subhas Chandra Basak
West Bengal	Bolpur	Cyber World	59, SUPER MARKET, SANTINIKETAN ROAD, BOLPUR - 731204	252542	Mr.Kishor Kumar Mukherjee
West Bengal	Burdwan	San Infosys	27/1 G.T Road, East End, Burdwan -713103.	3290265	Mr.Sanjit Debnath
West Bengal	Durgapur	Digitech Service	Ashok Bhavan J.K.Pal Lane Benachity , Durgapur -713213	3293600	Mr.Pintu Chatterjee
West Bengal	Haldia	Digitronix	Holding no -25, PO Khanjanchak, PS Durgachak, Haldia, Dist- East Medinipur-721602	272727 / 9332987527	Mr.Suman Jana
West Bengal	Howrah	Joyram Infotech	51, Jessore Road, Habra Bazar, Das Market, Dist- 24th Pargana(North), PIN-743263	302399 / 329677	Mr. Malay Das
West Bengal	Katwa	Devarshi Mobile Communication	Bhadrath Tala, Besides Ram Bhavan, Post - Katwa, Burdwan - 713130	9333611904	Mr. Devananda Dutta
West Bengal	Kharagpur	S. J. Communication	Inda Main Road, Khudram Ram Market, Kharagpur Shop No-53. Pin -721305	324056	Mr.Mr.Suman Jana
West Bengal	Kolkata	Berna Infosol Pvt Ltd.	P-168/1 CIT Road, Scheme VIII, KOLKATA 700 067	32943176	Mr.Arun Surana
West Bengal	Kolkata	Friends Communication	32(8) Barasat Road, N/L 15 no railgate, PO-nonuchandrapukur, PS-Titagarh, Barrackpore, Dist- North 24PGS, PIN-743102	25921263	Mr.Arup Sarkar & Tarasankar Mukherjee
West Bengal	Kolkata	Jaksom Engineering Pvt Ltd	Block-A, Shop-1, Ambika Vihar, 1/1 Harduttrai Chamarua Road, Howrah- 711001	32950383	Mr.PMukherjee
West Bengal	Kolkata	JP Computers	5B Ekdalia Place, Kolkata - 700019	24401923	Mr.Somin Kabir
West Bengal	Kolkata	Skylink	8/1A, Little Russel Street, Calcutta-700071	32903814	Mr.H R Molla
West Bengal	Kolkata	Sun Mobile Service	15 B.T. Road, N/L Peikpara Bus Stop, Kolkata -700002	32505444	Mr.Vivek Kumar Gupta
West Bengal	Krishnanagar	Addya Electronics	Rajani mukharjee Lane, krishna Nagar, Nadia-741101	2329355	Mr Arijit Sen
West Bengal	Malda	Deb Infotech	PIROJPUR, WOMENS COLLEGE ROAD, MALDA-732101	9434345486	Mr.LITPAL DEY(DEBASIS)

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
West Bengal	Midnapore	Zerobit	VIII- Parbatipur, PO.-Tamluk, Dist- Purba Midnapur, PIN-721636	267476 / 9434110802	Mr.Chanakya Sengupta
West Bengal	Nadia	Prayash	30 SWAMI VIVAKNANDA SARANI, RANAGHAT, DIST-NADIA,	9333515949	Mr. Amar Nath Malick
West Bengal	North 24 Parganas	M/s Telelink	Bashirhat Old Market(Bowbazar) ,Bashirhat Dist, North 24pgs, Pin-743411	325499	Mc. Sukanta Debnath.
West Bengal	North 24 Parganas	Molina Traders	Jessore Road, Bongoan, Dist- North 24 th Pargana, PIN-743235	325433	Mc. Subir Dutta
West Bengal	Purulia	IT POINT	N.C DAS GUPTA ROAD, 2ND FLOOR, SONARTARI APPT (NAMO PARA), PURULIA -723101	9333441065	Mr.Pinaki Roy Choudhary
West Bengal	Serampore	Sri Guru Mobile Service	87 B/15 G.T.Road (West), Hooghly Pin-712203	32528581	Mc:Shyamal Kumar Das
West Bengal	Siliguri	Care	sumantra bhawan.S.B.I hakim para building, 160/1030 Haren Mukharejee Road, siliguri-734001	6450515	Mr:Snjoy Dutta

 LG	SERVICE
 *MTNL / BSNL **Prefix STD Code	1800-180-9999* 39-01-0909**