



KS360 User Guide

LG ELECTRONICS INC.

KS360

ENGLISH
H I N D I

P/N : MMBB0320601 (1.0) H

CE 0168
www.lgmobile.com

Bluetooth QD ID B014200



Some of the contents in this manual may differ from your phone depending on the software of the phone or your service provider.



KS360 User Guide | ENGLISH

Congratulations on your purchase of the advanced and compact KS360 phone by LG, designed to operate with the latest digital mobile communication technology.

SET UP	01
YOUR STANDBY SCREEN	02
THE BASICS	03
GET CREATIVE	04
GET ORGANISED	05
BROWSER	06
SETTINGS	07
ACCESSORIES	08

Contents

01 SET UP	
Getting to know your phone	7
Open view	8
Installing the SIM and battery	10
Memory card	13
Installing a memory card	13
Removing a memory card	13
Formatting a memory card	13
Menu map	14
02 YOUR STANDBY SCREEN	
Your standby screen	15
The status bar	15
03 THE BASICS	
Calls	16
Making a call	16
Making a call from your contacts	16
Answering and rejecting a call	16
Adjusting the call volume	17
Speed dialling	17
Viewing your call logs	17
Using call divert	18
Using call barring	18
Changing the call settings	19
Contacts	20
Searching for a contact	20
Adding a new contact	20
Contact options	20
Adding a contact to a group	21
Renaming a group	21
Adding a picture to a contact	21
Copying your contacts to your SIM	22
Deleting all your contacts	22
Viewing information	22
Messaging	23
Messaging	23
Sending a message	23
Entering text	24
Text input mode using the keypad	24
Setting up your email	24
Sending an email using your new account	24
Message folders	25
Managing your messages	25
Using templates	26
Changing your text message settings	27
Changing your multimedia message settings	27
Changing your email settings	28
Changing your other settings	28

04 GET CREATIVE

Multimedia	29
Taking a quick photo	29
Before you've taken your photo	29
After you've taken your photo	30
Using the quick settings	30
Changing the image size	31
Viewing your saved photos	31
Setting a photo as Wallpaper or Picture ID ..	31
Shooting a quick video	32
After you've shot your video	32
Getting to know the viewfinder	33
Using the quick settings	33
Watching your saved videos	33
Adjusting the volume when viewing a video	33
MP3 player	34
Transferring music onto your phone	34
Playing a song	34
Using options while playing music	34
Creating a playlist	35
Playing a playlist	35
Editing a playlist	35
Deleting a playlist	36
Using the FM radio	37
Searching for stations	37
Resetting channels	37
Listening to the radio	37
Using the voice recorder	38
Recording your voice memo	38
Sending a voice recording	38
My stuff	39
Images	39
Images options menu	39
Sending a photo	40
Organising your images	40
Deleting an image	40
Deleting multiple images	40
Creating a slide show	41
Sounds	41
Using a sound	41
Videos	41
Watching a video	41
Using options while video is paused	42
Sending a video clip	42
Video options menu	42
Documents	43
Viewing a document	43
Others	43
External memory	43
Games and Applications	44
Games and Applications	44
Playing a game	44
Viewing applications	44
Changing the network profile	44

Contents

05 GET ORGANISED

Organiser & Tools.....	45
Adding an event to your calendar.....	45
Editing a calendar event.....	45
Sharing a calendar event.....	46
Adding a memo.....	46
Setting your alarm.....	46
Using your calculator.....	47
Using the stopwatch.....	47
Converting a unit.....	47
Adding a city to your world clock.....	47
SIM services.....	48

06 BROWSER

Browser.....	49
Accessing the web.....	49
Enjoying Yahoo!.....	49
Adding and accessing your bookmarks ...	49
Accessing a saved page.....	50
Viewing your browser history.....	50
Changing the web browser settings.....	50

07 SETTINGS


Settings.....	51
Changing your profiles.....	51
Personalising your profiles.....	51
Changing your date & time.....	51
Changing the language.....	51
Changing your display settings.....	52
Changing your security settings.....	52
Using flight mode.....	53
Using power save.....	53
Resetting your phone.....	53
Viewing memory status.....	53
Changing your Bluetooth settings.....	53
Changing your connectivity settings.....	53
Pairing with another Bluetooth device.....	54
Using a Bluetooth headset.....	54
Using your phone as a mass storage device..	55
Transferring a file to your phone.....	55
Sending and receiving your files using Bluetooth.....	56

08 ACCESSORIES

Accessories.....	57
Network service.....	58
Technical data.....	58
General.....	58
Ambient Temperatures.....	58

Guidelines for safe and efficient use.....	60
---------------------------------------------------	-----------

Getting to know your phone

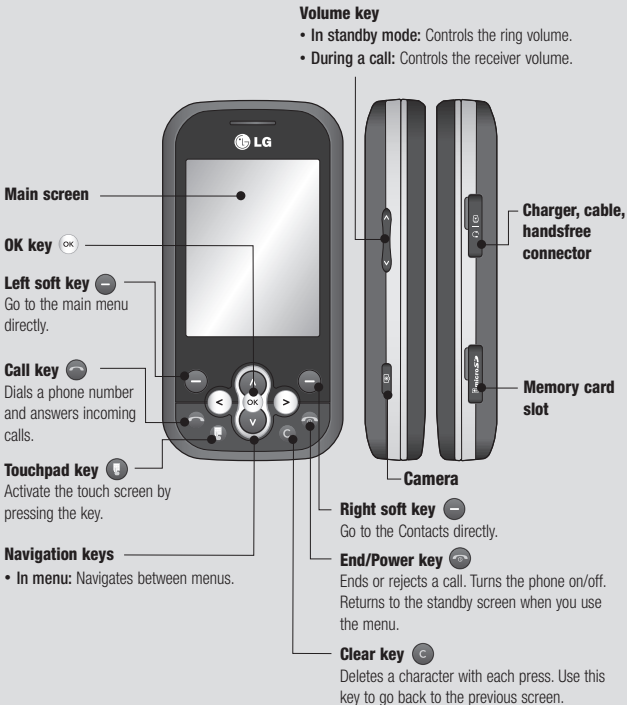

01

02

03

04

05


06

07

08

Open view



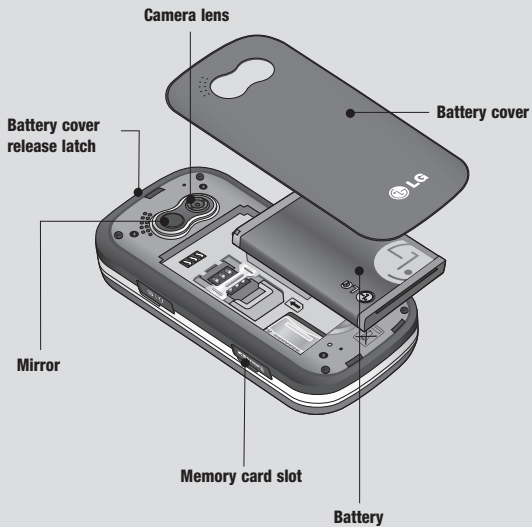

01

02

03

04

05

06


07

08

Installing the SIM and battery


1 Remove the battery cover


Press the battery cover release latch. The battery cover should lift off easily.



2 Remove the battery


Lever the bottom edge of the battery and remove it carefully from the battery compartment.




 **WARNING:** Do not remove the battery when the phone is switched on, as this may damage the phone.

3 Install the SIM card

Slide the SIM card into the SIM card holder. Make sure that the gold color contact area on the card is facing downwards. To remove the SIM card, push it out of the holder from the top.

 **WARNING:** Do not insert the SIM card when the keyboard is open, as this may damage your phone and SIM card.

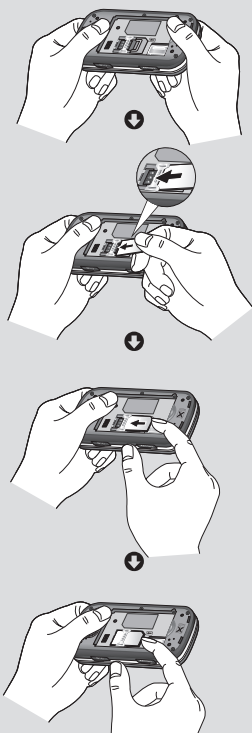

4 Install the battery

Insert the top of the battery first into the top edge of the battery compartment. Ensure the battery contacts align with the terminals on the phone. Press the bottom of the battery down until it clips into place.

01

02

03

04

05

06


07

08

Installing the SIM and battery

5 Replace the battery cover

Insert the bottom of the battery cover and push down until it clicks into place.

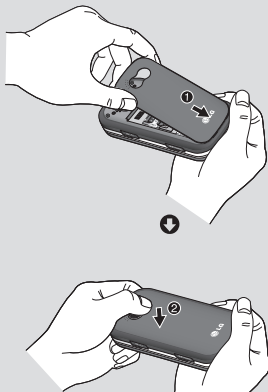

6 Charging your phone

Pull open the cover of the charger socket on the side of your KS360. Insert the charger and plug into a mains electricity socket. Your KS360 will need to be charged until a message reading Battery Full appears on screen.

⚠ WARNING: Do not charge the phone when it is on soft furnishings. The phone should be charged in a well ventilated area.




Memory card

Installing a memory card

You can expand the memory space available on your phone using a memory card.

TIP! A memory card is an optional accessory.

Open the memory card slot. Slide the memory card into the slot cover, until it clicks into place. Make sure that the gold contact area is facing downwards.



Removing a memory card

Open the cover and carefully remove the memory card by gently pushing it in to the phone and quickly releasing it, as shown in the following diagram:



Formatting a memory card

If your memory card is not already formatted, you will need to do so before you can begin using it.

- 1 From the standby screen press **OK** and select **Settings**.
- 2 Choose **Memory status** and select **External memory**.

WARNING: When you format your memory card, all the content will be wiped. If you do not want to lose the data on your memory card, back it up first.

01

02

03

04

05

06

07

08

Menu map



Games & Apps

- 1 Games
- 2 Applications
- 3 Network profile



Call history

- 1 All calls
- 2 Missed calls
- 3 Dialed calls
- 4 Received calls
- 5 Call duration
- 6 Call costs
- 7 Data information



Contacts

- 1 Search
- 2 New contact
- 3 Speed dials
- 4 Groups
- 5 Copy all
- 6 Delete all
- 7 Settings
- 8 Information



Multimedia

- 1 MP3 player
- 2 Camera
- 3 Video camera
- 4 FM radio
- 5 Voice recorder



Messaging

- 1 New message
- 2 Inbox
- 3 Email box
- 4 Drafts
- 5 Outbox
- 6 Sent
- 7 Listen to voicemail
- 8 Info messages
- 9 Templates
- 0 Settings



My stuff

- 1 Images
- 2 Sounds
- 3 Videos
- 4 Documents
- 5 Others
- 6 External memory



Profiles

- 1 General
- 2 Silent
- 3 Vibrate only
- 4 Outdoor
- 5 Headset



Organiser

- 1 Calendar
- 2 Memo



Tools

- 1 Alarm clock
 - 2 Calculator
 - 3 Stopwatch
 - 4 Unit converter
 - 5 World clock
 - 6 SIM services*
- *This feature depends on SIM and the network services. If your operator supports SIM Tool Kit then this menu will appear.



Browser

- 1 Home
- 2 Yahoo!
- 3 NDTV Active
- 4 Bookmarks
- 5 Enter address
- 6 History
- 7 Saved pages
- 8 Settings
- 9 Information



Connectivity

- 1 Bluetooth
- 2 Network
- 3 USB connection



Settings








- 1 Date & Time
- 2 Languages
- 3 Display
- 4 Shortcut
- 5 Call
- 6 Security
- 7 Flight mode
- 8 Power save
- 9 Reset
- 0 Memory status









Your standby screen

The status bar

The status bar uses various icons to indicate things like signal strength, new messages and battery life, as well as telling you whether your Bluetooth is active.

Below is a table explaining the meaning of icons you're likely to see in the status bar.

Icon	Description
	Network signal strength (number of bars will vary)
	No network signal
	Roaming service
	Bluetooth® is activated
	WAP service is connected
	An alarm is set
	New message

Icon	Description
	New voice message
	General profile in use
	Silent profile in use
	Vibrate profile in use
	Outdoor profile in use
	Headset profile in use
	Remaining battery life
	Battery empty

01

02

03

04

05





06

07

08


Calls

Making a call


- 1 Make sure your phone is on.
- 2 The fastest way to make a call is to activate touch mode by pressing . If you press this key, you can touch the screen to enter the phone number to call. Or, you can use the keypad after opening the slide. To delete a digit press  or the back arrow.
- 3 Press  to initiate the call.
- 4 To end the call, press .

TIP! To enter + when making an international call, touch and hold **0**.

Making a call from your contacts


- 1 Select **Contacts** in the menu and choose Search.
- 2 Using the keypad, enter the first letter of the contact you want to call and scroll to the contact.
- 3 Press  to initiate the call.

Answering and rejecting a call

When your phone rings, press **Accept** or press  to answer the call.

While your phone is ringing, then select Silent to mute the ringing. This is great if you have forgotten to change your profile to **Silent** for a meeting.

Press  or select **Reject** to reject the incoming call.

TIP! You can change the settings on your phone to answer your calls in different ways. Press , select **Settings** and choose **Call**. Select **Answer mode** and choose from **Slide open**, **Any key** or **Accept key only**.


Adjusting the call volume

To adjust the volume during a call, press the volume key on the left hand side of your phone.

Speed dialling

You can assign a speed dial number to a contact you call frequently.

- 1 Press **Menu** and choose **Contacts**, then select **Speed dials**.
- 2 Your voicemail is set to speed dial 1 and you cannot change this. Select any other number either by using the navigation keys and selecting **Assign** or by pressing the hard key number.
- 3 Your address book will open. Select the contact you'd like to assign to that number using the navigation keys, then select **OK**.

To call a speed dial number, press and hold the assigned number until the contact appears on screen. The call will initiate automatically; there's no need to press .

Viewing your call logs

Press **Menu** or , select **Call history**. Choose to view:

All calls - View a complete list of all your dialled, received and missed calls.

Missed calls - View a list of any calls you have missed.

Dialled calls - View a list of all the numbers you have called.

Received calls - View a list of all the numbers that have called you.

Call duration - View details of how long you have spent on your calls; received and dialled.

Call costs - View the charges applied to your Last call or All calls. This service is network dependent, some operators are unable to support this.


Data information - View the amount of all your received and sent data in kilobytes.

TIP! From any call log select **Options** and choose **Delete** to delete selected items.

TIP! Using the navigation keys, highlight any single call entry to view the date and time of the call.

Calls

Using call divert

- 1 Press **Menu** or  , select **Settings** and choose **Call**.
- 2 Select **Call divert**.
- 3 Choose whether to divert all calls, when the line is busy, when there is no reply, when you are out of reach, all data calls or all fax calls.
- 4 Choose **Activate** and select whether to divert to voicemail, another number or your favourite number.
- 5 Enter your divert number or select **Search** to browse **Contacts** for your divert number.

Note: Charges are incurred for diverting calls. Please contact your network provider for details.


TIP! To turn off all call diverts, choose **Cancel all** from the **Call divert** menu.

Using call barring

- 1 Press **Menu** or  , select **Settings** and choose **Call**.
- 2 Select **Call barring**.
- 3 Choose any or all of the seven options:
 - All outgoing**
 - Outgoing international**
 - Outgoing international except home country**
 - All incoming**
 - Incoming when abroad**
 - Cancel all barrings**
 - Change password**
- 4 Select **Activate** and enter the call barring password. Please check with your network operator for this service.

TIP! Select **Fixed dial number** from the **Call** menu to turn on and compile a list of numbers which can be called from your phone. You'll need your PIN2 code from your operator. When activated, only numbers included in the fixed dial list can be called from your phone.

Changing the call settings

- 1 Press **Menu** or , select **Settings** and choose **Call**.
- 2 From here you can amend the settings for:

Call divert - Choose whether to divert your calls.

Call barring - Select which calls you would like to be barred.

Fixed dial number - Choose a list of numbers that can be called from your phone.

Answer mode - Choose whether to answer the phone using only the accept key, any key or by sliding your handset open.

Send my number - Choose whether your number will be displayed when you call someone.

Call waiting - Be alerted when you have a call waiting.

SMS on call reject - When set to On, if any incoming call is Rejected by pressing Right soft key, it will direct to the Message template screen where desired message can be sent to call rejected number.

Minute minder - Select **On** to hear a tone every minute during a call.

Auto redial - Choose that the phone will automatically try to redial in the case of failure to connect a call.

Send DTMF tones - You can send the DTMF (dual tone multi-frequency) tones of the number on the display during a call. This option is helpful for entering a password or account number when you call an automated system, like a banking service.

01

02

03

04

05

06

07

08

Contacts

Searching for a contact

- 1 Select **Contacts** from the main menu and choose **Search**.
- 2 Using the keypad or touchpad enter the first letter of the contact you want to call.
- 3 To scroll through the contacts and their different numbers use the navigation keys.

Adding a new contact

- 1 Select **Contacts** and choose **New contact**.
- 2 Choose whether to store your new contact on your **Phone** or **SIM** card.
- 3 Enter all the information you have in the fields provided and select **Save**.

Or, use a slightly quicker method...

- 1 Enter the number you wish to store and press **Options**.
- 2 Choose **Save** or **Add to existing contact**.
- 3 Enter the relevant information as above and select **Save**.

Contact options

There are many things you can do when viewing a contact. Here's how to access and use the Options menu:

- 1 Open the contact you'd like to use. See **Searching for a contact** above.
- 2 Select **Options** to open the list of options.

From here you can:

Edit - Change any of the contact's details.

New message - Send a message to the contact. If the contact has an email address, select whether you'd like to send a **Message** or **Email**.

Send via - Send the contact's details to another person as a business card. Choose to send as a **Text message**, **Multimedia message**, via **Bluetooth** or by **Email**.

Delete - Delete the contact. Select **Yes** if you are sure.


New contact - Add a new contact.

Multi delete - Mark multiple contacts to delete.

Copy to SIM/phone - Choose to move or copy to the SIM card or phone (depending on where you originally saved the contact).

Adding a contact to a group

You can save your contacts into groups, for example, keeping your work colleagues and family separate. There are a number of groups including **Family**, **Friends**, **Colleague**, **VIP**, **Group 1**, **Group 2** and **No group** already set up on the phone.

- 1 Select **Contacts** and choose **Groups**.
- 2 Scroll to the group you wish to add a contact to and select **View** then select **Add**.
- 3 Your contacts will open. Scroll to any contacts you would like to add to the group and press , then select **Done**.
- 4 Select **Yes** if you are sure.

TIP! You can assign a ringtone or icon to a group. Select the group you wish to assign the ringtone or icon to, select **Options** and choose the item you want.

Renaming a group

You can rename any of the groups to fit your lifestyle.

- 1 Select **Contacts** and choose **Groups**.
- 2 Select the group you want to rename.
- 3 Choose **Options**, select **Rename** and enter your new group name.
- 4 Select **Save**.

Note: You can only assign a contact to a group or add a picture to a contact that is saved in your phone (not SIM) memory.

Adding a picture to a contact

You can change the appearance of your contacts in your address book to include a picture.

- 1 Select **Contacts** and choose **Settings**.
- 2 Select **View options** and choose **With picture**.
- 3 Then return to the address book and select the contact you want to add a picture to.
- 4 Choose **Options** and select **Edit**.

Contacts

- 5 Scroll down to the **Photo** section. Choose **Options** and select **Images** or **New image**. If you select **Images**, you can choose an image that is saved in your phone memory. If you select **New image**, your camera viewfinder will open, so you can take a picture of your contact. Take the picture then press set.
- 6 Select **Save**.

Copying your contacts to your SIM

You can also choose to copy your contacts from your SIM to your handset or from your handset to your SIM.

- 1 Select **Contacts** and choose **Copy All**.
- 2 Select to copy the contacts from **SIM to phone** or **Phone to SIM**.
- 3 Choose whether to **Keep original** or **Delete original**.
- 4 Select **Yes** if you are sure.

Deleting all your contacts

- 1 Select **Contacts** and choose **Delete all**.
- 2 Select to delete contacts from **SIM** or **Phone**.
- 3 Select **Yes** if you are sure.
- 4 Enter the password, which is set to 0000 as default, and select **OK**.


Viewing information

Select **Contacts** and choose **Information**. From here you can view your **Service dial numbers**, your **Own number** and your **Business card**.



TIP! If you haven't yet created a business card, the **Business card** screen will give you the option to create one. Select **New** and enter your details as you would for any contact. Choose **Save**.

Messaging


Messaging

Your KS360 includes functions related to SMS (Short Message Service), MMS (Multimedia Message Service) Email, Bluetooth message, as well as the network's service messages. Simply press  and select **Messaging**.

Sending a message

- 1 Press **Menu** or , select **Messaging** and choose **New message**. Or, a quicker way is to press  on the keypad when the slide is open.
- 2 Choose **Message** to send an SMS or MMS.
- 3 A new message editor will open. Message editor combines SMS and MMS into one intuitive and easy to switch between mode. The default setting of the message editor is SMS mode.
- 4 Enter your message using the keypad. See page 24 for more information on how to enter text.

- 5 Select **Options** and choose **Insert** to add an **Image, Sound, Video, Symbol, Text template, Emoticon, Name & Number, New slide, Subject** or **More (Contact/My business card/Schedule)**.
- 6 Choose **Send to**.
- 7 Enter the phone number or press **Options** and select **Contacts** or **Recent list** to open your contacts list. You can add multiple contacts.
- 8 Select **Send**.

 **WARNING:** If an **Image, Sound, Video, New slide** or **Subject** is added to the message editor, it will be automatically converted to MMS mode and you will be charged accordingly.

Note: You can send SMS to many users at a time.

Option "**Send to all**" will open the contacts list wherein user can mark/unmark contacts for sending message. First 100 contacts marked will be chosen if all are marked.

To send the SMS to a particular group of contacts select the option "**Send to group**" after composing the SMS.

01

02

03

04

05

06

07


08


Messaging

Entering text

You can enter alphanumeric characters using the phone's keypad. For example, storing names in Contacts, writing a message and creating scheduling events in the calendar all require entering text. The following text input methods are available in the phone: Abc manual mode and 123 mode.

Note: Some fields may allow only one text input mode (e.g. telephone number in address book fields).


To input a symbol in the text entry field, press the  key and select a symbol, then select **OK**. Scroll using the navigation keys to show more symbol options.

Complete each word with a space by pressing .

To delete a character, press .


Text input mode using the keypad

When you are required to enter text, for example when writing a message, the keypad will default to Abc mode. If you are entering a number, for example when making call, the keypad number keys will default to numbers.

In Abc mode you can enter numbers by first pressing  and then the number you require.


Setting up your email

You can stay in touch on the move using email on your KS360. It's quick and simple to set up a POP3 or IMAP4 email account.

- 1 Press **Menu** or , select **Messaging** and choose **Settings**.
- 2 Select **Email** then **Email account**.
- 3 Select **New**.


Sending an email using your new account

To send/receive an email, you should set up an email account (see above).

- 1 Press , select **Messaging** and choose **New message**.
- 2 Choose **Email** and a new email will open.
- 3 Write a subject then press **OK**.
- 4 Enter your message using the keypad.
- 5 Select **Options** and choose an attachment to add: **Image, Sound, Video, Document, Contact, My business card, Schedule** or **Others**.

- 6 Press **Send** and enter the recipient's address or press **Options** and select **Contacts** to open your contacts list.
- 7 Press **Send** and your email will be sent.

Message folders

Press **Menu** or , select **Messaging**. The folder structure used on your KS360 is fairly self-explanatory.

Inbox - All the messages you receive are placed into your Inbox. From here you can reply, forward and more, see below for details.

Email box - Contains all your email messages. Select the account you want to use then select **Retrieve**. Your KS360 will connect to your email account and retrieve your new messages.

Drafts - If you don't have time to finish writing a message, you can save what you have done so far here.

Outbox - This is a temporary storage folder while messages are being sent.

Sent - All the messages you send are placed into your Sent folder.

Listen to voicemail - You can access your voicemail box (if provided by your network). When a new voice message is received, the symbol will be displayed on the standby screen.

Info messages - All info messages and updates received from your operator.

Templates - A list of useful messages, already written for a quick reply.

Managing your messages

You can use your **Inbox** to manage your messages.

- 1 Press **Menu** or , select **Messaging** and choose **Inbox**.

- 2 Select **Options** and then choose to:

Delete - Delete the selected message.

Reply - Send a reply to the selected message.

Forward - Send the selected message on to another person.

Return call - Call the person who sent you the message.

Threaded view/General view - Choose the way messages are displayed in your inbox.

Messaging

Information - View the details of a message, for example, the time it was sent.

Copy/Move - Choose to copy or move the selected message to the SIM card or phone.

Multi delete - Delete selected messages.

Delete all read - All opened messages will be deleted.


Delete all - Delete text messages, multimedia messages or all messages.

If you see the message **No space for SIM message**, you should delete some messages from your inbox which are stored in SIM Card.

If you see the message **No space for messages**, you can delete either messages or saved files to create space.

Using templates

You can create templates for the **Text** and **Multimedia** messages you send most frequently. There are some templates already on your phone, which can be edited if you wish.

- 1 Press **Menu** or , select **Messaging** and choose **Templates**.
- 2 Choose **Text** or **Multimedia**. You can then select **Options** and choose **Edit** to change existing templates, to add **New template** or to **Delete** templates.
- 3 To send a template, select the one you want to send, choose **Options** and select **Send via**.
- 4 Choose how you would like to send the template, as a **Message, Bluetooth message** or **Email**.
- 5 Choose a contact and select **Send**.

Changing your text message settings

Your KS360 message settings are pre-defined so that you can send messages immediately.

If you would like to change the settings, you can do this using the **Settings** options.

Press **Menu** or **OK**, select **Messaging**, then choose **Settings** and **Text message**. You can make changes to:

Message type - Convert your text into Voice, Fax, Paging, X.400, Email or ERMES.

Validity period - Choose how long your message is stored at the message centre.

Delivery report - Choose to receive confirmation that your message was delivered.

Reply charging - Choose to be billed for your message recipient's reply.

Message centre number - Enter the details for your message centre.

Character encoding - Choose how your characters are encoded. This impacts the size of your message and therefore data charges.

Send long text as - Choose whether to send your message as SMS or MMS when you enter a text longer than 2 pages in the message field.

Bearer setting - Choose whether to send your messages via GSM or GPRS.

Changing your multimedia message settings

Your KS360 message settings are pre-defined so that you can send messages immediately.

If you would like to change the settings, you can do so using the **Settings** options.

Press **Menu** or **OK**, select **Messaging**, then choose **Settings** and **Multimedia message**. You can make changes to:

Slide duration - Choose how long your slides appear on screen.

Priority - Choose the priority level of your multimedia message.

Validity period - Choose how long your message is stored at the message centre.

Delivery report - Choose to allow and/or request a delivery report.

Read report - Choose to allow and/or send a read report.

01

02

03

04

05

06

07

08

Messaging

Auto download - Choose to automatically or manually download multimedia messages depending on whether you are at home or roaming.

Network profile - Select an operator specific network profile for sending multimedia messages.

Permitted message type - Select which type of multimedia messages to allow.

Changing your email settings

You can adapt your email settings to your own preferences.

1 Press **Menu** or , select **Messaging** and choose **Settings**.

2 Select **Email** then you can adapt the following settings:


Email account - You can set up an email account.

Access point - You can set the email access point.

Retrieve interval - Choose how often your KS360 checks for new email messages.

Signature - Create an email signature and switch this feature on.

Changing your other settings

Press **Menu** or , select **Messaging**, choose **Settings** then:

Voicemail number - Your voicemail number is stored here. Contact your network operator for more information on the service they provide.


Push message - Change your service message settings.


Info message - Choose the reception status, alerts and language of your info messages.

Save text message - Choose whether to save your text messages to the phone memory or to the external memory.

Multimedia


Taking a quick photo


- 1 Hold the camera key down on the left side of the handset. The camera viewfinder will appear on screen.
- 2 Holding the phone horizontally, point the lens towards the subject of the photo.
- 3 Position the phone so you can see the subject of your photo.
- 4 Press  or press the camera key all the way down to take a photo.


Note: You can also access the camera menu from the standby screen. Press  and select **Multimedia**. Select **Camera** to open the viewfinder.


Before you've taken your photo


Press  to access these options:

 **Self timer** - The self-timer allows you to set a delay after the capture button is pressed. Choose from 3 seconds, 5 seconds or 10 seconds. Great for that group photo you want to be part of.

 **Multi shot** - This enables you to take up to 9 shots automatically in very quick succession, great for taking photos of moving objects or at sporting events.

 **White balance** - The white balance ensures that any white in your photo is realistic. In order for your camera to correctly adjust the white balance you may need to determine the light conditions. Choose from **Auto**, **Daylight**, **Incandescent**, **Cloudy**, **Fluorescent** or **Night mode**.

 **Colour effect** - Choose from four colour tone options: **Off** (normal/colour), **Sepia**, **Mono** (black and white) or **Negative**.

 **EV** - Exposure values, represented by numbers with a plus or minus. When the main subject is darker than the background, increase exposure value. If the subject is much lighter than the background, decrease exposure value.

01

02

03

04

05

06

07

08

Multimedia

After you've taken your photo

Your captured photo will appear on the screen. The name of the image runs along the bottom of the screen and you will see six options displayed on the left side of the screen.

OK - Select to take another photo straightaway. Your current photo will be saved.



New image - Take another photo straightaway. Your current photo will be saved.



Set as - Select to open a sub menu to set your image as **Wallpaper** or **Picture ID**.



Send via - Select to send the photo as a **Multimedia message** or **Email**, **Bluetooth**. See page 23 for **Sending a message**.



Album - Select to look at the other photos in your album. Your current photo will be saved. See page 31 for **Viewing your saved photos**.

Delete - Delete the photo you have just taken and confirm by selecting **Yes**. The viewfinder will reappear.

Using the quick settings

Select **Options** to access the quick settings options. These include various options for taking photos.

Video camera - Convert from camera mode to video camera mode.

Display - Choose Standard or Clean mode.

Resolution - See **Changing the image size** on page 31.

Quality - Choose between **Normal**, **Fine** and **Super fine**. The finer the quality, the sharper a photo will be. The file size will increase as a result, which means you will be able to store fewer photos in your memory.

Shutter tone - Select one of the three shutter sounds.

Save to - Choose whether to save your photos to the phone memory or to the external memory.


Reset settings - Choose **Yes** to reset your phone to the original camera settings.

Changing the image size

You can change the size of the photo to save memory space. The more pixels, the larger the file size, which in turn means they take up more of your memory. If you want to fit more pictures on your phone you can alter the pixel number to make the file size smaller.

- 1 Press **Options** and select **Resolution** from the toolbar.
- 2 Select a pixel value from the four numerical options (320x240, 640x480, 1280x960, 1600x1200).
- 3 Press **OK** to implement your changes.

Viewing your saved photos

- 1 You can access your saved photos from within the camera mode and from the standby screen. From the viewfinder, simply press **Album**. From the standby screen you should press **Menu** or  , then select **My stuff** and **Images**.
- 2 Your gallery will appear on screen.
- 3 Use the navigation keys to select the photo you want to view and select **View** to enlarge it.

Setting a photo as Wallpaper or Picture ID

From your image gallery, use the navigation keys to select an image and choose **Options** and **Set as** to use the selected image as **Wallpaper** or **Picture ID** for one of your contacts. When you set the photo as Picture ID you can choose which part of the photo to use.

Note: Picture ID can only be added to contacts saved to your phone, not your SIM.

01

02

03

04

05

06


07

08

Multimedia

Shooting a quick video


- 1 Quickly press the camera key on the left side of the handset.
- 2 Choose **Video camera**.
- 3 Point the camera lens towards the subject of the video.
- 4 Press the camera key on the left side of the handset to start recording.
- 5 **REC** will appear in the bottom right corner of the viewfinder and a timer will show the length of your video.
- 6 To pause the video select **Pause** and resume by selecting **Resume**.
- 7 Select **Stop** to stop recording.


Note: You can also access the **Video camera** from the standby screen. Press  and select **Multimedia**, scroll down and select **Video camera** to open the viewfinder.


After you've shot your video


The name of the video runs along the bottom of the screen and six options will be displayed on the left side of the screen.

OK - Select to record another video straight away. Your current video will be saved.

 **New video** - Select to shoot another video straight away. Your current video will be saved.

 **Play** - Select to play the video you have just recorded.

 **Send via** - Select to send the video as a **Multimedia message** or **Email**. See page 23 for **Sending a message**.

 **Video album** - Select to look at the other video clips in your album. Your current video clip will be saved. See page 33 for **Watching your saved videos**.

Delete - Delete the video you have just recorded and confirm by selecting Yes. The viewfinder will reappear.

Getting to know the viewfinder

Note: You can adjust the zoom using the volume keys on the left side of the phone.

Using the quick settings

Select **Options** to access the quick settings options. These include various options for recording videos.

Camera - Convert from video camera mode to still camera mode.

Display - Choose Standard or Clean mode.



Resolution - If you want to fit more videos on your phone you can alter the pixel number to make the file size smaller. Choose between two options for your video, 176x144, 320x240.

Quality - Super fine/ Fine/ Normal.

Save to - Choose whether to save your video clip to the phone memory or to an external memory.

Reset settings - Choose **Yes** to reset your phone to the original video camera settings.

Watching your saved videos

- 1 You can access your saved videos either from within video camera mode or from the standby screen. From the viewfinder select **Album**. From the standby screen you should press **Menu** or , then select **My stuff** and **Videos**.
- 2 Your gallery will appear on screen.
- 3 Use the navigation keys to select the video you want to view and press  to watch it.

Adjusting the volume when viewing a video

To adjust the volume of the audio on a video whilst it is playing, use the volume keys on the left side of the handset. The volume level is shown below the video, on the left hand side.

01

02

03

04

05

06

07

08

Multimedia

MP3 player

Your LG KS360 has a built-in MP3 player so you can play all your favourite music.

To access the MP3 player, press **Menu** or  and select **Multimedia** then **MP3 player**. From here you have access to:

All songs - Contains all of the songs you have on your phone.

My playlist - Contains any playlists you have created as well as **On the go**, **Recent songs** and **Favourite songs**.







Settings - Adjust your music settings.

Transferring music onto your phone

The easiest way to transfer music onto your phone is via Bluetooth or your sync cable. To transfer using Bluetooth:

- 1 Make sure both devices have Bluetooth switched on and are visible to one another.
- 2 Select the music file on the other device and choose to send it via Bluetooth.
- 3 When the file is sent you will have to accept it on your phone by selecting **Yes**.
- 4 The file should appear in **All songs**.

Playing a song

- 1 Press **Menu** or  and select **Multimedia**, then choose **MP3 player**.
- 2 Choose **All songs** then select the song you want to play. Select .
- 3 Select  to pause the song.
- 4 Select  to skip to the next song.
- 5 Select  to skip to the previous song.
- 6 Select  to stop the music and return to the MP3 player menu.

TIP! To change the volume while listening to music, use the volume keys on the left side of your phone, or the up and down navigation keys.

Using options while playing music

Select **Options** and choose from:

Minimise - Hide the music player screen so that you can continue using your phone as normal while music is playing.

View playlist - Look at the playlist you are currently listening to.

Search - Search for a track from the list of songs on your phone.

Add to playlist - Adds the current track to a playlist.



Set as - Set the current track as your **Ringtone** or **Message tone**.

Information - You can view information about the music file you are listening to.



Settings - Change the Shuffle, Play mode or Equalizer settings.

Creating a playlist

You can create your own playlists by choosing a selection of songs from the **All songs** folder.

- 1 Press  and select **Multimedia**.
- 2 Choose **MP3 player**, then select **My playlist**.
- 3 Press **New**, enter the playlist name and press **Save**.
- 4 The **New playlist** folder will show. Select all of the songs that you would like to include in your playlist by scrolling to them and selecting .
- 5 Select **Save** to store the playlist.


Playing a playlist

- 1 Press **Menu** or  and select **Multimedia**.
- 2 Choose **MP3 player**, then select **My playlist**.
- 3 Select the playlist you would like to play and select **View**, then select .

Editing a playlist

From time to time, you may want to add new songs or delete songs from a playlist.

If you want to organise your playlists, you can edit them using the **Options** menu.

- 1 Press **Menu** or  and select **Multimedia**.
- 2 Choose **MP3 player**, then select **My playlist**.
- 3 Scroll to the playlist you want to edit and select **View**, then select **Options**. Choose from:

Play - You can play the selected music.

Add to Playlist - You can add songs to the playlist using this option.

01

02

03

04

05

06

07

08

Multimedia


Remove - Remove a song from the playlist. Select **Yes** to confirm.

Multi delete - Select and delete songs from the playlist.

Remove all - Remove all of the songs from the playlist.

Information - Select to view information.

Deleting a playlist

- 1 Press **Menu** or  and select **Multimedia**.
- 2 Choose **MP3 player**, then select **My playlist**.
- 3 Scroll to the playlist you want to delete and select **Options**.
- 4 Select **Delete** and select **Yes** to confirm.

Note:

As a result of the Digital Rights Management (DRM) system, some of the media items you download from the Internet or receive by MMS may have a "Purchase right" menu to access them. You can acquire the key to purchase the right from the website which owns the rights to the contents.

Music is copyright protected in international treaties and national copyright laws. It may be necessary to obtain permission or a licence to reproduce or copy music. In some countries national law prohibits private copying of copyrighted material. Please check the national legislation of the applicable country concerning the use of such material.

Using the FM radio


Your LG KS360 has an FM radio feature so you can tune in to your favourite stations to listen on the move.

Note: You will need to insert your headset in order to listen to the radio. Insert the plug into the headset socket (this is the same socket that you plug your charger into).


Searching for stations

You can tune radio stations into your phone by searching for them either manually or automatically. They will then be saved to specific channel numbers so you don't have to keep re-tuning. You can save up to 12 channels in your phone.

To auto tune:

- 1 Press **Menu** or  and select **Multimedia**, then choose **FM radio**.
- 2 Select **Options** and choose **Auto scan** then select **Yes**.
- 3 Each time a station is found, your KS360 will ask if you want to save it. Select **Yes** if you want to store the channel and **No** if you don't. Any stations you choose to save will automatically be allocated to a channel number in your phone.


To manually tune:

- 1 Press **Menu** or  and select **Multimedia**, then choose **FM radio**.
- 2 Select a channel number that you want to save a station to and choose **Edit**.
- 3 To enter your station, use the navigation keys to search or enter the frequency using the keypad, then select **Save**.


Note: You can also edit the stations you have saved in a channel number.

TIP! To improve the reception extend the headset cord, which functions as the radio antenna.

Resetting channels

- 1 Press **Menu** or  and select **Multimedia**, then choose **FM radio**.
- 2 Select **Options** and select **Reset channels**. Choose **Yes** to confirm the reset. Each channel will return to the starting 87.5Mhz frequency.

Listening to the radio

- 1 Press **Menu** or  and select **Multimedia**, then choose **FM radio**.
- 2 Select the channel number of the station you would like to listen to. The channels can be changed by

Multimedia




- Navigation keys
- Using the headset button (even during Keypad locked condition).

Note: You can listen to the radio via a built-in speaker. Press **Options**, select **Listen via** and choose **Speaker**.

Using the voice recorder

Use your **Voice recorder** to record voice memos or other sounds.

Recording your voice memo

- 1 Press **Menu** or  and select **Multimedia**, then choose **Voice recorder**.
- 2 Press  to begin recording.
- 3 Select **Pause** to pause the recording.
- 4 Choose **Stop** to end the recording.
- 5 Select  to listen to the recording.

Note: You can listen to all of the voice recordings you have saved by selecting **Album**.


Sending a voice recording

- 1 Once you have finished recording, select **Options**.
- 2 Select **Send via** and choose from **Multimedia message**, **Bluetooth** or **Email**. If you choose **Message** or **Email**, the recording will be added to the message and you can write and send it as normal. If you choose **Bluetooth**, you will be prompted to turn Bluetooth on.

TIP! If you plan to send your recording as a message, before you start recording, select **Options**, select **Recording mode** and choose **MMS**. This will ensure that the recording fits into a message.

My stuff

You can store any multimedia files in your phone memory so that you have easy access to all of your pictures, sounds, videos and games. You can also save your files to a memory card. The advantage of using a memory card is that you can free up space on your phone memory.

All your multimedia files will be saved in **My stuff**. Press **Menu** or  then select **My stuff** to open a list of folders.

Images

Images contains a folder of default images and default flash files pre-loaded onto your phone, images downloaded by you and images taken on your phone camera.

Images options menu

The options which are available to you in **Images** depend on what type of image you have selected. All of the options will be available for pictures you have taken on the phone's camera. Only the **View**, **Set as**, **File info**, **Slide show**, **Sort by** and **View style** options are available for default images.

In the **Images** folder, select **Options** to bring up your list of options.

Delete - Delete the selected image.

Set as - Set the selected image as your **Wallpaper** or as a **Picture ID**.

Send via - Send the selected image to a friend via **Multimedia message**, **Bluetooth** or **Email**.

Note: The image may need to be resized before it can be sent by MMS.

File - **Edit image**, **Rename**, **Make animation** or view the **Information** (Name, Size, Date, Time, Resolution, Type and Copyright) of the selected image. If you have an external memory card inserted, two additional options will show: **Move to external memory** and **Copy to external memory**.

Print via - Print an image file via **Bluetooth** or **Pictbridge**.

Slide show - Watch a slide show of your images. See **Creating a slide show** on page 41 for more information.

New folder - Create a new folder within the main Images folder.

Mark/Unmark - Select more than one image to delete or **Copy** or **Move**.

Delete all - Delete all the photos in your Images folder.

01

02

03

04

05

06

07


08

My stuff


Sort by - Arrange your images by **Date**, **Type** or **Name**.

View style - Change the way you view your photos.


Sending a photo

- 1 Press **Menu** or  then select **My stuff**.
- 2 Select **Images**.
- 3 Select a photo and choose **Options**.
- 4 Select **Send via** and choose from **Multimedia message**, **Bluetooth** or **Email**.
- 5 If you choose **Multimedia message** or **Email**, your photo will be attached to the message and you can write and send the message as normal. If you choose **Bluetooth**, you will be prompted to turn Bluetooth on and your phone will search for a device to send the picture to.




Organising your images

- 1 Press **Menu** or  then select **My stuff**.
- 2 Select **Images**.
- 3 Choose **Options** then select **Sort by**.
- 4 Choose from **Date**, **Type** or **Name**.

Deleting an image


- 1 Press  then select **My stuff**.
- 2 Select **Images**.
- 3 Select an image and press **Options**.
- 4 Select **Delete** and confirm by pressing **Yes**.

Deleting multiple images

- 1 Press **Menu** or  then select **My stuff**.
- 2 Select **Images**.
- 3 Choose **Options** and select **Mark/Unmark** and **Delete**.
- 4 A box will appear next to each image. Select  to mark each image. To unmark an image, select  again so that the tick disappears from the box. Or, you can select **Options** then choose **Mark all** or **Unmark all**.
- 5 Once you have marked all of the appropriate boxes, select **Done** and confirm you want to delete all of the marked images.

Creating a slide show

If you want to look at all of the images on your phone or scan through what you've got, you can create a slide show to save you from having to open and close each individual image.



- 1 Press **Menu** or  then select **My stuff**.
- 2 Select **Images**.
- 3 Select the photo you would like to begin the slide show and select **Options**.
- 4 Choose **Slide show** and it will begin.
- 5 Press **Pause** to pause the slide show and **Quit** to end the slide show and return to the **Images** folder.

During the slide show, press **Options** to choose between **Full image** and **Full screen**. Select **Landscape** to change the orientation of the image.

Sounds

The **Sounds** folder contains the **Default** sounds, your **Voice recordings** and sound files downloaded by you. From here you can manage, send or set sounds as ringtones.



Using a sound

- 1 Press **Menu** or  then select **My stuff**.
- 2 Scroll to and select **Sounds**.
- 3 Select **Default sounds** or choose from the list of voice recording files.
- 4 Select a sound and press  to listen to it.
- 5 Select **Options**, select **Set as** and choose from **Ringtone**, **Ringtone ID** and **Message tone**.

Videos

The **Videos** folder shows the list of downloaded videos and videos you have recorded on your phone.

Watching a video

- 1 Press **Menu** or  then select **My stuff**.
- 2 Scroll to and select **Videos**.
- 3 Select a video and press .

01

02

03

04

05

06

07

08

My stuff

Using options while video is paused

By selecting **Options**, the video you are playing will be in pause mode and you can choose from:

Delete - Delete the video.

Send via - Send the video to a friend via **Multimedia message, Bluetooth** or **Email**.

Information - View the Name, Size, Date, Time, Type and Copyright details of the selected file.

Sending a video clip

- 1 Press **Menu** or  then select **My stuff**.
- 2 Scroll to and select **Videos**.
- 3 Select the video clip you want and press **Options**.
- 4 Press **Send via** and choose from **Multimedia message, Bluetooth** or **Email**.
- 5 If you choose **Multimedia Message** or **Email**, your video clip will be attached to the message and you can write and send the message as normal. If you choose **Bluetooth**, you will be prompted to turn Bluetooth on and your phone will search for a device to send the video to.

Note: The video may need to be resized before it can be sent by MMS. Some videos may be too large to send by MMS at all.

Video options menu

In the **Videos** folder highlight a video and press **Options** to bring up the following list of options.

Delete - Delete the selected video.

Send via - Send the selected video to a friend via **Multimedia message, Email** or **Bluetooth**.

File - Rename the video or view the information (Name, Size, Date, Time, Type and Copyright).

If you have an external memory card inserted two additional options will show: **Move to external memory** and **Copy to external memory**.

New folder - Create a new folder within the main Videos folder.

Mark/Unmark - Select more than one video clip before selecting **Delete**.

Delete all - Delete all the clips in your Videos folder.

Sort by - Arrange your videos by **Date, Type** or **Name**.

Auto next play - Allows to set the play mode: **Off, Repeat once** and **Repeat all**.


- **Off**: Plays the selected file.
- **Repeat once**: Plays all files in a list once.
- **Repeat all**: Continues to play all files in a list repeatedly.

List view / Thumbnail view - Change the way you view your videos.

Documents

From the **Documents** menu.

Viewing a document

- 1 Press **Menu** or  then select **My stuff**.
- 2 Select **Documents**.
- 3 Select a document and press **View**.

Others

From the **Others** menu, you can view the files which are not saved in the Images, Sounds, Videos or Documents folders.

You may find that when you transfer files from your computer to your phone, they appear in the **Others** folder rather than the **Documents** folder. If this happens you can move them.

External memory

If you've inserted a memory card it will be displayed as a folder within **My stuff**. Your external memory folder will be divided into five further folders: **Images, Sounds, Videos, Documents** and **Others**. Each folder will contain all the files of that type which are saved to your memory card rather than your handset.

01

02

03

04

05

06

07


08

Games and Applications

Games and Applications

Your KS360 comes with preloaded games to keep you amused when you have time to spare. If you choose to download any additional games or applications they will be saved into this folder.


Playing a game

- 1 Press **Menu** or  and select **Games & Apps** and then **Games**.
- 2 You can download games from site, and then enjoy it.

Note: An additional cost is incurred when connecting to this service. Check your data charges with your network provider.


Viewing applications

You can manage the Java applications installed in your phone by using the **Applications** menu. You can also delete downloaded applications.

- 1 Press **Menu** or  and select **Games & Apps** and then **Applications**.
- 2 View and manage any applications you have.


Changing the network profile

To download a game, you can set the value to connect to the network using **Network profile**.

- 1 Press **Menu** or  and select **Games & Apps** and then **Network profile**.
- 2 You can add and edit a new network profile.


Organiser & Tools

Adding an event to your calendar

- 1 From the standby screen press **Menu** or , and select **Organiser**, then **Calendar**.
- 2 Select the date you would like to add an event to. You can choose a date either by scrolling to it using the navigation keys or by selecting **Options** and **Go to date** in order to enter a date.
- 3 Select **New schedule** and scroll down to enter the time you would like your event to begin. Scroll down and enter the end time of your event.
- 4 Scroll down again and choose whether you would like to set an **Alarm** for the event. Scroll left or right to see the available options. You can set the alarm to go off at the starting time of the event or at a set period of time before the event starts to remind you the event is coming up.
- 5 Scroll down and enter a **Subject** for the event. Use the keypad to type letters and numbers.

- 6 Scroll down once more to select whether the event is occurring **Once** or repeated at **Daily**, **Weekly**, **Monthly** or **Yearly** intervals. If the event is repeated, you can also scroll down to enter an **Expiration date** for when the events will stop completely.
- 7 Select **Save** and your event will be saved in the calendar. A square cursor will mark the days of any saved events.

Editing a calendar event

- 1 From the standby screen press **Menu** or , and select **Organiser**, then **Calendar**.
- 2 Choose **Options** and select **All schedules** to see a list of all your events. Scroll to the event you would like to edit and select **View**. Alternatively select the day of the event in the calendar and select **View**.
- 3 Select **Edit** and scroll to the event detail you want to change. Make your modifications and select **Save** to store the edited event.

Note: You can delete an event from your calendar by selecting to view the event and then pressing **Options** and **Delete**.

01

02

03

04

05


06

07


08

Organiser & Tools

Sharing a calendar event


- 1 From the standby screen press **Menu** or , and select **Organiser**, then **Calendar**.
- 2 Select the event you would like to share and choose **Options**.
- 3 Choose **Send via** and select from **Text message**, **Multimedia message**, **Bluetooth** or **Email**.

Adding a memo

- 1 From the standby screen press **Menu** or , and select **Organiser**, then **Memo**.
- 2 Select **New** and type your memo.
- 3 Select **Options** then **Save**.
- 4 Your memo will appear on screen the next time you open the memo application.

TIP! You can edit an existing memo. Select the one you want to edit, press **Options** and select **Edit**.

Setting your alarm


- 1 From the standby screen press **Menu** or , and select **Tools**, then **Alarm clock**.
- 2 Select **New**.
- 3 Scroll down and enter the time you would like the alarm to sound at.
- 4 Choose the repeat type to indicate whether you would like your alarm to sound **Once**, **Daily**, **Mon - Fri**, **Mon - Sat**, **Sat - Sun**, or **Choose weekday**.
- 5 Scroll down and choose whether you would like the alarm to **Always sound**, **Always vibrate** or **Follow profile**.
- 6 Scroll down to choose the alarm tone. Choose **Sounds** to select a new sound.
- 7 Scroll down and enter a name for the alarm or keep the suggested name.
- 8 Select **Save**.

Note: You can set up to 5 alarms.


Tip! Your KS360 has got an excellent feature called as "Scheduled SMS" where you can store the messages which you want to send later. Open the Calendar options and select Scheduled SMS.

Note: Multiple scheduled SMS cannot be sent for same time.


Using your calculator

- 1 From the standby screen press **Menu** or , and select **Tools**, then **Calculator**.
- 2 Press the numeric keys to input numbers.
- 3 For simple calculations, select the function you require (+, -, ×, ÷), followed by =.
- 4 For more complex calculations, select **Function** to select a command.
- 5 Select **Clear** to clear the screen and start a new calculation.


Using the stopwatch

- 1 From the standby screen press **Menu** or , and select **Tools**, then **Stopwatch**.
- 2 Select **Start** to begin the timer.
- 3 Choose **Lap** if want to record a lap time. Up to 20 lap times can be saved.
- 4 Select **Stop** to end the timer.
- 5 Choose **Resume** to restart the stopwatch at the time you stopped it at or select **Reset** to return to zero.

Converting a unit

- 1 From the standby screen press **Menu** or , and select **Tools**, then **Unit converter**.
- 2 Choose whether you would like to convert **Currency, Area, Length, Weight, Temperature, Volume** or **Velocity**.
- 3 Scroll up to choose from the unit of measurement you want to enter. Scroll left and right to select a unit, then scroll down and enter the unit quantity.
- 4 Scroll down to the unit conversion box and choose the unit measurement you want to convert into. The conversion will show automatically in the line below.

Adding a city to your world clock

- 1 From the standby screen press **Menu** or , and select **Tools**, then **World clock**.
- 2 Scroll up, down, left or right to navigate the globe and choose a continent.
- 3 Select **Zoom in** to zoom into an area and choose from the cities in that area.
- 4 Press **Set**.

01

02

03

04

05

06

07

08

Organiser & Tools

SIM services


This feature depends on SIM and the network services.

If the SIM card supports SAT (i.e. SIM Application Toolkit) services, this menu will be the operator specific service name stored on the SIM card.

Browser

With a browser at the tip of your fingers, you can get up to date news and weather forecasts as well as information on sports or traffic whenever you need it. In addition, the browser allows you to download the latest music, ringtones, wallpapers and games.

Accessing the web

- 1 Press **Menu** or  and select **Browser**.
- 2 To access the browser homepage directly, select **Home**. Or select **Enter address** and type in your desired URL, followed by **Connect**.

Note: An additional cost is incurred when connecting to this service and downloading content. Check your data charges with your network provider.

Enjoying Yahoo!

You can surf the web quickly and easily by selecting this menu.

Adding and accessing your bookmarks

For easy and fast access to your favourite websites, you can add bookmarks and save web pages.

- 1 Press **Menu** or  and select **Browser**.
- 2 Select **Bookmarks**. A list of your bookmarks will appear on the screen.
- 3 To add a new bookmark, select **Options** and choose **New bookmark**. Enter a name for your bookmark followed by the URL.
- 4 Press **Save**. Your bookmark will now appear in the list of bookmarks.
- 5 To access the bookmark simply scroll to the required bookmark and select **Connect**. You will be connected to your bookmarked page.

01

02

03

04

05


06

07

08


Browser

Accessing a saved page


- 1 Press **Menu** or  and select **Browser**.
- 2 Select **Saved pages**.
- 3 Select the required page and press **Open**.

TIP! This menu will also allow you to delete saved pages.

Viewing your browser history

- 1 Press **Menu** or  and select **Browser**.
- 2 Select **History** and select **OK**.
- 3 A list of web page titles you have accessed recently will be displayed. To access one of these pages, scroll to the required page and select **Connect**.

Changing the web browser settings


- 1 Press **Menu** or  and select **Browser**.
- 2 Select **Settings**.
- 3 You can choose the way your mobile handles, displays and uses information when browsing the internet. You can amend settings within **Network profiles**, **Rendering mode**, **Cache**, **Cookies**, **Security certificates**, **Show image**, **JavaScript**, **Storage location**.
- 4 Once you have changed your settings, select **OK**.

Settings

Within this folder you can adapt your settings to make your KS360 personal to you.


Note: For information on call settings see page 19.

Changing your profiles

You can quickly change your profile from the standby screen. Simply press  using the navigation keys then the profile you would like to activate. Choose from **General**, **Silent**, **Vibrate only**, **Outdoor** and **Headset**.


Personalising your profiles

You can personalise each profile setting.

- 1 Press **Menu** or  and select **Profiles**.
- 2 Choose the profile you want and select **Personalise**.
- 3 For the **Silent** and **Vibrate only** profiles, you can adapt the vibration. For the other profiles, you can change all of the sounds and alert options available in the list.

Changing your date & time

You can set functions relating to the date and time.

- 1 Press **Menu** or  and select **Settings**.
- 2 Select **Date & Time** and choose from the list below:

Set date - You can enter the current date.

Date format - You can set the date format. (YYYY/MM/DD, DD/MM/YYYY, MM/DD/YYYY)

Set time - You can enter the current time.

Time format - You can set the time format to either 24 hours or 12 hours.

Auto update - Select **On**, the phone will automatically update the date and time.

Changing the language

Select **Languages** to change the language for any text in your phone. Any change will also alter the language input mode.

01

02

03

04

05


06

07

08

Settings

Changing your display settings

- 1 Press **Menu** or  and select **Settings**.
- 2 Select **Display** and choose from:

Wallpaper - Choose a wallpaper to appear on your screen display.

Clocks - Choose to have the time and date visible on your standby screen. Choose from

No date & time or **Normal**.

Backlight timer - Choose how long the backlight remains on for.

TIP! The longer the backlight is on for, the more battery power is used and you may need to charge your phone more often.

Brightness - Use the navigation keys to adjust the brightness. Choose from 40%, 60%, 80% or 100%, then select OK to save your change.

Home screen shortcut - Select **On** to display the shortcuts of 4 menus as pictures on the middle of the standby screen.

Font size - Change the font size of the following : **Menu**, **Dialling** and **Messaging**.

Theme - Quickly change the whole look of your screen.

Menu style - Change the menu view from **Grid view** to **List view**.

Main font style - Adjust the font type.


Dialling font style - Adjust the font style for when you are dialling a phone number.

Standby text - Choose to add a message to your standby screen.

Network Name - Choose On or Off.

Changing your security settings

Change your security settings to keep your KS360 and the important information it holds protected.

- 1 Press **Menu** or  and select **Settings**.
- 2 Select **Security** and choose from the list below:

PIN code request - Choose a PIN code to be requested when you turn your phone on.

Auto key lock - Choose how long before the keypad locks when the phone is not in use.

Phone lock - Choose a security code to lock your phone **When power on**, **When SIM changed** or **Immediately**.

Anti-theft mobile tracker - The ATMT feature of this phone provides you with the ability to have a tracking system in place for your mobile in case you lose or misplace it.

The moment an un-authorized user uses your phone, a SMS is triggered from your phone and the message is send to your pre-defined number.

Call reject - You can store numbers from which do not wish to receive calls.

Change codes - Change your **Security code**, **PIN1 code**, **PIN2 code** or **ATMT code**.

Using flight mode

Use this function to switch the flight mode **On** or **Off**. You will not be able to make calls, connect to the internet, send messages when **Flight mode** is switched **On**.

Using power save

Choose to switch the power saving settings **On** or **Off**.


Resetting your phone

Use **Reset** in **Phone settings** to reset all the settings to the factory definitions. You need the security code to activate this function.

Viewing memory status


Your KS360 has three memories available: the phone, the SIM card and an external memory card (you may need to purchase the memory card separately).

You can use the memory manager to determine how each memory is used and see how much space is available.

Press **Menu** or  and select **Settings**. Choose **Memory status** and you will then see the current status of the memories (Common, Reserved, SIM card and External memory) in your KS360.

TIP! See page 13 for information on **inserting a memory card**.

Changing your Bluetooth settings

- 1 Press **Menu** or  and select **Connectivity**, then choose **Bluetooth**.
- 2 Choose **Bluetooth settings**. Make your changes to:


My visibility - Choose whether to **Show** or **Hide** your device to others.

My name - Enter a name for your KS360.

My address - View your Bluetooth address.

Changing your connectivity settings

Your connectivity settings have already been set up by your network operator, so you can enjoy your new phone from the off. If you want to change any settings, use this menu.

Press **Menu** or  and select **Connectivity**. Your options are:

01

02

03

04

05

06

07

08

Settings

Bluetooth - Set up your KS360 for Bluetooth use. You can adapt your visibility to other devices or search through devices your phone is paired with.

Network - Your KS360 connects automatically to your preferred network. To change these settings use this menu. You can also add new access points using this menu.

USB connection - Choose **Data service** and synchronise your KS360 using the LG PC Suite software to copy files from your phone. If you have a memory card inserted, select

Mass storage to use your phone in the same way as you would use a USB stick. Connect to your computer and drag and drop files to the KS360 removable device folder.

Pairing with another Bluetooth device

By pairing your KS360 and another device, you can set up a passcode protected connection. This means your pairing is more secure.

- 1 Check your Bluetooth is **On** and **Visible**. You can change your visibility in the **Bluetooth settings** menu, by selecting **My visibility**, then **Show**.


- 2 Select **Device list** from the Bluetooth menu and choose **New**.
- 3 Your KS360 will search for devices. When the search is completed **Pair** and **Refresh** will appear on screen.
- 4 Choose the device you want to pair with, select **Pair** and enter a passcode then choose **OK**.
- 5 Your phone will then connect to the other device, on which you should enter the same passcode.
- 6 Your passcode protected Bluetooth connection is now ready.


Using a Bluetooth headset

- 1 Check your Bluetooth is **On** and **Visible**.
- 2 Follow the instructions that came with your headset to place it in pairing mode and pair your devices.
- 3 Your KS360 will then automatically connect to your Bluetooth headset and switch to headset profile.

Using your phone as a mass storage device

Your KS360 can be used as a mass storage device, just like a USB stick. This is a great way of moving your files from your computer to your phone. If you've inserted a memory card, when connecting as **Mass storage**, the phone will be displayed as two drives on your computer: the handset memory and external memory.

- 1 Press **Menu** or  select **Connectivity**.
- 2 Select **USB Connection**.
- 3 Scroll to **Mass storage** and select **OK**.
- 4 Insert the smaller end of the USB cable into the USB cable connector on the edge of the KS360. Plug the larger end into the USB port of your computer.
- 5 A removable disk folder will open automatically on your computer, two if you have a memory card inserted, showing all the folders on your phone or memory card.
- 6 Drag and drop your images, videos, music or documents into the correct folders.
- 7 Safely remove your phone by clicking on the **Safely remove hardware** icon in your desktop toolbar.

- 8 When you want to then access a file, for example an image, press **Menu** or , then select **My stuff** followed by **External memory** then **Images**. All the images you transfer will be contained in this file.

Transferring a file to your phone

You can also transfer files from your computer to your phone using Bluetooth.

- 1 Make sure your phone and computer have Bluetooth switched on and are visible to one another.
- 2 Use your computer to send the file via Bluetooth.
- 3 When the file is sent you will have to accept it on your phone by selecting **Yes**.
- 4 The file will be saved within the appropriate folder depending on type. So for example, photographs will be saved in the **Images** folder and music in the **Sounds** folder. If your phone cannot identify the file type, the file will be saved in the **Others** folder.

Note: Files sent using Bluetooth will be saved to the phone memory.


Settings

Sending and receiving your files using Bluetooth

Bluetooth is a great way to send and receive files as no wires are needed and connection is quick and easy. You can also connect to a Bluetooth headset to make and receive calls.

Before you can start sharing files using Bluetooth, you will need to pair your phone with another Bluetooth device. For information on pairing devices, see **Pairing with another Bluetooth device** on page 54.

To switch Bluetooth on:

- 1 Press **Menu** or  and select **Connectivity**, then choose **Bluetooth**.
- 2 Select **Bluetooth on/off** and choose **On**.
- 3 Select **Off** to switch Bluetooth off.

To send a file:

- 1 Open the file you want to send, typically this will be a photo, video or music file.
- 2 Select **Options** and choose **Send via**, then **Bluetooth**.
- 3 Select **Yes** to turn Bluetooth on if it is not already activated.

- 4 Your KS360 will automatically search for other Bluetooth enabled devices within range.
- 5 Choose the device you want to send the file to and select **Send**.

To receive a file:

- 1 To receive files, your Bluetooth must be both **On** and **Visible**. See **Changing your Bluetooth settings** on page 53 for more information.
- 2 A message will prompt you to accept the file from the sender. Select **Yes** to receive the file.

TIP! Keep an eye on the progress bar to make sure your file is sent.

Note The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by LG Electronics is under licence. Other trademarks and trade names are those of their respective owners.

Accessories

These accessories were supplied with your KS360.

Charger



Stereo headset



Battery



User Guide

Learn more about your KS360.

Note

- Always use genuine LG accessories. Failure to do this may invalidate your warranty.
- Accessories may be different in different regions; please check with our regional service company or agent for further inquiries.

01

02

03

04

05

06

07

08

Network service

The wireless phone described in this guide is approved for use on the GSM 900, DCS 1800 and PCS1900 networks.

A number of features included in this guide are called Network Services. These are special services that you arrange through your wireless service provider. Before you can take advantage of any of these Network Services, you must subscribe to them through your service provider and obtain instructions for their use from your service provider.

Technical data

General

Product name : KS360

System : GSM 900 / DCS 1800 / PCS 1900

Ambient Temperatures

Max : +55°C (discharging)

+45°C (charging)

Min : -10°C

Declaration of Conformity



Suppliers Details

Name

LG Electronics Inc

Address

: LG Twin Tower 20, Yeouido-dong, Yeongdeungpo-gu Seoul, Korea 150-721

Product Details

Product Name

E-GSM 900 / DCS 1800 / PCS 1900 Tri Band Terminal Equipment

Model Name

KS360

Trade Name

LG

CE 0168

Applicable Standards Details

R&TTE Directive 1999/5/EC

EN 301 489-01 v1.6.1 / EN 301 489-07 v1.3.1 / EN 301 489-17 v.1.2.1

EN 300 328 V 1.6.1

EN 60950-1 : 2001

EN 50360/EN 50361 : 2001

EN 301 511 V9.0.2

Supplementary Information

The conformity to above standards is verified by the following Notified Body(BABT)

BABT, Balfour House, Churchfield Road, Walton-on-Thames, Surrey, KT12 2TD, United Kingdom
Notified Body Identification Number : 0168

Declaration

I hereby declare under our sole responsibility that the product mentioned above to which this declaration relates complies with the above mentioned standards and Directives

European Standard Center
LG Electronics Logistics and Services B.V.
Veluwezoom 15, 1327 AE Almere, The Netherlands
Tel : +31 - 36- 547 - 8940, Fax : +31 - 36 - 547 - 8794
e-mail : jacob @ lge.com

Name

Issued Date

Seung Hyoun, Ji / Director

18. JUN. 2008


Signature of representative

Guidelines for safe and efficient Use

Please read these simple guidelines. Not following these guidelines may be dangerous or illegal.

Exposure to radio frequency energy

Radio wave exposure and Specific Absorption Rate (SAR) information

This mobile phone model KS360 has been designed to comply with applicable safety requirements for exposure to radio waves. These requirements are based on scientific guidelines that include safety margins designed to assure the safety of all persons, regardless of age and health.

- The radio wave exposure guidelines employ a unit of measurement known as the Specific Absorption Rate, or SAR. Tests for SAR are conducted using standardised methods with the phone transmitting at its highest certified power level in all used frequency bands.
- While there may be differences between the SAR levels of various LG phone models, they are all designed to meet the relevant guidelines for exposure to radio waves.
- The SAR limit recommended by the International Commission on Non-Ionizing Radiation Protection (ICNIRP) is 2W/kg averaged over 10g of tissue.

- The highest SAR value for this model phone tested by DASy4 for use at the ear is 0.489 W/kg (10g) and when worn on the body is 0.949 W/kg (10g).
- SAR data information for residents in countries/regions that have adopted the SAR limit recommended by the Institute of Electrical and Electronics Engineers (IEEE), which is 1.6 W/kg averaged over 1g of tissue.

Product care and maintenance

WARNING

- Only use batteries, chargers and accessories approved for use with this particular phone model. The use of any other types may invalidate any approval or warranty applying to the phone, and may be dangerous.
- Do not disassemble this unit. Take it to a qualified service technician when repair work is required.
 - Keep away from electrical appliances such as TVs, radios, and personal computers.
 - The unit should be kept away from heat sources such as radiators or cookers.
 - Do not drop.

- Do not subject this unit to mechanical vibration or shock.
- Switch off the phone in any area where you are required by special regulations. For example, do not use your phone in hospitals as it may affect sensitive medical equipment.
- Do not handle the phone with wet hands while it is being charged. It may cause an electric shock and can seriously damage your phone.
- Do not to charge a handset near flammable material as the handset can become hot and create a fire hazard.
- Use a dry cloth to clean the exterior of the unit (do not use solvents such as benzene, thinner or alcohol).
- Do not charge the phone when it is on soft furnishings.
- The phone should be charged in a well ventilated area.
- Do not subject this unit to excessive smoke or dust.
- Do not keep the phone next to credit cards or transport tickets; it can affect the information on the magnetic strips.
- Do not tap the screen with a sharp object as it may damage the phone.
- Do not expose the phone to liquid or moisture.
- Use the accessories like earphones cautiously. Do not touch the antenna unnecessarily.

Efficient phone operation

Electronics devices

All mobile phones may get interference, which could affect performance.

- Do not use your mobile phone near medical equipment without requesting permission. Avoid placing the phone over pacemakers, for example, in your breast pocket.
- Some hearing aids might be disturbed by mobile phones.
- Minor interference may affect TVs, radios, PCs, etc.

Guidelines for safe and efficient Use

Road safety

Check the laws and regulations on the use of mobile phones in the area when you drive.

- Do not use a hand-held phone while driving.
- Give full attention to driving.
- Use a hands-free kit, if available.
- Pull off the road and park before making or answering a call if driving conditions so require.
- RF energy may affect some electronic systems in your vehicle such as car stereos and safety equipment.
- When your vehicle is equipped with an air bag, do not obstruct with installed or portable wireless equipment. It can cause the air bag to fail or cause serious injury due to improper performance.
- If you are listening to music whilst out and about, please ensure that the volume is at a reasonable level so that you are aware of your surroundings. This is particularly imperative when near roads.

Avoid damage to your hearing

Damage to your hearing can occur if you are exposed to loud sound for long periods of time. We therefore recommend that you do not turn on or off the handset close to your ear. We also recommend that music and call volumes are set to a reasonable level.

Glass Parts

Some parts of your mobile device are made of glass. This glass could break if your mobile device is dropped on a hard surface or receives a substantial impact. If the glass breaks, do not touch or attempt to remove. Stop using your mobile device until the glass is replaced by an authorized service provider.

Blasting area

Do not use the phone where blasting is in progress. Observe restrictions, and follow any regulations or rules.

Potentially explosive atmospheres

- Do not use the phone at a refueling point.
- Do not use near fuel or chemicals.
- Do not transport or store flammable gas, liquid, or explosives in the same compartment of your vehicle as your mobile phone and accessories.

In aircraft

Wireless devices can cause interference in aircraft.

- Turn your mobile phone off before boarding any aircraft.
- Do not use it on the ground without permission from the crew.

Children

Keep the phone in a safe place out of the reach of small children. It includes small parts which may cause a choking hazard if detached.

Emergency calls

Emergency calls may not be available under all mobile networks. Therefore, you should never depend solely on the phone for emergency calls. Check with your local service provider.

Battery information and care

- You do not need to completely discharge the battery before recharging. Unlike other battery systems, there is no memory effect that could compromise the battery's performance.
- Use only LG batteries and chargers. LG chargers are designed to maximize the battery life.
- Do not disassemble or short-circuit the battery pack.
- Keep the metal contacts of the battery pack clean.
- Replace the battery when it no longer provides acceptable performance. The battery pack maybe recharged hundreds of times until it needs replacing.
- Recharge the battery if it has not been used for a long time to maximize usability.
- Do not expose the battery charger to direct sunlight or use it in high humidity, such as in the bathroom.
- Do not leave the battery in hot or cold places, this may deteriorate the battery performance.

Guidelines for safe and efficient Use

- There is risk of explosion if the battery is replaced by an incorrect type.
- Dispose of used batteries according to the manufacturer's instructions. Please recycle when possible. Do not dispose as household waste.
- If you need to replace the battery, take it to the nearest authorized LG Electronics service point or dealer for assistance.
- Always unplug the charger from the wall socket after the phone is fully charged to save unnecessary power consumption of the charger.

HOW TO USE QUICK REFERENCE GUIDE

Cut out Quick Reference Guide bound to this manual along the cutout line and fold as illustrated below.



How to cut

Cut out Quick Reference Guide along the cutout line. You can place a scale on the cutoff line and cut as illustrated below.

- Be careful not to cut yourself when using scissors.

How to fold

Fold Quick Reference Guide along the perforated line so that the cover faces upwards as illustrated below.






KS360

त्वरित संदर्भ मार्गदर्शिका

LG मोबाइल चुनने पर स्वागत और धन्यवाद

और विवरण के लिए, कृपया उपयोगकर्ता मार्गदर्शिका देखें.

फोन के भाग



1. मुख्य स्क्रीन
2. कॉल कुंजी
3. टचपैड
4. साफ कुंजी
5. समाप्त/पावर कुंजी
6. वॉल्यूम कुंजी
7. चार्जर, केबल, हैंडफ्री कनेक्टर
8. कैमरा
9. मेमोरी कार्ड स्लॉट

खोलें दृश्य

बाई सॉफ्ट कुंजी/बाई सॉफ्ट कुंजी
प्रदर्शन में सबसे नीचे दिया फंक्शन चलाता है

Fn कुंजी
पाठ मोड से प्रतीक / न्यूमेरिक मोड में जाएं और कीपैड लॉक करें.

प्रतीक कुंजी
प्रतीक/कैल्कुलेटर वर्ण लिखती है.

पाठ मोड बदलें
(कॉपीटेल / स्मॉल)

अल्ट्रा न्यूमेरिक कुंजियाँ

स्पेस कुंजी
समाप्त करने समय स्पेस दर्ज करें.

Enter कुंजी

OK कुंजी

मेनू विकल्प चुनती है और स्क्रीन के केंद्र में दिए गए कार्य की श्रृंखला करती है.

साफ कुंजी

• एक बार दबाने पर एक वर्ण मिटाती है. सभी इनपुट को मिटाने के लिए इस कुंजी को दबाकर रखें.

• पिछली स्क्रीन पर वापस जाने के लिए इस कुंजी का उपयोग करें.



एमपी3 प्लेयर

आपके LG KS360 में विल्ट-इन MP3 प्लेयर है जिससे आप अपना पसंदीदा संगीत चला सकते हैं.

- ▶ **सभी गाने:** इसमें आपके फोन के सभी गाने होते हैं.
- ▶ **थेरी प्लेस्ट:** इसमें आपके द्वारा बनाई गई प्लेस्टिस्ट साथ ही चल रहे गाने, हाल में चलाए गए गाने और पसंदीदा गाने होते हैं.
- ▶ **सेटिंग:** अपनी संगीत सेटिंग समायोजित करें..

कोई गाना चलाना

- 1 मेनू या (OK) दबाएं और मल्टीमीडिया चुनें फिर MP3 प्लेयर चुनें.
- 2 सभी गाने चुनें फिर चलाने के लिए अपना इच्छित गाना चुनें.
▶ चुनें.
- 3 गाना रोकने के लिए || चुनें.
- 4 अगले गाने पर जाने के लिए >>> चुनें.
- 5 पिछले गाने पर जाने के लिए <<< चुनें.
- 6 संगीत बंद करने के लिए (C) चुनें और MP3 प्लेयर मेनू में वापस जाएं.

कैमरा

तुरंत फोटो लेना

- 1 हैंडसेट के बाईं ओर कैमरा कुंजी को दबाए रखें। कैमरा व्यूफाइंडर स्क्रीन पर दिखाई देगा।
- 2 फोन को क्षैतिज रूप में पकड़कर लेंस को फोटो के विषय पर केंद्रित करें।
- 3 फोन को सही स्थिति में पकड़ें जिससे आप अपने फोटो का विषय देख सकें।
- 4 कोई फोटो लेने के लिए (⊗) दबाएँ या कैमरा कुंजी को दबाकर रखें।

नोट: आप स्टैंडबाय स्क्रीन से कैमरा मेनू भी एक्सेस कर सकते हैं। (⊗) दबाएँ और कैमरा चुनें। व्यूफाइंडर खोलने के लिए स्टील कैमरा चुनें।

वीडियो कैमरा

- 1 हैंडसेट के बाईं ओर कैमरा कुंजी को तुरंत दबाएँ।
- 2 वीडियो कैमरा चुनें।
- 3 कैमरा लेंस को वीडियो के विषय पर केंद्रित करें।
- 4 रिकॉर्डिंग शुरू करने के लिए हैंडसेट के बाईं ओर कैमरा कुंजी को दबाएँ।
- 5 **REC** व्यूफाइंडर के निचले दाएँ कोने में दिखाई देगा और टाइमर आपके वीडियो की लंबाई दिखाएगा।
- 6 वीडियो को रोकने के लिए रोकें चुनें और फिर से चलाने के लिए पुनः शुरू करें चुनें।
- 7 रिकॉर्डिंग बंद करने के लिए बंद करें चुनें।

नोट: आप स्टैंडबाय स्क्रीन से वीडियो कैमरा भी एक्सेस कर सकते हैं। (⊗) दबाएँ और कैमरा चुनें, नीचे स्कॉल करें और व्यूफाइंडर खोलने के लिए वीडियो कैमरा चुनें।

एफएम रेडियो

आपके LG KS360 में FM रेडियो सुविधा है जिससे आप सुनने के लिए अपने पसंदीदा रेडियो स्टेशन ट्यून इन कर सकते हैं।

नोट: रेडियो सुनने के लिए आपको अपना हैंडसेट जोड़ना होगा। हैंडसेट के सॉकेट में प्लग डालें (यह उस सॉकेट के समान होता है जिसमें आप अपना चार्जर लगाते हैं)।

रेडियो सुनना

- 1 'मेनू' दबाएँ, मल्टीमीडिया चुनें तब FM रेडियो चुनें
- 2 जिस सटेशन को आप सुनना चाहते हैं उस का चैनल संख्याय दबाएँ, चैनल को बदला जा सकता है:
-> नेविगेशन बटन द्वारा
-> हैंडसेट बटन द्वारा (कुंजीपटल लोकड की स्थिति में भी)

वॉइस रिकॉर्डर

वॉइस मेमोज या अन्य ध्वनियों रिकॉर्ड करने के लिए अपना वॉइस रिकॉर्डर उपयोग करें।

अपने वॉइस मेमो को रिकॉर्ड करना

- 1 (⊗) दबाएँ और मल्टीमीडिया चुनें, फिर वॉइस रिकॉर्डर चुनें।
- 2 शुरू करने के लिए (●) दबाएँ।
- 3 रिकॉर्डिंग रोकने के लिए रोकें दबाएँ।
- 4 रिकॉर्डिंग समाप्त करने के लिए बंद करें चुनें।
- 5 रिकॉर्डिंग सुनने के लिए ▶ चुनें।

नोट: आप सहेजी गई सभी वॉइस रिकॉर्डिंग एलएम का चयन कर सुन सकते हैं।



WARRANTY CARD

This LG handset and charger comes with a 12-month warranty from date of purchase or 15 months from manufacturing date of corresponding IMEI No. Of the unit whichever is earlier, against defect in material or workmanship. In case of a defect, LG Electronics India Pvt. Ltd. undertakes to get the set repaired free of charge through its authorised service centre (ASC) or service dealer subject to following conditions:

Terms and Conditions

1. This warranty is applicable to the first purchase and in no case it can be transferred or extended.
2. Repair of this product will be carried out on a carry in basis to the nearest ASC.
3. While the company will make every effort to carry out repairs at the earliest, it however is made explicitly clear that the company is under no obligation to do so in a specified period of time.
4. The company or its authorised ASC/ service dealer reserves the right to retain any parts of the component/s replaced at its discretion. In the event of a defect being noticed in the equipment during the warranty period.
5. This warranty entitles the purchaser to free of cost repairs of the unit within warranty period and does not entitle for replacement or refund of entire unit. Claims, if any, to this warranty shall in no case exceed the purchase price of the unit.
6. In case of any software upgradation of the phone, no warranty is provided on phone memory or phone book.
7. The warranty is void in case the serial no./ IMEI no. is tampered / disfigured or details in the warranty card are not properly filled up at the time of purchase.
8. This warranty is not valid for damages resulting due to negligence, mishandling, improper use, tampering, breakage, soaking, fire, unauthorised repair and failure due to network upgrades.
9. Batteries are covered under warranty for a period of 6 months from date of purchase or 9 months from date of corresponding IMEI no. of the unit whichever is earlier
10. Warranty does not cover accessories external to the equipment supplied by the dealer.
11. The Delhi / New Delhi courts shall have the jurisdiction to try any dispute and /or suits related to or arising out of this agreement.

Customer Information Center/ Call Center Number

For any query related to the after sales service and customer support please contact us at the numbers listed below.

LG	SERVICE
 <small>*MTNL / BSNL **Prefix STD Code</small>	1800-180-9999* 39-01-0909**

BRANCH ADDRESSES

S.No.	Branch	Branch Office Address	STD Code	Phone No.
1	Ahmedabad	LGEIL_233-234,Platinum Plaza, Judges Bungalow Road, Bodakdev Road, Ahmedabad - 5	079	40040013 / 14
2	Asansol	LGEIL_Block-E-1st Floor, P C Chatterjee Market,Rambandhu Tala,GT Road (E) Asansol-713303	0341	3292009 / 3292010
3	Aurangabad	LGEIL_302 CIDCO No 3, Opp Hotel Ramgiri, Jalna Road,Aurangabad - 431003	0240	2414545 / 32095436 / 32095437 / 32095438
4	Bangalore	LGEIL_ No. 914, 2nd Floor, Shri Venkateshwara Complex, Opp. IBP Petrol Bunk, 80ft Road, 8th Block, Koramangala - Bangalore - 560095	080	4114415 / 41144750 / 41144751 / 30910754 / 30910753
5	Bhopal	13 A Vignes Warehousing Corporation, Sector-G Govindpura Industrial Area J K Road Bhopal	0755	4062900 / 3092938 / 3095904
6	Bhubaneswar	LGEIL_ Plot No.02, 1st Flr. Bapuji Nagar, Bhubaneswar-751009	0674	2531430 / 2534280 / 3966525 / 3966526
7	Chandigarh	LGEIL_ SCO No. 142-143, 3rd Floor, Sector-34A Chandigarh-160002	0172	5087389 / 90 / 5089107 / 3256001 / 3256003
8	Chennai	LGEIL_AA11, 2nd Avenue, Fatima Tower, Anna Nagar West, Chennai-600040	044	65510501 - 04
9	Cochin	LGEIL_40/1270, Vasudeva Buildings, T.D.Road, Ernakulam Cochin-682011	0484	2369743 / 2370744 / 2370484 / 4027444 / 4027555
10	Coimbatore	LGEIL_ 250a, Sangapur Main Road, Kannappa Nagar, Coimbatore-641027	0422	2332197 / 2332195 / 2332506 / 3094613 / 3094573
11	Dehradun	LGEIL_ M - 22, Mobbewala, Tata Commercial Compound, Dehradun Saharanpur Road, Dehradun	0135	2944213 / 283
12	Delhi	LGEIL_ A-27 Mohan Co-operative Industrial Estate, New Delhi	011	26991411 / 12 / 13
13	Ghaziabad	LGEIL_ J-10, RDC Rajnagar Ghaziabad - 201001	0120	9811354152 / 3 / 64 / 65
14	Goa	LGEIL_Pkt No-D-3&D-4 Rego Baug, Alto Santacruz, Bambolim, Goa-403	0832	3294956 / 3294956 / 3294799
15	Gurgaon	LGEIL_II nd Flr, A Block, Centre Point Bldg, Sushant Lok, PH-I, Gurgaon-122001	0124	4047461 / 62 / 63 / 4272668 / 4047460
16	Guwahati	LGEIL_ Shantilineer Bhawan, C K Aggarwal Path, Chenkerituli, Guwahati-781003	0361	2663895 / 2666958 / 2665983 / 2668994
17	HUBLI	LGEIL_ 603/B, Ravi Nagar Road, Behind Renuka Petrol Pump, Gokul Road, HUBLI-580030	0836	4250251 / 52 / 2337251 / 52
18	Hyderabad	LGEIL_ 1st Floor, Survey No.54, Pulla Reddy Building, Vikarampuri Main Road Kharkhana, Secunderabad - 500004	040	2781732 / 33 / 34
19	Indore	LGEIL_ 3rdflr. 304 Bansi Trade Centre,5815 M.G.Road,Indore-452003	0731	4065523 / 24 / 40622157
20	Jaipur	LGEIL_B-71, Sahakar Marg, Lal Kothi Scheme, Jaipur-302015	0141	5111118 / 5113028 / 5105392
21	Jalandhar	LGEIL_Village Khajurta Near Hawall Restaurant Jalandhar, Phagwara Highway, G T Road, Jalandhar	01824	502667 / 508025 / 502698
22	Jammu	LGEIL_ Pkt No.-52, Yard No. 6, Transport Nagar, Nanwal, Jammu-180005	0191	2477120 / 24771419 / 2474396 / 2474384
23	Jodhpur	LGEIL_221-A/212-B/2, RIICO Heavy Industrial area, Jodhpur - 342003	0291	2742384 / 392
24	Kolkata	LGEIL_ 1 Ho-Ch-Min Saran, 6th Floor, Metro Towers, Kolkata-700071	033	22682350 / 51 / 52
25	Kundli	LGEIL_Sunshine Enterprises, Sunder Cold Storage, Gt Karnal Road, Kundli-Sonapat	0130	2219201 / 02 / 03
26	Lucknow	LGEIL_B- 537 Hari Kunj, Keshav Nagar, Sitapur Road Lucknow -226020	0522	2757538 / 39 / 2759121
27	Ludhiana	LGEIL_ Village Jhande Near Badowal Railway Station, Opp ferrozpur Road Ludhiana.	0161	2804413 / 19
28	Mumbai	LGEIL_ Trade Star, 4th Floor, A Wing, J.B Nagar, Andheri Kurla Road, Andheri (E) Mumbai-400059	022	28352882 - 2887
29	Nagpur	LGEIL_ Sa,Road No.13, Behind Mtrc Workshop, MIDC Hinga, Nagpur-440016	07104	235120 / 235122
30	Patna	LGEIL_ 2nd Floor, Ankit Chandra Deep Complex, Bander Bageecha, Near Samrat Hotel, Patna-800001.	0612	3291956
31	Pune	LGEIL_ 105/106, Premium Point, GM Road, Opp Modern High School, 3rd Floor, Shivaji Marg Pune -411005	020	6630100 / 732
32	Raipur	LGEIL_ Nathani Compound, Shyam Nagar, Katora Talab, Raipur(C.G.)	0771	4053171 / 4037470 / 4048745
33	Ranchi	LGEIL_402, Commerce Tower, Opp. Gel Church Complex, Main Road, Ranchi	0651	3294026 / 2331815 / 3090426
34	Surat	LGEIL_1001-1004 Ascon Plaza, 1Ind Flr, Anand Mahal Road, Behind Bhukha Bhawan School, Adajan Surat-395009	0261	2730982 / 83 / 84
35	Thane	LGEIL_ Gall Shop No 6-9-S-2 Golden Park Complex Hardas Nagar LBS Marg Panchpakhandi Thane(West)-400602	022	25472633 / 2637
36	Varanasi	LGEIL_ Pama Complex, DLW, Lahartara Road, Shivdaspur, Mandchadh, Varanasi UP-221002	0542	2337342 / 36 / 37
37	Vijaywada	LGEIL_ Door No 32-2/1-7, Ratnamamba Street, Prajasakli Nagar, Vijaywada - 520010, Andhra Pradesh	0866	2497283 / 87
38	Warangal	LGEIL_HOUSE No. 1-8-598/1 FIRST FLOOR, BESIDE HDFC BANK NAKKALGUTTA, HANAMAKONDA-506001 (WARANGAL.)	0870	2551453

Dealer name with stamp Dealer address

IMEI No. Date of sale Serial no

LG Electronics India Pvt. Ltd., Plot No. 51, Udyog Vihar Surajpur Kansa Road, Greater Noida, U.P.

SERVICE CENTER LIST


LG | CUSTOMER SERVICE
 *From: BSNL / MTNL **1800-180-9999***
 **From Mobile: **39-01-0909**
 Add local STD Code**

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Andhra Pradesh	Adhoni	RS CDMA	21/490,Arts & Science College Road, Near Devi Nursing home, Adhoni	9346490905	Mr.Mohan
Andhra Pradesh	Adilabad	KIRAN MOBILE WORLD	7-14-78/A, Near Nethaji Chouk, Cinema Road, Adilabad	9346358181	kiran kumar
Andhra Pradesh	Amalapuram	SANDESH CELLULAR	Shop no 5 R.K. TOWERS COLLEGE ROAD AMALAPURAM	9346398838	Mr.RAVI KUMAR
Andhra Pradesh	Anantpur	RK LG CDMA	Shop No 3, Cellular,Pallavi Towers, Opp to Canara Bank.Subash Road, Ananthpur	9393722777	Sridhar
Andhra Pradesh	Armoor	SAI SRI Electronics	Shop.no.2, mahalakshmi road, Armoor	9392622038	Mr.srinivas
Andhra Pradesh	Bapatla	Vijaya Communications	G.B.C.Road, Bapatla	9346206305	Mr.B.Siva
Andhra Pradesh	Bhimavaram	Gopi Krishna Communications	JP Road Near Mohan Service Center Bhimavaram	9346700202	Mr.Siva
Andhra Pradesh	Chirala	Lakshmi Infocomm	Munthavari street, sangam thestre Road, Chirala	9347052181	Ms.Shakeena
Andhra Pradesh	Chittoor	CMT Computer Services	20-439, A.S.M.STREET, MITTOOR, CHITTOOR	9347361979	Mr.Gopi
Andhra Pradesh	Cuddapah	Srinivasa Communication	Shop No.4, Siddapriya Complex, Opp. HP Petrol Pumping Point, Cuddapah	9346350224	Mr.Sahadeva Reddy
Andhra Pradesh	Dharmavaram	Siddharta Communications	Opp to Sathya Lodge, PRC Circle, Dharmavaram	9347064101	Mr.Naresh
Andhra Pradesh	Eluru	S.S.COMPUTERS	Door.No:23B-4-8/3, Ayyappa Complex, Beside Kanuri Madhavi Hospital, Subbama Devi School Road, R.R.Pet, Eluru	329294	Mr.DIWAKER
Andhra Pradesh	Gudivada	KANAKURIGACOMMUNICATIONS	SHOP NO:4,C/O SURYA RESIDENCY, OPP:VIJAYA GAS COMPANY,ELURU ROAD,GUDIWADA	9394220688	Mr.KUMAR
Andhra Pradesh	Gudur	Srinivasa Electronics	1st floor, Airtel Building, Kummari Veedhi,Gudur	9390829440	S. Naga Suman
Andhra Pradesh	Guntur	Vasavi Associates	Shop No:21,Central Plaza,Naaz Center,Guntur	3257789	MR.Satyam
Andhra Pradesh	Hazamagari/Kodad	Sri Pavan Electronics	Malika Towers, Besides Reliance Web World, Kodad	9346901519	Mr Narasimha Rao
Andhra Pradesh	Hindupuram	S.V.A Cellular	Shop.no.3,Vinayaka Lodge, Railway Road, Hindupur	9390000135	Mr. D.B.Ravindra Nath
Andhra Pradesh	Huzurabad	BHARGAVI COMMUNICATIONS	DCMS Complex, Near bus Stand, main road, Huzurabad	9391755619	T.VISHNU YARDHAN
Andhra Pradesh	Hyderabad	SUNBEAM TECHNOLOGIES	120,Chenoy Trade Centre, Parklane, Near Paradise,Secunderabad	40200193 / 66383193	Mr.Suresh
Andhra Pradesh	Hyderabad	Bhagya Communications	Shop no:109, Upper Ground Floor,#12-2-825, S.G.M. Mall, Mehdipatnam, Hyderabad	32972308, 32001406	Mr.Bipin

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Andhra Pradesh	Hyderabad	JVR Infotech Pvt Ltd	Shop No 8, Vanijiya Vihar, Nalanda Building, Dilsukh Nagar Main Road, Hydrabad	24161848, 55109604	EV Ramakanth
Andhra Pradesh	Hyderabad	PRIMUS INFOMATIC & SOFTWARE PVT LTD	#18/A Methodist Complex, 5-9-190, Lane Opp to Chermas, Abids, Hyderabad	66755111	Mr.Govind Kabra
Andhra Pradesh	Hyderabad	Reliable Communication	G-8, 3-6-561, AALTO'S A & M Trade Centre, HIMAYATNAGAR, HYDERABAD	32913251	Mr.Sandeep.soni
Andhra Pradesh	Hyderabad	S V Electronics	Shop No. 41, Nilagiri Block, Aditya Enclave, Ameerpet Main Road, Hydrabad	55754477 32977389	Mr.Pradeep
Andhra Pradesh	Hyderabad	Shweta Communications	Shop No.9, Ground Floor, Pavani Anusya Complex, Opp. Huda Complex, Tamaka, Hyderabad	32968162	Mr. Sandeep Heda
Andhra Pradesh	Hyderabad	Shweta Computers	# 1-7-69/1 & 2, OPP Aditya Delux Hotel, Near Paradise circl, Sarojini Devi Road, Secunderabad	27721076, 52977548	Mr.Jagdish
Andhra Pradesh	Hyderabad	Sreenivasa Technologies	SAI VIKRAM TOWERS, SHOP NO -4, RELIANCE WEB WORLD BUILDING, Balaji Nagar Kukatpally	32961479	Mr.Praveen
Andhra Pradesh	Hyderabad	Sri Surya Communications	#Madhu Enclave.Street no 06.Shyamal Buildings, Begumpet . Hyderabad	32961127	Mr.Nageswara Rao
Andhra Pradesh	Hyderabad	Sri Varun Electronics	D.No 5-8-344/1, " DHAN BHAGYA ESTATE ", Chirag Ali Lane, Abids, Next to Raghava Ratna Towers, Hyderabad	32909099 55781999	Mr.Alokh Mohan
Andhra Pradesh	Hyderabad	VICTORY ELECTRONICS	Shop No. B-1, Quli Qutub Shah Stadium, Opp. City College, Hyderabad	32408999, 24502339	MR.B.LYARMA
Andhra Pradesh	Jagityal	SS Communications	Opp to L.G.RAM. Lodge Street, Park Line, Jagityal	9391533535	Mr.Hari
Andhra Pradesh	Jangaon	SKY WIN COMMUNICATIONS	#2-7-134, Beside Bharat Gas, Bus stand Road,Jangaon.	9390102839	VARJUN
Andhra Pradesh	Jangareddygudem	SRI DEVI COMMUNICATION	Near Mavullana Temple, Opp.Andhra Bank,Jangareddygudem	227297	Prasanna Lakshmi
Andhra Pradesh	Kakinada	Delta Infotech	Door No. 6-1-29, Opp. Swami Vivekananda Park, Jawahar Street, Surya Rao Pet, Kakinada	5595553	Mr. Shivanand
Andhra Pradesh	Kamareddy	Pager King Communication	Sircilla Road, Kamareddy, Dist. Nizamabad	9397366633	Mr. Moizuddin
Andhra Pradesh	Karimnagar	SS Marketers	2-8-40, Mukarampura, Near Circus Grounds, Karimnagar	9391552223	Sujan
Andhra Pradesh	Kavali	Sree Balaji Infotech	Trunk Road,Near Ongole Bus stand, Kavali, Nellore District, Andhra Pradesh	6329567	Mr. C. Sri Sai Charan
Andhra Pradesh	Khammam	Sriven Technologies	D.No:11-2-37,Shop No.3, D.V.Krishna Complex, Beside Baburao Petrol Bunk, Balaji Nagar, Wyra Road, Khammam	325567	Mr.Bhaskar Reddy
Andhra Pradesh	Kothagudem	S.Swathi CDMA Service Center	9-3-3,Above Sindhura Electronics, Near RTC BUS Stand,Kothagudem	9391552228	Mr.niaz Ahmed
Andhra Pradesh	Kuppam	SAGAR COMPUTER SERVICES	14-124, PALACE ROAD, KLPPAM	9391862436	Mr.Sagar
Andhra Pradesh	Kurnool	R K LG CDMA	Shop no:13, First floor, UCON Plaza, Kurnool	220201	Mr.G Rama Krishna
Andhra Pradesh	Machilipatnam	Om Sree Sai Communications	25/276, Kota Vani Tulla Center, Jaganadhapuram, Machilipatnam	9347741777	Mr.Rafee
Andhra Pradesh	Madanapalle	Sri Balaji Computers	Shop No2, 1st floor, Sri sai Complex, CTM Road, Madanapally	9390025204	Ravi Kumar

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Andhra Pradesh	Mahabubnagar	SRI Chakra mobile care centre	Shop.no:15,Shareef Complex, Near Bus stand, Mahbubnagar	9396348999	Mr.Anil
Andhra Pradesh	Manchiryal	SS CDMA Service Centre	Shop no.7,Mounika Complex,BPL Chourasta,Manchiryal	9394552223	Mr.T. Nagaraju
Medak	Kavali	Balaji Communications	Door.no:1-3-77/j, Opp to State bank of Hyderabad, Main Branch, Main road, Medak	9346439961	Mr. Rajkumar
Andhra Pradesh	Medchal	Khan Electronics	Sarjeeva Reddy Complex, Besides RTC Bus Depot, Medchal	9347222088	Mr. Jaleel Khan
Andhra Pradesh	Miryalguda	Needs Electronics	Jagannath Complex, Opp Bus Stand, Miryalguda	9394645696	Mr Ravi Kumar
Andhra Pradesh	Nalgonda	Quintessence Electronics	Shop No:5,Srinivasa complex, Opp to market office,HYD road, Nalgonda	9396610220	Mr Venkateshwar Rao
Andhra Pradesh	Nandyal	Dhanush Systems,	Dno:25/165 B,Sarjeev Nagar, Near Ramalayam, Nandyal	9392235699	Mr.Ramesh
Andhra Pradesh	Narasaraopet	Rajendra Infotech	C/o Hari priya Electronics, Anundelpet, Narsaraopet	224136	Mr.Sasi Bhushan
Andhra Pradesh	Nellore	Siri Enterprises	Co-Operative Bank Complex, 1st Floor, Shop No: 26,Near Gandhi Statue, G.N.T.Road, NELLORE. Andhra Pradesh.	3290339, 9398309571	Mr.Pratap
Andhra Pradesh	NELLORE	Balaji Watch & Electronics	16/249,Trunk Road,Nellore	2339999	Mr.Rajesh
Andhra Pradesh	Nirmal	OM SAI Electronics	Shop.no:1, Kala Nagar road, Beside 2 town Police station, Nirmal	9390000024	Mr. Mahendar
Andhra Pradesh	Nizamabad	Satya Electronics	# 7-10-65,Shop no 1 ,1 st Floor,H.M.H.V Complex,Beside Bus Stand,Nizamabad	326000	Mr.Satyam
Andhra Pradesh	Ongole	TejaSri Communications	37-1-107,Near Mastan Darga Center,Trunk Road,Ongole	9395026115	Mr.SASI BHUSAN
Andhra Pradesh	Peddapalli (Ramagundam)	Abhi Marketers	Shop No:19/8/291, MRK Plaza, Lakshmi Nagar, Godhavari Khani	9347077009	Srinivas
Andhra Pradesh	Peddapuram	Devi Infotech	Opp.Veterinary Hospital, Shop No-1, Santa Market Road,Peddapuram	9394864400	Mr.Siva Kumar
Andhra Pradesh	Prodattur	SV Technologies	4-625-3,Gandhi Road, Opp Karur Vyasa Bank, Prodduttur	9347251806	Mr.Ravi Kumar
Andhra Pradesh	Puttur	Siva Sai Computer World	8-104/C, VIJAYA LAKSHMI COMPLEX TIRUPATI-CHENNAI ROAD, PUTTUR	9395028024	C.Janardna Reddy
Andhra Pradesh	Rajamundhary	Siri Infotech	Police Welfare Complex, City Hospitals Junction, Danvai Pet Main Road, Rajamundry	2421567	Mr Raghvendra
Andhra Pradesh	Raychoti	Raju Computer World	Room No 3 Up Stairs Syeedia complex, bustand road, Rayachoty	9346209881	Mr.Raju
Andhra Pradesh	Repalle	Sri Satya Solutions	10/14-126,Municipal Office Road,Raipet,Repalle	9396222995	Mr.Sridhar
Andhra Pradesh	Sangareddy	Sri Technologies	Srimaan Complex, Beside Inspection Bunglow, Main Road, Sangareddy	9391216573	Mr.AJAZ AHMED
Andhra Pradesh	Sattenapalli	S.S. Communications	Opp.Telephone Exchange, Sattenapalli	9397610550	Mr.Sai
Andhra Pradesh	Shad Nagar	Sri Gana Electronics,	Shop No : 2, Khajia Veeresam Complex, College Road, Shadnagar	9392633111	Mr. Vigneswar
Andhra Pradesh	Siddipet	Gopala Krishana Communications	SHOP NO:13, FIRST FLOOR, MACCA COMPLEX, OPP:CITIZEN'S CLUB, M.G ROAD, SIDDIPET	9392511064	Mr. Kura Giridhar
Andhra Pradesh	Srikakulam	SRI SAI COMPUTER SHOPPE	OPP TEJA TIFFIN CORNER,G. T. ROAD, SRIKAKULAM	9390611779	MR SESHAGIRI
Andhra Pradesh	Srikalahasti	KSV Computer Services	NNR Buildings, d.no: 16-582, Panagal road, Srikalahasti	9390044399	SAHADEVA REDDY

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Andhra Pradesh	Sullurpet	Sai Baba Electronics,	D.No. 10/47, Bapuji Steet, Sullurpet	9346920527	S. Venkata Krishna
Andhra Pradesh	Tadepalligudem	SRI HARIPRIYA INFOTECH	THOTA GOPI COMPLEX PLOICE QUARTERS LANE, BESIDES ZP HIGH SCHOOL, TADEPALLIGUDAM.	9346408640	Mr.Suresh
Andhra Pradesh	Tanuku	SHIVANAND ENTERPRISES	D/NO-34-3-3, MAIN ROAD GAMINI COMPLUND TANUKU.	220489	Mr. SRINIVAS
Andhra Pradesh	Tenali	Vaishnavi Infotech	D.No.22/11/114, Opp.Kankacharla Kalyanamandapam, Bose Road, Tenali.	9347651330	Mr.Murali
Andhra Pradesh	Tirupathi	CMT Computer Services	18-1-624 VV Mahal Road,OPP HDFC BANK, Tirupathi	3296979	Mr.K Vasu Naidu
Andhra Pradesh	Vijayawada	K.L Computer House	39-9-46 SVS Temple Street,Labbipet,Vijayawada	5520461, 5671461	Mr.Kartik
Andhra Pradesh	Vijayawada	V V Communications	28-23-31/32,OPP.SWARUGHA FOODS,VIJAY TALKIES CENTER,VIJAYAWADA	9396467789	Mr.Rahul
Andhra Pradesh	VIJAYAWADA	Balaji Watch & Mobles Pvt.Ltd	29-37-79, Eluru Road, Opp. Vijaya Talkies, Vijayawada	6648888	Mr.Prasad
Andhra Pradesh	Vishakapatnam	Sri Sai Ganesh Infotech	G5,Ground Floor, Backside of Sangam-Sarat Theatre,1st Lane,Dwarka Nagar, Visakhapatnam	3258777	Mr.Chandra Shekar
Andhra Pradesh	Vishakapatnam	Jai Bharani Communications	Door No:52-11-7/7, Sapthagiri Plaza, Old Resuvanipallem, Vishakapatnam-13	3242111	Mr. P.Venkatapathi Raju
Andhra Pradesh	Vizayanagaram	S R TECHNOLOGIES	DRNO 17-2-29, RAJABAZAR, VIZAINAGARAM	9346418791	Mr.Balakrishna
Andhra Pradesh	Vuyyuru	Sugreeva Communications	Behind Datta Automobiles, Katturu Road, Vuyyuru	9395033355	Mr.Phani
Andhra Pradesh	Wanaparthy	Sri Ganesh Electronics	Shop No : 16-63, Opp R R Complex, Wanaparthy	9396800275	Mr Deva Raj
Andhra Pradesh	Warrangal	S S Marketers	6-1-73/1, Sai Bhavan, Sidevi Theatre Road, Hanamkonda, Warrangal	2552223	Mr. L.Srinivas Rao
Assam	Guwahati	A B PERIPHERALS & SERVICES	Wahed house, 2nd Floor,Opp ASTC Volvo point, Ulubari, Kamrup, Guwahati	2732417	Wassi Ahmed
Bihar	Arrah	Surya Services	Sushila Bhawan, Suryapuri colony, By pass road, Arrah	9334538845	Sanjay Kumar
Bihar	Aurangabad	Computer Sansar	L.P.Complex,old G.T.Road, Aurangabad, Bihar, PIN:824101	9334926768	Shreeniwas
Bihar	Begusarai	Krishna Communication	Eashwari Complex,Dak Bangla Chowk, Bishnupur, Begusarai, Bihar-851101.	9334341700	Dinkar Kumar
Bihar	Bhagalpur	S.K. Communication	NEAR RAILWAY STATION,Super market complex, Patel Babu road, BHAGALPUR -812001	9334255275	Kundan Kumar
Bihar	Bhagalpur	Printronix Infosolutions	Ganpati Complex,1st floor, Patel babu road	9934629247	Himansu Shekhar
Bihar	Biharsharif	Shanya Infotech	Magdha Commercial Complex, 1st.Floor, Shop.No.5, MG Road, Bharaopar,Bihar Sharif, Nalanda Dist. Bihar,Pin:803101	9334048037	Amit Kanchan
Bihar	Chapra	Ambey Associates	D-23, Hathwa Market, Chapra,Dist: Saran, Bihar, Pin:841301	9334295605	Jayant Kumar
Bihar	Darbanga	Prime Computer	Hanuman Nagar, Doner Road, Darbanga.	2220560	Abhinav Kumar Verma
Bihar	Gaya	Agrawal Distributors	Swarajpuri Road (Opp. Nagbatia Road), Waves Building,Gaya, Pin:	9334218122	Lalit Agrawal
Bihar	Muzafarpur	Krish Enterprises	Nr.Kanhoulina.no.2, Kachisarai Road, Muzafarpur.	9304410745	Sanjeev Kumar

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Bihar	Patna	INFOTEK TRADING COMPANY	1st floor, City Palace, New Dak Bunglow Road, Patna-800001	2227166	Sanjay Choubey
Bihar	Patna	Synergy Trading Company	G-01,Chanakya Plaza Complex,Main Road, Kankarabagh, Patna.8000020	2356900	Vikas Chandra
Bihar	Patna	COMPETENT MOBILE SERVICE	Shop 1, Hotel Lalitha Complex, East Bowring Canal Road, Patna	9334027706	Mohit Ahluwalia
Bihar	Patna	Micro Zone-Patna	17/C.S.K Puri, Near Basawan Park	3294696	Mithlesh Kumar
Bihar	Purnea	Micro Zone-Purnea	Narottam Hata,NH-31, Purnea	9304166633	Amit Kumar
Bihar	Sasaram	Nandika Enterprises	Hari Complex, Panjab National Barik, Sasaram, Rohtas (Bihar)	4222008	Abhinav Gupta
Chhattisgarh	AMBIKAPUR	NEHA COMMUNICATION	Ramanaj Ganj road, Opp. Kosa Form , Ambikapur , Sarguja, Pin-497001	440414	Mr.Rishi Dubey
Chhattisgarh	Bhilai	A B Automation	Shop No 117 , Ground Floor , Chouhan Estate, Supela Bhilai	09329750711 / 0788-2295989	Mr. Satish Singh
Chhattisgarh	Bhilai	Sai Ram Electronics	SHOP-NO-52/90, HIMALAY COMPLEX, AKASH GANGA, SUPELA, BHILAI	4038917	Mr. Balan
Chhattisgarh	Bilaspur	Mahamaya Infotech	Shop No 203, Jain Plaza, Ground floor, Link Road, Bilaspur	2413865	Mr. Pawan Kumar
Chhattisgarh	KORBA	STAR MOBILE SERVICES	SS Plaza FD-13 PH Road Korba Chhattisgarh	9300401485	Mr. Anish Menon
Chhattisgarh	Raigarh	BLUE CHIP COMPUTER	Purana Sadar Bazaar, Raigarh, Chhatisgarh.	329888	Mr. Ashok Agrawal
Chhattisgarh	Raipur	Cybernet Systems	B-2,1st floor, Garchaz Complex, Jail Road, Raipur - 492001	077-14069971	Mr Anand Singh
Chhattisgarh	Rajnandgaon	BHAVYE SERVICES	SHOP NO 5 , BELOW SBI , KAMPTEE LINE , RAJNANDGAON	395200	MANISH GOLCHA
Delhi	Delhi	Aegiss Infotech	UG-25 , Ansal Chamber -2, 6, Bhkaji Cama Place, New Delhi-110066	65477740 , 9312294105, 9313796774	Mr. Atul Gupta
Delhi	Delhi	Arham Infotech Services	1/1, Regal Building, Near Malik Sweets, Connaught Place New Delhi - 110 001.	011-41501124, 011-32584421	Mr. Anil Surana
Delhi	Delhi	Comhard Systems	D-30.31, First floor, Near Hotel Shipra, Main Vikas Marg, Lakshmi Nagar	011-32955887, 9818867678, 011-32979819	Mr Ravi Kant Gupta
Delhi	Delhi	Comhard Systems	B-120, Hardev Puri, 100 Feet Main Road, Near MTNL Office, Nathu Colony Chowk, Shahdra, New Delhi - 110 093.	011-32575507 , 011-32572427	Mr. Ravi Kant Gupta
Delhi	Delhi	Connexions and Communications	183, Avtar Enclave, Opposite Nirula's , Pashchim vihar ,New Delhi-11 0063	011-32451431, 011-65237374	Mr. Bhupinder Agrawal
Delhi	Delhi	Cube Engineers and Consultants Pvt Ltd	A-65, Naraina Industrial Area, Phase-1, New Delhi	09312224103, 011-65450272, 41411623	Mr. Arvinder
Delhi	Delhi	Innovative Telecom	304 , GDITL Northex Towers, A-09 ,3rd Floor , Northex Tower, Netaji Subhash Place, Pitampura, New Delhi-110 088.	011-32925753, 011-65154343, 9811682453	Mr Manoj Garg
Delhi	Delhi	Nice Telecom	15/19 & 15/21, DDA Complex, Nangal raya, Near D Block, Janakpuri, Delhi - 110046	011-32607072, 0-9213264403	Ripul Garg

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Delhi	Delhi	R K Communications	2516 Hudson Lines, Kingsway Camp-Nr. Kamla Nagar, New Delhi	011-32508861, 9312606463	Mr. Pradeep Aggarwal
Delhi	Delhi	Sagar Technologies	J-39,Central Mkt, Lajpat Nagar-II, New Delhi-110024	011- 65425644, 9350224692	Mr.Manoj Kumar
Delhi	Delhi	Sukriti Communication	101 Patparganj- Mayur Vihar phase -1 - New Delhi - 110091	011-32498011, 011-65238011	Mr.Dipendra kumar chaturvedi
Delhi	Delhi	Touch Tone Telecom	B-52, First floor, Kalkaji, New Delhi	011 32939031, 011-65672800	Ashish Dey
Delhi	Delhi	Ucom Technologies Pvt Ltd.	45, 1st Flr, Corner Mkrt, Mahiyi Nagar, New Delhi - 110017	011-41745469, 09212131300	Mr. Neeraj
Delhi	Delhi	Telecom systems	67/4, harshvihar chowk, pitampura, new delhi	9910089333	mr. Satbir
Delhi	Delhi	Shine telecom	N-18, SOUTH EX-1, NEW DELHI	9811143204	Mr. Naveen Goyal
Delhi	Delhi	Elcom Trading Company Pvt. Ltd.	G-1, Goverdhan Building, 53-54, Nehru Place, New Delhi -110019.	9310577009, 011-64582709	Mr. Somesh Narang
Delhi	Delhi	Teletalk	C-21,First floor, Near Bus Stand, Bhajan pura, Delhi-110053	9818400551	Mr.B.c. Vashist
Goa	Panjim	Mandovi Mobiles	Mohidin Towers Do. No. AS3 Opp to Hotel Manashanti Dadavaidya rd Panjim-403001	6452949	Prakash
Gujarat	Ahmedabad	Vision Communication	33, 1st Floor, Sukh Sagar Complex, Opp. Dinesh Chamber, Bapunagar, Ahmedabad	65122322	Mr Ajay Kachhadia
Gujarat	Ahmedabad	M Age Cellnet	A-176, Popular Plaza, Near Someswar Part -1, 132 Ft. Ring Road, Satellite, Ahmedabad	30122838	Mr K Jairaj
Gujarat	Ahmedabad	A Com Technologies	Shop No-37, 1st Floor, Shubh Complex, Near Rajasthan Hospital, Camp Road, Shahibaug, Ahmedabad	32940560	Mr. Vijay S.Gohel
Gujarat	Ahmedabad	Mishree Communication	FF-17, RUDRA SQUARE, OPP. JUDGES BUNGALOW, POLICE STATION, BODAKDEV, AHMEDABAD	32508491	Mr. Mitesh Patel
Gujarat	Ahmedabad	Silcon Valley	9, Gokul Palace, Maninagar Cross Road, Maninagar Ahmedabad	30225430	Mr. Rajesh Patel
Gujarat	Ahmedabad	Shiv Sai Communications	21,Municipal Market, C.G.Road, Ahmedabad	66057999	Mr. K.Jayraj
Gujarat	Amreli	Precision Telecom	32.33 Opera House, Station Road, Amreli.	230940	Mr. Kamlesh Tank
Gujarat	Anand	Desktop Infosystems	B/10, Vaibhav Tower, V V Nagar Road, Anand	246885	Mr. Dipesh Patel
Gujarat	Ankaleshwar	Akshar Telecom	C 1 Keval Shopping Center,old National Highway No.8,GIDC ,Ankaleshwar	02646-250860	Mrs. Anita Amin
Gujarat	Bharuch	Akshar Telecom	Pramukh Swami Complex, Panch Batti, Bharuch	26422241027	Mr. Harif Patel
Gujarat	Bhavnagar	Shivshruti Services	98/B, Makvana Building, Down Chowk, Bhavnagar	3296222	Mr.P D Jala
Gujarat	Bhuj	Infotech Computer	2nd Floor, NarNarayan Chambers, Opp Indian Airlines Office, Station Road,Bhuj	324295	Mr. Vasant Mevani
Gujarat	Gandhidham	Vansh Electronics	Shop No. 35, Swami Vivekanand Complex, Near Oslo Circle, Gandhidham	232739	Mr. Siddarth Gajjar
Gujarat	Gandhinagar	Creative Communications	Shop No 102,Suman City,Sector 11,Gandhinagar	23226241	Mr. K.J.Barot

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Gujarat	Godhra	Binary Computers	34, Lokhandwala Complex, LIC Road, Nr. Chitra Cinema, Godhra.	9376589019	MR. A. Raja
Gujarat	Himmatnagar	Jay Telecommunications	B-F 105, 1st floor, Durga Complex, Near Railway Station, Himmatnagar	329532	Mr. Manibhai Patel
Gujarat	Idar	Maruti Communication	3, Sarvoday Market, Near Bus Stand, Behind Sarvoday Guest House, Idar		Mr. Niraj Patel
Gujarat	Jamnagar	Sudarshan Infosys	"Shradhha", Park Colony, Motor House, Near UTI Bank, P.N.Marg, Jamnagar	2552696	Mr. Amit Unadkat
Gujarat	Junagadh	KJ.Traders	29/30, Danapith, Junagadh	2627320	Mr. Paresch Rughani
Gujarat	Kalol	Maitree Communication	B/93,Yogi Complex, near Mahendra Mill Road,Kalol	325288	Mr. Jignesh Shah
Gujarat	Mehsana	Prime Computer Consumables	83-B, Vinal Super Market, B K Road, S.T.Workshop Road, Mehsana	2325123	Mr. Suketu Patel
Gujarat	Morvi	Pulse Sales and Services	Madhav Market, 1st Floor, Near New ST Stand, Sanala Road Morbi.	300433	Mr. Natubhai Patel
Gujarat	Nadiad	D.C. Infosystems	105, Municipal Shopping Centre, Opp.Paras Cinema, Santram Road, Nadiad.		Mr. Dipesh Patel
Gujarat	Navsari	Deep Enterprise	10, Upper Level, Diamond Palace, Sattabir, Sayaji Road, Navsari-	02637 324095	Mr. Vinod Kasundra
Gujarat	Palanpur	Shree Manibhadra Mobile	16, 1st Floor, Aroma Arcad, Opp. Joravar Palace, Palanpur	320321	Mr. Panchal Sunil D
Gujarat	Patan	Able infotech	F/9, palika bazar complex, rajnahal road,near sanktoba hall, Patan	226400	Mr. Rakesh Bhai
Gujarat	Porbandar	Varun Infotech	1ST Floor,Garden Cafe Building, Opp.New Fountain, Nr.R.T.O Office, Porbandar	3290285	Mr. Mitesh Changela
Gujarat	Rajkot	Joshi Telecom	Shop No.8, Kuber Complex, Opp Chandubhai Bhelwala, Dr Yagnik Road, Rajkot	6530707	Mr Jiten Dave
Gujarat	Rajkot	Roopang infocare	Vinod Nivas, 4, Sardarnagar(West), Nr Astron Cinema, Rajkot	6950111	Mr. Kishore Patel
Gujarat	Sanand	Ravi Communication	37,Sagar Complex, Opp,Hotel Khabbar, Sarkhej Bavla Cross Road, Sanand	32401211	Mr. Ravi N
Gujarat	Surat	Om Sai Services	39,Golden Point,Near Science Laboratory, Ring Road, Surat -	2613231233	Mr. Dharmesh Patel
Gujarat	Surat	Yash Telecom	M-20, Centre point, Near Kadiwala High School, Civil Cross Road, Ring Road,Surat-395002	0261 2477903	Mr. Rehan Saikh
Gujarat	Surat	Excel Solutions	H-3, Ruchi Flats, Near Iqara Building, Adajan Hazira Road. Surat-	0261-6544500	Mr. Virender Jain
Gujarat	Surendranagar	Nihai Computer Services	94, old housing board, opp school no 13, Surendranagar	320375	Mr. Sikandar
Gujarat	Vadodara	Shreeji Telecom	GF 13, Sterling Shopping Center,R.C.Dutt Road,Alkapuri, Vadodara -	0265-3059363	Mr. Jignesh Gohel
Gujarat	Valasad	Klassik Stationo Products	10, Jethalal Muji Market, Halar Road,Valasad -	02632-329363	Mr. Darshan Panchal
Gujarat	Vapi	Klassik Stationo Products	116, Bhanudarshan Co-Op Society, Koparji Road, Near Gunjan Cinema, CIDC, Vapi	0260-3292363	Mr. Avishek Suhasania
Haryana	Ambala	Bee Ess Aar Communication	92-93, Gandhi market, Ambala Cantt-133001	2641234,	Rajiv Gupta

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Haryana	Bahadurgarh	Unique Telecom	5,Rajaram Market, Main Najafgarh Road, Bahadurgarh, Near Bajaj Showroom	9315873676, 9350941877	Mr. Harinder
Haryana	Bhiwani	Sandeep Electronics	10 th Plot, First Floor, Circular road, Mahem Gate Chowk, Near Dr. Kajal's Nursing Home, Adjacent to Rameshwar's Sweet House, Bhiwani, Haryana - 127021	252000	Mr. Sukhveer Saini
Haryana	Faridabad	Comsoft Computers	601/1 Gopi Colony Chowk- Sector-19 , Near Prem Prakash Ashram, OLD Faridabad-121002	0129-3293512, 0129-4104252, 9310977888	Mr. Ashwani Jindal
Haryana	Faridabad	VR Infocomm	Shop No.44, Neelam Fly Over, Neelam Chowk, NIT Faridabad.	0129-4031959, 0129-3208737	Mr. Vinod Kumar Gupta.
Haryana	Faridabad	Sky lark mobile point	4, G.T.Road, Near Bus Stand, Marfa Colony, Fatehabad	0989655244	Pankaj
Haryana	Gurgaon	Signature Communications	B-100 A , South City -1, Opposite - Huda Gymkhana Club - Gurgaon 122001	0124-3256565, 0124-4102709	Raj Kumar Garg
Haryana	Gurgaon	Lalji Communication	SCO-31 , - First Floor, Above MTNL Sanchar Haat, Main Market, Opp. BSNL Exchange, Sector-12A, OLD Gurgaon - 122001.	95124-3200900	Mr.Bharat Bhushan
Haryana	HISAR	M K ELECTRONICS	SHOP NO-4A/FIRST FLOOR, NEELKANTH COMPLEX, CAMP CHOWK, MAIN DELHI RD.	9991090260	MANMOHAN KRISHAN
Haryana	Hissar	Pamami Communication	32,Neel Kamal Complex, Red square Market,Near Elite Cinema Hall, Hissar, Haryana-125001	09354332000	Mr. Pradeep Garg
Haryana	Jind	Gaurav Telecom	Main Bazar, Near rani Talab, Near Bharat Electronics, Jind	325400	Deepak Garg
Haryana	Kaithal	Mahesh Communication	Shop no.22, Bajrang Bali Market, Near Randhir cinema- Kaithal	9315146000	Mr. Mahesh
Haryana	Karnal	Mass Communication	Shop No.69, Main Market, Ground Floor, Moughal Canal, Karnal - 132001	3290717	Mr.Harish
Haryana	Kurukshetra	Bharti Communication	3,Krishna Market, Opp.Abhay Palace, Pipli Road,Kurukshetra,Haryana-	01744-327717	Mr. Ramesh
Haryana	NARNAUL	PRIME COMMUNICATION	Shop no.8 , 1st floor Taneja complex, near Nirula Hotel ,main Road Narnaul	9355375351	MR. Naveen
Haryana	Palwal	Shree Ganesh Communications	Basant Apts, Shop No.5, Kithwari Chowk, Mathura Road, Near Saraswathi School, Palwal	01275-321028, 09315403328	Harish Chandra
Haryana	Panipat	INS Telecom	2, Bishan Sarup Colony, Opp Bus Stand, Near Hotel Deep, Panipat	3291860	Jagdeep Sachdeva
Haryana	Rewari	Mahak tele services	53-A, Model Town, Near Shreeji restaurant, Rewari	01274-329222	Gaurave yadve
Haryana	Rohtak	Telecentre	Shakti Market, Civil Hospital Road, Near Chhotu Ram Chowk, Rohtak-124001	247242	Mr.Madaan
Haryana	Sirsa	Sirsa Communication	168,Huda Complex, Old Bus Stand, Sirsa	0166-329591	Rajindera
Haryana	Sonipat	Teleworld	Shop No 20, 1st Floor, M.C.Market, Subhash Chowk, Sonipat, Haryana-138001	3290889	Vipin Dua
Haryana	SONPAT	RELIABLE TELLY SHOPPE	OPP. OLD CIVIL HOSPITAL RLY ROAD SONIPAT NEAR S.B.I. BANK, SONEPAT	9991090252	LIMESH CHAUDHARY
Haryana	YAMUNAGAR	KRISHNA COMMUNICATION	SHOP NO.19, 20-A 1ST FLOOR, WORKSHOP ROAD, YAMUNAGAR	9354784019	MR. SURESH/ Mr.Sandeep

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Haryana	Yamunanagar	Manish Communications	Shop No.3, Sharma Colony, Near Mahindra Petrol Pump, Yamunanagar - 135005	233277	Vinod Kumar Mittal
Himachal Pradesh	MANDI	V.M. COMMUNICATION	NEAR PNB MOTI BAZAAR, MANDI-175001	9816024978	M Mahender Singh Thakur
Himachal Pradesh	Palampur	Electronic Home	Kallu Di Hatti, PO Maranda Thasil, Palampur, Distt-Kangra-176102	01894238463	Mr. Ravi Kumar
Himachal Pradesh	Poanta Sahib	SINGAL MARKETING	Badni Nagar, Near LIC Office, Poanta Sahib	9318715848	Mr. Rajesh singal
Himachal Pradesh	Shimla	Hanu Computers	76/ 9, 2nd floor Lower Bazar Shimla	9418068421	Sandeep Patial
Himachal Pradesh	Solan	Vikas Mobile Repair Center	MOHAN COMPLEX, First Floor Upper Bazar, Solan-173212	9816271183	Vikas
Jammu	Jammu	MOBILE CARE	608-A Gandhi Nagar Behind Laxmi Narayan Mandir	0191-2436814	Mr Dait Gupta
Jammu	Srinagar	THE NET SURFER	2nd Floor Mohi-ud-Din Building, Polowiev, srinagar	0194-2459549	Mr Wasim
Jammu	Udhampur	SERVICE SOLUTIONS	Ward No. 15 Shakti Nagar Opp. Old ITI Udhampur	01992-276724	Mr Rakesh
JHARKHAND	BOKARO	Digital Equipment Centre	GB-11, City Palace, Opp. Indian Bank, Bokaro.	9334072270	Dewashish Ojha
Jharkhand	Daltonganj	MAA MOBILES	Jail Road, Jail Hata, Dalton Ganj-822101	9304285663	Mr. Navin Kr. Kashyap
Jharkhand	Deogah	Kanan Electronics	Hotel Relax Complex, BLC Road, Deogarh-814112	9304059528	Mr. Mahesh Sharma
Jharkhand	Dhanbad	Nirmala Enterprises	Ground Floor, Muskan Complex, Nr. Subhash Chowk, Dhanbad.	9334027583	Mr. Niraj Sinha
Jharkhand	Godda	Karan Mobilink	Maa Kalyani, Katra, Main Market, Godda-814133	9334525200	Mr. Saroj Kumar Jha
Jharkhand	Hazaribagh	Digital Services	Plaza Mkt. pugmill road, Nr. Kallu Chowk, Hazaribagh.	9334599570	Mr. Shish Alam
Jharkhand	Jamshedpur	Triupati Teletech	Chakravarti Compound, Near Hotel Castel, Contractors area, Bistupur, Jamshedpur-831001	0657 3293331	Abhijeet Mukherjee
Jharkhand	Jamshedpur	Prasad Electronics	Nr. Bus stand, Community Center, Kagal Nagar, Jamshedpur.	0657-2226077	Mr. Raju/ Saritha
Jharkhand	Ramgarh	Shreyas Empaire	Bus Stand Complex, Ramgarh-829122	9334085642	Mr. Piyush
Jharkhand	Ranchi	Balaji Infotech	Near Dr. Kashyap Eyeclinic, Purulia Road, Ranchi.	0651-3205400, 9304412277	Mr. Sanjeev, Mr. Sunil Kedia
Jharkhand	Ranchi	Satya Systems & Solutions	158, Opp Hotel Palace, Kadru, Ranchi-834002	0651 3291019	Amit Rastogi
Karnataka	Anekal	Sri Venkateshwara Communications	# 37, KSRTC COLONY, HOSUR MAIN ROAD, ANEKAL TALLUK, BANGALORE - 562106	320078	R. Jaganath
Karnataka	Bagalkote	Turning Point Computers	Opp. VRL Booking point, near Engg college BEC road, Vidyanigri, Bagalkote	329510	B.M. Hiremath/ Veeresh
Karnataka	Bailhongal	3G Communication	Shop No 459/2 Near Inchal Cross Belgaum Road Bailhongal-591102	9343815097	Vishwanath
Karnataka	Bangalore	Ascent Communication	No:113, St Johns Church road, Bangalore - 560005	32914856	Kumaresan
Karnataka	Bangalore	Insta Service Point	NO:64, Mission road, SATHI COMPLEX, BANGALORE-27	22107560	Venkatesh
Karnataka	Bangalore	Optima Mobile Services	24/2, Dr. Rajkumar Road, Near Subramanyanagar Police Station, 2nd Block, Rajajinagar, Bangalore - 560 010	23151953	Umni Krishnan

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Karnataka	Bangalore	Optima Mobile Services	P-3, Mallikarjuna Complex, Opp R T Nagar Police Station, 80 Feet Road, R T Nagar, Bangalore-560032	32710202	Madan
Karnataka	Bangalore	Pranav infocom	No 102, Surya Mansion, 7th Main, 4th Block, JAYANAGAR, BANGALORE -560011	9343023209	S.V.Sirish
Karnataka	Belgaum	Hello India Telecom	G-4,Maratha Mandir Complex, Khanapur Road, Near Railway Flyover, Belgaum - 590 001.	2420533	Mohan
Karnataka	Bellary	Shri Vinayak Electronics	# C1, R K Complex, KC Road Bellary-583103	655043	Devandra / Richard
Karnataka	Bhadravati	Digital communication	SR Complex 4th cross B H Road Bhadravathi-577301	9341081291	Nagabushan
Karnataka	Bhatkal	Vijay Communication	Hussian Complex Bunder road Bhatkal - 581320	329327	Vittal H.Naik
Karnataka	Bidar	Mayuri Infotech	Ravi complex,shop no: 4,Udgir road,Bidar-585401	225544	Ravi Halhali
Karnataka	Bijapur	Turning point computers	Khed building,opp Vijaya college, Sholapur road, Bijapur-586103	329318	S.M.Hiremath
Karnataka	Channapatna	C&C Technology	"Ramanujam Nilaya" No.2104, 11th Cross, Kuvempunagar B M Road, Channapatna - 571501	324222	Charan
Karnataka	Chikaballpur	Sri Ram Prasad Enterprises	Post office road Chikaballapur-562101	329579	Vardharaj / Ram prasad
Karnataka	Chikmagalur	Cell Tec Electronics	ragavendra complex, NMC circle,Neharu road, Chikmagalur - 577101	9341013183	Prem kumar
Karnataka	Chintamani	Amrutha Mobiles	Gajanna Circle Chintamani - 563125	9342262811	Sudarshan Reddy
Karnataka	Davangere	Kruthika Communication	Shop No: 6, Park View Plaza, (Income Tax Office's Ground Floor) , 4th Main, Near Vishweshwaraiah Park, P.J. Extension, Davangere-577002	395444	Sujay
Karnataka	Doddaballpur	Santosh Communication	VITOBHA TEMPLE ROAD, OPP ASHWINI HOSPITAL, DODDABALLAPUR -561205.	9341736645	Santosh
Karnataka	Gadag	Tranql Telecom Service Pvt Ltd	Shop No12, Siddalingeshwar Complex Below SBM, Station Road,Gadag District Gadag-528101	576998	Raju / Zakir
Karnataka	Gokak	Cell World	Basaweshwara circle opp-court Gokak - 591307	93438-73777	Shivanand / Chougala
Karnataka	Gulbarga	Aishwarya Communication	C-9, Asian Plaza S.V.P.Chowk Main road Gulbarga-585102	329447	Mallikarjun
Karnataka	Hassan	Sree Digital Solutions	1380 Mission Hospital road opp Hindibed college - 575201	329481	Vidya Shankar
Karnataka	Hosikote	Emposys Communication	Shop no 1, Mahalatha Devi Complex M V Badavane, College Road Hoskote-562114	652532	Raghuvanand
Karnataka	Hubli	Shruti Services	shop no : B6, Lami complex, Court circle , Hubli- 580020	3290671	Mahendar
Karnataka	Hunsur	Sriram Infocom	No.6, Municipal complex, H.D.Kote road circle - 571105	253699	H.H.Pradeep
Karnataka	Kadur	Ashwa Tele Mobiles	TB Road Kadur -577548	9341033310	R.Ananda Murthy
Karnataka	Kanakapura	Sumukh Communications	Harshitha Complex, Budikere, Bangalore main rd, Near KSTC Bus stand Kanakapura-562117	9342743344	R.C.Harish
Karnataka	Karwar	Mithun Tele Solution	Prema complex Civil court road opp SBM Karwar -581301	9341199222	Mithun palyunker
Karnataka	KGF	Global Net Communications	Opp. King George Hall, Geetha road Robetson pet, KGF - 563122	329559	Shiva Kumar

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Karnataka	Kolar	Seamatrix	No:384,Suguna complex, Near KSRTC bus stand, Anthargange road, Kolar 560101	2228714	Shetty
Karnataka	Kumta	Krishna Mobiles	938, College road, NH 17, opp RWW, Kumta - 581343	329607	D.V.Prabhu
Karnataka	Kundapur	Reya Mobiles	Vaishali complex I fir Shastri circle, Kundapur - 576201	320866	Anantha / Ramya
Karnataka	Madikeri	C.M. Communications	Shop no. 8, M A Complex 1st fir Kohinoor rd Madikeri	9343837555	Mohamad Sharief
Karnataka	Mandya	C & C Technology	2068, First Cross, Krishna Krupa Nilaya Subhash Nagar, Mandya-571401	320777	Charan
Karnataka	Mangalore	Innovative Infocom	15-10-557/11, Jayavarma Centre, Mallikatte Circle, Kadri, Mangalore - 575002.	6565244	Sebastian Fernandes
Karnataka	Moodabidri	Media Guard Technologies	Rajeev Gandhi complex main road Moodabidri	325909	Vishwas Kumar
Karnataka	Mysore	K.K.Marketing	1432/9, Tribhuvan Towers, opp Veterinary Hospital, Dewan's Road, Dhanwantri Road Cross, Mysore -570001	4258613	Karunakaran.
Karnataka	Nipani	Manusoft Computers	Dumale Complex Chikodi road Nipani - 591237	9448148005	Mahesh Dumale
Karnataka	Raichur	Akshay Electronics	1st floor, hotel UMA complex, station road, Raichur - 584101	329673	Narasimhlu
Karnataka	Ranibennur	Kruthika Communication	LIC Building Opp to Gupta Petrol bunk PB road Ranebennur-581115	231444	Sujay
Karnataka	Shimoga	Chetan Electronics	C-5, Kenchappa complex, Durgigudi main road, Shimoga-577201	9343370193	Panduranga rao / Binoy
Karnataka	Tiptur	Shree Digital Solutions	Nanjappa complex, opp city union bank, BH road, Tiptur - 572201	9343813731	Vidyashankar
Karnataka	Tumkur	Durga Communication	No.14 CMI Complex, opp Jayadeva Hostel, B.H.Road - 572101	2256184	Naveen Kumar
Karnataka	Udupi	Sanman Mobile Services	Shop No: 15, Simaz complex, Diana circle, Court road, Udupi- 576101.	3955770	Prakash
Kerala	Alappuzha	GETRONICS	FIRST FLOOR, KARTHIKA BUILDING, OPP SDV BOYS HIGH SCHOOL, COURT ROAD, ALLEPPY.	3290446	OMPRAKASH
Kerala	Alathur	MARSTEK	12/950, Ground Floor, AR Complex, Opp. Munsiff's Court, Alathur, Palakkad Dt.- 678 541	04922-321311	Mr. Rajesh. V.
Kerala	Aluva	SED INFOSYS	BUILDING NO 12/57 DOOR NO 8, FIRST FLOOR, POOTHULLIL BUILDING, ALUVA - 683 101.	3235599	Sudheesh
Kerala	Attingal	AM Technologies	Mamam, Near Dreams Theater, Attingal	3290301	Saji
Kerala	Badagara	Amarkish Communications	1st Floor, Sarala Complex, Near KVR Motors, N.H. Bypass Road, Nut Street, Vadakara-673101.	0496 - 3255756	Mr.Jeeju / Mr. Bajju
Kerala	Cherthala	Cherukattu Phones	Krishna Bulding, Opp govt boys high school, AC road, Cherthala	9388441434	Mahesh C D
Kerala	Ernakulam	TELETECH SYSTEMS	20, First Floor, Penta Estate, above Airtel office, Janatha Junction, Palarivattom, Cochin-25	3207554	SONY THOMAS
Kerala	Ernakulam	Zenicon Infocom(P) limited	Above Syndicate Bank, Opp Cochin Shipyard, M.G.Road, Cochin-15	2359511	Jaimon Joseph
Kerala	Ernakulam	Guidelines	Ground Floor, Mundukottackal Estates, Kadavanthara, S A Road, Cochin	4000113	Manoj G
Kerala	IRINJALAKKUDA	NICE MOBILES	NICE BUILDING, ST. JOSEPH'S COLLEGE JUNCTION, IRINJALAKKUDA - 680121	0480-3291515	MR. SEBASTIAN

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Kerala	Kalpetta	Mobi Care	Apasara Building, Near Municipality Office, Main Road, Kalpetta	04936-329366	Thanseer
Kerala	Kanhagad	Xn COMPUTERS & DATACARE	BENGACHERY COMPLEX, OPP.VYAPARA BHAVAN, T B ROAD JN, KANHAGAD.	0467-3259755	Mr.SANDEEP
Kerala	KANNUR	SAHAR COMMUNICATIONS	SB-666-C & D, PRESTIGE CENTRE, GROUND FLOOR, SUB REGISTER OFFICE ROAD, KANNUR.	0497-3258585	AJAJ ABHIRAM
Kerala	Karunagapally	Supreme Enterprises	Valiyath Plaza, Opp to KSRTC Bus stand,Karunagapally	2620282	Mr. Ratish/Prem
Kerala	Kasargode	Xn COMPUTERS & DATACARE	BENDICIAL COMMERCIAL COMPLEX, PRESS CLUB JN, MG ROAD, KASARGOD.	04994-324755	Mr. SANDEEP
Kerala	Kollam	Digital Infosystems	MC-3087, New Block, Bishop Jeromi Nagar, Chinnakada, Kollam-691001	2760647	Johnson Lawrence
Kerala	Kottarakkara	Sivashakthi Communications	KP II/1574, Valiyavila bldg, Near Marthoma Girls high school, Pulamon PO, Kottarakkara	3298191	Suresh
Kerala	Kottayam	SVM Technologies	M.P.M COMPLEX, Near Popular Maruti Show Room, M.C ROAD, S.H MOUNT,KOTTAYAM, KERALA- 686 006	2565303	Rajesh K S
Kerala	Kozhikode	Domain Infosystems	1st Floor, Al Fahad Complex, Saba School Cross Road, Near Corporation Stadium, Puthiyara, Kozhikode-673004	0495-2722222, 0495-3243745	Mulundan
Kerala	KUNNAMKULAM	V STAR MOBILES	ROOM NO 4/ VIII/1039, CITY COMPLEX,OPP TEMPO PARK, TOWN HALL ROAD, KUNNAMKULLAM.	04885-320009	VIJUMON.K.V.
Kerala	Manjeri	Integrated Computer Systems	Royal Tower, TB Road, Manjeri - 676121	0483-3299686	Mr. Thomason Chacko
Kerala	Mavelikara	Ettutharayil Agencies	GROUND FLOOR, KOIPPALLIL ROYAL ARCADE, PUTHIYAKAVU, MAVELIKARA	3293340	Biji
Kerala	Palai	Cyriac Tv Plaza	Vypana Building,Petta Road, Palai.	329746	Tom Cyriac
Kerala	Palakkad	Benraws International	12/310/6, Ground Floor, Mero Complex, H.P.O.Road, Palakkad - 678 001.	0491-3052002	Mathews
Kerala	Palakkad	ORION TECHNO SOLUTIONS	12/310/15 FIRST FLOOR, METRO COMPLEX, HEAD POST OFFICE ROAD, PALAKAD-678001	0491 - 3200255	KHAJA HUSSAIN
Kerala	Pathanamthitta	Melamparambil Agencies	10/264, Main Road, Town,Pathanamthita	2223132	M.V. Francis Oommen
Kerala	THALASSERY	SAHAR COMMUNICATION	44-1929, MACKSON MONOR, OPP. PARIS RESIDENCY, LOGANS ROAD, THALASSERY	0490 - 3208585	AJAJ
Kerala	Thiruvalla	Sangeetha Electronics	524/17, Central Tower, Cross Junction, Thiruvalla	3203000	Ranjeev Kumar
Kerala	Thiruvananthapuram	Appolo Systems	Thelungu Chetty Complex, Shop No 23-24, Kalpalayam JN Karamana, Thiruvananthapuram 695 002.	2340523	Santosh
Kerala	Thiruvananthapuram	Smart Mobile	TC 2/3554(5), First Floor, Opp. Petrol Pump, Kesavadasapuram, Trivandrum-695004	3200105	Krishnakumar P B
Kerala	Thodupuzha	National Electronics	Shop No 5, Aswathy Shopping Complex, Temple Junction, Thodupuzha	220520	Aneesh M A
Kerala	Thiriprayar	Nice Mobiles	382], 1st floor, Century Plaza, N.H.17, Near Bus Stand, Thiriprayar-680567	0487 - 3240400	T.P. Sebastian
Kerala	Tirur	Telit Telecom Shop	GROUND FLOOR, AL AMAL COMPLEX, PAN BAZAR, TIRUR	0494 - 3295623	Vasan.K.Nair

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Kerala	TRICHUR	CELL TECH	SHOP NUMBER 5B,TC23/326, N.P. TOWER, GURUVAYOOR ROAD, WEST FORT, Thrissur	0487-2387386	SANTOM KALLOOR
Kerala	Vaikom	VAIKUNDAM ELECTRONICS	II/ 214C, Mannameriel Complex, Bus stand Road, Valiyakavala, Vaikom	326616	Sreekumar.G
Madhya Pradesh	Balaghat	Shri Computers	Keshar Plaza Complex, Hanuman Chowk, Balaghat	9300632132	Mr. Deepak Bajaj
Madhya Pradesh	Betul	Shivam Electronics	Japarakash Chowk,Kothi Bazar, Auto Stand, Betul - 460001	9329099071	Mr.Vikram Motwani
Madhya Pradesh	Bhopal	Akansa Enterprises	25-26 , CENTRAL MARKET, ROSHANPURA SQUARE, BHOPAL MP	7553201626	Mr. Dinesh Asija
Madhya Pradesh	Bhopal	Neha Sales Corporation	F-1 04, Anmol Tower, E-5/14, Commercial Zone, Arera Colony, Bhopal-462016	7553015088	Mr.Ashok Hirwani
Madhya Pradesh	Bhopal	MUSJC MAHAL BHOPAL	SHOPNO.1 NEW MARKET NEAR HANUMAN MANDIR, BHOPAL	0755-5220725/ 2579178	Mr.SHINU
Madhya Pradesh	Bhopal	GSM SOLUTION-BHO	M-2 CHETAK COMPLEX, ZONE -2 M.P NAGAR, Bhopal	07373-316816	Mr.NEERAJ
Madhya Pradesh	Biaora	MOBILECARE-BIAORA	KR Complex Rajkand Road, Biaora. M.P.	07373-316816	Mr.Atul Sharma
Madhya Pradesh	Chindwara	Bunty Photoelectronics	Shop No.33, Jiji Bai Complex, Parasija Road, Chindwara	07162-230358	Mr.Ritesh Shukla
Madhya Pradesh	Dewas	New Taj Electronics	New Taj Electronics, 4, New Market, Moti Bunglow Main Road, Dewas	07272-220005, 406006	Mr.Shabbir Shaikh
Madhya Pradesh	Guna	Mobile Junction	Jai Stambh Chauraha,Nr.Central Bank, Guna-473001	07542-329277	Mr.Deepak Arya
Madhya Pradesh	Gwalior	Galav Computers	Ground floor ,Ganpati Plaza , City Centre , Gwalior	0751-4013311	Mr.Pradeep Dait
Madhya Pradesh	Gwalior	VERSHA SALES & SERVICE-ASP	GROUND FLOOR SARAFI BAZAR LASHKAR,GWALIOR	0751-4060444	Mr.AJIT KUMAR
Madhya Pradesh	Indore	Apurna Electronics	UG 11 , BM Tower , Sapna Sangeta Road , Opp. Lotus, Indore	7313207283	Mr.Nitin Kulkarni
Madhya Pradesh	Indore	Ayushi Electronics	UG-10,Ratnamani Complex, 7/1 New Palasia, Indore-452001	0731 - 3251284	Mr.Santosh Dawided
Madhya Pradesh	Indore	PIONEER MARKETING	224, Prem Trade Center, Maharani Road, Indore.	0731-4006503	Mr.Ritesh
Madhya Pradesh	Indore	IT CUSTOMER CARE-IND	LG-13, TRADE CENTRE,18,SOUTH TUKOGANJ, INDORE	0731-4207487	Mr. Sanjay Dhankar
Madhya Pradesh	Itarsi	S.S. Telecommunications	Vijayshree Complex 5, Line Sarafa Bazar, Itarsi - 461111	9300272505,	Mr.Aklesh Saxsena
Madhya Pradesh	Jabalpur	Sri Sai Communication	C/O MUSKAN CARD GALLERY, 766, SHAHID SMARK MARG, NEAR RANITAL SQUARE, JABALPUR-482001	0761-4046831	Mr.MOHIT SAREEN
Madhya Pradesh	Jabalpur	I T SOLUTION	GROUND FLOOR,ASTHA APPARTMENTS.WRIGHT TOWN, Jabalpur	0761- 4014064/ 4064370	Mr.SANJEEV CHOUBEY
Madhya Pradesh	Katni	Excellent Infosys	20/306, Gurunanak Ward, Katni	07622-406047	Mr.Prafull Agrawal
Madhya Pradesh	Khandwa	NAMAN REFRIGERATION-KHANDWA	TAPAL CHALL,KHANDWA	0735-2230089	MR.YASHWANT MALI
Madhya Pradesh	Mandsaur	Sky Link Mobile Services	Payas Ice Cream Parlour, 16, Opium Godown Road, Nai Abadi, Mandsaur 458001 (M.P.)	07422-243978	Mr.Gaurav B. Mittal
Madhya Pradesh	MORENA	MOBILE PLAZA	M S ROAD , JIWAJI GUNJ , OPP BANK OF INDIA, MORENA	07532-400886	Mr.T C SHIVHARE

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Madhya Pradesh	Neenuch	Shree Balaji Mobiles	Jain Bhavan Road, Near Ganganagar Off., NEEMUCH (M.P.)	07423-320033	Mr.Savesh Goyal
Madhya Pradesh	Ratlam	Kirti Telecom	124 Station road Opp.Raj Tower, Ratlam - 457001	239346	Mr.Kirti Jain
Madhya Pradesh	Sagar	Neeta Computers	Jama Complex, Teen Batti, Sagar - 470002.	07582-329951	Mr.Ramesh Gupta
Madhya Pradesh	Satna	Maa Sharda Communication	Gali No 1, C/o Shri Gopal Sharan Singh, Pushp Raj Colony, Satna	7672320797	Mr.Prashant Singh
Madhya Pradesh	SATNA	AKASHWANI AGENCES-SATNA	OPP.CMA SCHOOL,SHOP NO.2,ANNAM CHHAYA, REWA ROAD, Satna	07672-416455	Mr.Ajay Sukhramani
Madhya Pradesh	Shivpuri	Ocean Computer Corporation	1st Floor, Vishnu Mandir Market, Near Panipat Handloom, Shivpuri	07492-225505	Mr.Sameer Saxena
Madhya Pradesh	Lijain	Galaxy Computers & Communication	43/2, Varruchi Marg,Opp Madhav Nagar Police Staion, Freearj, Ujain	0734-2515995, 2530777	Mr.Anurag Chhajlani
Maharashtra	AHMEDNAGAR	T V SPOT	B-3, ADARSH SAMRUDHI, NR. CHOUPATI KARANJA 414001	0241-2526267	MR ANIL APTE
Maharashtra	Akola	Supra Computers	Ushakiran Complex, Shastri Nagar, Opp. Hotel Surya, Akola.	9326866469	Mr.Prashant
Maharashtra	Amravati	Scorpio Services	Shop No. 84, Ground Floor, Gulshan Towers, Nr. Panchasheel Cinema, Amravati, Pin-444601	0721-2567302	Mr. Pramod
Maharashtra	Aurangabad	Uniqe Telematics	Shop no.108/B, Behind Sajawat Handloom, Tapdiya Super Market, Nirala Bazar, Aurangabad-431001	0240-2356447	Mr.Mazhar Ahmed Shaikh
Maharashtra	Aurangabad	Electronics World	Sahyadri Building,opp. To Shivaji School,Khokadpura, Aurangabad-431001.	0240-3296998	Mr. Rauf
Maharashtra	Beed	Shree Enterprises	Behind Raj Hotel A/H Wada Yachalay Road, beed-431122.	02442 231831, 02442-228855	Mr. Rahul Joshi/ Mr. Rajiv Joshi
Maharashtra	BHIWANDI	VARAD ELECTRONICS	SHOP NO2, PRABHU CHAYA BLDG, PRABHU ALL NEAR OLD GOVT. HOSPITAL, MANDAL, BHIWANDI, DIST THANE	02522- 222653	Mr. Hitendra Zope
Maharashtra	Chalisgaon	Mobile Point	Shop-22, Momaya Complex, Near Bus Stand, Chalisgaon	02554-309996	Mohd. Israfil Ansari
Maharashtra	Chandrapur	Crystal Services	Behind Hotel Simran, Jatpura Gate Chandrapur	9370273776	Mr. Mahmood
Maharashtra	Chandrapur	Shiv Communications	Ramnagar, Near Durga Mata Mandir, Sindi Colony, Chandrapur	329546	Mr.Mahesh
Maharashtra	Chinchwad (Pimpri)	Ritz Communication	Shop No 10,'A' wing,Jai Ganesh Vision,Next to Hotel Neelkanth,Near Fam Multiplex,Akundi, Pune-411033	020-27485613, 020 32661900, 09371029777	Ms Nikita
Maharashtra	Dhule	Pearl Communications	Below Reliance WebWorld Express, CKB Arcade, Nr Deopur Bus Stand, Dhule.	02562-324666	Mrs. Sonu Atul Bang
Maharashtra	Gondia	M/s V2 Care	Opp. Cofee house, Railtoli, Gondia 441614	329322	Mr. Krishna Sargam
Maharashtra	Hatkangale (Ichalkaranji)	Sai Vision Services	11/236 MOHAN ARCADE SHOP NO B1 4, STATION ROAD, TAL-HATKANGALE, CITY-ICHALKARANJI-416115	0230-2439989	Sameer Bhonsale
Maharashtra	Islampur	Solar Shoppay	opp Sai Motor Driving School, Nr Stand Road, Islampur, Distt Sangli, ISLAMPUR-415409	9326777603	Mr. D.H.Patil
Maharashtra	Jalgaon	Global Enterprises	E-81, 1st floor, Golani Market, Jalgaon -425001	0257-2236899	Mr. Pramod
Maharashtra	KALYAN	SKY LARK ASSOCIATES	Shop:1, 'A' Wing, Suresh Tower Co-op. Hg. Soc. Opp. Municipal Vegetable Market, Santoshi Mata Road, Kalyan (W)	0251-3209899	MR. NASEER

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Maharashtra	Kolhapur	SMS Services	S5, Diwan Tower, Opp. Nutan Marathi School, Near Mirajkar Takty, Kolhapur, Pin -416005.	0231-2541120, 9326226120	Prakash Patil
Maharashtra	Kolhapur	KOMAL ELECTRONICS	517/10 "SAWALI" SHIVAJI PARK,NEAR VIKRAM HIGHSCHOOL,SHIVAJI PARK KOLHAPUR-416001	0231-2521424, 09823317055	MR. VASANT P. BODAKE
Maharashtra	Kopergaon	Om Sai Mobile	Opp. ST Bus Stand, Dahamgaon Road, Kopergaon, Dist Ahmednagar.	02423-226463	Mr. Mahendra Devkar
Maharashtra	Latur	HINDUSTAN MOBILES SERVICES	Shop No.47/59,Site 110, Gandhi Market, Nr Bhalchandra Blood Bank, Main Road, Latur-413512	02382-641111, 982345500	Mr. Sandeep Parande
Maharashtra	Malegaon	Cell Care	Shop No.14, Beside Sana Travels, Bunkar Bazar, Qidwai Road, Malegaon - 423203.	937020819	Mr Ansari Mohd Israfil
Maharashtra	Mumbai	Absolute Networks	A007, Vishal Shopping Centre, Next to Vishal Hall, Near Station, M.V.Road, Andheri (E), Mumbai - 400 069	022 32544800	Mr. Arun
Maharashtra	Mumbai	Creative Solutions	SHOP NO 6 AMBIKA COOPERATIVE HOUSING SOCIETY, JAWAHAR NAGAR ROAD NO 2 NEAR RAILWAY CROSSING,GOREGAON WEST, MUMBAI 400062	022-28769003	Mr. Anand
Maharashtra	Mumbai	CYBER-GYAN CONVERGENCE & SERVICES (INDIA) PVT. LTD.	43/44, Gold Filled Plaza, Sion Bandra Link Road, Sion, Mumbai-400017	022-24075939	Mr. Jatin Parekh
Maharashtra	Mumbai	G.P.ELECTRONIC	A/27, Cr. floor, Sagar Tech Plaza, Andheri-Kurla Road, Saki-Naka, Andheri (E), Mumbai 400072	2232633960	Mr. MAYUR
Maharashtra	Mumbai	Grace Tele Services	Shop no 3, C/1, Manik Nagar Soc, Punjabi lane, Borivali (W), Mumbai 400092	022-32455033	Mr. Daniel
Maharashtra	Mumbai	Komplex Telecom Corporation	Shop no.A/19, Nootan Nagar Premises Co. Op. Hsg. Society, Near Bandra Rly. Stn., Towards Bandra Talav, Turner Road, Bandra (West) Mumbai	022 64147153	Mr. Haque
Maharashtra	Mumbai	LG Service Centre	Shop No.1,2,3 Ground Floor, Rajakamal Bldg,Opp.Ram Mandir, Subhash Road, Vile Parle(E) Mumbai 400 057	022-26134917	MR. RAKESH / OMKAR
Maharashtra	Mumbai	PARAS TELECOM	2nd floor, Rear Side Capital Cinema Building, Wauddy Road, Opp. Mumbai CST Railway Station, Mumbai	022 32022228	Mr. Ganesh
Maharashtra	Mumbai	Sai Tele Services	A-110, Satyam Commercial Complex, M.G.Road, Chhatkoper (E), Mumbai - 400 077.	022-40111264	Ms. ISHA
Maharashtra	Mumbai	Yash Telecom	Dadarkar Tower, Shop no.1, Opp.Film Centre, Near Crossroads, Tardeo, Mumbai - 400 034	9324049698	Mr.Girish
Maharashtra	Mumbai	TERABYTE	Shop 27, Vikas Paradise, Bhakti Marg, Off L.B.S. Road, Near R Mall, Mulund (W), Mumbai 400080	022-32640045	Mr. Chirag
Maharashtra	Mumbai	Trident Communications	8-A,Vasant Smruti, Dadasaheb Phalke Road, Beside 'BharatKshetra Building', Near Dadar station(E), Dadar -East, Mumbai - 400 014.	9323960027	Mr. Kalpesh
Maharashtra	Mumbai	Sierra Mobiles	Opp Prabhū Darshan, L.J.Road, Shivaji Park, Near Shiv Sena Bhavan, Mumbai 400016	022 24382200	Mr. Anurag
Maharashtra	Nagpur	Epoch Services	"Shope No. UG-9, Bhakati Vihar Complex, Chapru Nagar Square, Lakadganj, Nagpur -440008"	0712 3246777	Mr. Girish

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Maharashtra	Nagpur	Spectrum Marketing	Shop No.2, Dharampeth Towers, West High Court (WHC) Road, Dharampeth , Nagpur - 440010	712-22527823	Ms. Sonali
Maharashtra	Nagpur	Shivatronics	B-31 Sai Regency Complex Ravi Nagar Square Nagpur Maharashtra 440044	9300892579	Mr. Ravi Gupta
Maharashtra	NANDED	DEVANSH MICROTRONICS	.opp forest office, nr Ranbhidkar's residence -Nanded-431602	02462-249789	Mr. Prashant Palnate
Maharashtra	Nanded	ROYAL UNIQUE SERVICES-NANDED	Plot No-48,Krishna Kamal , Opp. Sunil Furniture, Bhagya Nagar road, Ashok Nagar Nanded-431605	2.462.262.419	Mrs. Sunita Ashish Naik
Maharashtra	Nasik	Mobs Associates	Shop No. 8a, First Floor,'Kapote-Meher' Market, Renuka Nagar, Wadala Naka, Dawrka, Nasik - 422 001.	0253-6523613	Mr. Mahesh
Maharashtra	PANVEL	Oceanic Tele System	Shop No. 3, Sai Arcade, Sector 15, New Panvel (E),Dist. Raigad.	9322217221	Ms. Swapnaja
Maharashtra	PEN	SKYPHONE ENTERPRISES	SHOP NO 3, SHREE COMPLEX, OPP UNIQUE BAZAR, PEN KHOPOLI ROAD, PEN, DIST RAIGAD-402107	9373435000	MR KULDEEP
Maharashtra	Pune	MICROCHIP SOLUTIONS	Akshay Chambers 216 Naryan Peth,Near Bhide Bridge, N C Kelkar Rd, Pune-411030	020-24471155, 9823905949	Mr Mahyesh Bhosale
Maharashtra	Pune	Horizon	32A, Lotus Court, Near Hotel Panchami, Pune Satara Road, Pune.	02032501222, 9325002399	Mr. Nilesh Pundye
Maharashtra	Pune	Mobile World	G-25, AKSHAY COMPLEX, DHOLE PATIL ROAD, PLUNE-411 001	30942268, 9325088055	Pawan Mantri
Maharashtra	Pune	Viki Info Technologies	Shop No4, Amit Complex,474, Sadashiv Peth,Opp New English School, Tiak Road Pune Maharashtra	020 24434134, 932206664.09 371829891	MR.VIVEK SURVE
Maharashtra	Ratnagiri	S P ELECTRONICS-PUNE	shop no-19, Parasmani Complex, K C Jain Nagar, Nr Maruthi Mandir, Ratnagiri-415612	02352-329556, 221982, 9823317158	MR. SANTOSH PRABHU
Maharashtra	Sangamner	Rajpal Telecom	Yashodhan complex,New Nagar Rd, Near hotel Chaitai, Sangamner	02425320888	Mr Harish Rajpal
Maharashtra	Sangli	Ramesh Electronics	Opp. Kanya Purohit prashala, Rajwada, Sangli-416416	0235-2327601, 9823085176, 09372107601	Suresh Shegane
Maharashtra	Satara	Shivkal Moblink	173/6/7 Raviwarpeth shop no-11, Vitthal Lila Complex, Powai Naka, opp Janta Bank, Satara-415002	02162-325212	Mr. Mahesh Shinde
Maharashtra	Shirampur	Siddharth Infocom	Shop No 1, Hotel Sidhartha Building, Sidhartha Stop, Sagananer Road, Shirampur-413709	02422-222117, 02422-329530	Mr. Kedar Fargade
Maharashtra	Solapur	ATHARVA ELECTRONICS PUN	940/2 NORTH SADAR BAZAR, GARUD BUNGLOW, SOLAPUR-413003	0217-2317595, 9823317081	MR. UMESH KAMALAPURKAR
Maharashtra	Solapur	Jawaharlal Radio Service	184, Gold Finch Peth, nr Hotel Ritesh, Solapur - 413007.	0217-2725030	Prasanna J Chavan
Maharashtra	Thane	Urmi Enterprises	G. F. Abhiman II , Opp. Forest Office, Teen Hath Naka, Thane (W)	022 65928384	Mr. Rinkesh Panchal
Maharashtra	VASAI	E-Link Solutions	Shop No.5, Type C, Bldg no.5/6, Shanti Vihar, Mira Road -E, Pin Code : 401107.	9322839386	Mr. OMKAR

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Maharashtra	VASHI	BEEKEYEN ENTERPRISES	Block No 1, Shop No. 17, Mahaveer Milan, Sector 28, Near Blue Diamond, Hotel, Vashi, New Mumbai	022-65114304	Mr. Shalesh
Maharashtra	VASHI	LG Service Centre- DAKC	H Block, Ground Floor, Dhirubhai Ambani Knowledge City, Navi Mumbai-400709	022-30386032	Mr. Rajnish
Maharashtra	VIRAR	Siddhivinayak Tele Services	Shop no 5&6, Vishnu Prasad Complex, Opp Utkarsha School, Near S.T. Bus stand, P.P. Marg., Virar (West) Pin 401305.	0250-3258111	Mrs. Yogita Kadam
Maharashtra	Wardha	Libra Electronics	Opposite to LIC office,Anvi Stand Main Road, Wardha : - 442001	245286	Ms. Manjusha
Maharashtra	Yavatmal	Star Electronics	Near Shyam Talkies Ram Mandir Road Yavatmal Maharashtra 445001	2324106	Mr.Snajay Chabda
Maharashtra	Yavatmal	Combine Electronics & Services	Shop No 13, 1st floor, Old Indira Gandhi Market, Azad Maidan Road, Yavatmal-445001	9822200166	Mr. Ajay Shukla
Maharashtra	Yeotmal	IT Services	Nr datey college,C/o Yahoo cyber cafe, Yawatmal 445001	9372610121	Mr. Umeh Gadwe
Orissa	Anugul	Creative Solution	Hanuman Bazar, Near gundicha mandir, Angul-759122	06764-329207	Mr Tapas Sahu
Orissa	Balasure	Raghunath IT Solutions	Azimabad, Proof Road, Balasure.-756001	06782-329267, 9337669107	Mr. Sujit Kr Sen
Orissa	Berhanpur	Global Electronics	Gandhi Nagar, 1st Lane, Berhanpur.	0680-2223124	Mr. D.B.Nepak
Orissa	Berhanpur (Orissa)	RASHMI ELECTRONICS & COMPUTERS	Shop No.19, Sai Complex, Main Road, Gandhi Nagar, Berhanpur, Orissa	0680-3290409	RASHMI RANJAN SHARMA
Orissa	BHADRAK	A B Associates	Nr.Reliance Web World Express, Bypass Road, BHADRAK-756001	9337040450	Kartik Chandra Rout
Orissa	Bhubaneswar	Miracle Services IT Extn.	Plot No. 136, Fr. Lane of Vigilance Office, Beh. Passport Office, Surya Nagar, BBSR.	0674-2390461, 2391533	Mr. Chaco/ Suprava
Orissa	Bhubneshwar	S.A.INFOSYS	291.Bomikhal, Opp.Akamra cinema hall, Bhubaneswar-751010	0674-2573114	Ashwini k saho
Orissa	Cuttack	O.A.INFOTECH	Behind Govt Bus Stand, Badambadi, Cuttack -753012	9338912613	Arabind Rout Ray
Orissa	Jajpurroad	Smruti Infotech	Dala Chhak, Jajpur Road, Jajpur	06726-324529	Mr Sumit Ranjan Nayak
Orissa	PURI	Bajinath Infocomm	At Muncpal Mkt, Grand Road, Puri-752001	9337032005	Mr.Ajay/ Sandeep Agrawal
Orissa	Rourkela	Infosys	13,Bitra Road,subhadra complex Opp.Choudhary Petrol Pump, Rourkela	9337403999	Arun Ghosh
Orissa	Sambalpur	A.N.Communication	Inf. Of Zila School, Pensionpara, Sambalpur-768001	9337660919	Mr. Md. Abdul Aziz
Punjab	Amritsar	Bajaj Telecommunication	87, G Floor, Nehru Complex, Lawrence Road, Amritsar-143001	9814650314	Suman Bajaj
Punjab	Barnala	Unique Infotech	Mittal Street, Near M C Office, Barnala-148101	01679- 238007	Pankaj Goyal
Punjab	Batala	New Krishna Entrepriese	Circular Road, Near Shekhari di Kothi, Batala	1871-396612	Navin Handa
Punjab	Bathinda	Lall's Electronic Gallery	1139-A, First Floor, Amrik Singh Road, Nr Gole Digg, Bhatinda	0164-2239500, 2236337	Ashok Kakria
Punjab	Chandigarh	Vignesh Services	S.C.O- 189-90, Sec- 34, Chandigarh	0172-3018028	Mukesh Arya

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Punjab	Chandigarh	New Tech	SCO 495/496 SEC 35C First floor	9814244862	Mr Pawan
Punjab	Gurdaspur	S K Electronics	Ajit Singh Market, Batala Road, Nr. Petrol Pump, Gurdaspur	01874-329906	Mr. S.Sukhvinder
Punjab	Hoshiarpur	Kuldip's Mobile Care	Dhobian Wali Gali,Phagwara Road, Hoshiarpur-	01882-226906	Kuldip
Punjab	Jalandhar	Mobile Center	233/1, Saheed Udharn Singh Nagar,Backside Hotel Preet, Nakodar Road, Jalandhar-144001.	0181-3292666	Vikas Sangar
Punjab	Kapurthala	Arun Electronics	217,C Block,Jama Masjid, Shopping Complex-144601	01 822 329254	Arun Khosla
Punjab	Kotkapura	OM MOBILE SERVICE CENTRE	1ST FLOOR DHANU RAM PANSARI , Railway Road-151204	1635-223069, 9815759239	ROHIT MITTAL
Punjab	Ludhiana	Shahi Communication	Shop No.5, 4X International, 583 L, Model Town, Ludhiana	0161-3244190	Amit Shahi
Punjab	Ludhiana	Anant Shree Comp	19K Opp PAU Gate no 1 Ferozpur Road	0161- 3245386	Ms Monia
Punjab	Malaut	KHURANA MOBILE SOLUTION	SHOP NO 7 OPP, NEW TELEPHONE EXCHANGE G T ROAD MALLUAT PIN NO = 152107	9316940003	RAMESH KHURANA
Punjab	Malekoti	Prime Infocomm	Opp. Main gate,Govt College, Malerkotla-148023	9317731979	Rohit Bansal/Raj Verma
Punjab	Mandi Gobindgarh	Aditya Infocom	Main Iron Market, Mandi Gobindgarh	9316320490	Naresh Aggarwal
Punjab	Mansa	Sharma Telecom	OPP.PARKASH BOOK DEPOT,NAGINA MARKET, MANSANA	9316173009	Udesh Kumar Sharma
Punjab	Moga	Rashpal Telecom	6, Red Cross Road, Court Road, Near Old Court, Moga-142001	01636-222468	Mr. Rashpal Singh
Punjab	Nabha	Echo Telecom	Opp. Milan Palace Circular Road. NABHA 147201	01765-329244	Girish Garg
Punjab	Nawashahr	Kapoor Electronics	Kothi Road, Opp Kumar Hotel, Nawashahr-144514	01823-509739	Narender Pal
Punjab	Pathankot	Touch InfoSys	189 Opp. Guru Nanak Park, Model Town, Pathankot.	0186-3290300	Mr.Navdeep Singh Bedi
Punjab	Pathankot	Leo Comp	Near Tourist hotel, military ground, Pathankot	9814586406	Mr. Kamal
Punjab	Patiala	Image Services	84, First Floor, Leela Bhawan, Patiala-147001	0175-2222796, 9872281524	Rohit Bansal
Punjab	Phagwara	Bansal telecom	G T Road,Railway Road Chowk, Phagwara-144401	01824-461321, 9888005339	Mangalesh
Punjab	Rajpura	M K Enterprises	Shop no.6,Gurudwara Singh Sabha Market, Rajpura Town-140401	9316432866	Johny
Punjab	Ropar	Arora Communication	Shop No.1,Lehari Shah Mandir Road,Ropar	9872363032	Amit Arora
Punjab	Samana	Sangam Mobile care	Tehsile Road,Near Garg Laboutry	9316868292	Vaneet Kumar
Punjab	Sangrur	NATIONAL COMPUTERS	SUNAMI GATE, SANGRUR PIN NO = 148001	1672233335, 9814586196	SARABJIT SINGH
Punjab	Sarhind	A.S. Infocom	Grain Market,Cinema Road Sirhind City-140406	01763-324777	Jaspreet Singh
Rajasthan	Ajmer	Nehal Infotech	S1, 2nd Floor, Inderlok Complex, Near Agra gate, Ajmer	3291404	Suresh sharma/ Shatragan
Rajasthan	Ajmer	Prangan	112/10,Civil lines,Ajmer		Pareek

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Rajasthan	Alwar	R.K.Telecom	SHOP NO.112, FIRST FLOOR, GANPATI TOWER NEAR NANGLI CIRCLE , Alwar		Umesh sharma
Rajasthan	alwar	Pareek electronics	Opp. To Tehsil,Alwar		Pareek
Rajasthan	Beawar	Srikrishna Infocom	Chaoni Road, Bhagat Chauraha, Near Roadways Bus Terminus,Beawar	329675	Shravan
Rajasthan	Bhilwara	Ajanta Communications	No3,Bapna Complex,Pur Road,Bhilwara	9351610212	Shravan
Rajasthan	Bikaner	Tech Solutions	1st floor,222&223, Ganpati plaza, KEM Road, Bikaner	3292423	Aziz/Vika
Rajasthan	chittorgarh	Arihant Infotech	A46,Meera Market, Near Rajasthan Patrika Office, Chittorgarg	325933	Abhishek
Rajasthan	chomu	Tambi Telelink	Kotwali chabutra, dhan ji ki gali, Sadar Bazar Chomu	9314090400	Anup tambi/DP Saini
Rajasthan	Dholpur	Trupati Telecom	14.Bhagwati Market, Near Jagan Cinema hall, Jagan Tiraha,Dhoulpur		Moshin/Devender
Rajasthan	Jaipur	Alpha Infotech Systems	F-1, First Floor, Krishna Mall, Lakshmi Mandir Crossing, Tonk Road, Jaipur-302015	3299724	Shatrugan mangal
Rajasthan	Jaipur	Vishwas Infoteck	13-14,Indira Switch, Opp Chambal Power House, Hawa Sarak,Civil Lines, Jaipur-302016	3242050	Madan
Rajasthan	Jaipur	Alliance Communication	G6,City plaza.Space Cinema Hall, Jhotwara Road, Jaipur-16		Amit/Bhushan
Rajasthan	Jaipur	Solution Computers	Plot no4,Krishna nagar II, Janpeth, Lakothi, Near Hotel Paradise, Jaipur.		Dhreej mathur
Rajasthan	Jhunjunu	M S Mobile Point	Shop num.5,Kaswan Complex,Opp Roadways Bus Stand,Jhunjunu		Abhishek/Sunil
Rajasthan	Jodhpur	Omega Electronics	UG/4, Adeshwar Tower, Main Chopasani Road, Opp.Gehlot Watch Co, Jodhpur-342003	3291214	Pratap singh
Rajasthan	Jodhpur	Space Electronics	Shop no4, Manidhari Hospital, Residency road, Jodhpur	3291214	Hemanbt
Rajasthan	Jodhpur	Digital electrocare	3/4B, 1st Polo Pawta,Jodhpur		Johender
Rajasthan	Kishangarh	Capital Enterprises	5,Radha Krishan market, Opp. Sardul school, Kishangarg	326550	Shamugan
Rajasthan	Kota	Cyber Infosystems	26, Ground floor, Kalawati Palwal market, Gumanpura, Kota-324007	232153	Rais khan
Rajasthan	kota	Rajesh electronics	355,Shopping centre,Near Jain Mandir,Kota		Rajesh
Rajasthan	Kota	Saya electronics	1-TA-16,Vigyan Nagar,Kota		Lalit
Rajasthan	Kotputli	Isha Communications	11, ground floor, Govardhan plaza, Nehru Bazar, Kotputli		Vijender
Rajasthan	Nagaur	Jam Apex	Shop num.7, Opp. Old power house, Station road, Nagaur	329595	Amit
Rajasthan	Nathdwara	Geniue Infotech	Shop num.10,Suriya apartments, Opp.Vandana talkies, Bus stand, Nathdwara.	329208	Cajender
Rajasthan	Pali	Mansi Mobile	9,Vasant Vihar,Opp. Bangur college,Pali		Abhishek
Rajasthan	ShrigangaNagar	Telecare Servecies	33J Block, Near Birbal Circle, SriGanga nagar	3207687	Abhishek
Rajasthan	ShrigangaNagar	Electro device care	10 H Block, Sri Ganga nagar.		Raman choudhary
Rajasthan	Sikar	Rita Computers	ShopNo4, Kabra Market, Shramdan Marg, Sikar		Saurav chakrwarthy

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Rajasthan	Udaipur	Ficusa Enterprises	13,Darshanpura,Opp.M.B.Commerce College Gate, Nr Computer Zone,Udaipur-313002	2410002	Mahak/Virendra
Tamilnadu	Ambasamudram	THE MOST TECH	63D , k.n.v.complex, Opp to Marichamman Temple , Ambasamudram	04634-251143	mr.stany
Tamilnadu	Arkonam	G.M. MARKETING	NO.3/4, SUBURAYAN STREET, ARAKKONAM-631001	04177-231395	Mr. p.gajapathi
Tamilnadu	Arni	Digitech Computers	Shop No. 201/82- B1, SM Road, Arani - 623101	04173-223929	d.mohan ram
Tamilnadu	Aruppukottai	THE MERCURY COMPUTERS	607, MADURAI ROAD, NEAR NEW BUS STAND, ARUPPUKOTTAI-626101	04566-222552	Mr. R. BOOMINATHAN
Tamilnadu	Attur	VRNET	V.R.Net,Dr.Arumugam complex,salem main road ,ATTUR	04282-243585	Mr.Senthil kumar
Tamilnadu	Batlagundu	Karthik Communications	No 221, Main Road , Batlagundu- 624202	9360019090	Mr Lakshmanan
Tamilnadu	Bhavani	Sri Abirami Electronics	2E , Pavadi Street, Anthiyur Corner, Bhavani-638301	04256-230919	Mr Balamurugan
Tamilnadu	Chegalapatu	SKB Electronics	No-42 Devarajanar pillai Street, Vedachalam Nagar, Chengalpet	044-37406080	Mr.Balaji
Tamilnadu	Chennai	Genesis Communication	63/3, First main road, Gandhi Nagar, Adyar, Chennai-600020	044-24401188	Mr Suresh
Tamilnadu	Chennai	GS Systems	547/352, F M Towers, Mount Road, Nandanam, Chennai-600035	044-24330889	Mr.Nicholus
Tamilnadu	Chennai	Sabisu	B2, Golden Enclave, New 275, Old 184, Poonamallee High Road, Kilpauk, CHENNAI 600 010.	044-26612347	Mr.palani
Tamilnadu	Chennai	Unicare Infocomm Services	No.293, Arcot Road, Next to Indian Overseas Bank, Kodambakkam Chennai - 24	044 24724666, 044 52047059, 09382306857	Kartik
Tamilnadu	Chennai	GARAGE DE TELECOM	OLD No:30- NEW No: 10, KMBF BUILDING,1ST FLOOR, DURAISAMY ROAD, NEAR POTHYS.T.NAGAR, CHENNAI 600017	044-28143454	
Tamilnadu	Chidambaram	Future Tech	Hasan Towers, 1st Floor, No. 14, V.C.P.Street, Near Hotel Ritz, Chidambaram	04144-222150	Mr.Shaker
Tamilnadu	Coimbatore	Fast track	138-C, TV Swamy Road (West) , RS Puram , Coimbatore - 641002	2551155 ,	Mr Anand
Tamilnadu	Coimbatore	Nucom Services	3/61, Master Building, Kattoor Road, Pappa Naicken, Palayam, Coimbatore - 641037.	4351569	Mr.Uthaman
Tamilnadu	Coimbatore	Classic Electronics - Coi,	No 1/1 , Alagappa Road , 6th St, Tatabad, Coimbatore - 640012	4374875	Mr Arivazhagan
Tamilnadu	Cuddalore	Kasturi Cellular Service	NO: 37 (2C) BHARATHI ROAD, CUDDALORE. 607 001, CUDDALORE DISTRICT,TAMIL NADU.	04142 -220183	Mr Raghupati
Tamilnadu	Cumbum	LG MOBILE SERVICE GALLERY	No 52, Gandhiji Street, CUMBUM-625516	9360211100	Mr.Senthil kumar
Tamilnadu	Dharapuram	IT Zone	40-A-1, Bye Pass Corner, Dharapuram-624202	9360360779, 04258-329293	Mr Ramakrishnan
Tamilnadu	Dharmapuri	CALRITY DIGITAL PHOTO&AUDIO	98/29C KANDASAMY VADIYAR STREET, DHARMAPURI, 636701	04342-265835	MR. RAJ MURUGHESAN
Tamilnadu	Dindigul	padma electronics	15,Dudley high School, Dindigul	0451-2427080	murali chandra
Tamilnadu	Erode	Jans Electronics	29, Sathy Road, Near Hotel Oasis, Erode - 638004	3258526	Mr Kannan
Tamilnadu	Gobichettipalayam	BEST ELECTRONICS	47a/1, kms complex kachery medu, gobichettipalayam	04285-225598	Mr. g.jayakumar

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Tamilnadu	Hosur	Suryas will of people	R S Towers, Opp Traffic Police Station, Bangalore By Pass Road, Hosur-635109	04344-246687	Shanmugam
Tamilnadu	Kallkuruchi	NEW MAGESTIC CELL SALES&SERVICE	OPP TO TELEPHONE EXCHANGE, GANDHI ROAD KALLAKURICHI	04151-228270	MURUGESAN
Tamilnadu	Kancheepuram	Classic Mobile Care Centre	Door No.67-A, (Shop No.5), P.S.K. Street, Kancheepuram-631 501	9345636900	Mr. Dimodaran
Tamilnadu	Karaikal	SHREE HARINI CELLULOR SERVICE	OPP. TO NEW BUS STAND , BHARATHI MAIN ROAD,KARAIKAL-609602	320544	K.SELVAGANAPATHY
Tamilnadu	Karaikudi	SITIYES ELECTRONICS	10 A / 3 , Muthulakshmi Complex, Opp to Income Tax Office, Sekkalai, Karaikudi - 630002	9362611455	Ms.SVEERAPANDIYAN
Tamilnadu	Karur	Aswathi Electronics	108 ,Old Bye-pass Road , Near KG Hospital , Karur	9360244555 , 9367123748	Mr Satish Kumar
Tamilnadu	Kovilpatti	ST.MARYS CELLPHONES	No.6, Rajakumari Towers, AKS Theater Road, Kovilpatti	9360533649 / 9894133839	Mr. Iyyappan
Tamilnadu	Krishnagiri	Madura Care Centre	No 361, Crown Complex, Bangalore Main Road, Krishnagiri-635001	9364258223	Mr Suresh Kumar
Tamilnadu	Kumbakonam	FARGAN ELECTRONICS	NO.5 VRS COMPLEX, HAJIAR STREET, KUMBAKONAM- 612001,	0435- 2401123, 3290303	SURBUDEEN
Tamilnadu	Kuzhithurai	Mobile Care	Shop no 211, SM Arcade, Main Road, Marthandam , Kuzhithurai - 629165	270587	Mr Surendra Kumar
Tamilnadu	Madurai	Devaa Electronics	No 4, Thirumakulam North Street,Near Ayyappan koil, Thhhalakulam, Madurai-625002	4360995	Guna
Tamilnadu	Mayiladuthurai	NRS MOBILE CITY	NO-28 - C/14, R.R.COMPLEX, MAILADUTHURAI	04364-223277	ABDUL RAHIM
Tamilnadu	Nagercoil	Redeemer Electronics	Shop no 2, Pillars Gate, Balmore Road, Nagercoil-629001	04652- 327788, 9443453490	Mr.Dinkar
Tamilnadu	Namakkal	V.R CARE	77/2, Veera Vilas, Trichy Main Road, Namakkal - 637001	04286-329304	Mr. R.Vijayalakshmi
Tamilnadu	Ooty	MOUNTAIN CELL COM	NO.302.Band lane, Commercial road,Near Liberty Theatre, Ooty-643001.	0423-2443787	Mr.Sujith & Miss .Geetha
Tamilnadu	Palani	HI-TECH ELECTRONICS	No.76, New Dharapuram Road, Opp. ICICI Bank, Palani - 624601	04545-240244	Mr. ramachandran
Tamilnadu	Paramathy Velur	Vishwak Mobiles	No 5, KK High School Building, 98, High school Road, Paramathy Velur - 638182	04268- 224348, 9360110755	Mr Mohan
Tamilnadu	Pattukottai	MOBILE CARE	127, BIG STREET, PATTUKOTTAI	04373-252150	MR.ARIUL ALAGAN
Tamilnadu	Perambalur	THE BEST	Vivanand st., M.P. office opp. Perambalur	04328-275717	Mr.P.Kumar

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Tamilnadu	Perundurai	SREE BABY ELECTRONIC	483, mainroad, perundurai	04294-221800	Mr.shiva balan
Tamilnadu	Polchi	STAR MOBILES	SHOP NO. 5 Ground Floor, Vasanth Complex, Immamkam Street, POLLACHI.	04259-222230	Mr.Senthil Kumar
Tamilnadu	Pondicherry	Digital Logistics	126/2, Perumal Koil Street (Bharathi Street Cutting), Pondicherry-605001	9843093348	G Singaravelu
Tamilnadu	Pondicherry	BALAJI ELECTRONICS (ASC)PON-CHE	No:21, 3rd CROSS STREET, Annanagar, PONDICHERRY	3090414	
Tamilnadu	Ponneri	SRI BALAJI MOBILE CARE CENTER	NO, 26, THALLUKKA OFFICE ROAD, PONNERI, THIRUVALLUR DIST-601204	27973381	Mr.BALAJI
Tamilnadu	Port Blair	UNIVERSAL SERVICE CARE	R.G.T. ROAD, PORT BLAIR, ANDAMAN-744101	03192-329588	Mr.Naveen
Tamilnadu	Pudukottai	YEM KAY ELECTRONICS	2, Subabharathi complex, 5378, 79, Alangudi Road, Pudukottai-622001.	9344038441	Mr.Rajesh Kannan
Tamilnadu	Rajapalayam	SRI VICNESH MOBILES	292\1, TENKASI ROAD, OPP BOMBAY LADGE, RAJAPALAYAM-626117	04563-220398	Mr. K.U.G.MUTTHIAH
Tamilnadu	Ramanathapuram	ZEENATH TELECOM	13-B/23, PAL LUCKY PLAZA, Madurai Road , RAMANATHAPURAM-623501	04567-226750	Mr.M.S.JAHIR HUSSAIN
Tamilnadu	Ranipet	Unicare Infocom Services	No.36, opp.Gangadhara Muddalair Middle School, MBT Road, Novelpur,ranipet, Vellore Dist.	270806	Mr.Basker/ Mr.karthik
Tamilnadu	Rasipuram	SMS CARE SERVICE	No 179 / 1, Anna Salai, Ground Floor, Rasipuram-637208	9345052553	Mr.Manikavasagam
Tamilnadu	Salem	Vishwesh Mobiles	Sixer Complex, 121/19A, Sarada College Road, Next to Abi Medical Centre, Salem - 636007	3290535	Vasudev Nayak
Tamilnadu	Sivakasi	TELE WORLD	78, PARSN PLAZA, Chariman Shanmuga Nadar Road , OPP.TO.WATER TANK, SIVAKASI-626123	04562-325730	B.MATHAN KUMAR
Tamilnadu	Tambaram	SARAVANAS INFOCOM SERVICES PVT LTD	New No-43, Old No:3A,Mudichur road,Tambaram west,chennai 600045	044-32915599	Mr.Palani/ Mr.ranjith
Tamilnadu	Tenkasi	AIRTONE	1/ 17, KMSS complex, west masi street, Tenkasi. 627811	04633-227980	Mr. M.Nagaraja sankar
Tamilnadu	Thanjavur	Z M Electronics	1006/1007, South East Rampart, Opp to Municipal Higher Sec School Tanjore - 613001	272595, 329554	Ziauddin
Tamilnadu	Tindivanam	REVA COMMUNICATIONS	Old No. 117/1, New No. 205/1, Nehru Street, Tindivanam - 604001	225250	LAKSHMI NARAYANAN
Tamilnadu	Tiruchendur	ARK MOBILE SOLUTIONS	ARK DTP centre, No. 1 a 7 North car street, Rayan Complex, Tiruchendur. 628215	04639-243339	Mr.Mahesh
Tamilnadu	Tiruchengode	BALAJI ELECTRONICS	108 s s d road,near lony stand tiruchengode	04288-255157	Mr.sekar
Tamilnadu	Tirunelveli	Classic Electronic	39, Trivendrum Road, Opposite Kalimark, Welcome Complex, Palayamkottai, Tirunelveli-627002	2575801, 3290339	Erkins
Tamilnadu	Tirupattur	Acal Computer Systems	52/1, kkc complex, krishnagiri road, tirupattur	325385	sunder
Tamilnadu	Tirupur	Shri Vasavi Electronics	*# 155-303, Mangalam Road, Karuvam palyam, Tirupur -641604*	4244009	MR.U.B. Bala Murali

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Tamilnadu	Tiruvanur	Softel Teleservices	No 21, Municipal Complex , Ground Floor , Panagal Road , Tiruvanur-610001	04366- 22110, 9362721444	Mr Ravi
Tamilnadu	Tiruvellore	Yamkama Computer	38/186 JAWAHARLAL NEHRU ROAD, OPP TO SBI MAIN BRANCH, THIRUVALLUR - 602 001	37600329	Mr. Saravana
Tamilnadu	Trichy	S K Electronics	Raj Complex, 9/A EVR Road, Puthur, Trichy- 620017	277,194	Krishnan
Tamilnadu	Tuticorin	Snows Cell Care	Kala Complex, No 20,B-1,W G C Road, Tuticorin-628002	0461-2334043	Kennedy
Tamilnadu	Udumalpet	ALLWA ELECTRONICS	5 Thulva vellar shopping complex, V.O.C. street,UDUMALPET.642126	04252-223047	Mr. Sentamarai kannan
Tamilnadu	Vaniambadi	REVA COMMUNICATIONS	No.848/3, CL Road, Vaniyambadi - 635 751	395023	LAKSHMI NARAYANAN
Tamilnadu	Vellore	Matha Communication	4, S.L.N Plaza, Opposite Odai Pilliar Koil, Gandhinagar,Velloor - 632006	0416-2240800	Gunaa Shekhar
Tamilnadu	Villupuram	BROAD BAND	no 642, nehruji road, VILLUPURAM	222936	Mr. Pragasam
Tamilnadu	Virudhunagar	RBG Electronics	76/9, Lakshmi Complex, Pullalakkottai Road, (Opposite Uzhavar sandhai), Virudhunagar-626001.	04562-420160, 9344869593	Mr Karupuswamy
U.P. (East)	Barabanki	Yash Enterprises	Rashid Enclave, Mugal Darbar, First Floor,nagar palika rd, Barabanki	9336323714	Mr. Ajay Srivastava
U.P. (East)	FAIZABAD	Microworld Computer Hardware Lab	1st floor, Baldev Plaza, Rekhbaganj, Faizabad	9335098244	Kapil/Sunil
U.P. (East)	Fatehpur	TRIMURTI TELECOM SERVICES	230, SHADIPIUR CHAURAHA, NASEPEER ROAD,FATEHPUR-212601	9336223093	Sanjay Sachan
U.P. (East)	Gonda	DIGITECH SERVICES	Suraj Complex Malviya Nagar, Ground Floor,In front of Distt. Mahila Hospital, Gonda	9336695719	Atul Singh Chauhan
U.P. (East)	HARDOI	Shipra Electricals & Appliances	553 STATION ROAD, RAILWAY CANJ, HARDOI-241001	9335348407	Gaurav
U.P. (East)	JHANSI	Krishna Enterprises	372/A CIVIL LINES,GWALLAR ROAD, JHANSI-284001	9335090997	SUJEET
U.P. (East)	Kanpur	AAKARSH ELECTRONICS	63/2 C(9)BALAJI COMPLEX, THE MALL, KANPUR	9335360303	Mr.Raman
U.P. (East)	Kanpur	AR Infotech	111/402 Ashok Nagar, Kanpur Pin 208012		Amit Trivedi
U.P. (East)	Kanpur	LB Infotech	124/1 22A GOVIND NAGAR, KANPUR	0512-3207303	Deepak Bhatia
U.P. (East)	LAKHIMPUR	S S ELECTRONICS	GURDARSHAN BUILDING,, KACHEHRI ROAD, LAKIMPUR KHERI, LAKHIMPUR -262701	9335038258	SAURABH SINHA
U.P. (East)	Lucknow	ALFA ELECTRONICS	Shop No.CF20 ABC Complex, Kanpur Road, Lucknow	0522-3948730	Harjinder Singh

State	City	ASC Name	ASC Address	Phone No.	Contact Person
U.P. (East)	Lucknow	Hitech Communication	SS 205, Road Cross Plaza, Badshah Nagar Crossing, Lucknow.	9335088061	MR.RAVI PRAKASH/ MR.RAJENDRA RAMAN
U.P. (East)	Lucknow	NET COM	3 way road, City Point, Opp Krishi Bhawan, Lucknow-226024	0522-3094222	Vinod Sharma
U.P. (East)	Lucknow	RR ENTERPRISES	Shop No.3,first floor, Deewan Chand Complex, 292/11 Chowk, Lucknow	0522-3262263	MR.YOGESH
U.P. (East)	Lucknow	MOBILE DOT COM	G2 Shri Ram Towers Ashok Marg, Lucknow	9335819202	Mr Anand Jhouri
U.P. (East)	Raebareilly	Karuna Enterprises	Shop No.3, Bajpai Market, Beliganj, Maik Main Road, Raebareilly	9336005741	Vikas
U.P. (East)	Sitapur	Higrade Computers	7, Muncpal Market, Sitapur	05862-351808	Sanjeev Goel
U.P. (East)	SULTANPUR	S S INFOCOM	SHOP NO. 14&15 NANDINI COMPLEX NEAR SUPER MARKET SULTANPUR-228001	9335055217	SACHIN DWIVEDI
U.P. (East)	Unnao	Avijit Infocom	251 opp Collector Garj, Unnao	0512-6820020	VISHNU PANDEY
Uttar Pradesh	Agra	NSC Computers	Shop No G-124, Block No- 29, Sanjay Place, Agra -	9319111350	Rajeev Singhal
Uttar Pradesh	Agra	Ankur Care Centre	6/1, M.G.Road, Agra.	9412254152	Ankur Goyal
Uttar Pradesh	Agra	Space Consultancy & Services	UG 1 & 2, Opp. Jaihind Hotel, Merchant Chamber, Sadar Bazar, Agra	93358504140	Kapil Sharma / Rihan Pervej
Uttar Pradesh	Aligarh	Infocare	17, Vikram Arcade, Railway Road, Aligarh -	9359588880	Kamal Jain / Prabal bansal
Uttar Pradesh	Aligarh	AV.Computer Services	City Enclave opp.Kumar Nursing Home Ramghat Road	9412274391	Vaihar Gupta
Uttar Pradesh	Allahabad	RADIO CENTRE	SHOP NO-3 1ST FLOOR MEENA BAZAR, Allahabad	3292488	MR. MANISH KHANNA
Uttar Pradesh	Allahabad	B.P.Electronics	28, M.G.Marg, opp Rama Jewlers Civil lines, Allahabad-211001	3290315	Mr. Umesh Aggarwal
Uttar Pradesh	Allahabad	MICRONET SOLUTION	B 38/1 .SHOP NO. FF3 VASHTSITHA VINAYAK TOWER, TASHKAND MARG, CIVIL LINES, ALLAHABAD	9335395183	Mr. Hashmi
Uttar Pradesh	AMROHA	SHREE JEE TRADERS	KAILSA ROAD NEAR MODABADI GATE, AMROHA	9319075289	SIDHARTH AGARWAL
Uttar Pradesh	AZAMGARH	RAJASTHALI	ASIF GANJ, CHOWK, AZAMGARH-276001	223644	MR.TRILOKI NATH JALAAAN
Uttar Pradesh	Badlyun	Customer Care Services.	Plaza Market 1st floor Near Chantaghar sixroad Badlyun.	9319086944	Mr. Nazim
Uttar Pradesh	BALIA	Sankatha Communications	Mall Godam Road Dr.S. N.Pandey Clinic Chowk Balia-277001. UP	9336635533	Mr. Manish
Uttar Pradesh	Bareilly	JAI INFOTECH	SA-96 DEENDAYAL PURAM BAREILLY	0581-3208484	Mr Rohit Tandon
Uttar Pradesh	Bareilly	Sapan Infotech	G - 64 A Kunwar Complex, Near Gupta Watch Co,116 Civil Lines, Bareilly	9359102467	Mr. Dharendra Negi
Uttar Pradesh	Basti	Royal Enterprises	Shop No.12 Nagar Palika Market, Company Bagh, Basti	9336784054	Sunil Kumar
Uttar Pradesh	BHADOI	Kislay Communication	VINDA MARKET NEAR TEHSIL, BHADDOI-224101	9235506029	KISLAY
Uttar Pradesh	Bijnor	Konark Service Centre	Shop No.7,1st Floor, Near Azaj Ali Hall, Nagar Palika Complex, Bijnor.	9358364067	Mr.Pratyush Gupta
Uttar Pradesh	Bullandshar	MN Telecom	Shop No-1 BHARAMAPUTRA COMPLEX,KALA AAM, BULANDSHAR	9.358.011.688	Mr Taurik Khan

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Uttar Pradesh	CHANDOUSI	OM TECHNOLOGIES	697, SITA ROAD, NEAR GANESH MANDIR, CHANDOUSI	9359986766	SACHIN GUPTA
Uttar Pradesh	DEORIA	ATHARAV COMMUNICATION	SHOP NO 5, SHANTI COMPLEX, HANUMAN MANDIR ROAD	9305012566	K.N.GUPTA
Uttar Pradesh	Etah	Triveni Computer Service	688/1 Vijay Nagar, Infront of Shradha Cinema, Thandi Sadak, Etah-207001	9719398761	Vinod Kumar
Uttar Pradesh	Etawah	Frontline Computer	132, Civil Lines, Pakka Talab X-ing, Opp. HeroHonda Showroom, Etawah-206001	9219404194	Mr.Puneet Kaushik
Uttar Pradesh	FARRUKHABAD	WAVE TECHNOLOGIES	2 B /122 AVAS VIKAS, LOHIA PURAM, FARRUKHABAD-209625	9335921175	DHARMVEER
Uttar Pradesh	Ghaziabad	Charu Enterprises	Shop No.15, Opp. Sales Tax Check Post, G.T.Road, Mohan Nagar	0120-3223417	Mr.Chander Shelker
Uttar Pradesh	Ghaziabad	Concessionair Documentation India Pvt Ltd (CDIL)	C-83, Rajnagar District Center (RDC), Ghaziabad	0120-3292011, 4102418	Anil Tiwari
Uttar Pradesh	Ghaziabad	AZURE SYSTEMS	F-28 Konark Building, RDC, Raj nagar GZB	0120-2700717	Mr. Aseem Saraswat
Uttar Pradesh	Gorakhpur	Eternal Electronics	Shop No.11, Pandey Complex, 33, Kasya Road, Opp DIG Bunglow, Gorakhpur -273001	3250395	Mr. Ajith
Uttar Pradesh	Gorakhpur	MM Communication	Udai Trade Centre, Opp Dr H.N.Singh Medical College, Basharatpur, Gorakhpur	3250395	Mr.Ashwani
Uttar Pradesh	Hapur	SMART SOLUTIONS	10, 1st Floor, City Plaza , Hapur, Ghaziabad - 388001	9319384063	Mr.Rajkumar Kanaojia
Uttar Pradesh	Hathras	Anya Electricals	Bldg No.2206, Near Mayfair Hotel, Kamla Bazar, Hathras-204101	9319338655	Mr.Suneet Arya
Uttar Pradesh	Jaunpur	Shubham Pustakalya	Mandi Naseeb Khan, Near Siya College, Jaunpur	9336510130	Sudhir/Sanjay
Uttar Pradesh	Jaunpur	SUPREME COMMUNICATION	J.P. Complex, Oland Ganj, Jaunpur	9235407278	Mr.Mahatab Raja beg
Uttar Pradesh	Kannoj	DIXIT MOBILE LAB	SHOP NO. A1 WARSI COMPLEX, LAKHAN TIRAHA, KANNOJ	9335042373	SUNIL DIXIT
Uttar Pradesh	Khatauli	Sigma Systems	A-6, Shivlok Market, Near Indra Murti, G.T.Road, Khatauli	9412582668	Mr.Alok Kumar
Uttar Pradesh	Mainpuri	Raj Communication	1002, Sadar Bazar, Near PNB , Mainpuri-205001 (IJP)	9358090251	Mr.Rishabh Khirbat
Uttar Pradesh	Mathura	R K Infocare	G-1, Aithya Palace, Sonkh Adda, Junction Road, Mathura-	9319999666	Alok Gupta
Uttar Pradesh	Meerut	Care Centre	G-19 , Vardaman Plaza, Garh Road, Meerut.	0121-3249666	Mr.Ajay Mittal
Uttar Pradesh	Meerut	Systech Computers	F-124/125 1st floor Ganga Plaza, Begum Bridge Road, Meerut.	0121-4003194	Vineet Goyal
Uttar Pradesh	Meerut	COINCAP SERVICES	Labour Compound, Above Allahabad Bank, Near Akash Ganga Jewellers, Begum Bridge, Meerut	0121-2667942	Atul Mittal
Uttar Pradesh	Meerut	Essar Services	F-122/123 1st floor Ganga Plaza, Begum Bridge Road, Meerut.	4024894	Rajiv Gupta
Uttar Pradesh	MIRZAPUR	MOBILE ZONE	RAM MARKET, PASARHATTA BAZAR, MIRZAPUR-231 001.	9335785979	MR.Anup
Uttar Pradesh	Modinagar	ANANYA COMMUNICATIONS	24,K.N.MODI COMPLEX, Modinagar-201204	01232-325424	Mr.Nitin
Uttar Pradesh	Moradabad	Bhavya Technologies	A12, 1st Floor, Rampur Road, Gandhi Nagar, Moradabad	0591-3292318	Vivek Kumar Singh

State	City	ASC Name	ASC Address	Phone No.	Contact Person
Uttar Pradesh	MUGLSARA	SKY MOBILE WORLD	SUPER MARKET,MUGALSARAI	255505	VIBHUTI JAISWAL
Uttar Pradesh	Muzaffarnagar	ADVANCE SERIES	Shop No-15 prakash chowk Muzaffarnagar-251001	09412210142	Mr. Rajiv
Uttar Pradesh	Muzaffarnagar	Jai Computers	Shop No. 4, 1st Floor, Roorkee road, Near Shiv Chowk,Central Bank Mkt, Muzaffarnagar-251001	0131-3294447	Manohar Singh
Uttar Pradesh	Noida	M R Telecom	D-329, Sector 10, Noida, (Corner Building, Noida Stadium - Jhundpura Main Road)	0120-4312715	Kailash Aggarwal
Uttar Pradesh	Pilibhit	Kamal Electronics	Station Road, Pilibhit	9319911226	Mr. M A Jillani
Uttar Pradesh	PRATAPGARH	CHANDRA PRATAP VEER & CO	KATCHERY ROAD, CHOWK BAZAR, PRATAPGARH -230001	9335048271	RAJESH AGARWAL
Uttar Pradesh	RAMPUR	MAMTA TECHNOLOGIES	OPP JILA PANCHAYAT OFFICE, RAHE RAZA, RAMPUR	9319347583	RAJEEV YADAV
Uttar Pradesh	Saharanpur	Maharaj Communications	Near Maharaja Palace,Delhi Road, Saharanpur	0132-2720881	Pankaj Malhotra
Uttar Pradesh	Shahjahanpur	Sunny Mobile Point	258 B TARIN BAHADURGANJ, SHAHJANPUR	9335019616	Rajaram Maurya
Uttar Pradesh	Varanasi	Jaiswal Electronics	56/107 KACHAHRI CROSSING,NEAR COURT, VARANSI	3200375	Mr.Sujeet
Uttar Pradesh	Varanasi	Shivam Mobile Distributers	Shop No.5,B37/115-B-1 Baradari Complex, Rathyatra Crossing, Varansi Pin 221010	933540000	Rishi Mohan
Uttaranchal	Almora	Kumar Telecommunications	Paltan Bazaar, Almora	9411525789	Mr. S Kumar
Uttaranchal	Dehradun	Krishna Communication	Shop No 15A, Meedo Plaza, Rajpur Road, Dehradun,Uttaranchal.	0135 3290895	Vinod
Uttaranchal	Dehradun	PROMPT SERVICES-DEH	133, Old Connaught Place, Dehradun	9359903573	Mr. Bipin
Uttaranchal	Haldwani	Fairdeal Agencies	1st Floor,Nainital Road,Uttaranchal Trade Centre,Tikonia Chouraha, Tikonia, Haldwani	09359136000	Mr.Ajay Gupta
Uttaranchal	Haridwar	Maharaj Computer Services	B-7, Royal Plaza, Ranipur Mod, Haridwar	9359209901	Mr. Kamal Sachdeva
Uttaranchal	Kashipur	Tirpti Communications	Station Road, Main Market, Udamsingh Nagar, KASHIPUR	9837005991	Mr.Ajay Gupta
Uttaranchal	Roorkee	Geetanjali Telecom	Shop No.6, Shyam Market, BSM Tiraha, NehruNagar, Dehradun Road, Roorkee.	01352-326510	Mr. Manish Kumar
West Bengal	Assansol	Sky Computer & Telecom	Islam Market, Nuruddin Road, Assansol-713301	2207719	Syed Arshad Ali
West Bengal	Basirhat	Telelink	Bashirhat Old Market(Bowbazar)Bashirhat Dist,North 24pgs.Pin-743411	9332511610, 03217-325499	Mr. Sukanta Debnath.
West Bengal	Behrampur	CHAITANNYA ENTERPRISE	152, B B Sen Road, Sadar bazar, PO Behrampur, Distt Murshidabad,pin-742101	9335310161	SUBHAS CHANDRA BASAK
West Bengal	Bolpur	CYBER WORLD	59, SUPER MARKET, SANTINIKETAN ROAD, BOLPUR - 731204	9333739783	Mr.KISHOR KUMAR MUKHERJEE
West Bengal	Bongoan	MOULINA TRADERS	Jessore Road, Bongoan, Dist- North 24 th Pargana, PIN-743235	9332410022	Mr. Subir Dutta
West Bengal	Burdwan	San Infosys	27/1 G.T Road , East End, Burdwan -713103.	3290265	Sanjit Debnath
West Bengal	Durgapur	Digitech Service	Ashok Bhavan J.K.Pal Lane.Benachity, Durgapur -713213	3293600	Mr.Pintu Chatterjee

State	City	ASC Name	ASC Address	Phone No.	Contact Person
West Bengal	Habra	JOYRAM INFOTECH	51 Jessore Road,Habra Bazar, Das Market, Dist- 24th Pargana(North), PIN-743263	237608	Mr. Malay Das
West Bengal	Haldia	DIGITRONIX	Holding no -25 ,PO Khanjanchak, PS Durgachak, Haldia, Dist- East Medinapur-721602	9332987527	Suman Jana
West Bengal	Katwa	Devarshi Mobile Communication	Bhuthnat Tala, Besides Ram Bhavan, Post - Katwa, Burdwan - 713130	03453-255197	Devananda Dutta
West Bengal	Kharagpur	S. J. Commication	Inda Main Road, Khudiram Ram Market, Kharagpur.Shop No-53. Pin -721305	9333745553	Mr.Suman Jana
West Bengal	Kolkata	Benma Infosol Pvt Ltd.	P-168/1 CIT Road, Scheme VIIM, KOLKATA 700 067	033-32943176-7	Arun Surana
West Bengal	Kolkata	Friends Communication	32(8) Barasat Road,N/L 15 no railgate,PO-nonachandanpurk, PS- Titagarh, Barrackpore, Dist- North 24PGS, PIN-743102	033-25921263	Anup Sarkar & Tarasankar Mukherjee
West Bengal	Kolkata	Jakson Engineering Pvt Ltd	Block-A, Shop-1, Ambika Vihar,1/1 Harduttrai Chamarua Road,Howrah-711001	033-32950383	P.Mukherjee
West Bengal	Kolkata	JP Computers	5B Ekdalia Place, Kolkata - 700019	033-24401923	Somim Kabir
West Bengal	Kolkata	Skylink	8/1A, Little Russel Street, Calcutta-700071	033-32903814	H R Molla
West Bengal	Kolkata	SOURAV TELECOM	195 BLOCK-J NEW ALIPUR, N/L New Alipur State Bank, KOLKATA-700053.	033-32511256	Amit Ghosh
West Bengal	Kolkata	Sun Mobile Service	15 B.T. Road, N/L Peikpara Bus Stop, Kolkata -700002	033-32505444	VIVEK KUMAR GUPTA
West Bengal	Kolkata	Sagnik	10A HO CHI MINH SARANI , KOLKATA-71	9830880150	RATHIN PAL CHOWDHURY
West Bengal	Krishnagar	ADDYA ELECTRONICS	13 MOHITOSH BISWAS STREET, P.O.KRISHNANAGAR, DIST: NADIA, PIN: 741101.	03472253031	MR ARJIT SEN
West Bengal	Malda	Classic Services	3 No Govt Colony, Near B.B, Medecine , Malda, Pin-732101	9332293622	Mr. S.P Ganguly
West Bengal	Ranaghat	PRAYASH	30 SWAMI VIVAKNANDA SARANI, RANAGHAT, DIST-NADIA	09335515949	Mr. Amar Nath Malick
West Bengal	Serampore	Sri Guru Mobile Service	87 B/15 G.T.Road (West), Hooghly Pin-712203	033-32528581	Shyamal Kumar Das
West Bengal	Siliguri	CARE	A.T Mukherjee Road, Subhash Pally (PRANTIK), Near SILIGURI COLLEGE, PO- Siliguri, Dist - Derjeeling.	9332211009	Mr.Snjoy Dutta
West Bengal	Tamluk	ZEROBIT	VII - Parbatipur, P.O.-Tamluk, Dist- Purba Midnapur,PIN-721636	9434110802	Mr. Chanakya Sengupta


LG | CUSTOMER SERVICE

*From: BSNL / MTNL **1800-180-9999***

From Mobile: **39-01-0909**

Add local STD Code

MEMO

A series of horizontal dotted lines for writing.

