



KP500 User Guide

LG ELECTRONICS INC.

KP500 User Guide

E N G L I S H

CE 0168

www.lgmobile.com

P/N : MMBB0307441 (1.2)W



KP500 User Guide

LG ELECTRONICS INC.

KP500 User Guide

E N G L I S H

CE 0168

www.lgmobile.com

P/N : MMBB0307441 (1.2)

Bluetooth QD ID B014534



Some of the contents in this manual may differ from your phone depending on the software of the phone or your service provider.



KP500 User Guide

Congratulations on your purchase of the advanced and compact KP500 phone by LG, designed to operate with the latest digital mobile communication technology.

Set up **01**

Your standby screen **02**

The basics **03**

Get creative **04**

Get organised **05**

The web **06**

Settings **07**

Accessories **08**

Contents

Set up

Getting to know your phone	8
Open view	10
Installing the USIM and battery	11
Memory card	14
Menu map	16

Your standby screen

Touch screen tips	17
-------------------------	----

The basics

Calls	22
Making a call	22
Making a call from your contacts	23
Answering and rejecting a call	23
In-call options	24
Adjusting the call volume	25
Speed dialling	25
Making a second call	25
Turning off DTMF	26
Viewing your call logs	26
Using call divert	27
Using call barring	27
Changing the common call setting	28
Contacts	30
Searching for a contact	30
Adding a new contact	30
Contact options	31
Creating a group	32

Changing your contact settings	33
Viewing information	34
Messaging	35
Messaging	35
Sending a message	35
Entering text	36
T9 predictive	36
Abc manual	37
Keyboard	37
Handwriting recognition	38
Setting up your email	40
Retrieving your email	43
Sending an email using your new account	43
Changing your email settings	44
Message folders	45
Managing your messages	46
Using templates	47
Using emoticons	47
Changing your text message settings	48
Changing your multimedia message settings	49
Changing your other settings	50

Get creative

Camera	51
Taking a quick photo	51

After you've taken your photo.....	51	Adding text to a photo.....	69
Getting to know the viewfinder.....	52	Adding an effect to a photo.....	70
Choosing a shot type.....	53	Morphing a photo.....	71
Adjusting the exposure.....	53	Adding a colour accent to a photo ..	72
Using continuous shot mode.....	54	Swapping the colours in a photo	72
Using the advanced settings.....	54	Trimming the length of your video...	73
Changing the image size.....	56	Merging two videos together.....	73
Choosing a colour effect.....	56	Merging a photo with a video	74
Viewing your saved photos	57	Adding text to a video.....	75
Video camera	58	Overlaying a photo.....	76
Shooting a quick video	58	Adding a voice recording.....	76
After you've shot your video	59	Adding a soundtrack to your video..	77
Getting to know the viewfinder.....	60	Changing the speed of your video ...	78
Adjusting the Exposure.....	61	Multimedia.....	79
Using the advanced settings.....	61	Pictures.....	79
Changing the video image size.....	63	My images option menus.....	79
Choosing a colour tone.....	63	Sending a photo.....	80
Watching your saved videos	64	Using an image	81
Your photos and videos	65	Printing an image.....	81
Viewing your photos and videos.....	65	Moving or copying an image.....	82
Using zoom when viewing a photo..	65	Creating a slide show.....	82
Adjusting the volume when		Sounds	82
viewing a video.....	65	Using a sound.....	83
Capturing an image from a video	66	Videos.....	83
Viewing your photos as a slide		Using options while video is paused	83
show.....	66	Editing a video clip	84
Setting a photo as wallpaper	67	Sending a video clip.....	84
Editing your photos.....	68	Using the video options menu.....	85

Contents

Games and Applications	85	Sharing a to do item	96
Installing a game/application via local install	86	Adding a memo	96
Playing a game	86	Using date finder	97
Using the games options menu.....	86	Setting your alarm	97
Documents	87	Adding a memo with drawing panel	98
Transferring a file to your phone	87	Voice recorder	98
Viewing a file.....	87	Recording a sound or voice.....	99
Others.....	88	Sending the voice recording.....	99
Creating a movie	88	Using your calculator.....	100
Music.....	89	Converting a unit.....	100
Transferring music onto your phone	90	Using the stopwatch	101
Playing a song	90	Adding a city to your world time....	101
Using options while playing music...	91	PC Sync.....	102
Creating a playlist.....	91	Installing LG PC Suite on your computer	102
Editing a playlist.....	92	Connecting your phone and PC.....	102
Deleting a playlist.....	92	Backing up and restoring your phone's information	103
Using the radio.....	92	Viewing your phone files on your PC	103
Searching for stations	93	Synchronising your contacts.....	104
Resetting channels	93	Synchronising your messages	104
Listening to the radio.....	93	Using your phone as a mass storage device	105
Get organised		Using your phone as Music	
Organiser	94	Sync device.....	105
Adding an event to your calendar	94		
Changing your default calendar view	95		
Adding an item to your to do list.....	95		

The web

Browser	106
Accessing the web	106
Adding and accessing your bookmarks	106
Using RSS reader	107
Saving a page	107
Accessing a saved page	108
Viewing your browser history	108
Changing the web browser settings	108
Using your phone as a modem	109

Settings

Personalising your profiles	111
Changing your screen settings	111
Changing your phone settings	112
Changing your connectivity settings	113
Using memory manager	115
Sending and receiving your files using Bluetooth	116
Pairing with another Bluetooth device	117
Using a Bluetooth headset	118

Accessories	119
-------------------	-----

Network service	120
-----------------------	-----

Technical data	120
----------------------	-----

Guidelines

Guidelines for safe and efficient use	122
Trouble Shooting	128

Getting to know your phone


End/Power key

Ends or rejects a call.
Turns the phone on/off.
Press once to return to
the standby screen.

Multitasking key

Call key

Dials a phone number and
answers incoming calls.

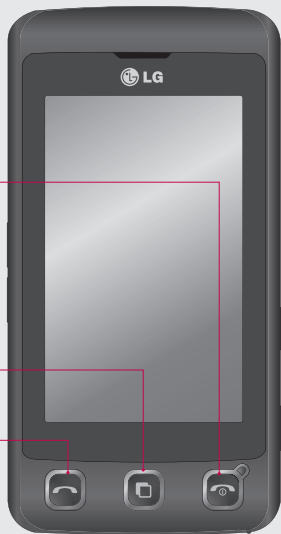

⚠ WARNING: Placing a heavy object on the phone or sitting on it while it is in your pocket can damage the phone's LCD and touch screen functionality.



Charger, Cable, Handsfree connector

TIP: To connect the USB cable, wait until the phone has powered up and has registered to the network.

Side keys

- **When the screen is idle:** volume of key tone.
- **During a call:** volume of the earpiece.
- **When playing a BGM track**
 - **Short press:** controls the volume.



Micro SD memory card socket

Lock/Unlock key

Capture button

Stylus

01

02

03

04


05

06

07

08


Open view

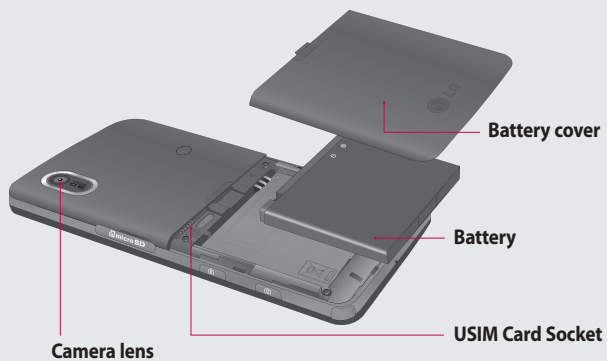

Installing the USIM and battery

1 Remove the battery cover

Slide the battery cover towards the bottom of the phone and away from it.



2 Remove the battery

Using the cut-out at the bottom lift it from the battery compartment.



⚠ WARNING: Do not use your fingernail when removing the battery.

⚠ WARNING: Do not remove the battery when the phone is switched on, as this may damage the phone.

01

02

03

04

05

06


07

08

Installing the USIM and battery

3 Install the USIM card

Slide the USIM card into the USIM card holder making sure that the gold contact area on the card is facing downwards. To remove the USIM card, pull it gently in the opposite direction.




4 Install the battery

Insert the top of the battery first into the top edge of the battery compartment. Ensure that the battery contacts align with the terminals on the phone. Press down the bottom of the battery until it clicks into place.



5 Charging your phone

Lift and twist the charger socket cover of the on the side of your KP500. Insert the charger and plug it into a mains electricity socket. Your KP500 needs to be charged until "Battery full" appears on screen.



01

02

03

04

05

06

07

08


Memory card

Installing a memory card

You can expand the memory space on your phone by using a MicroSD memory card. The KP500 will support up to a 8GB memory card.

NOTE: A memory card is an optional accessory.



- 1 Open the memory card slot cover on the right hand edge of the phone.
- 2 Slide the memory card into the slot until it clicks into place.



- 3 Close the cover.

Formatting the memory card

Your memory card may already be formatted. If your card isn't formatted, you will need to format it before you can begin using it.


- 1 From the standby screen select , then touch  and choose **Phone settings**.
- 2 Touch **Memory manager** then chose **External memory**.
- 3 Touch **Format** and then confirm your choice.
- 4 Enter the password, if one is set, and your card will then be formatted and ready to use.

TIP! To change your default storage destination, open Memory manager from the Phone settings menu and select Primary storage settings.

NOTE: If your memory card already has content, it will automatically be filed in the correct folder; for example, videos will be stored in the My Videos folder.

Transferring your contacts

To transfer your contacts from your USIM to your phone:

- 1 From the Communicate tab, select  and choose **Settings**.
- 2 Touch **Copy**.
- 3 Choose **Handset to SIM**.
- 4 Choose **all** or choose names one by one and touch **Copy**.

01

02

03

04


05

06

07

08

Menu map

Touch  in the standby screen to open a **Top menu**. From here you can access further menus: **Communicate**, **Entertainment**, **Utilities** and **Settings**.



Communicate

- Dialling
- Speed dials
- Contacts
- Call history
- New message
- New Email
- Messaging



Entertainment

- Gallery
- My stuff
- Camera
- Video camera
- Muvee studio
- Music
- FM radio
- Games & Apps



Utilities

- Browser
- Organiser
- Alarms
- Voice recorder
- Drawing Panel
- Tools
- Sim Tool Kit



Settings

- Profiles
- Screen settings
- Phone settings
- Call settings
- Touch settings
- Bluetooth
- Connectivity

Your standby screen

Whenever your KP500 is not in use it will return to your home screen. From here you can access all the menu options, make a quick call and view the status of your phone as well as many other things.

Touch screen tips

The home screen is also a great place to get accustomed to the touch screen.



To select an item, touch the icon accurately. Your KP500 will vibrate slightly when it recognises you've touched an option.

To scroll through lists, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

- There's no need to press too hard, the touchscreen is sensitive enough to pick up on a light, yet firm, touch.
- Use the tip of your finger to touch the option you want. Be careful

not to touch any other options around it.

- When the screen back light is off, press the Unlock/Lock key on the right hand side to bring back the home screen.
- Don't cover the phone with a case or cover. The touchscreen won't work with any material covering it.
- There are two types of idle screen. Flick left or right to change your idle screen types on the standby screen.

- 1 Widget idle** - When you touch , the mobile widget panel appears.
- 2 Speed dial idle** - When you touch , the speed dial list appears. You can drag and click what you need right away in both idle types.

01

02

03

04

05


06

07


08

Your standby screen

Widget idle




Speed dial idle



The quick keys

The quick keys provide easy, one-touch access to your most used functions.



Touch to bring up the touch dialling pad to make a call. Input the number as you would using a normal key pad and touch **Calls** or press the  hard key.



Touch to open your address book. To search for the number you want to call, enter the name of the contact at the top of the screen using the touchpad. You can also create new contacts and edit existing ones. See page 30 for details.



Touch to access the Messaging options menu. From here you can create a new SMS or MMS, or view your message folder. See page 35 for details.



Touch to open the full Top menu which is divided into four vertical sub-menus. Touch each sub-menu's tab to view further options.

01

02

03

04

05

06

07

08
















Your standby screen

The status bar

The status bar uses various icons to indicate things like signal strength, new messages and battery life, as well as telling you whether your Bluetooth or GPRS is active.


Below is a table which explains the meaning of the icons you're most likely to see in the status bar.

Icon	Description
	Multitasking
	Network signal strength (number of bars will vary)
	No network signal
	Remaining battery life
	Battery empty
	New text message
	New voice message
	Message inbox is full
	Message sending failed


Icon	Description
	Multimedia message sending failed
	An alarm is set
	Customised Profile in use
	Normal profile in use
	Outdoor profile in use
	Silent profile in use
	Headset profile in use
	Calls are diverted
	EDGE in use
	Roaming
	Flight mode is on
	Bluetooth is active
	BGM play
	BGM pause
	Memory card is enable to use


Changing your Status from the status bar

Touch the status bar to open the Status Summary. It shows the current Time, Network, SVC ID, Battery, Handset memory, External Memory, Profile, MP3 and Bluetooth status. Here you can set Profile type, play/pause MP3 and activate/deactivate Bluetooth.



Using the Multitasking function

Press the multitasking hard key  to open the Multitasking menu. From here you can view all the applications you have running and access them with one touch.

When you have an application running in the background (e.g. a game or the FM radio),  will appear in the status bar.

01

02

03

04

05





06


07


08


Calls


Making a call


- 1 Touch  to open the keypad.
- 2 Key in the number using the keypad. To delete a digit touch the clear key.
- 3 Press the  Hard key or touch  to initiate the call.
- 4 To end the call press the  hard key.

TIP! To enter + for making an international call, press and hold .




TIP! Press the lock/unlock hard key  to lock the touchscreen to prevent calls being made by mistake.

TIP! To bring up the keypad during a call, press the .



TIP! Touch to unlock. You can unlock by touching the button for a while until the screen is able to work or press the Unlock hard key .




TIP! You can send a message and search contacts by tapping .

Making a call from your contacts

- 1 From the standby screen touch  to open the address book.
- 2 Enter the first few letters of the contact you would like to call.
- 3 From the filtered list, touch the contact you'd like to call and select the number to use if you have more than one saved.
- 4 Press the  Hard key or touch  to initiate the call.

Answering and rejecting a call

When your phone rings press the  hard key or touch  to answer the call.

Tap  to mute the ringing. This is great if you've forgotten to change your profile to Silent for a meeting. Press the  hard or touch  to reject an incoming call.

You can send a message to notify why you don't receive an incoming call using "Excuse message" before you reject an incoming call

01

02

03

04

05


06


07


08

Calls


In-call options





Speaker - Touch  to turn on the speaker phone.

Mute - Touch  to turn off the microphone so the person you are talking to cannot hear you.

Options - Choose from a list of further in-call options, including **Go to messages**, so you can check your messages, Go to contacts to add or search contacts during a call. You can also end the call from here by touching **End call**.

 - Choose to search your contacts during a call.

+  - Choose to add another person to the call.

 - Choose to open a numerical keypad for navigating menus with numbered options. For example, when dialling call centres or other automated telephone services.




TIP! To scroll through a list of options or your list of contacts, touch the last item visible and slide your finger up the screen. The list will move up so more items become visible.

Adjusting the call volume





To adjust the volume during a call, use the up and down button on the left edge of the phone.

Speed dialling

You can assign a frequently-called contact to a speed dial number.

- 1 From the standby screen touch  and select  and tap .
- 2 Your Voicemail is already set to speed dial 1. You cannot change this. Touch any other number to assign it a speed dial contact.
- 3 Your address book will open. Select the contact you'd like to assign to that number by touching their phone number once. To find a contact tap the search field box and enter the first letter of the name of the contact required.

Making a second call

- 1 During your initial call, touch  and select the number you want to call.
- 2 Dial the number or search your contacts (see **Making a call** on page 22 for details).
- 3 Press  to connect the call.
- 4 Both calls will be displayed on the call screen. Your initial call will be locked and the caller put on hold.
- 5 To change between the calls, touch  and choose **Swap call** or press the number of the held call.
- 6 To end one or both calls press  and select **End** followed by **All**, **Held** or **Active**.

01

02

03

04

05

06

07

08


Calls

TIP! You can combine your calls by selecting **Accept** then **Join**. Check that your network provider supports conference calling.

NOTE: You will be charged for each call you make.




Turning off DTMF

DTMF allows you to use numerical commands to navigate menus within automated calls. DTMF is switched on as default.

To turn it off during a call (to make a note of a number for example) touch  and select **DTMF off**.


Viewing your call logs


TIP! To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.


Touch  and select  and tap .

Choose to view:

All - View a complete list of all your dialled, received and missed calls.

Dialled  - View a list of all the numbers you have called.




Received  - View a list of all the numbers that have called you.

Missed  - View a list of all the calls you have missed.

TIP! From any call log touch  and **Delete all** to delete all the recorded items.

TIP! Touch any single call log entry to view the date, time and duration of the call.




Using call divert

- 1 Touch , select  and choose .
- 2 Touch **Call divert**.
- 3 Choose whether to divert all calls, when the line is busy, when there is no answer or when you are not reachable.
- 4 Input the number you'd like to divert to.
- 5 Touch **Request** to activate.

NOTE: Charges are incurred for diverting calls. Please contact your network provider for details.

TIP! To turn off all call diverts, choose **Deactivate all** from the **Call divert** menu.

Using call barring

- 1 Touch , select  and choose .
- 2 Touch **Call barring**.
- 3 Choose any or all of the six options:

All outgoing
Outgoing international
Outgoing international calls
except home country
All incoming
Incoming when abroad
Deactivate all

01

02

03

04

05

06

07




08

Calls

- 4 Enter the call barring password. Please check with your network operator for this service.

TIP! Select **Fixed dial number** to turn on and compile a list of numbers which can be called from your phone. You'll need your PIN2 code from your operator. Only numbers included in the fixed dial list can be called from your phone.

Changing the common call setting

- 1 Touch , select  and choose .
- 2 Touch **Common settings**. From here you can amend the settings for:

Call reject - Slide the switch to **On** to highlight the Reject list. You can touch the text box to choose from all calls, specific contacts or groups, or those from unregistered numbers (those not in your contacts). Touch **Save** to change the setting.

Send my number - Choose whether your number will be displayed when you call someone.

Auto redial - Slide the switch left for **On** or right for **Off**.

Answer mode - Choose whether to answer the phone using the send key or any key.

Minute minder - Slide the switch left to **On** to hear a tone every minute during a call.

BT answer mode - Select **Hands-free** to be able to answer a call using a Bluetooth headset, or select **Handset** to press a key on the handset to answer a call.

Save new number - Select **Yes** to save a new number.

TIP! To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

01

02

03

04

05

06

07




08

Contacts




Searching for a contact

There are two ways to search for a contact:

From the standby screen

- 1 From the standby screen touch  to open the address book. Select the contact from the list that you want to make a call.
- 2 Touch  or press the  hard key to initiate the call.


From the main menu

- 1 Touch , select .
- 2 Touch  and select **Search**.
- 3 You see a list of contacts, typing in the first letter of a contact's name will jump the menu to that alphabetical area of the list.

TIP! The alphabetical keypad is displayed once you tap the blank square.

TIP! To scroll through your list of contacts, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

Adding a new contact


- 1 From the standby screen touch  and touch **Add contact**.
- 2 Choose whether to save the contact to your **Handset** or **SIM**.
- 3 Enter the first and last name of your new contact. You do not have to enter both, but you must enter one or the other.

- 4 You can enter up to five different numbers per contact. Each entry has a preset type **Mobile, Home, Office, Pager, Fax, and General**. When you have finished, touch **Close**.
- 5 Add an email address.
- 6 Assign the contact to one or more groups. Choose from **No group, Family, Friends, Colleagues, School** or **VIP**.
- 7 You can also add a **Ringtone, Birthday, Anniversary, Homepage, Home address, Company name, Job title, Company address** and a **Memo**.
- 8 Touch **Save** to save the contact.

TIP! You can create customised groups for your contacts, see **Creating a group** on page 32.

Contact options

There are many things you can do when viewing a contact. Here's how to access and use the options menu:

- 1 Open the contact you'd like to use. See **Searching for a contact** on page 30.
- 2 You can call or send a message directly from here.
- 3 Press  to open the list of options.

Edit - Change any of the contact's details.

Delete - Delete the contact. Touch **Yes** if you are sure.

Copy or Move to USIM/Handset - Choose to move or copy to the USIM card or handset (depending on where you originally saved the contact).

01

02

03

04

05

06

07





08

Contacts


Send business card - Send the contact's details to another person as a business card. Choose to send as a **Text message**, **Multimedia message**, **Email** or via **Bluetooth**.

TIP! Send message - Send a message to the contact. If the contact has an email address, select whether you'd like to send an email or SMS/MMS. See page 35 for details on how to send messages.

Creating a group

- 1 Touch  and select .
- 2 Touch  then **Groups**.
- 3 Touch .
- 4 Select **Add group**.
- 5 Enter a name for your new group. You can also assign a ringtone to the group.
- 6 Touch **Save**.




NOTE: If you delete a group, the contacts which were assigned to that group will not be lost. They will remain in your address book.

TIP! You can edit an existing group by highlighting it and touching . Choose **Add members** to the group from your contacts, assign a Group ringtone, Rename the group or Delete a group.

Changing your contact settings

You can adapt your contact settings so that your address book suits your own preferences.

TIP! To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

- 1 From the standby screen touch  and select .
- 2 Touch  and select **Settings**.
- 3 From here you can adjust the following settings:

Contact list settings - Choose whether to view contacts saved to both your **Handset & USIM**, **Handset** only or **USIM** only
You can also choose to show the first name or last name of a contact first.

Copy - Copy your contacts from your USIM to your handset or from your handset to your USIM. Choose to do this one at a time, or all at once. If you select one at a time, you'll need to select each contact to copy one by one.

Move - This works in the same way as Copy, but the contact will only be saved to the location you've moved it to. So if you move a contact from the USIM to the handset it will be deleted from the USIM memory.

01

02

03

04

05

06

07

08

Contacts

Send all contacts via Bluetooth




- Send all of your contacts to another device using Bluetooth. You will be prompted to turn on Bluetooth if you select this option.

Backup and Restore contacts

- Backup and restore contacts to the Memory Card.

Clear contacts - Delete all your contacts. Touch **Yes** if you are sure you want to wipe your address book.

Viewing information

- 1 From the standby screen touch  and select .
- 2 Touch  and select **Information**.
- 3 From here you can view your **Service dial numbers**, your **Own number**, your **Memory info**. (how much memory space you've got left) and **My business card**.





TIP! If you've yet to add a business card for yourself, select **My business card** and enter all your details as you would for any contact. Touch **Save** to finish.

Messaging





Messaging

Your KP500 combines SMS, MMS and email into one intuitive and easy to use menu.


There are two ways to enter the messaging centre:


- 1 Touch  from the standby screen.
- 2 Touch  from the standby screen, then select  and choose .

Sending a message

- 1 Touch  to open a blank message.
- 2 From here you can send an SMS or MMS. To send an email, touch  from the standby screen, then select  and . See page 40 for details.
- 3 Touch **Insert**, to add an image, video, sound or template.

- 5 Touch **To(1)** at the top of the screen to enter the recipient's number, or touch the search icon to open your address book. You can add multiple contacts. Touch **Send** when ready.

 **WARNING:** You will be charged per 1 page text message for each person that you send the message to.

 **WARNING:** If an image, video or sound is added to an SMS it will be automatically convert to an MMS and you will be charged accordingly.

TIP! Quick reply - Send a reply promptly to the selected message using a template.

01

02

03

04

05

06

07

08

Messaging


Entering text


There are five ways to enter text:


Keypad, Keyboard, Handwriting-Screen, Handwriting-Box, Handwriting-Double Box.


You can choose your input method by tapping  and **Input method**.

Tap the screen once, the keyboard appears.


 Touch to turn on T9 predictive text.

 You can choose writing languages.

 Tap to change numbers, symbols and text keypad.

Use  to scroll through the different keyboard types in each text entry mode (for example, capitals or lowercase).


T9 predictive

In T9 mode you will see .

T9 mode uses a built-in dictionary to recognise words you're writing based on the key sequences you touch. Simply touch the number key associated with the letter you want to enter, and the dictionary will predict the word you want to use.

For example, press 8, 3, 5, 3, 7, 4, 6, 6, 3 to write 'telephone'.

Abc manual


In Abc mode you will see .


In Abc mode you must touch the key repeatedly to enter a letter. For example, to write 'hello', touch 4 twice, 3 twice, 5 three times, 5 three times again, then 6 three times.

Keyboard

In Keyboard mode the screen flips to landscape and a full keyboard appears on screen.

Simply touch each letter to write your message and press:

 to switch to upper case



TIP! Keyboard mode predicts and shows what you will type in next. These words are predicted based on the sentences you have typed in so far. If you do not wish to use the suggested words, keep typing in new words. If you wish to use the suggested words, press the space bar to confirm them.

01

02

03

04

05

06

07

08

Messaging

Handwriting recognition

In Handwriting mode you simply write on the screen and your KP500 will convert your handwriting into your message. Select **Screen** or **Box** depending on your preferred view.

TIP! You may find it easier to use the stylus in this mode, please remember to press lightly to protect your screen from damage.

Handwriting recognition translates stylus gestures into letters, numbers or other character, and displays these characters as text. Handwriting recognition is only active where text can be entered.

Note: Most letters can be written using different stroke styles. The position on the screen decides case, not the style.

Alphabet

If you select capital letter mode (ABC), letters you type will be inserted as capital letters even if you write in small letters, and vice versa.

Letter	Strokes
A	A A' a a'
B	B B b b'
C	c c'
D	D D d d'
E	E E e e'
F	F F f f'
G	G G g g'
H	H H h h'
I	I I i i'
J	J J j j'
K	K K k k'
L	L l l'

Letter	Strokes
M	M M m m
N	N N n n
O	O O o o
P	P P p p
Q	Q Q q q
R	R R r
S	S s
T	T T t t
U	U U u
V	V v
W	W w w
X	X x
Y	Y y y y
Z	Z z
ß	ß

Numbers

Numbers are written above the arrow.

Number	Strokes
0	0 0
1	1 1 1 1 1
2	2 2 2
3	3 3
4	4 4 4 4
5	5 5 5 5
6	6
7	7 7 7 7
8	8 8 8 8
9	9 9 9 9

01

02

03

04

05

06

07




08

Messaging

Setting up your email

You can stay in touch on the move using email on your KP500. It's quick and simple to set up a POP3 or IMAP4 email account.

TIP! To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

- 1 Touch  then tap .
- 2 Select  then scroll menu to **Settings**.
- 3 Touch **Email** then **Email accounts**.
- 4 Touch **Add Account**.
- 5 Setup Wizard will help you set up your email settings.

Email address - Enter your email address.

Password - Enter the account password.

Username - Enter your account user ID as supplied by your email provider.

Mailbox type - Select the internet protocol type used to transfer your email, IMAP4 or POP3.

Incoming server - Enter your incoming (POP3 or IMAP4) mail server name or IP address.

Outgoing server - Enter your outgoing(SMTP) mail server name or IP address. This may be the same server as for incoming mail.

SMTP authentication - Turn on SMTP authentication if the outgoing server requires user name and password to send email.

Account name - Enter the mailbox name that you wish to appear as the account name for the Mailbox.

Now your account is set up, it will appear in the list of accounts in your Email folder.

6 You can check and edit settings by selecting the account in the list. You can also check the additional settings that were filled in automatically when you created the account.

Reply email address - Enter the 'reply to' email address.

Maximum receive size - Choose the size limit of your emails, the maximum is 1MB.

Save sent mail into - Select whether to save sent emails (an option when the mailbox type is set to IMAP4). When the mailbox type is POP3, sent mails are always saved into handset.

01

02

03

04

05

06

07

08

Messaging

Access points - Choose your Internet access point.

Auto retrieve - Choose whether to retrieve your new emails automatically.

Advanced settings - Choose whether to use the advanced settings.

SMTP port number - Normally, this will be 25.

SMTP TLS/SSL - Choose whether to use SSL for outgoing server.

Incoming server port - Normally, this is 110 for POP3 accounts and 143 for IMAP4 accounts.

Incoming TLS/SSL - Choose whether to use SSL for incoming server.

SMTP Username - Enter the SMTP username.

SMTP Password - Enter the SMTP password.





APOP secure login - Choose to activate APOP secure login for a POP3 account. IMAP4 accounts are always set to off.

- 7** You can change your default email account by touching **Activate**.

Retrieving your email

You can automatically or manually check your account for new emails. See 'Changing your email settings' on page 44 to check automatically.

To check manually:

- 1 Touch  then select  and .
- 2 Touch **Mailbox**.
- 3 Touch the account you want to use then .
- 4 Choose **Retrieve** and your KP500 will connect to your email account and retrieve your new messages.

Sending an email using your new account

- 1 Touch **New Email** in the **Communicate** menu and a new email will open.
- 2 You can enter the recipient's address and write your message. You can also attach images, videos, sounds or other file types.
- 3 Touch **Send** and your email will be sent.

TIP! You can upload Word, Excel, PowerPoint and PDF documents to your KP500 so you can review them on the move.

01

02

03

04

05

06

07




08

Messaging

Changing your email settings

You can change your email settings according to your own preferences.

TIP! To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

- 1 Touch  then select  and .
- 2 Touch **Settings** and **Email** and then you can adapt the following settings:

Allow reply Email - Choose to allow the sending of 'read, confirmation' messages.

Request reply Email - Choose whether to request read confirmation messages.

Retrieve interval - Choose how often your KP500 checks for new email messages.

Retrieve amount - Choose the number of emails to be retrieved at any one time.

Include message in Fwd & Reply - Choose to include the original message in your reply.

Include attachment - Choose to include the original attachment in any reply.

Auto Retrieval in Roaming - Choose whether to retrieve your messages automatically when abroad (roaming).

TIP! Costs for retrieving email may be higher when roaming. Check with your network supplier.

New email notification - Choose whether to be alerted to new emails.

Signature - Create an email signature and switch this feature on.

Priority - Choose the priority level of your email messages.

Message folders

You'll recognise the folder structure used on your KP500, which is fairly self-explanatory.

Inbox - All the messages you receive are placed into your inbox. From here you can view, delete and more, see **Managing your messages** below for details.

Mailbox - All the emails you receive on your KP500 will be placed in your mailbox.

Drafts - If you don't have time to finish writing a message, you can save what you've done so far here.

Outbox - This is a temporary storage folder while messages are being sent.

Sent items - All the messages you have sent are placed in this folder.

My Folders - Create folders to store your messages.

01

02

03

04

05

06

07





08

Messaging

Managing your messages

You can use your Inbox to manage your messages.

TIP! To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

- 1 Touch  then select  and .
- 2 Select **Inbox**.
- 3 Touch  and then choose to:
 - Delete** - Delete marked messages.
 - Create new message** - Open a new blank message or email.
 - Move to My folders** - Move the marked messages to My folders.

Filter - View your message by type. This will group SMS separately from MMS.

Delete all - Delete all of the messages.

If you see the message **No space for USIM messages** you should delete some messages on the USIM.

If you see the message **No space for messages** you should delete some messages to free up memory space.



Using templates

Create templates for the SMS and MMS messages you send most frequently. You'll find some templates already on your phone, you can edit these if you wish.

- 1 Touch  then choose **Templates** on the **Communicate** menu.
- 2 Choose **Text templates** or **Multimedia templates**. You can then touch  to **Add new**, **Delete** or **Delete all** templates.
- 3 Touch **Add template** to create a new template.
- 4 You can view the template by selecting it on the list and edit it by touching on the view screen.

Using emoticons

Liven up your messages using emoticons. You'll find some commonly used emoticons already on your phone.

- 1 Touch  then choose **Emoticons** on the **Communicate** menu.
- 2 Touch  to **Add new**, **Delete** or **Delete all** emoticons.
- 3 Touch "Add emoticon" to create a new emoticon.
- 4 You can view the emoticon by selecting it on the list and edit it by touching on the view screen.

01

02

03

04

05

06

07


08

Messaging

Changing your text message settings

Your KP500 message settings are pre-defined so that you can send messages immediately. These settings can be changed according to your preferences.

TIP! To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

Touch  then choose **Settings** on the **Communicate** menu. Select **Text message**. You can make changes to:

Text message centre - Enter the details of your message centre.

Delivery report - Slide the switch left to receive confirmation that your messages have been delivered.

Validity period - Choose how long your messages are stored at the message centre.




Message types - Convert your text into **Text, Voice, Fax, X.400** or **Email**.

Character encoding - Choose how your characters are encoded. This impacts the size of your messages and therefore data charges.

Send long text as - Choose to send long messages as Multiple SMS or as MMS.

Changing your multimedia message settings

Your KP500 message settings are pre-defined so that you can send messages immediately. These settings can be changed according to your preferences.

Touch , select  then . Chose **Settings** and **Multimedia message**. You can make changes to:

Retrieval mode - Choose **Home** or **Roaming network**. If you then choose Manual you will receive only notifications of MMS and you can then decide whether to download them in full.

Delivery report - Choose to allow and/or request a delivery report.

Read report - Choose to allow and/or request a reply report.

Priority - Choose the priority level of your MMS.

Validity period - Choose how long your message is stored at the message centre.

Slide duration - Choose how long your slides appear on screen.

Creation mode - Choose your message mode.

Delivery time - Choose how long before a message is delivered.

Multi msg centre - Enter the details of your message centre.

01

02

03

04

05




06

07


08

Messaging

Changing your other settings

Touch  / , select , choose

Settings on the **Messaging** menu then:



Voicemail - Touch  to add a new Voicemail service or tap on "Add voice mail". Contact your network operator for more information on the service they provide.

Service message - Choose to receive or block service messages. You can also set your message security by creating trusted and untrusted lists of senders.

Info service - Choose your reception status, language and other settings.


Camera

Taking a quick photo

- 1 Press the  key on the right side of the phone briefly.
- 2 The viewfinder will appear on screen.
- 3 Holding the phone horizontally, point the lens towards the subject of the photo.
- 4 Position the phone so you can see the subject of your photo in the preview screen.
- 5 When the camera has focused on your subject, either press the  on the side of the phone firmly or press the red box on the lower right of the screen to take the photo.

After you've taken your photo

Your captured photo will appear on screen. The name of the image runs along the bottom of the screen together with six icons down the right side.



-  Touch to move to your gallery.
-  Touch to send the photo as a message, e-mail or Bluetooth. See page 35 for Sending a message, and page 116 for Sending and receiving your files using Bluetooth.
-  Touch to edit the photo.
-  Touch to set the picture you have taken as Wallpaper.
-  Touch to delete the photo you have just taken and confirm by touching **Yes**. The viewfinder will reappear.
-  Touch to take another photo straightaway. Your current photo will be saved.

01

02

03

04

05


06

07

08

Camera


Getting to know the viewfinder

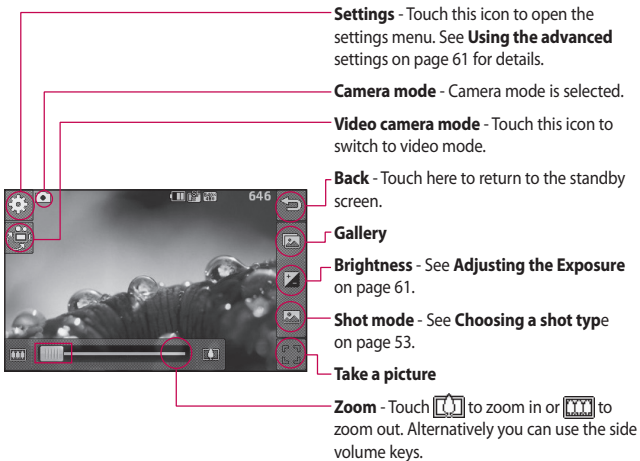

TIP! You can bring up the options by tapping the screen. They auto turn off after a few seconds.

NOTE: Image size should be 640*480/
400*240/ 320*240 to use zoom.

Choosing a shot type

1 Touch  to open the available shot types.


2 Choose from two options:

Normal shot - This is the default shot type, the photo will be taken in the normal way, as outlined in taking a quick photo.

Burst shot - This enables you to take 3/6/9 shots automatically in very quick succession.

Adjusting the exposure

Exposure defines the difference between light and dark (contrast) in an image. A low contrast image will appear foggy, whereas a high contrast image will appear much sharper.

1 Touch .

2 Slide the contrast indicator along the bar - left for a lower exposure, hazier image or right for a higher exposure, sharper image.

01

02

03

04

05

06


07

08


Camera


Using continuous shot mode

Continuous shot mode is great for taking photos of moving objects or at sporting events.

- 1 Touch  to open the available shot types and select **Burst shot**.
- 2 Select the shot count that you would like to take continuously.
- 3 Position the subject in the viewfinder and press the capture button as you would to take a normal photo.
- 4 The camera will take 3/6/9 pictures in quick sequence.

Using the advanced settings

From the viewfinder touch  to open all the advanced settings options.



Preview settings

Size - Change the size of the photo to save on memory space or take a picture preset to the correct size for contact. See **Changing the image size** on page 56.

Colour Effect - Choose a colour tone to apply to the photo you're taking. See **Choosing a colour effect** on page 56.

White balance - Choose from Auto, Incandescent, Sunny, Fluorescent or Cloudy.

Night mode - Useful to use at dark place.

Self-timer - The self-timer allows you to set a delay after the capture button is pressed before the camera takes the picture. Choose from **3 seconds, 5 seconds** or **10 seconds**. Great for that group photo you want to be part of.

Quality - Choose between **Super fine, Fine** and **Normal**. The finer the quality the sharper a photo will be, but the file size will increase. This means you'll be able to store fewer photos in your memory.

View mode - Choose from Full screen or Full image. In Full screen some clipping of the image may occur.

Other settings

Memory - Choose whether to save your photos to the Handset memory or to the External memory.

Shutter sound - Select one of the three shutter sounds.

Grid screen - Choose from Off, Simple cross or Trisection

Reset settings - Reset all the camera settings.

TIP! When you exit the camera all your settings will return to default, except image size and image quality. Any non-default settings you require will need to be reset, for example colour tone. Check them before you shoot your next photo.

01

02

03

04

05

06

07


08

Camera

TIP! The settings menu is superimposed over the viewfinder, so when you change elements of the image colour or quality you'll be able to see the image change in preview behind the settings menu.

Changing the image size


The more pixels, the larger the file size, which in turn means they take up more of your memory. If you want to fit more pictures on to your phone you can alter the pixel number to make the file size smaller.

- 1 From the viewfinder touch  in the top left corner.
- 2 Select **Size** from the Preview menu.

- 3 Select a pixel value from the five numerical options (**3M: 2048x1536, 2M: 1600x1200, 1M: 1280x960, 640x480, 400x240(W), 320x240**) or choose the preset:


Contacts - This sets the camera to take a photo the perfect size to be added to a phone contact.

Choosing a colour effect

- 1 From the viewfinder touch  in the top left corner.
- 2 Select **Colour Effect** from the Preview menu.
- 3 There are five colour tone options: **Off, Black & White, Negative** or **Sepia**.

TIP! You can change a photo taken in colour to black and white or sepia after it's taken, but you cannot change a picture taken in black and white or sepia back to colour.

Viewing your saved photos

- 1 You can access your saved photo's from within the camera mode. Simply touch  and your gallery will appear on screen.

01

02

03

04

05






06

07

08


Video camera

Shooting a quick video


- 1 Press the camera key on the right side of the phone.
- 2 On the Camera preview mode touch the Video camera icon  in the view finder to switch to video mode. The video camera's viewfinder will appear on screen.
- 3 Holding the phone horizontally, point the lens towards the subject of the video.
- 4 Press the capture button once to start recording. Or press the red dot  at the bottom right of the screen.
- 5 **Rec** will appear at the top of the viewfinder and a timer at the bottom showing the length of your video.
- 6 To pause the video touch  and resume by selecting .
- 7 Touch  on screen or press the capture button a second time to stop recording.


After you've shot your video


A still image representing your captured video will appear on screen. The name of the video runs along the bottom of the screen together with five icons down the right side .





 Touch to play the video.

 Touch to send the video as a **Message or Email** or by **Bluetooth**. See page 35 for **Sending messages**, or page 116 for **Sending and receiving your files using Bluetooth**.

 Touch to edit the video.

 Touch to view a gallery of saved videos and images.

 Touch to delete the video you have just captured and confirm by touching **Yes**. The viewfinder will reappear.

 Touch to shoot another video straight away. Your current video will be saved.

01

02

03

04

05


06

07

08

Video camera


Getting to know the viewfinder

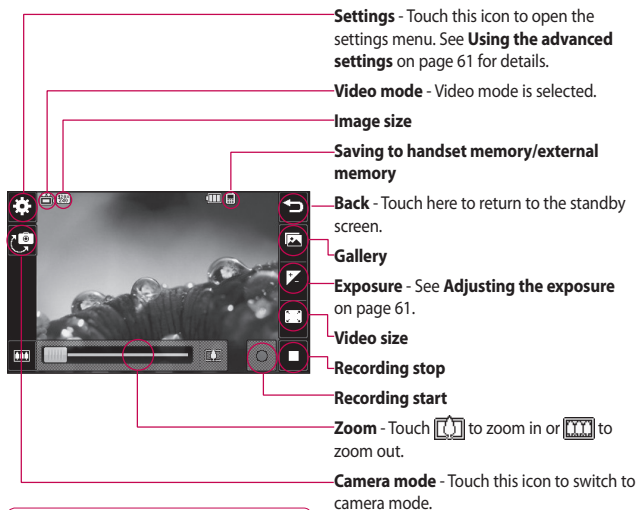

TIP! You can close all the shortcut options for a clearer viewfinder screen. Simply touch the centre of the viewfinder once. To recall the options touch the screen again.


Adjusting the Exposure

Exposure defines the difference between light and dark (contrast) in an video. A low contrast image will appear foggy, whereas a high contrast video will appear much sharper.

- 1 Touch .
- 2 Slide the exposure indicator along the bar, left for a lower exposure, hazier video, or right for a higher contrast, sharper video.

Using the advanced settings

From the viewfinder touch **Settings** to open all the advanced settings options.



01

02

03

04

05

06

07

08

Preview settings

Video size - Change the size of the video to save on memory space. See **Changing the video image size** on page 63.

Colour Effect - Choose a colour tone to apply to the video you're taking. See **Choosing a colour tone** on page 63.

Video camera

White balance - The white balance ensures that any white in your videos is realistic. In order for your camera to correctly adjust the white balance you may need to determine the light conditions. Choose from **Auto, Incandescent, Sunny, Fluorescent** or **Cloudy**.

Quality - Choose between **Super fine, Fine** and **Normal**. The finer the quality the sharper a video will be, but the file size will increase as a result, which means you'll be able to store fewer videos in the phone's memory.

Set time - Set a duration limit for your video. Choose from **No limit**, or **MMS** to limit the size so that you can send the video as an MMS.

View mode - Choose from Full screen or Full image. In Full screen some clipping of the image may occur.

TIP! If you choose MMS duration, try choosing a lower image quality to enable you to shoot a longer video.

Other settings

Memory - Choose whether to save your videos to the **Handset memory** or to the **External memory**.

Voice - Choose Mute to record a video without sound.

Reset settings - Reset all the video camera settings.

Changing the video image size


The more pixels, the larger the file size, which in turn means they take up more memory. If you want to fit more videos on to your phone you can alter the pixel number to make the file size smaller.

- 1 From the viewfinder touch  in the top left corner.
- 2 Select **Video size** from the Preview menu.
- 3 Select a pixel value from the two options:
 **320x240** - Large image size, therefore larger file size. Up to 24 fps are available for video play back, up to 12 fps are available for video recording.
 **176x144** - Small image size and therefore smaller file size. Up to 15 fps are available for video play back.

- 4 Select the size option you'd like to use.

TIP! For video format conversion software, see the CD you received with your KP500.

Choosing a colour tone

- 1 From the viewfinder touch  in the top left corner.
- 2 Select **Colour Effect** from the settings menu.
- 3 There are five colour tone options, **Off** (Normal), **Black & White**, **Negative**, **Sepia**.
- 4 Touch the colour tone you'd like to use.

TIP! You can change a video shot in colour to black and white or sepia after it's taken, but you cannot change a video shot in black and white or sepia back to colour.

01

02

03

04

05


06

07

08




Video camera


Watching your saved videos

- 1** In the viewfinder touch .
- 2** Your gallery will appear on screen.
- 3** Touch the video you want to view once to bring it to the front of the gallery.
- 4** Touch the video a second time to open it fully.


Your photos and videos

Viewing your photos and videos



- 1 Touch  on your camera preview screen.
- 2 Your gallery will appear on screen.
- 3 Touch the video or photo twice to open it fully.
- 4 To play the video touch . To pause playback touch .



TIP! Flick left or right to view other photos or videos.

TIP! To delete a photo or video, open it and select . Touch **Yes** to confirm.

Using zoom when viewing a photo

To zoom in press  repeatedly. To zoom out press . Use the thumbnail in the bottom right corner to move the focus area.

Adjusting the volume when viewing a video

To adjust the volume of the audio on a video whilst it is playing, slide the marker up and down the volume bar on the left side of the screen.

01

02

03

04

05



06


07

08

Your photos and videos



Capturing an image from a video

- 1 Select the video you would like to take an image from.
- 2 Touch **||** to pause the video on the frame you'd like to convert to an image and touch the right side of the screen to open the options menu.
- 3 From the options menu select .
- 4 The image will appear on screen, with its assigned image name.
- 5 Touch the image then  to return to the gallery.
- 6 The image will be saved in your Media Album folder and appear in the gallery. You need to exit the gallery and then re-open it for this to appear.

 **WARNING:** Some functions will not work properly if the multimedia file has not been recorded on the phone.

Viewing your photos as a slide show

Slideshow mode will show all the photos in your gallery one at a time as a slideshow. Videos can not be viewed as a slideshow.

- 1 Touch the photo twice with  which you would like to begin the slide show.
- 2 Select .
- 3 The slideshow will begin.



There are options within slideshows:



Touch to show random.



Touch to pause the slideshow on a particular photo.




Touch again to resume playback.



Touch to increase or decrease the speed of the slideshow.

Setting a photo as wallpaper

- 1 Touch the photo you would like to set as wallpaper twice to open it. Turn the phone to landscape.
- 2 Touch the right side of the screen to open the options menu.
- 3 Touch .
- 4 The screen will switch to portrait mode. You can then change the size of the picture.
- 5 When you are happy with the picture touch **Set**.

01

02

03

04

05

06


07

08


Your photos and videos


Editing your photos


There are loads of great things you can do to your photos to change them, add to them or liven them up a little.


1 Open the photo you'd like to edit and touch  to bring up the options.

2 Touch the icons to adapt your photo:


 Crop your photo. Choose a square or circular crop area and move your finger across the screen to select the area.


 Draw something on your photo freehand. Select the thickness of the line from the four options and the colour you would like to use.


 Put writing on the picture. See **Adding text to a photo** on page 69.

 Decorate your photo with stamps. Choose from the different stamps available and touch your photo wherever you'd like them to be.

 Erase whatever you draw.


 Save the changes you have made to the photos. Select to save the changes over the **Original file**, or as a **New file**. If you select **New file** enter a file name.

 Undo the last **Effect** or edit you made to the photo.

 Touch to open further effect options including **Rotate**. There are also more advanced editing options. See **Resize, Morphing, Colour Accent, Add images** etc.

 See **Adding an effect to a photo** on page 70.



 Touch to return to the gallery.

Adding text to a photo

- 1 From the editing screen, touch **T**.
- 2 Select **Signature** to add unframed text or choose one of the speech bubble shapes.
- 3 Enter your text using the keypad and touch **Save**.
- 4 Move the text by touching it and sliding it to the place you'd like it to be.

01

02

03

04

05

06

07

08

Your photos and videos

Adding an effect to a photo

- 1 From the editing screen, touch



- 2 Choose to apply any of the six options to the photo:

Face beautify - Automatically detect a face in the image and brighten it up.

Tunnel effect - Lomo camera effect.

Colour negative - Colour negative effect.

Black and white - Black and white colour effect.

Sepia - Sepia effect.

Blur - Apply a blurred effect.

Sharpen - Move the marker along the bar to sharpen the focus of the photo. Select **OK** icon to apply the changes or choose to cancel.

Mosaic blur - Touch to apply a blurred mosaic effect to the photo.

Oil painting - Oil painting effect.

Sketch - Apply an effect to make the picture look like a sketch.

Emboss - Emboss effect.

Solarize - Change the effect of exposure to the light

Vivid - An effect of clearness and brilliance.


Moonlight - Change the light to look like moonlight.

Antique - An old image effect.

Glow - A light beam effect.

Cartoon - A cartoon effect.


Water color - A water color effect.

- 3** To undo an effect simply touch **Undo** .

TIP! You can add more than one effect to a photo, except for a colour effect.

Morphing a photo

Morphing a photo is great for changing the facial expressions of friends, or just for distorting a photo for artistic effect.

- 1** From the editing screen touch .
- 2** Choose **Morphing** and four crosses will appear on the photo.
- 3** Move the crosses around the photo so they are on the part you'd like to morph. For example, if you are morphing a face, place a cross on the outside corner of each eye and one each side of the lips.
- 4** Select a face to represent how you'd like to morph the photo.
- 5** Select **OK** to save the changes.

01

02

03

04

05

06

07

08

Your photos and videos

Adding a colour accent to a photo

- 1 From the editing screen, touch .
- 2 Choose **Colour Accent**.
- 3 Select part of the photo. A traced line will appear around everything in that area which is of the same or similar colour. For example, someone's hair or the colour of their jumper.
- 4 Touch **OK**.
- 5 All colour will be removed from the photo, apart from the section marked for colour accenting.
- 6 Alter the intensity of the accenting by sliding the marker up or down the intensity bar.
- 7 Select **Save** to save the changes.

Swapping the colours in a photo

- 1 From the editing screen, touch .
- 2 Choose **Colour swapping**.
- 3 Select part of the photo. A traced line will appear around everything in that area which is of the same or similar colour. For example, someone's hair or the colour of their jumper.
- 4 Select a colour.
- 5 Press **OK**.
- 6 The part of the photo selected for colour accenting will change to the selected colour.
- 7 Select **Save** to save the changes.

Trimming the length of your video

- 1 Open the video you'd like to edit, select and touch the screen to bring up the options.
- 2 Select and choose **Trim**.
- 3 Touch and mark the new start and end points using .
- 4 Touch **Play cropped** to ensure you are happy with the new cut.
- 5 Touch **Save** or, alternatively, touch to return to the gallery and discard the changes.



Merging two videos together

- 1 Open the video you'd like to edit, select and touch the screen to bring up the options.
- 2 Select and choose **Video merge**.
- 3 The **My stuff** folder will open, select either **My Videos** or **My memory card** (if fitted). Choose the video you would like to merge and touch **Select**.
- 4 Touch and slide the photo to merge it to the end or the beginning of the video.
- 5 Touch **Effect** to choose how the videos merge together: **None**, **Pan zoom**, **Oval**, **Uncover**, **Blind**, **Checker board**, **Dissolve**, **Split** or **Shape diamond**.

01

02

03

04

05

06

07

08




Your photos and videos

- 6 Press **Save** followed by **Yes** to save the new merged video. Choose to save over the original file or as a new file.
- 7 Repeat these steps to merge more videos.


Merging a photo with a video

- 1 Open the video you'd like to edit, select  and touch the screen to bring up the options.
 - 2 Select  and choose **Image merge**.
 - 3 The **My stuff** folder will open select either **My Images** or **My memory card** (if fitted). Choose the photo you would like to merge into your video and touch **Select**.
 - 4 Touch and slide the photo to merge it to the end or the beginning of the video.
- 5 Touch **Effect** to choose how the photo and video merge together: **None, Pan zoom, Oval, Uncover, Blind, Checker board, Dissolve, Split** or **Shape diamon**.
 - 6 Press **Save** followed by **Yes**. Choose to save over the original file or as a new file.
 - 7 Repeat these steps to merge more photos.

Adding text to a video

- 1 Open the video you'd like to edit, select **||** and touch the screen to bring up the options.
- 2 Select  and choose **Text overlay**.
- 3 Enter your text using the keypad and select **Done**.
- 4 Touch  and mark when you'd like the text to appear using .
- 5 Touch the area of the screen you'd like the text to appear in.



- 6 Touch  to mark when you'd like the text to disappear.
- 7 Touch **Preview** to ensure you are happy with the text overlay.
- 8 Touch **Save** followed by **Yes**. Choose to save over the original file or as a new file.
- 9 Repeat these steps to add more text.

01

02

03

04

05

06


07

08



Your photos and videos



Overlaying a photo

- 1 Open the video you'd like to edit, select  and touch the screen to bring up the options.
- 2 Select  and choose **Image overlay**.
- 3 The **My stuff** folder will open select either **My images** or **My memory card** (if fitted). Choose the photo you would like to overlay your video and touch **Select**.
- 4 Touch  and mark when you'd like the photo to appear using .
- 5 Touch the area of the screen you'd like the photo to appear in. If the photo is too big it will overlay the whole screen, not just the area selected.





- 6 Touch  to mark when you'd like the photo to disappear.
- 7 Touch **Preview** to ensure you are happy with the photo overlay.
- 8 Touch **Save** followed by **Yes**. Choose to save over the original file or as a new file.
- 9 Repeat these steps to add more photos.

Adding a voice recording

- 1 Open the video you'd like to edit, select  and touch the screen to bring up the options.
- 2 Select  and choose **Voice recording**.
- 3 The quality of the original audio will be affected by adding a voice recording. Touch **Yes** to continue.

- 4 Touch  to view your video. When you get to the part you'd like to record your voice over, press .



- 5 Press  or  to stop recording and playback.
- 6 Touch **Preview** to ensure you are happy with the voice recording.
- 7 Touch **Save** followed by **Yes** to save. Choose to save over the original file or as a new file.
- 8 Repeat these steps to add more voice recordings to the video.
- ### Adding a soundtrack to your video
- 1 Open the video you'd like to edit, select  and touch the screen to bring up the options.
- 2 Select  and choose **Audio dubbing**.
- 3 The **My stuff** folder will open select either **My sounds** or **My memory card** (if fitted). Choose the track you would like to add to your video and touch **Select**.
- 4 The original audio of your video will be erased. Touch **Yes** to continue.
- 5 If the audio is shorter than the video choose whether to play **Once** or to **Repeat** it.
- 6 Choose to save over the original file or as a new file.

01

02

03

04

05



06

07

08

Your photos and videos


Changing the speed of your video

- 1 Open the video you'd like to edit, select  and touch the screen to bring up the options.
- 2 Select  and choose **Time scaling**.
- 3 Select one of the four speed options: **x4, x2, x1/4, x1/2**.
- 4 Choose to save over the original file or as a new file.

NOTE: Only 3gp Video file can be edited.


Multimedia

You can store any multimedia files into your phone's memory so that you have easy access to all of your pictures, sounds, videos and games. You can also save your files to a memory card. The advantage of using a memory card is that you can free up space on your phone's memory.

To access the Multimedia menu, touch  then . Touch  to open a list of folders storing all of your multimedia files.

Pictures

My images contains a list of pictures including default images pre-loaded onto your phone, images downloaded by you and images taken on your phone's camera.

Touch  to change the view from thumbnail view to list view.

My images option menus

The options which are available to you in **My images** depend on what type of image you have selected. All of the options will be available for pictures you have taken on the phone's camera, but only the **Sort by, List View, Folder info.** and **Memory manager** options are available for default images.

01

02

03

04

05

06

07

08

Multimedia

Send - Send the image to a friend.

Move - Move an image from the phone memory to a memory card or vice versa.

Copy - Copy an image from the phone memory to a memory card or vice versa.

Delete - Delete an image.

Rename - Rename an image.

Print - Print the selected image using a printer.

Create new folder - Create a new folder within the My images folder.

Slide show - Start a slide show.

List/Grid view - Grid view to List view or vice versa.

Folder info. - View the Name, Size, Date details of the folder and number of files and sub-folders inside the folder.

Memory manager - View the memory status.





Delete all - Delete all of your images.

Sending a photo

- 1 Touch  then .
- 2 Touch  then choose **My images**.
- 3 Touch  **Send** and choose from **Message, Email** or **Bluetooth**.
- 4 If you choose **Message** or **Email**, your photo will be attached to a message and you can write and send the message as normal. If you choose **Bluetooth**, Bluetooth will be turn on automatically and your phone will search for a device to send the picture.

Using an image

You can choose images to use as wallpapers and screensavers or even to identify a caller.

- 1 Touch  then .
- 2 Touch  then **My images**.
- 3 Select an image and touch .
- 4 Touch **Use as** and choose from:





Wallpaper - Set a wallpaper for the standby screen.

Contacts image - Allocate an image to a particular person in your contacts list so that their picture shows when they call you.

Start-up image - Set an image to appear when you switch the phone on.

Power off image - Set an image to appear when you switch the phone off.

Printing an image

- 1 Touch  then .
- 2 Touch  then **My images**.
- 3 Select an image and touch .
- 4 Touch **Print** then choose between **Bluetooth** and **PictBridge**.

TIP! You can print via bluetooth or by connecting to a PictBridge compatible printer.

01

02

03

04

05

06





07

08

Multimedia





Moving or copying an image

You can move or copy an image between the phone memory and the memory card. You might want to do this to either free up some space in one of the memory banks or to safeguard your images from being lost.

- 1 Touch  then .
- 2 Touch  then **My images**.
- 3 Touch  and select **Move** or **Copy**.
- 4 You can mark/unmark the images by tapping it sequentially. Mark the image that you want to move or copy and touch **Copy/Move**.

Creating a slide show





If you want to look at all of the images on your phone, you can create a slide show to save you from having to open and close each individual image.

- 1 Touch  then .
- 2 Touch  then **My images**.
- 3 Choose a start image for your slide show.
- 4 Touch  then **Slide show**.

Sounds

The **My sounds** folder contains the Downloaded sounds, **Default sounds** and **Voice recordings**. From here you can manage, send or set sounds as ringtones.




Using a sound

- 1 Touch  then .
- 2 Touch  then **My sounds**.
- 3 Select **Default sounds** or **Voice recordings**.
- 4 Select a sound and it will begin to play.
- 5 Touch  and select **Use as**.
- 6 Choose from **Ringtone**, **Message tone**, **Start-up** or **Shut down**.


Videos

The **My videos** folder shows a list of downloaded videos and videos you have recorded on your phone.

Watching a video

- 1 Touch  then .
- 2 Touch  then **My videos**.
- 3 Select a video to play.

Using options while video is paused

Touch  while in pause mode and choose from:

Capture - Capture the frozen frame as a picture.

Send - Send the video in a message or via Bluetooth.

Delete - Delete the video.

Edit - Edit the video.

File info. - View the Title, size, date, type, duration, protect and forward.

01

02

03

04

05

06



07

08

Multimedia

Editing a video clip

While your video is being played and is in pause mode you can choose from a number of options to edit the video clip.

- 1 Select a video and touch **Play**.
- 2 Touch  then .
- 3 Touch **edit** and choose from:

Trim - Cut the video down to only the part you want.

Video merge - Merge the video with another video clip.

Image merge - Merge the video with an image from your Images folder.

Text overlay - Add text to the video.

Image overlay - Add an image to the video.

Audio dubbing - Choose to add sound from the **Defaults folder** or from your own **Voice recordings**.

Sending a video clip

- 1 Select a video and touch .
- 2 Touch **Send** and choose from **Message, Email** or **Bluetooth**.
- 3 If you choose **Message** or **Email**, your video clip will be attached to the message and you can write and send the message as normal. If you choose **Bluetooth**, you will be prompted to turn Bluetooth on and your phone will search for a device to send the video.

Using the video options menu

From the **My videos** folder, you can choose from the following options:

Send - Send a video to a friend.

Move - Move a video clip from the phone memory to a memory card or vice versa.

Copy - Copy a video clip from the phone memory to a memory card or vice versa.

Delete - Delete a video.

Rename - Rename a video.

Create new folder - Create a new folder within the **My videos** folder.

Sort by - Sort videos into order by Date, Type or Name.

List/Grid view - Grid view to List view or vice versa.

Folder info - View the Name, Size, Date details of the folder and number of files and sub-folders inside the folder.

Memory manager - View the memory status.

Delete all - Delete all videos.

Games and Applications

You can install new games and applications to your phone to keep you amused when you have time to spare.

01

02

03

04

05




06

07

08




Multimedia

Installing a game/application via local install


- 1 Touch  then .
- 2 Touch  and **Others** or **My memory card** if external memory is inserted.
- 3 Select the file(*.jad or *.jar) to install and press **Install** command. An application will be installed.

NOTE: The jad should contain its own jar.

Playing a game

- 1 Touch  then .
- 2 Touch  **My games & apps**.
- 3 Open the Games folder and choose and touch a game to launch.

Using the games options menu

From the **Games** folder, the following options are available when you touch :

Delete – Delete a file.

Create new folder – Create a folder within **My games & Apps**.

Rename – Rename a file.

Move – Move a file from the phone memory to a memory card or vice versa.

File info. – View the Name, Size, Date, Time, Type, Duration, Dimension, Protection and Copyright details.

Sort by - Sort the games and applications by **Date, Size or Name**.

Memory manager - View the memory status.

Delete all - Delete all files.

Documents

From the Documents menu, you can view all of your document files. From here you can view Excel, Powerpoint, Word, Text and PDF files.




Transferring a file to your phone

Bluetooth is probably the easiest way to transfer a file from your computer to your phone. You can also use LG PC Suite via your sync cable, see page 102 for details.

To transfer using Bluetooth:

- 1 Make sure your phone and computer have Bluetooth switched on and are visible to one another.
- 2 Use your computer to send the file via Bluetooth.
- 3 When the file is sent you will have to accept it on your phone by touching **Yes**.
- 4 The file should appear in your **Documents** or **Others folder**.

Viewing a file

- 1 Touch  then .
- 2 Touch  then **Documents**.
- 3 Select a document and touch **View**.

01

02

03

04

05

06

07





08

Multimedia



Others


The **Others** folder is used to store files which are not pictures, sounds, videos, games or applications. It is used in the same way as the **Documents** folder. You may find that when you transfer files from your computer to your phone that they appear in the **Others** folder rather than the **Documents** folder. If this happens you can move them.

To move a file from **Others** to **Documents**:

- 1 Touch  then .
- 2 Touch  then **Others**.
- 3 Select a file and touch .
- 4 Touch **Move**, choose the destination folder from the list by touching the arrow icon. The screen will display **Moved** when the transfer is complete.




Creating a movie

- 1 Touch  then .
- 2 Touch  (Muvee studio).
- 3 Touch  to add an image. Checkbox images you want to include then select **Insert**.
- 4 Touch style tab to choose a Muvee style.
- 5 Touch **Default sound** to change the sound.
- 6 Touch  to see what you've created.
- 7 Touch  then **Order** to make an order.

- 8 Touch  then **Save Location** to choose where to save the movie.



Music

Your LG KP500 has a built-in music player so you can play all your favourite tracks. To access the music player, touch  then  then . From here you can access a number of folders:

Recently played - View all of the songs you have played recently.

All tracks - Contains all of the songs you have on your phone.

Artists - Browse through your music collection by artist.

Albums - Browse through your music collection by album.

Genres - Browse through your music collection by genre.

Playlists - Contains all playlists you have created.

Shuffle tracks - Play your tracks in a random order.

01

02

03

04

05

06

07

08

Multimedia







Transferring music onto your phone


The easiest way to transfer music onto your phone is via Bluetooth or your sync cable.

You can also use LG PC Suite, see page 102 for details. To transfer using Bluetooth:

- 1 Make sure both devices have Bluetooth switched on and are visible to one another.
- 2 Select the music file on the other device and choose to send it via Bluetooth.
- 3 When the file is ready to be sent you should accept it on your phone by touching **Yes**.
- 4 The file should appear in **Music > All tracks**.

Playing a song

- 1 Touch  then .
- 2 Touch , then **All tracks**.
- 3 Select the song you want to play.
- 4 Touch  to pause the song.
- 5 Touch  to skip to the next song.
- 6 Touch  to skip to the previous song.
- 7 Touch  to return to the **Music** menu.



Using options while playing music

Touch  and choose from:

Minimise - Make the music player screen disappear so that you can continue using your phone as normal.

File info. - View the Title, size, date, type, duration, protect and forward.

Send - Send the song as a message or via Bluetooth.

Use as - Use the song as Ringtone, Message tone, Start-up or Shut down.

Creating a playlist

You can create your own playlists by choosing a selection of songs from the **All tracks** folder.

- 1 Touch  then .
- 2 Touch , then **Playlists**.
- 3 Touch **Add new playlist**, enter the playlist name and touch **Save**.
- 4 The **All tracks** folder will show all the songs in your phone. Touch all of the songs that you would like to include in your playlist; a tick will show next to the track names.
- 5 Touch **Save**.

01

02

03

04

05

06





07

08

Multimedia

Editing a playlist

From time to time, you may want to add new songs or delete songs from a playlist. When you want to do this, you can edit the playlist.

- 1 Touch  then .
- 2 Touch , then **Playlists**.
- 3 Select the playlist.
- 4 Touch  and select:



Add new songs – To add more songs to the playlist. Mark the ones you want and touch **Done**.

Remove – Remove a song from the playlist. Touch **Yes** to confirm.

Memory status - View the memory status.

Remove all - Remove all tracks from the playlist.

Deleting a playlist

- 1 Touch  then **Entertainment**.
- 2 Touch **Music**, then **Playlists**.
- 3 Touch  then **Delete** or **Delete all** to delete all of the playlists.

Using the radio





Your LG KP500 has an FM radio feature so you can tune into your favourite stations to listen to on the move.

NOTE: You will need to insert your headphones in order to listen to the radio. Insert them into the headphone socket (this is the same socket that you plug your charger into).





Searching for stations

You can tune radio stations into your phone by searching for them either manually or automatically. They will then be saved to specific channel numbers so you don't have to keep re-tuning. You can save up to 50 channels in your phone. You must first attach the headset to the phone as this acts as the antenna.





To auto tune:

- 1 Touch  then .
- 2 Touch  then .
- 3 Touch Auto scan. Then the stations will be automatically found and allocated to a channel in your phone.




NOTE: You can also manually tune into a station by using

 and  displayed next to the radio frequency. If you press and hold  and , the stations will be automatically found.


Resetting channels

- 1 Touch  then .
- 2 Touch  then .
- 3 Choose **Reset** to reset the current channel or choose **Reset all** to reset all of the channels. Each channel will return to the starting 87.5Mhz frequency.

Listening to the radio

- 1 Touch  then .
- 2 Touch  then touch the channel number of the station you would like to listen to.

TIP! To improve the radio reception, extend the headset cord, which functions as the radio antenna.

You can minimize the screen and listen the BGM Radio by tapping .

01

02

03

04

05

06

07


08

Organiser




Adding an event to your calendar

- 1 From the standby screen select , then touch  and choose . Select **Calendar**.
- 2 Select the date you would like to add an event to.
- 3 Touch  then **Add event**.
- 4 Touch **Category** then choose from **Appointment, Anniversary** or **Birthday**.
Check the date and enter the time you would like your event to begin.
- 5 For appointments and anniversaries enter the time and date your event finishes in the lower two time and date boxes.




- 6 If you would like to add a subject or a note to your event, touch **Note** and type in your note, followed by **Save**.
- 7 Set **Alarm** and **Repeat**.
- 8 Select **Save** and your event will be saved in the calendar. A square cursor will mark the day that any events have been saved to and a bell will ring at the start time of your event, so that you can stay organised.

TIP! You can set a holiday in your calendar. Touch each day you are on holiday one at time, then touch  and select **Set holiday**.

Changing your default calendar view

- 1 From the standby screen select , then touch  and choose . Select **Settings**.
- 2 Touch **Calendar** and choose either **Monthly view** or **Week view**.
- 3 Set **week starts on**.
- 4 Touch **Save** to confirm your choice.

Adding an item to your to do list

- 1 From the standby screen select , then touch  and choose .
- 2 Select **To do** and touch **Add To do**.
- 3 Set the date for the to do item, add notes and select a priority level: **High**, **Medium** or **Low**.
- 4 Save your to do list item by selecting **Save**.

TIP! You can edit a item by selecting it, and touch the tab and input. Confirm your amends by selecting **Save**.

01

02

03

04

05





06

07

08




Organiser

Sharing a to do item

- 1 From the standby screen select , then  and choose . Select **To do**.
- 2 Select the to do item you would like to share, then touch .
- 3 Select **Send**. You can choose to share your to do item by **Text message**, **Multimedia msg.**, **Email** or **Bluetooth**.

TIP! You can back up and synchronise your calendar with your computer. See PC Sync on page 102.

Adding a memo




- 1 From the standby screen select , then touch  and choose . Select **Memo**.
- 2 Touch **Add memo**.
- 3 Type your memo, followed by **Save**.
- 4 Your memo will appear on screen next time you open the **Memo** application.

TIP! You can edit an existing memo. Select the one you want to edit and type your changes.





Using date finder

Date finder is a handy tool to help you calculate what the date will be after a certain amount of days has passed. For example, 60 days from 10.10.07 will be 09.12.2007.

This is great for keeping tabs on deadlines.

- 1 From the standby screen select , then touch  and choose .
- 2 Select **Date finder**.
- 3 In the **From** tab set your required date.
- 4 In the **After** tab set the number of days.
- 5 The **Target date** will be shown below.

Setting your alarm

- 1 From the standby screen select , then touch  and choose .
- 2 Touch **Add alarm**.
- 3 Set the time you would like the alarm to sound and touch **Save**.
- 4 Choose whether you would like your alarm to repeat **Once, Daily, Mon - Fri, Mon - Sat, Sat - Sun, Except holiday or Choose weekday**.
The icons indicate the weekday you select.
- 5 Select **Alarm type** to select a type for your alarm.
- 6 Touch **alarm tone** then choose **Default sounds** or **Voice recordings** folder to find sounds. To listen to sounds touch the sound, followed by .

01

02

03

04

05

06

07

08





Organiser

- 7 Add a memo for the alarm. Touch **Save** when you have finished typing the memo.
- 8 Finally you can set the snooze interval at 5, 10, 20, 30 minutes, 1 hour or off.
- 9 Once you have set your alarm, touch **Save**.

NOTE: You can set up to 5 alarms.





TIP! Touch on/off icon on the right hand side of the alarm to set.

Adding a memo with drawing panel

- 1 From the standby screen select , then touch  and choose .
- 2 Touch **Add drawing**.
- 3 Draw your memo on the touch screen LCD followed by .
- 4 Your memo will appear on screen next time you open the **Drawing Panel** application.

Voice recorder







Use your voice recorder to record voice memos or other sounds.


- 1 Touch  then .
- 2 Touch  then  and **Settings** choose from:

Duration – Set the recording duration. Choose from **No limit**, **MMS msg. size** or **1 minute**.


Quality – Select the sound quality. Choose from Super Fine, Fine or Normal.


Recording a sound or voice

- 1 Touch  then .
- 2 Touch .
- 3 Touch  to begin recording.
- 4 Touch  to end recording.
- 5 Touch  to listen to your recording.



Sending the voice recording

- 1 Once you have finished recording, touch .
- 2 Touch **Send via** and choose from **Message, Email** or **Bluetooth**. If you choose **Message** or **Email**, the recording will be added to the message and you can write and send it as normal. If you choose **Bluetooth**, you will be prompted to turn Bluetooth on.

NOTE: After you have finished recording, touch  and choose **Send via, File, Delete, Use as** (to use the recording as your ringtone) **Settings** or **Go to my sounds**.

01

02

03

04

05





06

07




08

Organiser




Using your calculator

- 1 From the standby screen select , then touch  and choose .
- 2 Select **Calculator**.
- 3 Touch the numeric keys to input numbers.
- 4 For simple calculations, touch the function you require (+, -, *, /), followed by =.
- 5 For more complex calculations, touch  and choose from **sin**, **cos**, **tan**, **log**, **ln**, **exp**, **sqrt**, **deg** or **rad** etc..





Converting a unit

- 1 From the standby screen select , then touch  and choose .
- 2 Select **Converter**.
- 3 Choose whether you would like to convert **Currency**, **Surface**, **Weight**, **Length**, **Temperature**, **Volume** or **Velocity**.
- 4 You can then select the unit, and enter the value you would like to convert from, followed by the unit you would like to convert to.
- 5 The corresponding value will appear on the screen.

Using the stopwatch

- 1 From the standby screen select , then touch  and choose .
- 2 Select **Stopwatch**.
- 3 Touch **Start** to begin the timer.
- 4 Touch **Lap** if you want to record a lap time.
- 5 Touch **Stop** to end the timer.
- 6 Touch **Resume** to restart the stopwatch at the time you stopped it at, or touch **Reset** to begin the time again.

Adding a city to your world time

- 1 From the standby screen select , then touch  and choose .
- 2 Select **World time**.
- 3 Touch the , followed by **Add city**. Start typing the name of the city you require and it will show at the top of the screen.

01

02

03

04

05

06




07

08

PC Sync

You can synchronise your PC with your phone to make sure all your important details and dates match, and also to backup your files to put your mind at ease.

Installing LG PC Suite on your computer

- 1 From the standby screen press  and select  and choose .
- 2 Select **USB connection mode** and choose.
PC internet
Mass storage
PC suite
Music sync
Always ask
- 3 Insert the supplied CD into your PC. Click on the **LG PC Suite Installer** which will appear on your screen.

- 4 Select the language you would like the installer to run in and click **OK**.
- 5 Follow the instructions on the screen to complete the LG PC Suite Installer wizard.
- 6 Once installation is complete, the LG PC Suite icon will appear on your desktop.

Connecting your phone and PC

- 1 Connect the USB cable to your phone and your PC.
- 2 Double click on the **LG PC Suite** icon on your desktop.
- 3 Click on **Connection Wizard**, then **USB**.
- 4 Click on **Next**, then **Next** again, then **Finish**.
Your phone and PC are now connected.

Backing up and restoring your phone's information

- 1 Connect your phone to your PC as outlined above.
- 2 Click on the **Backup** icon, and select **Backup** or **Restore**.
- 3 Mark the contents you would like to back up or restore. Select the location you would like to backup information to, or restore information from. Click **OK**.
- 4 Your information will be backed up or restored.

Viewing your phone files on your PC

- 1 Connect your phone to your PC as outlined previously.
- 2 Click on the **Contents** icon.
- 3 All of the documents, flash contents, images, sounds and videos you have saved onto your phone will be displayed on the screen in the LG Phone folder.

TIP! Viewing the contents of your phone on your PC helps you to arrange files, organise documents and remove contents you no longer need.

01

02

03

04

05

06

07

08

PC Sync

Synchronising your contacts

- 1 Connect your phone to your PC.
- 2 Click on the **Contacts** icon.
- 3 Your PC will now import and display all contacts saved to your USIM card and handset.
- 4 Click on **File** and select **Save**. You can now select where you would like to save your contacts to.




NOTE: To backup contacts saved to your USIM card, click on the SIM card folder on the left side of your PC screen. Select **Edit** at the top of the screen, then **Select all**. Right-click your contacts and select **Copy to contact**. Now click on the **Handset** folder on the left of your screen and all your numbers will be displayed.

Synchronising your messages

- 1 Connect your phone to your PC.
- 2 Click on the **Messages** icon.
- 3 All of your PC and phone messages will be displayed in folders on your screen.
- 4 Use the tool bar at the top of your screen to edit and rearrange messages.

Using your phone as a mass storage device

Your phone can be used as a mass storage device.




- 1 Disconnect your phone from your PC.
- 2 From the standby screen select , then touch .
- 3 Select , then **USB connection mode**.
- 4 Touch **Mass storage**.
- 5 Connect your phone to your PC. Your phone will read: **Connected**.
- 6 All of your phone files will automatically be stored onto your PC hard drive.

NOTE: Your phone must be unplugged from your PC to initiate Mass Storage.

Using your phone as Music Sync device

Your Phone can be used as Music Sync device to Sync Music Files only.

Music Sync can be done using Windows Media Player 10 / 11 and supports both Handset Memory and External Memory Card.

- 1 Disconnect your phone from your PC.
- 2 From the standby screen select , then touch .
- 3 Select , and then **USB connection mode**.
- 4 Touch **Music sync**.
- 5 Connect your phone to your PC. Your phone will read: **Connecting as Music Sync ...** followed by **Disconnect Cable to Stop Music Sync**.

01

02

03

04

05

06

07




08

The web

Browser

Browser gives you a fast, full colour world of games, music, news, sport, entertainment and loads more, straight to your mobile phone. Wherever you are and whatever you're into.





Accessing the web

- 1 From the standby screen select , then touch  and choose .
- 2 To access the browser homepage directly, select **Home**. Alternately select **Enter address** and type in your desired URL, followed by **Connect**.

NOTE: An additional cost is incurred when connecting to this service and downloading content. Check your data charges with your network provider.

Adding and accessing your bookmarks


For easy and fast access to your favourite websites, you can add bookmarks and save web pages.

- 1 From the standby screen select , then touch  and choose .
- 2 Select **Bookmarks**. A list of your Bookmarks will appear on the screen.
- 3 To add a new bookmark, select  and touch **Add Bookmark** or tap on "add bookmark" option. Enter a name for your bookmark followed by the URL.
- 4 Touch **Save**. Your Bookmark will now appear in the list of bookmarks.
- 5 To access the bookmark simply touch the bookmark and then touch Connect. You will be connected to your bookmark.

Using RSS reader

RSS (Really Simple Syndication) is a family of web feed formats used to publish frequently updated content such as blog entries, news headlines or podcasts. An RSS document, which is called a feed, web feed, or channel, contains either a summary of content from an associated web site or the full text. RSS makes it possible for people to keep up with their favourite web sites in an automated manner that is easier than checking them manually. The user subscribes to a feed by entering the feed's link into the reader or by clicking an RSS icon in a browser that initiates the subscription process. The reader checks the user's subscribed feeds regularly for new content, downloading any updates that it finds.

Saving a page

- 1 Access your required webpage as described above.
- 2 Touch  and select **Save this page**.
- 3 Enter a name for the webpage so you can easily recognise it.
- 4 Touch **Save**.

TIP! This menu will also allow you to edit titles of saved pages, protect or unprotect the screen memo, and delete saved pages.

01

02

03

04

05




06

07




08

The web




Accessing a saved page

- 1 From the standby screen select , then touch  and choose .
- 2 Select **Saved pages**.
- 3 Select the required page and it will open.

Viewing your browser history

- 1 From the standby screen select , then touch  and choose .
- 2 A list of web page titles you have accessed recently will be displayed. To access one of these pages, simply select the required page.

Changing the web browser settings

- 1 From the standby screen select , then touch  and choose .
- 2 You can choose to edit **Profiles, Appearance settings, Cache, Cookies, Security**, or to reset all settings, select **Reset Settings**.

Using your phone as a modem

Your KP500 can double as a modem for your PC, giving you email and internet access even when you can't connect using wires. You can use either the USB cable or Bluetooth.

Using the USB cable:

- 1 Ensure you have the LG PC Suite installed on your PC.
- 2 Connect your KP500 and your PC using the USB cable and launch the LG PC Suite software.
- 3 Click **Internet Kit** on your PC. Then click **New** button and select **Modem**.
- 4 Choose **LG Mobile USB Modem** and select **OK**. It will now appear on screen.

5 Write the Profile that can connect to the Internet and save the values.

6 The profile that you create will appear on your PC screen. Select it and click **Connect**. Your PC will connect through your KP500.

NOTE: For more information on synchronising using the LG PC Suite see page 103.

Using Bluetooth:

- 1 Ensure Bluetooth is switched **On** and **Visible** for both your PC and KP500.
- 2 Pair your PC and KP500 so that a passcode is required for connection.
- 3 Use the **Connection wizard** on your LG PC Suite to create an active Bluetooth connection.
- 4 Click **Internet Kit** on your PC. Then click **New** button.

01

02

03

04

05

06

07

08

The web

- 5 Choose **LG Mobile USB Modem** and select **OK**. It will now appear on screen.
- 6 Write the Profile that can connect to the Internet and save the values.
- 7 The profile that you create will appear on your PC screen. Select it and click **Connect**.
Your PC will connect through your KP500.

NOTE: For more information on Bluetooth see page 116.

Settings



Within this folder you can adapt your settings to make your KP500 personal to you.

NOTE: For information on call settings see page 28.




Personalising your profiles

You can quickly change your profile on the standby screen. Simply touch the status summary bar on the top and touch the profile tab.

Using the settings menu you can personalise each profile setting.

- 1 Press  and then choose .
- 2 Touch **Profiles** and then choose the profile you want to edit.
- 3 You can then change all of the sounds and alert options available in the list, including your **Voice Ring tone** and **Volume, Message alerts** settings and more.

Changing your screen settings

- 1 Touch  then choose .
- 2 Touch  and then choose from:

Wallpaper - Choose the theme for your standby screen.

Top Menu - Choose the style of the top menu.

Dialling - Adjust the number size and colour.

Font - Adjust the font size.

Backlight - Choose how long the backlight remains ON.

NOTE: The longer the backlight is on for, the more battery power is used and you may need to charge your phone more often.

01

02

03

04

05

06

07

08

Settings

Brightness - Adjust the screen brightness.

Greeting message - Choose on or off and fill in the greeting message.




Start-up/Shut down - Choose the theme for your start-up/shut down screen.

- 2 Touch **Save** to save your settings.

Changing your phone settings

Enjoy the freedom of adapting how your KP500 works to your own style.

TIP! To scroll through a list of options, touch the last item visible and slide your finger up the screen. The list will move up so more items are visible.

- 1 Touch  then choose .
- 2 Touch  then choose from the list below.

Date and time - Adjust your date and time settings or choose to auto update the time when you travel or for daylight saving.

Power save - Choose to switch the factory set power saving settings **Off**, **Night only** and **Always on**.

Languages - Change the language of your KP500's display.

Auto key lock - Lock the keypad automatically in standby screen.

Security - Adjust your security settings, including PIN codes and handset lock.

Memory manager - See **Using memory manager** on page 115 for more information.

Reset settings - Reset all the settings to their factory definitions.

Handset information - View the technical information for your KP500.

Changing your connectivity settings

Your connectivity settings have already been set up by your network operator, so you can enjoy your new phone. If you want to change any settings, use this menu.

Touch  then .

Select .

Network settings

Select Network - If you set to **Automatic**, KP500 automatically searches for the network and registers the handset to the network. This is recommended for best service and quality.

If you set to **Manual** all the currently available networks are shown and you can select one of them for registration. If the registration of the network has failed, the network lists are listed again and you can select any other one for registration.

NOTE: When your handset loses the network in manual mode, the popup message to select the available network will be shown on the Idle screen.

01

02

03

04

05

06

07

08

Settings

Preferred lists - If the network is searching automatically, you can add a preferred network to be connected to. The following options are available.

Internet profiles - This menu shows the Internet profiles. You can create new profiles, delete or edit them by using the Option Menu. However, you cannot delete or edit default configurations depending on country variant.

Access points - Your network operator has already saved this information. You can add new access points using this menu.

Packet data conn. - Choose when your device should be connected to network for packet data.




USB connection mode - Choose Data service and synchronise your KP500 using the LG PC Suite software to copy files from your phone. See page 102 for more information on synchronisation. If you use Music sync with Windows Media Player, select Music sync in this menu. Music sync is only available for music content.

Streaming settings - Your network operator has already saved this information. You may edit it if you'd like to make changes.

Using memory manager

Your KP500 has three memories available: the phone, the SIM Card and an external memory card (you may need to purchase the memory card separately).

You can use memory manager to determine how each memory is used and see how much space is available.

Touch  followed by . Select  then **Memory Manager**.

Handset common memory - View the memory available on your KP500 for Pictures, Sounds, Video, Flash, MMS, Email, Java applications and others.

Handset reserved memory - View the memory available on your handset for SMS, Contacts, Calendar, To do list, Memo, Alarm, Call history, Bookmarks and Miscellaneous items.

SIM memory - View the memory available on your SIM Card.

External memory - View the memory available on your external memory card (you may need to purchase the memory card separately).

Primary storage settings - Choose the location you prefer items to be saved to.

TIP! See page 14 for information on **Inserting a memory card**.

01

02

03

04

05

06

07

08

Settings

Sending and receiving your files using Bluetooth

Bluetooth is a great way to send and receive files as no wires are needed and connection is quick and easy. You can also connect to a Bluetooth headset to make and receive calls.

To send a file:

- 1 Open the file you want to send, typically this will be a photo, video or music file.
- 2 Choose **Send**.
Choose **Bluetooth**.
- 3 If you have already paired the Bluetooth device, your KP500 will not automatically search for other Bluetooth devices. If not, your KP500 will search for other Bluetooth enabled devices within range.
- 4 Choose the device you want to send the file to and touch **Select**.





- 5 Your file will be sent.

TIP! Keep an eye on the progress bar to make sure your file is sent.

To receive a file:

- 1 To receive files your Bluetooth must be both **On** and **Visible**. See Changing your Bluetooth settings on the right for more information.
- 2 A message will prompt you to accept the file from the sender. Touch **Yes** to receive the file.
- 3 You will see where the file has been saved and you can choose to **View** the file or **Use as wallpaper**. Files will usually be saved to the appropriate folder in your Media Album.

Changing your blueooth settings:

- 1 Touch  and choose .
- 2 Choose  then touch  and choose **Settings**.

Make your changes to:

My device visibility - Choose to be **Visible** or **Hidden** or **Visible for 1 min**.

My device name - Enter a name for your KP500.

Supported services - Choose how to use Bluetooth in association with different services. See **Using your phone as a modem** on page 109 or **Using a Bluetooth headset** on page 118.

Remote SIM Mode - Turn on or off.

My address - Show your Bluetooth address.

Pairing with another Bluetooth device

By pairing your KP500 and another device, you can set up a passcode protected connection. This means your pairing is more secure.

- 1 Check your Bluetooth is **On** and **Visible**. You can change your visibility in the **Settings** menu.
- 2 Touch **Search**.
- 3 Your KP500 will search for devices. When the search is completed **Refresh** will appear on screen.
- 4 Choose the device you want to pair with and enter the passcode, then touch **OK**.
- 5 Your phone will then connect to the other device, on which you should enter the same passcode.
- 6 Your passcode protected Bluetooth connection is now ready.

01

02

03

04

05

06

07

08

Settings

Using a Bluetooth headset

- 1 Check your Bluetooth is **On** and **Visible**.
- 2 Follow the instructions that came with your headset to place your headset in pairing mode and pair your devices.
- 3 Touch **Ask before connect** or **Always connect** and touch **Yes** to Connect now. Your KP500 will automatically switch to Headset profile.

TIP! See page 29 for details on **BT answer mode** so that you can control how you answer calls when your Bluetooth headset is connected.

Accessories

These accessories are supplied with KP500.

Charger



Data cable and CD

Connect and synchronise your KP500 and PC.



Battery



User Guide

Learn more about your KP500.



Stereo headset



NOTE:

- Always use genuine LG accessories.
- Failure to do this may invalidate your warranty.
- Accessories may be different in different regions; please check with our regional service company or agent for further inquiries.

Protection Film

WARNING:

When the protection film is attached on touch window, touch sensitivity might be decreased.



01

02

03

04

05

06

07

08

Network service

The wireless phone described in this guide is approved for use on the GSM 900, DCS 1800, GSM 850 and, PCS 1900 network.

A number of features included in this guide are called Network Services. These are special services that you arrange through your wireless service provider. Before you can take advantage of any of these Network Services, you must subscribe to them through your service provider and obtain instructions for their use from your service provider.

Technical data

General

Product name : KP500

System : GSM 900 / DCS 1800 / GSM 850 / PCS 1900

Ambient Temperatures

Max : +55°C (discharging),
+45°C (charging)

Min : -10°C

Battery Specification

Battery : 900mA, Li-Ion

Talk time : 4.5hrs (pl 7)

Standby time : 407hrs (p.p 9)

Note

Variation in operation time may occur depending on SIM card, network condition, usage style, usage setting and environment.

Declaration of Conformity



Suppliers Details

Name

LG Electronics Inc

Address

LG Twin Tower 20, Yeouido-dong, Yeongdeungpo-gu Seoul, Korea 150-721

Product Details

Product Name

E-GSM 900 / DCS 1800 / GSM 850 / PCS 1900 Quad Band Terminal Equipment

Model Name

KP500, KP500Q, KP570, KP570Q

Trade Name

LG

CE 0168

Applicable Standards Details

R&TTE Directive 1999/5/EC

EN 301 489-01 v1.6.1 / EN 301 489-07 v1.3.1 / EN 301 489-17 v.1.2.1
EN 60950-1 : 2001
EN 50360/EN 50361 : 2001
EN 301 511 V9.0.2
EN 300 328 V 1.7.1

Supplementary Information

The conformity to above standards is verified by the following Notified Body(BABT)

BABT, Balfour House, Churchfield Road, Walton-on-Thames, Surrey, KT12 2TD, United Kingdom
Notified Body Identification Number : 0168

Declaration

I hereby declare under our sole responsibility that the product mentioned above to which this declaration relates complies with the above mentioned standards and Directives

European Standard Center
LG Electronics Logistics and Services B.V.
Veluwezoom 15, 1327 AE Almere, The Netherlands
Tel : +31 - 36 - 547 - 8940, Fax : +31 - 36 - 547 - 8794
e-mail : jacob @ lge.com

Name

Seung Hyoun, Ji / Director

Issued Date

1, September, 2008


Signature of representative

Guidelines for safe and efficient use

Please read these simple guidelines. Not following these guidelines may be dangerous or illegal.

Exposure to radio frequency energy

Radio wave exposure and Specific Absorption Rate (SAR) information
This mobile phone model KP500 has been designed to comply with applicable safety requirements for exposure to radio waves. These requirements are based on scientific guidelines that include safety margins designed to assure the safety of all persons, regardless of age and health.

- The radio wave exposure guidelines employ a unit of measurement known as the Specific Absorption Rate, or SAR. Tests for SAR are conducted using standardised methods with the phone transmitting at its highest certified power level in all used frequency bands.

- While there may be differences between the SAR levels of various LG phone models, they are all designed to meet the relevant guidelines for exposure to radio waves.
- The SAR limit recommended by the International Commission on Non-Ionizing Radiation Protection (ICNIRP) is 2W/kg averaged over 10g of tissue.
- The highest SAR value for this model phone tested by DASY4 for use at the ear is 0.990 W/kg (10g) and when worn on the body is 1.26 W/Kg(10g).
- SAR data information for residents in countries/regions that have adopted the SAR limit recommended by the Institute of Electrical and Electronics Engineers (IEEE), which is 1.6 W/kg averaged over 1g of tissue.

Product care and maintenance

WARNING

Only use batteries, chargers and accessories approved for use with this particular phone model. The use of any other types may invalidate any approval or warranty applying to the phone, and may be dangerous.

- Do not disassemble this unit. Take it to a qualified service technician when repair work is required.
- Keep away from electrical appliances such as TVs, radios, and personal computers.
- The unit should be kept away from heat sources such as radiators or cookers.
- Do not drop.
- Do not subject this unit to mechanical vibration or shock.
- Switch off the phone in any area where you are required by special regulations. For example, do not use your phone in hospitals as it may affect sensitive medical equipment.
- Do not handle the phone with wet hands while it is being charged. It may cause an electric shock and can seriously damage your phone.
- Do not charge a handset near flammable material as the handset can become hot and create a fire hazard.
- Use a dry cloth to clean the exterior of the unit (do not use solvents such as benzene, thinner or alcohol).
- Do not charge the phone when it is on soft furnishings.
- The phone should be charged in a well ventilated area.

Guidelines for safe and efficient use

- Do not subject this unit to excessive smoke or dust.
- Do not keep the phone next to credit cards or transport tickets; it can affect the information on the magnetic strips.
- Do not tap the screen with a sharp object as it may damage the phone.
- Do not expose the phone to liquid or moisture.
- Use the accessories like earphones cautiously. Do not touch the antenna unnecessarily.

Efficient phone operation

Electronics devices

All mobile phones may get interference, which could affect performance.

- Do not use your mobile phone near medical equipment without requesting permission. Avoid placing the phone over pacemakers, for example, in your breast pocket.
- Some hearing aids might be disturbed by mobile phones.
- Minor interference may affect TVs, radios, PCs, etc.

Road safety

Check the laws and regulations on the use of mobile phones in the area when you drive.

- Do not use a hand-held phone while driving.
- Give full attention to driving.

- Use a hands-free kit, if available.
- Pull off the road and park before making or answering a call if driving conditions so require.
- RF energy may affect some electronic systems in your vehicle such as car stereos and safety equipment.
- When your vehicle is equipped with an air bag, do not obstruct with installed or portable wireless equipment. It can cause the air bag to fail or cause serious injury due to improper performance.
- If you are listening to music while out and about, please ensure that the volume is at a reasonable level so that you are aware of your surroundings. This is particularly imperative when near roads.

Avoid damage to your hearing

Damage to your hearing can occur if you are exposed to loud sound for long periods of time. We therefore recommend that you do not turn on or off the handset close to your ear. We also recommend that music and call volumes are set to a reasonable level.

Glass Parts

Some parts of your mobile device are made of glass. This glass could break if your mobile device is dropped on a hard surface or receives a substantial impact. If the glass breaks, do not touch or attempt to remove. Stop using your mobile device until the glass is replaced by an authorized service provider.

Guidelines for safe and efficient use

Blasting area

Do not use the phone where blasting is in progress. Observe restrictions, and follow any regulations or rules.

Potentially explosive atmospheres

- Do not use the phone at a refueling point.
- Do not use near fuel or chemicals.
- Do not transport or store flammable gas, liquid, or explosives in the same compartment of your vehicle as your mobile phone and accessories.

In aircraft

Wireless devices can cause interference in aircraft.

- Turn your mobile phone off before boarding any aircraft.
- Do not use it on the ground without permission from the crew.

Children

Keep the phone in a safe place out of the reach of small children. It includes small parts which may cause a choking hazard if detached.

Emergency calls

Emergency calls may not be available under all mobile networks. Therefore, you should never depend solely on the phone for emergency calls. Check with your local service provider.

Battery information and care

- You do not need to completely discharge the battery before recharging. Unlike other battery systems, there is no memory effect that could compromise the battery's performance.
- Use only LG batteries and chargers. LG chargers are designed to maximize the battery life.

- Do not disassemble or short-circuit the battery pack.
- Keep the metal contacts of the battery pack clean.
- Replace the battery when it no longer provides acceptable performance. The battery pack maybe recharged hundreds of times until it needs replacing.
- Recharge the battery if it has not been used for a long time to maximize usability.
- Do not expose the battery charger to direct sunlight or use it in high humidity, such as in the bathroom.
- Do not leave the battery in hot or cold places, this may deteriorate the battery performance.
- There is risk of explosion if the battery is replaced by an incorrect type.
- Dispose of used batteries according to the manufacturer's instructions. Please recycle when possible. Do not dispose as household waste.
- If you need to replace the battery, take it to the nearest authorized LG Electronics service point or dealer for assistance.
- Always unplug the charger from the wall socket after the phone is fully charged to save unnecessary power consumption of the charger.
- Actual battery life will depend on network configuration, product settings, usage patterns, battery and environmental conditions.

Trouble Shooting

This chapter lists some problems that you might encounter while using your phone. Some problems require that you call your service provider, but most of problems you encounter are easy to correct yourself.

Message	Possible causes	Possible Corrective measures
SIM error	There is no SIM card in the phone or you may have inserted it incorrectly.	Make sure that the SIM card is correctly inserted.
No connection to the network	Signal weak Outside GSM network	Move higher to a window or open space. Check service provider coverage map.
Codes do not match	When you want to change a security code you have to confirm the new code by entering it again. The two codes that you have entered do not match.	Contact your Service Provider.
Function cannot be set	Not supported by Service Provider or registration required	Contact your Service Provider.
Calls not available	Dialling error New SIM card inserted Charge limit reached	New network not authorised. Check for new restrictions. Contact Service Provider or reset limit with PIN 2.
Phone cannot be switched on	On/Off key pressed too briefly Battery empty Battery contacts dirty	Press On/Off key for at least two seconds. Charge battery. Check charging indicator in the display. Clean contacts.

Message	Possible causes	Possible Corrective measures
Charging error	Battery totally empty	Charge battery.
	Temperature out of range	Make sure the ambient temperature is right, wait for a while, and then charge again.
	Contact problem	Check power supply and connection to the phone. Check the battery contacts, clean them if necessary.
	No mains voltage	Plug in to a different socket or check voltage.
	Charger defective	If the charger does not warm up, replace it.
	Wrong charger	Only use original LG accessories.
	Battery defective	Replace battery.
Phone loses network	Signal too weak	Reconnection to another service provider is automatic.
Number not permitted	The Fixed dial number function is on.	Check settings.

LG Mobile



WARRANTY CARD


This LG handset and charger comes with a 12-month warranty from date of purchase or 15 months from manufacturing date of corresponding IMEI No. Of the unit whichever is earlier, against defect in material or workmanship. In case of a defect, LG Electronics India Pvt. Ltd. undertakes to get the set repaired free of charge through its authorised service centre (ASC) or service dealer subject to following conditions:

Terms and Conditions

1. This warranty is applicable to the first purchase and in no case it can be transferred or extended.
2. Repair of this product will be carried out on a carry in basis to the nearest ASC.
3. While the company will make every effort to carry out repairs at the earliest, it however is made explicitly clear that the company is under no obligation to do so in a specified period of time.
4. The company or its authorised ASC/ service dealer reserves the right to retain any parts of the component/s replaced at its discretion. In the event of a defect being noticed in the equipment during the warranty period.
5. This warranty entitles the purchaser to free of cost repairs of the unit within warranty period and does not entitle for replacement or refund of entire unit. Claims, if any, to this warranty shall in no case exceed the purchase price of the unit.
6. In case of any software upgradation of the phone, no warranty is provided on phone memory or phone book.
7. The warranty is void in case the serial no./ IMEI no. is tampered / disfigured or details in the warranty card are not properly filled up at the time of purchase.
8. This warranty is not valid for damages resulting due to negligence, mishandling, improper use, tampering, breakage, soaking, fire, unauthorised repair and failure due to network upgrades.
9. Batteries are covered under warranty for a period of 6 months from date of purchase or 9 months from date of corresponding IMEI no. of the unit whichever is earlier
10. Warranty does not cover accessories external to the equipment supplied by the dealer.
11. The Delhi / New Delhi courts shall have the jurisdiction to try any dispute and /or suits related to or arising out of this agreement.

Customer Information Center/ Call Center Number

For any query related to the after sales service and customer support please contact us at the numbers listed below.

 LG	SERVICE
	1800-180-9999*
<small>*MTNL / BSNL **Prefix STD Code</small>	39-01-0909**

BRANCH ADDRESSES

S. No.	Branch	Branch Office Address	STD Code	Phone No.
1	Ahmedabad	LGEIL 233-234 Platinum Plaza, Judges Bunglow Road, Bodakder Road, Ahmedabad - 51	079	40040013 / 14
2	Asansol	LGEIL Block-E 1st Floor, P C Chattarjee Market, Rambanodu Tata, GT Road (E) Asansol - 713303	0341	3292009 / 3292010
3	Aurangabad	LGEIL 302 CIDCO No 3, Opp Hotel Ramgiri, Jaina Road, Aurangabad - 431003	0240	2474055 / 32095436 / 32095437 / 32095438
4	Bangalore	LGEIL No. 914, 2nd Floor, Sri Venkateshwara Complex, Opp. IBP Petrol Bunk, 80th Road, 6th Block, Koramangala - Bangalore - 560095	080	41145145 / 41144750 / 41144751 / 30910754 / 30910753
5	Bhopal	13A Vignes Warehousing Corporation Sector-G Govindpura Industrial Area J K Road Bhopal	0755	4062000 / 3092938 / 3995804
6	Bhubaneswar	LGEIL Plot No.02 1st Flr., Bajuri Nagar, Bhubaneswar - 751009	0674	2531430 / 2534280 / 3966525 / 3966526
7	Chandigarh	LGEIL SCO No. 142-143, 3rd Floor Sector-34A Chandigarh - 160002	0172	5087389 / 90 / 5089107 / 3256001 / 3256003
8	Chennai	LGEIL AA11, 2nd Avenue, Fatima Tower, Anna Nagar West, Chennai - 600040	044	65510501 - 04
9	Cochin	LGEIL 40/1270, Vasudeva Buildings, T.D. Road, Emakulam Cochin - 682011	0484	2369743 / 2370744 / 2370484 / 4027444 / 4027555
10	Coimbatore	LGEIL 250a, Sangarun Main Road, Kannappa Nagar, Coimbatore - 641027	0422	2332197 / 2332195 / 2332506 / 3094613 / 3094573
11	Dehradun	LGEIL M - 22, Mobbewala, Tata Commercial Compound, Dehradun Saharanpur Road, Dehradun	0135	2644213 / 283
12	Delhi	LGEIL A-27, Mohan Co-operative, Industrial Estate, New Delhi	011	26991411 / 12 / 13
13	Ghaziabad	LGEIL J-10, RDC Rajnagar Ghaziabad - 201001	0120	3811354152 / 3 / 64 / 65
14	Goa	LGEIL Plot No-D-38D-4 Rego Bldg, Alto Santacruz, Bambolim, Goa - 403	0832	3294955 / 3294956 / 3294759
15	Gurgaon	LGEIL II rd Fir A Block, Centre Point Bldg, Sushant Lok, PH, Gurgaon - 122001	0124	4047461 / 62 / 63 / 4272687 / 4047460
16	Guwahati	LGEIL Shantiner Bhawan, C K Aggarwal Path, Chenkeruthi, Guwahati - 781003	0361	2663895 / 2669958 / 2665983 / 2669984
17	Huaji	LGEIL 603/16, Ravi Nagar Road, Behind Remuka Petrol Pump, Gokul Road, Huaji - 580030	0836	4262025 / 52 / 2332325 / 52
18	Hyderabad	LGEIL 1st Floor, Survey No 54, Pula Reddy Building, Vikarampur Main Road Rharikana, Secunderabad - 500004	040	27811732 / 33 / 34
19	Indore	LGEIL 3rd flr., 394 Bansi Trade Centre 53/15 M.G. Road Indore - 452003	0731	4065521 / 24 / 40622157
20	Jalpur	LGEIL B-71, Sahakar Marg, Lai Kothi Scheme, Jalpur - 302015	0141	5111116 / 5103028 / 5105302
21	Jalandhar	LGEIL Village Khauria Near Hawal Restaurant Jalandhar Phagwara Highway, G T Road, Jalandhar	01824	5023687 / 5090265 / 5026988
22	Jammu	LGEIL Plot No. 52 Yand No. 6 Transport Nagar, Jammu - 180006	0191	2471420 / 2477419 / 2474396 / 2474384
23	Jodhpur	LGEIL 221-A/21/2 B/2, RIICO Heavy Industrial area, Jodhpur - 342003	0291	2472394 / 399
24	Kolkata	LGEIL 1, Ho-Chin-Saran, 6th Floor, Metro Towers, Kolkata - 700071	033	22883250 / 51 / 52
25	Kundli	LGEIL Sunshme Enterprises, Sunder Cold Storage, Gt Karnal Road, Kundli - Sonapat	0130	2219201 / 02 / 03
26	Lucknow	LGEIL B-537, Hari Kunj, Keshav Nagar, Sitapur Road Lucknow - 226020	0522	2757538 / 39 / 2759121
27	Ludhiana	LGEIL Village Jhandie Near Batowal Railway Station Opp ferozpur Road Ludhiana	0169	2604413 / 19
28	Mumbai	LGEIL Trade Star, 4th Floor A Wing, J.B Nagar Andheri Kuria Road, Andheri (E) Mumbai - 400059	022	2832582 / 2887
29	Nagpur	LGEIL S. Road No.13, Behind Meric Workshop, MIDC Hinga, Nagpur - 440016	0714	235120 / 235122
30	Patna	LGEIL 2nd Floor, Ankit Chandra Deep Complex, Bander Bageecha, Near Samrat Hotel, Patna - 800011	0612	3299156
31	Pune	LGEIL 105/106, Premium Plot, GM Road, Opp Modern High School IIIrd Floor Shivaji Marg, Pune - 411005	020	66030100 / 732
32	Raipur	LGEIL 4021, Nathani Compound, Shyam Nagar, Katara Talab, Raipur (C.G.)	0771	4053171 / 4037470 / 4048745
33	Ranchi	LGEIL 402, Commerce Tower, Opp. Gel Church Complex, Main Road, Ranchi	0661	3294026 / 2331815 / 3090426
34	Surat	LGEIL 1001-1004, Ascon Plaza, IInd Fir, Anand Mahal Road, Behind Bhika Bhavan School, Adajan, Surat - 395009	0261	2730962 / 83 / 84
35	Thane	LGEIL Gal Shop No - 206, 207, 2nd Floor, Sai Plaza, Above Vijay Sales Opp. Cine Wonder Mall, Ghodbunder Road, Thane(West) - 400607	022	2542363 / 2637
36	Varanasi	LGEIL Pama Complex, DLW, Lahartara Road, Shivdaspur, Manduahri, Varanasi UP - 221002	0542	2373432 / 36 / 37
37	Vijaywada	LGEIL Door No 32-21-7, Ratnamamba Street, Prajesaki Nagar, Vijaywada - 520010, Andhra Pradesh	0866	2497283 / 87
38	Warangal	LGEIL HOUSE No. 1-8-598/1 FIRST FLOOR, BESIDE HDFC BANK NAKKALGUTTA, HANAMAKONDA-506001 (WARANGAL)	0870	2551453

Dealer name with Stamp Dealer address
 IMEI No. Date of sale Serial no.

LG Electronics India Pvt. Ltd., Plot No. 51, Udyog Vihar Surajpur Kasna Road, Greater Noida, U.P.

SERVICE CENTER LIST

 LG	SERVICE
	1800-180-9999*
<small>**MTNL / BSNL ***Prefix STD Code</small>	39-01-0909**

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Adhoni	RS CDMA	21/490, Arts & Science College Road, Near Devi Nursing home, Adhoni-518301	9346490905	Mr.Mohan
Andhra Pradesh	Adilabad	Kiran Mobile World	7-14-78/A, Near Nethaji Chouk, Cinema Road, Adilabad-504001	9346358181	Mr.Kiran Kumar
Andhra Pradesh	Amalapuram	Sandesh Cellular	D.No-4-2-14, Opp: S.K.B.R Collage AMLAPURAM-533201	9346398838	Mr.Ravi Kumar
Andhra Pradesh	Ananthapur	RK LG CDMA	Shop No 3, Cellular, Pallavi Towers, Opp to Canara Bank, Subash Road, Ananthpur-515001	241450,	Mr. Sridhar
Andhra Pradesh	Armoor	Sai Sri Electronics	Shop.no.2, mahalakshmi road, Armoor - 503224	9392620338	Mr.Srinivas
Andhra Pradesh	Bapatla	Vijaya Communications	Opp: Old Indian Gas Company, Sikaram Vari Street, G.B.C.Road, Bapatla	9346206305	Mr.B.Siva
Andhra Pradesh	Bhimavaram	Gopi Krishna Communications	JP Road Near Mohan Service Center Bhimavaram Pin-534202	9394071036	Mr.Siva
Andhra Pradesh	Chirala	Lakshmi Infocomm	Shop No.17&18 Banam Plaza, Munthavari Center, Chirala-523155	326000	Ms.Shakeena
Andhra Pradesh	Chittoor	CMT Computer Services	18-162, High Road Opp.Bishnu Bhavan Hotel, Chittoor	222733	Mr.Gopi
Andhra Pradesh	Cuddapah	Srinivasa Communication	Shop No.4, Siddapriya Complex, Opp. HP Petrol Pumping Point, Cuddapah	9346350224	Mr.Sahadeva Reddy
Andhra Pradesh	Dharmavaram	Siddharta Communications	Opp to Sathya Lodge, NPR Circle, Dharmavaram	9347064101	Mr.Shiva Ramkrishna
Andhra Pradesh	Eluru	S.S.Computers	DoorNo238-4-8/3, Ayyapa Complex, Beside Kanani Madhavi Hospital, Subbama Devi School Road, R.R.Pet, Eluru-534002.	329294	Mr.Divaker
Andhra Pradesh	Gudnada	Kanakadurga-communications	Opp: Alankar Family Restaurant, Eluru Road, Nehru Chowk Center Gudnada	9394220688	Mr.Kumar
Andhra Pradesh	Gudur	Srinivasa Electronics	1st floor, Airtel Building, Kummari Veedhi, Gudur - 524101, Nellore (Dt).	645644	Mr.Suman
Andhra Pradesh	Guntur	Vasavi Associates	Door No.6-7-36, V.S.N.Complex, 8th Line, Arundelpet, Guntur-522 002.	3257789	Mr.Satyam

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Hazuragar/ Kodad	Sri Pavan Electronics	Malika Towers, Besides Reliance Web World, Kodad - 508206	9346901519	Mr.Narasimha Rao
Andhra Pradesh	Hindupuram	S.VA Cellular	Shop.no:3, Vinayaka Lodge, Railway Road, Hindupur - 515201	320777	Mr.D.B.Ravindra Nuth
Andhra Pradesh	Huzurabad	Bhargavi Communications	Shp No E-2, DCMs Complex, Near Bus Stand, Main Road, Huzurabad-505122	9391755619	Mr.T.Vishnu Vardhan
Andhra Pradesh	Hyderabad	Bhagya Communications	Shop no:109, Upper Ground Floor, #12-2-825, S.G.M. Mall, Mehdiapatnam, Hyderabad-500028.	32972308 / 32001406	Mr.Suresh
Andhra Pradesh	Hyderabad	JVR Communication	Shop No.8, Vanija Vihar, Nalanda Building, Dilzakh Nagar Main Road, Hyderabad- 500060	66109604	Mr.A.Venket nariyan reddy
Andhra pradesh	Hyderabad	Primus Infomatic & Software Pvt Ltd	# 18/A, Methodist Complex, 5-9-190, Lane Opp to Chermas, Abids, Hyderabad	66755111	Mr.Govind Kabra
Andhra Pradesh	Hyderabad	LG Direct Service Centre	MCH No 6-3-852/3/A Ground floor, Vishwa Central, Nizamia Observatory Road, Ameerpet Hyderabad	40033769 / 70	Mr.Tarun Dandavate
Andhra Pradesh	Hyderabad	ReLiable Communication	G-8, 3-6-561. AALTO'S A & M Trade Centre, HIMAYATNAGAR, HYDERABAD - 500029	9346320705	Mr.Sandeep Soni
Andhra Pradesh	Hyderabad	S V Electronics	Shop No. 41, Nilagiri Block, Aditya Enclave, Ameerpet Main Road, Hydrabad-500038	9346449323	Mr.Pradeep
Andhra Pradesh	Hyderabad	Shweta Communications	Shop No.9, Ground Floor, Pavani Anusya Complex, Opp. Huda Complex, Tarnaka, Hyderabad	32968162	Mr. Sandeep Heda
Andhra Pradesh	Hyderabad	Shweta Computers	# 1-7-69/1 & 2, OPP Aditya Delux Hotel, Near Paradise circl, Sarojini Devi Road, Secunderabad - 500003	27721076 / 32977548	Mr.Sandeep
Andhra Pradesh	Hyderabad	Sreenivasa Technologies	SAI VIKRAM TOWERS, SHOP NO -4, RELIANCE WEB WORLD BUILDING, Balaji Nagar Kakatpally	32961479	Mr.Praveen
Andhra Pradesh	Hyderabad	Sri Surya Communications	#Madhu Enclave, Street no 06, Shyamal Buildings, Begumpet, Hyderabad	32961127	Mr.Nageswara Rao
Andhra Pradesh	Hyderabad	Sri Varun Electronics	D.No 5-8-344/1, " DHAN BHAGYA ESTATE "; Chitag Ali Lane, Abids, Next to Raghava Ratna Towers, Hyderabad - 500 001	32900909 / 55781999	Mr.Alok Mohan
Andhra Pradesh	Hyderabad	Sunbeam Technologies	120, Cheney Trade Centre, Parklane, Near Paradise, Secunderabad -500003	40200193 / 66383193	Mr.Suresh
Andhra Pradesh	Jagjyal	SS Communications	Opp Kanti Bhavan Lane, Duwarka Nagar, Jagtial	9391533535	Mr.Hari
Andhra Pradesh	Jangaon	Sky Win Communications	# 2-7-134, Beside Bharat Gas, Bus stand Road, Jangaon-506167.	9390102839	Mr. Varun

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Jangareddygudem	Sri Devi Communication	Near Gangallama Temple, Opp. Andhra Bank, Jangareddygudem	227297	Mr. Prasanna Lakshmi
Andhra Pradesh	Kakinada	Delta Infotech	Door No. 6-1-29, Opp. Swami Vivekananda Park, Jawahar Street, Surya Rao Pet, Kakinada - 533001	5593533	Mr. Shivanand
Andhra Pradesh	Kamareddy	Pager King Communication	Sircilla Road, Kamareddy, Dist. Nizamabad - 503 111.	9397366633	Mr. Moizuddin
Andhra Pradesh	Karimnagar	SS Marketers	2-8-40, Mukampura, Near Circus Grounds, Karimnagar	9391552223	Mr.Cheekradhar
Andhra Pradesh	Kavali	Sree Balaji Infotech	Prasad Complex Trunk Road, Near Ongole Bus Stand, Kavali	6329567	Mr. C. Sri Sai Charan
Andhra Pradesh	Khammam	Sriven Technologies	D.No:11-2-37, Shop No.3, D.V.Krishna Complex, Beside Baburao Petrol Bunk, Balaji Nagar, Wyra Road, Khammam-507002	9396698866	Mr.Bhaskar Reddy
Andhra Pradesh	Kothagudem	S.Swathi CDMA Service Center	9-3-3, Above Sindhura Electronics, Near RTC BUS Stand, Kothagudem-507101	9391552228	Mr.Niaz Ahmed
Andhra Pradesh	Kuppam	Sagar Computer Services	14-204, PALACE ROAD, KLUPPAM-517425	9391862436	Mr.Sagar
Andhra Pradesh	Kurnool	R K LG CDMA	Shop no.26, 27, First floor, UCON Plaza, Kurnool-518001	220201	Mr.C Rama Krishna
Andhra Pradesh	Machilipatnam	Om Sree Sai Communications	25/276, Kota Vari Tulla Center, Jagannadhapuram, Machilipatnam	9347741777	Mr.Rafee
Andhra Pradesh	Madanapalle	Sri Balaji Computers	Shop No.2, 1st floor, Sri sai Complex, CTM Road, Madanapally - 517325	9390025204	Mr.Manohar
Andhra Pradesh	Mahabubnagar	Sri Chakra Mobile Care Centre	Shop.no.15, Shareef Complex, Near Bus stand, Mahbubnagar - 509002	9396348999	Mr.Anil
Andhra Pradesh	Mancherial	SS CDMA Service Centre	Shop no.7, Mounika Complex, BPL Chourasta, Mancherial-504208	9394552223	Mr.Rajesh
Andhra Pradesh	Medak	Balaji Communications	Door.no:1-3-77/5, Opp to State bank of Hyderabad, Main Branch, Main road, Medak	9346439961	Mr.Sudhakar
Andhra Pradesh	Medchal	Khan Electronics	Sanjeeva Reddy Complex, Besides RTC Bus Depot, Medchal - 501 401	9347220888	Mr. Jaleel Khan
Andhra Pradesh	Miryalguda	Needs Electronics	Jagamath Complex, Opp Bus Stand, Miryalguda - 508207	9394645696	Mr Ravi Kumar
Andhra Pradesh	Nalgonda	Quintessence Electronics	Shop No -5, Srinivasa complex, Opp to market office, HYD road, Nalgonda - 508001	9396610220	Mr.Venkateshwar Rao
Andhra Pradesh	Nandyal	Dharush Systems	Dno:25/165 B, Sanjeev Nagar, Near Ramalayam, Nandyal	9392236699	Mr.Ramesh
Andhra Pradesh	Narasaraopet	Rajenda Infotech	D.No -90-11-10/7, Saradhamba Complex, Arundelpet,Near S.B.I ATM Narasaraopet	224136	Mr.Sasi Bhushan

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Nellore	Balaji Watch & Electronics	16/249, Trunk Road, Nellore-524001	2339999	Mr.Rajesh
Andhra Pradesh	Nellore	Trimalaa Electronics	Shop No. 26, 1St Floor, Co-Operative Bank Complex, Near Gandhi Statue, G.N.T. Road, Nellore	3290339	MrPratap
Andhra Pradesh	Nimal	Om Sai Electronics	Shop.no:1, Kala Nagar road, Beside 2 town Police station, Nimal - 504106	939000024	MrMahendar
Andhra Pradesh	Nizamabad	Satya Electronics	# 7-10-65, Shop no 1, 1 st floor, H.M.HV Complex, Beside Bus Stand, Nizamabad-503001	326000	McVenu gopal
Andhra Pradesh	Ongole	Tejsari Communications	37-1-107, Opp: Kerala Bakery, Near Mastan Darga Center, Trunk Road, Ongole	9393026115	Mr.Sasi Bhusan
Andhra Pradesh	Peddapalli (Ramagundam)	Abhi Marketers	Shop No:19/8/291, MRK Plaza, Lakshmi Nagar, Godhavari Khani - 505209	9399987773	MrNagaraj
Andhra Pradesh	Peddapuram	Devi Infotech	Opp. Veterinary Hospital, Shop No. 1, Santa Market Road, Peddapuram	6593533	Mr.Siva Kumar
Andhra Pradesh	Prodattur	SV Technonologies	4-625-3, Gandhi Road, Opp Karur Vyysya Bank, Produttur	9347251806	MrKavi Kumar
Andhra Pradesh	Rajamundhary	Siri Infotech	Police Welfare Complex, City Hospitals Junction, Darwai Pet Main Road, Rajahmundry	9397925799	Mr Raghvendra
Andhra Pradesh	Raychoti	Raju Computer World	Room No 3 Up Stairs Syeedia complex, bustand road, Rayachoty	9346209881	Mr.Raju
Andhra Pradesh	Repalle	Sri Satya Solutions	D.no- 10.14.125 (UP Staires) Municipal Office Road, Railpet, Repalle-522265	9396222993	Mr.Sridhar
Andhra Pradesh	Sangareddy	Sri Technologies	Srimaan Complex, Beside Inspection Bungalow, Main Road, Sangareddy. 502001, Medak Dist	9391216573	McAjaz Ahmed
Andhra Pradesh	Sattenapalli	S.S.Communications	Opp.Telephone Exchange, Sattenapalli	9397610550	McSai
Andhra Pradesh	Shad Nagar	Sri Gana Electronics	Shop No - 2, Khajia Veeresam Complex, College Road, Shadnagar - 509216	9392633111	McVigneswar
Andhra Pradesh	Siddipet	Gopala Krishana Communications	SHOP NO:13, FIRST FLOOR, MACCA COMPLEX., OPP-CITIZEN'S CLUB, M.G ROAD, SIDDIPET - 502103. (A.P)	9392511064	Mc. Nagaraj
Andhra Pradesh	Snikakulam	Venkateshwara Infotech	Raja Commercial Complex, OppElectrical Office, Ground Floor, Shop No.10 &11, GT Road, Snikakulam	324577	McKran Kumar
Andhra Pradesh	Snikalahasti	KSV Computer Services	NNR Buildings, d.no:16-582, Panagal road, Snikalahasti 517644	9390044399	Mc.Sahadeva Reddy
Andhra Pradesh	Sullurpet	Sai Baba Electronics	S.V.T Street, Opp. Reliance Office, Sullurpet	9346920527	Mc. S. Venkata Krishna

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Andhra Pradesh	Tadepalligudem	Sri HariPriya Infotech	Thota Gopi Complex, Police Quarters Lane, Beside Zp High School, Tadepalligudem	9346445720, 08818-210565	Mr.Suresh
Andhra Pradesh	Tanuku	Shivanand Enterprises	Door No. 34-3-3, Main Road, Gamini Compound, Tanuku	9346408640	Mr.Srinivas
Andhra Pradesh	Tenali	Vaishnavi Infotech	D.No:22/11/114, Opp. Kanilacharla Kalyanamandapam, Bose Road, Tenali.	9347651330	Mr.Murali
Andhra Pradesh	Tirupati	CMT Communication	13-7-796/14/3, TUDA OFFICE Road, Tirupathi-517501	3296979	MrK Vasu Naidu
Andhra Pradesh	Vijayawada	K L Computer House	39-9-46, Srs Temple Street, Labbipet, Vijayawada	6520461	Mr.Kartik
Andhra Pradesh	Vijayawada	V V Communications	28-23-31/32, Opp.Swarugha Foods, Vijay Talkies Center, Vijayawada	320866-320988	Mr.Rahul
Andhra Pradesh	Vishakapatnam	Jai Bharani Communications	Door No:52-11-7/7 Sapthagiri Plaza, Old Resuvanipallem, Vishakapatnam-13	6634666	Mr.PVenkatapathi Raju
Andhra Pradesh	Vishakapatnam	Sri Sai Ganesh Infotech	G5, Ground Floor, Backside of Sangam-Sarat Theatre, 1st Lane, Dwarka Nagar, Vishakapatnam - 530 016.	3258777	Mr.Chandra Shekar
Andhra Pradesh	Vizayanagaram	S R Technologies	D.No:1-9-1/44, Opp: Z.P Office, Railway Station Road, Vizayanagaram.	9346418791	Mr.Balakrishna
Andhra Pradesh	Vuyyuru	Sugreeva Communications	Behind Datta Automobiles, Katturu Road, Vuyyuru	9390333555	Mr.Phani
Andhra Pradesh	Wanaparthy	Sri Ganesh Electronics	Shop No : 16-65, Opp R R Complex, Wanaparthy - 509103, Dist Mahabubnagar	9396800275	Mr Deva Raj
Andhra Pradesh	Warangal	S S Marketers	6-1-73/1, Sai Bhawan, Sridevi Theatre Road, Hanamkonda, Warangal-506001	2522223	Mr.L.Srinivas Rao
Andhra Pradesh	Zaheerabad	Renuka Technologies	Shop no:123/1, First Floor, Alpur, Zaheerabad.Pin-502220	316143	Mr.Abhiram Joshi
ASSAM	Gwahati	PRAGATI SERVICES	2nd Floor, Kieranhangsha Commercial Complex, Dr J.C. Das Road, Haisabha, Panbazar, Guwahati, Assam	2733501	Mr. Pradeep Khaitan
Assam	Silchar	IT ONLINE	N.S.Avenue, Rangirkhani, Silchar, Cachar, Assam	221260	Mr.Sharma
Bihar	Arrah	Surya Services	Sushila Bhawan, Suryapuri colony, By pass road, Arrah	9334538845	Mr.Sanjay Kumar
Bihar	Begusarai	Krishna Communication	Eashwari Complex, Dak Bangla Chowk, Bishnupur, Begusarai, Bihar-851101.	9334341700	Mr.Dinkar Kumar
Bihar	Bhagalpur	Printronix Infosolutions	Ganpati Complex, 1st floor, Patel babu road	9934605864	MrHimansu Shekhar
Bihar	Bhagalpur	S.K.Communication	NEAR RAILWAY STATION, Super Market Complex, Patel Babu Road, BHAGALPUR-812002	9334255275	MrKundan Kumar
Bihar	Biharsharif	Shanya Infotech	Magdha Commercial Complex, 1st.Floor, Shop.No.5, MG Road, Bharoapur, Bihar Sharif, Nalanda Dist, Bihar.	9334048037	MrAmit Kanchan

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Bihar	Chapra	Ambey Associates	D-23, Hathwa Market, Chapra, Dist. Saran-841413 Bihar.	9334295605	MeJayant Kumar
Bihar	Darbanga	Prime Computer	Hanuman Nagar, Doner Road, Darbanga.	9334934065	MrAbhinav Kumar Verma
Bihar	Gaya	Louts Enterprises	Opp.Aviva Life Insurance, Kanya High School Road, Ramna, Gaya.	9334492033	MrPankaj Ranjan
Bihar	Muzafarpur	Krish Enterprises	Nr-Kanhoulinaka.no.2, Kachisarai Road, Muzafarpur.	9304410745	MrSanjeev Kumar
Bihar	Patna	Competent Mobile Service	Shop 1, Hotel Lalitha Complex, East Bowring Canal Road, Patna	9334027706	Mr.Mohit Ahluwalia
Bihar	Patna	Infotek Trading Company	1st floor, City Palace, New Dak Bunglow Road, Patna-800001	9334116145	Mr.Sanjay Choubey
Bihar	Patna	Micro Zone-Patna	A.H Complex, # G26, Near Kotak Mahindra Bank, Exhibition Road, Patna	3294696	Mr.Mithlesh Kumar
Bihar	Patna	Synerzy Trading Company	G-01 , Chanakya Plaza Complex, Main Road, Kankarabagh, Patna.8000020	2356900	Mr.Vikas Chandra
Bihar	Purnea	Micro Zone-Purnea	Narottam Hata, Opp.Dr.PC.JHA, NH-31, Purnea-854326	9304166633	Mr.Amit Kumar
Bihar	Sasaram	Nandika Enterprises	Hari Complex, Panjab National Bank, Sasaram, Rohtas-821115 (Bihar)	4222008	MrAbhinav Gupta
Chattisgarh	Ambikapur	Neha Communication	Ramanuj Ganj road, Opp. Kosa Form, Ambikapur, Sarguja, Pin-497001	240427	Mr.Rishi Dubey
Chattisgarh	Bhilai	A B Automation	Shop no. 242, 1st floor Chouhan Plaza, GE Road, Supela Bhilai, Chhatisgarh- 490023	2295989	Mr. Satish Singh
Chattisgarh	Bhilai	Sai Ram Electronics	SHOP-NO-52/90, HIMALAY COMPLEX, AKASH GANCA, SUPELA, BHILAI	4038917	Mr. Balan
Chattisgarh	Bilaspur	Mahamaya Infotech	Shop No 203, Jain Plaza, Ground floor, Link Road, Bilaspur	2413865	Mr. Pawan Kumar
Chattisgarh	Korba	Star Mobile Services	SS PLAZA, FD-13 POWERHOUSE ROAD, KORBA-495678	9300401485	Mr. Anish Menon
Chattisgarh	Raigarh	Blue Chip Computer	Purana Sadar Bazaar, Raigarh, Chhatisgarh.	9977217776	Mr. Ashok Agrawal
Chattisgarh	Raipur	Cybernet Systems	B-2, 1st Floor, Garchaz Complex, Jail Road, Raipur - 492001	406771	Mr Anand Singh
Chattisgarh	Rajnandgaon	Bhavay Services	SHOP NO 5, BELOW SBI, STATE BANK OF INDIA, KAMPTEE LINE, RAJNANDGAON.	324200	Mr. Manish Golcha
Delhi	New Delhi	Aegiss Infotech	LUG-25, Ansal Chamber -2, 6, Bhikaji Cama Place, New Delhi-110066	65477740	Mr. Atul Gupta
Delhi	New Delhi	Anham Infotech Services	4737/A 23, Ansari Road, Daryaganj, Delhi-110002	41501124	Mr. Anil Surana

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Delhi	New Delhi	Comhard Systems	D-30, 31, First floor Near Hotel Shipra, Main Vikas Marg, Lakshmi Nagar	32955887	Mr Ravi Kant Gupta
Delhi	New Delhi	Comhard Systems	B-120, Hardev Puri, 100 Feet Main Road, Near MTNL Office, Nathu Colony Chowk, Shahdra, New Delhi - 110 093.	32575507	Mr. Ravi Kant Gupta
Delhi	New Delhi	Connexions And Communications	183, Avtar Enclave, Opposite Nirula's, Pashchim vikar, New Delhi-110063	32451431	Mr. Bhupinder Agrawal
Delhi	New Delhi	Cube Engineers And Consultants Pvt Ltd	A-65, Naraina Industrial Area, Phase-1, New Delhi	65450272 / 41411620	Mr. Arvinder
Delhi	New Delhi	Elcom Trading Company Pvt. Ltd.	G-1, Goverdhan Building, 53-54 , Nehru Place, New Delhi -110019.	64582709	Mr. Somesh Narang
Delhi	New Delhi	Innovative Telecom	304, CDITL Northex Towers, A-09, 3rd floor, Northex Tower, Netaji Subhash Place, Pitampura, New Delhi-110 088.	32925753 / 65154340	Mr Manoj Garg
Delhi	New Delhi	Nice Telecom	15/19 & 15/21, DDA Complex, Nangal raya, Near D Block, Janakpuri, Delhi - 110046	9350863630	Mr. Ripul Garg
Delhi	New Delhi	Sukriti Communication	101 Patparganj- Mayur Vihar phase - 1 - New Delhi -110091	32498011	Mr.Dipendra kumar chaturvedi
Delhi	New Delhi	Teletalk	C-21, First Floor; Near Bus Stand, Bhajan pura, Delhi-11053	9818400551	Mr.B.C.Vashist
Delhi	New Delhi	Touch Tone Telecom	B-52, First Floor, Kalkaji, New Delhi	32939031	Mr. Ashish Dey
Delhi	New Delhi	Ucom Technologies Pvt Ltd.	45, 1st Fl, Corner Mkt, Malviya Nagar, New Delhi - 110017	41745469	Mr. Neeraj
Goa	Margoa	SKY LARK	SHOP NO 05,CARVALHO APPTS, NEAR RAILWAY CROSSING, COMBA.	2736100	Mr:CHRIS
Goa	Panjim	Mandovi Mobiles	Mohidin Towers Dc. No. AS3 Opp to Hotel Manashanti Dadavaiya rd Panjim-403001	6452949	Mr. Prakash
Gujarat	Ahmedabad	A Com Technologies	Shop No-37, 1st Floor, Shubh Complex, Near Rajasthan Hospital, Camp Road, Shahibaug, Ahmedabad-380004	32940560	Mr. VijayS.Gohel
Gujarat	Ahmedabad	Mishree Communication	FF-17, RUDRA SQUARE, OPP. JUDGES BUNGALOW, POLICE STATION, BODAKDEV, AHMEDABAD-54.	32508491	Mr. Mitesh Patel
Gujarat	Ahmedabad	Silcon Valley	9, Gokul Palace, Maninagar Cross Road, Maninagar Ahmedabad-380008	30225430	Mr. Rajesh Patel
Gujarat	Ahmedabad	Vision Communication	33, 1st Floor, Sukh Sagar Complex, Opp. Dinesh Chamber, Bapunagar, Ahmedabad -380024	65122322	Mr Ajay Kachhadia
Gujarat	Amreli	Precision Telecom	32, 33 Opera House, Station Road, Amreli	230940	Mr. Kamlesh Tank

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Gujarat	Ankaleshwar	Akshar Telecom	C/1 Keval Shopping Center, old National Highway No.8, GIDC, Ankaleshwar-393001	250860	Mrs. Anita Amin
Gujarat	Bharuch	Akshar Telecom	Pramukh Swami Complex, Panch Batti, Bharuch	2241027	Mr. Hanif Patel
Gujarat	Bhavnagar	Shivshruti Services	981/B, Makvana Building, Down Chowk, Bhavnagar.364001	3296222	Mr. P D Jala/ Sandeep patel
Gujarat	Bhuj	Infotech Computer	2nd Floor, NarNarayan Chambers, Opp Indian Airlines Office, Station Road, Bhuj	324295	Mr. Vasant Mevani
Gujarat	Gandhidham	Vansh Electronics	Shop No. 35, Swami Vivekanand Complex, Near Oslo Circle, Gandhidham	232739	Mr. Siddarth Gajjar
Gujarat	Gandhinagar	Creative Communications	Shop No 102, Suman City, Sector 11, Gandhinagar-382011	23226241	Mr. KJ.Barot
Gujarat	Himmatnagar	Jay Telecommunications	B-F 105, 1st floor, Durga Complex, Near Railway Station, Himmatnagar	329532	Mr. Manibhai Patel / Neeraj patel
Gujarat	Jamnagar	Sudarshan Infosys	"Shradha", Park Colony, Motor House, Near axis Bank, P.N.Marg, Jamnagar 361008	2552696	Mr. Amit Unadkat
Gujarat	Junagarh	K.J.Traders	29/30, Danapith, Junagadh	2627320	Mr. Paresb Rughani
Gujarat	Kalol	Maitree Communication	B/93, Yogi Complex, opp. Mahendra Mill Road, Kalol	325288	Mr. Jignesh Shah
Gujarat	Mehsana	Prime Computer Consumables	15-B, Vimal Super Market, B K Road, S.T.Workshop Road, Mehsana-384002	2325123	Mr. Sukueto Patel
Gujarat	Morvi	Pulse Sales And Services	SHOP NO 6 MADHAV MARKET FIRST FLOOR NEAR NEW S.T.STAND SANADA ROAD Morvi-383641	9428565667	Mr. Natubhai Patel
Gujarat	Navsari	Deep Enterprise	10, Upper Level, Diamond Palace, Sayaji Road Sattapji, Navsari-396445	324095	Mr. Vinod Kusundra
Gujarat	Palanpur	Shree Manibhadra Mobile	21-First Floor, aroma arcade, opp jilla panchayat, near kozi tower, Palanpur-385001	300001	Mr. Panchal Sunil D
Gujarat	Patan	Able Infotech	9, Palika Bazar Complex, Rajmahel Road, Near Santokba Hall, Patan	9924256068	Mr. Rakesh Bhai
Gujarat	Porbandar	Varun Infotech	1ST Floor, Garden Cafe Building, Opp>New Fountain, Nicold R.T.O Office, Porbandar - 360575	3290285	Mr. Mitesh Changela
Gujarat	Rajkot	Joshi Telecom	Shop No.8, Kuber Complex, Opp Chandubhai Bhehwa, Dr Yagnik Road, Rajkot	6530707	Mr Jiten Dave
Gujarat	Rajkot	Roopang Infocare	Vinod Nivas, 4, Sardarnagar(West), Nr Astron Cinema, Rajkot-360001	2464485	Mr. Kishore Patel

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Gujarat	Surat	Excel Solutions	H-3, Ruchi Flats, Near Iqara Building, Adajan Hazira Road, Surat-395009	6544500	Mr. Virender Jain
Gujarat	Surat	Om Sai Services	39, Golden Point, Near Science Laboratory, Ring Road, Surat	3231233	Mr. Dhamesh Patel
Gujarat	Surendranagar	Nihaal Computer Services	94 Old Housing Bortd Opp Muni, School No.13, Surendranagar.	320375	Mr. Sikandar
Gujarat	Vadodara	Shreeji Telecom	5B-10, Windsor Plaza, R.C.Dutt Road, Alkapuri, Vadodara - 390002	9328093424	Mr. Jignesh Gohel
Gujarat	Valasad	Klassik Stationo Products	10, Jethalal Mulji Market, Halar Road, Valsad -396001	329363	Mr. Darshan Panchal
Gujarat	Vapi	Klassik Stationo Products	116, Bhanudarshan Co-Op Society, Koparli Road, Near Gunjan Cinema, GiDC, Vapi	3292363	Mr. Avishek Suhalaria
Gujrat	Anand	Zainee Mobile	2nd Floor, Limbuwala Complex, Nr. GPO, Opp. Kavita Shopping Centre, Anand	9375960954	Mr. A. J. Raja
Haryana	Ambala	Bee Ess Aar Communication	26 First floor MC Market Behind Negar Cinema Ambala Cantt- 133001	4006229	Mr. Rajiv Gupta
Haryana	Bahadurgarh	Unique Telecom	Shop No.5, Rajaram Market, Main Najafgarh Road, Bahadurgarh, Near Bajaj Showroom	9315873676	Mr. Harinder
Haryana	Bhiwani	Sandeep Electronics	10 th Plot, First Floor, Circular road, Mahem Gate Chowk, Near Kajal's Nursing Home, Near Vodafone Office, Bhiwani, Haryana - 127021	252000	Mr.Sukhveer Saini
Haryana	Faridabad	Comsoft Computers	601/1 Gopi Colony Chowk- Sector-19, Near Prem Prakash Ashram, OLD Faridabad-121002	4104252	Mr. Ashwani Jindal
Haryana	Faridabad	VR Infocomm	Shop No.44, Neelam Fly Over, Neelam Chowk, NIT Faridabad.	4031959	Mr. Vinod Kumar Gupta.
Haryana	Fatehabad	Sky Lark Mobile Point	4, G.T.Road, Near Bus Stand, Marla Colony, Fatehabad	989655244	Mr.Pankaj
Haryana	Gurgaon	Signature Communications	B-100 A, South City -1, Opposite - Huda Gymkhana Club Near Signature Tower - Gurgaon 122001	4102709	Mr. Raj Kumar Garg
Haryana	Gurgaon	Lalji Communication	SCO-31, - First Floor, Above MTNL Sanchar Haat, Main Market, Opp. BSNL Exchange, Sector-12A, OLD Gurgaon -122001.	3200900	Mr.Bharat Bhushan
Haryana	Gurgaon	LG Direct Service Centre	B-36, 37 & 38, Industrial Area, Mehrauli Gurgaon Road, Near Bata Chowk, Gurgaon - 122 001.	3027300	Mr.Deepak
Haryana	Hisar	Pamami Communication	32, Red square Market, Near Dena Bank, Hisar, Haryana-125001	9354332000	Mr.Pradeep Garg
Haryana	Jind	Gaurav Telecom	Shop No.19 Near Rani Talab, Near Bharat Electronics, Jind	325400	Mr. Deepak Garg
Haryana	Kaithal	Maresh Communication	Shop no.22, Bajrang Bali Market, Near Randhir cinema- Kaithal	9315146000	Mr.Maresh

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Haryana	Karnal	Mass Communication	Shop No.68, Main Market, Ground Floor, Moughal Canal, Karnal - 132001	3290717	Mr.Davender Yadav
Haryana	Kurukshetra	Bharti Communication	3, Krishna Market, Opp.Purohit Sweet House, Pipri Road, Kurukshetra, Haryana-	9354165077	Mr.Vijay
Haryana	Narnaul	Prime Communication	Shop no.8, 1st Floor Taneja complex, near Nirula Hotel, RewariRoad Narnaul	9355375351	Mr.Naveen
Haryana	Palwal	Shree Ganesh Communications	Basant Apts, Shop No.5, Kithwari Chowk, Mathura Road, Near Saraswathi School, Palwal	321028	MrHarish Chandra
Haryana	Panipat	INS Telecom	2, Bishan Sarup Colony, Opp Bus Stand, Near Hotel Deep, Panipat	9354917110	Mr.Pankaj kumar
Haryana	Rewari	Mahak Tele Services	53-A, Model Town, Near Shreeji restaurant, Rewari	329222	Mr.Gaurave Yadve
Haryana	Rohtak	Telecentre	13, Apna Bazar, Civil Hospital Road, Near Chhotu Ram Chowk, Rohtak-124001	247242	Mr.Mr.Madaan
Haryana	Sirsa	Sirsa Communication	168, Huda Complex, Old Bus Stand, Sirsa	329591	MrRajinder
Haryana	Sonipat	Teleworld	Shop No 20, 1st Floor, M.C.Market, Subhash Chowk, Sonipat, Haryana-138001	3290889	Mr.Vipin Dua
Haryana	Yamuna Nagar	Krishna Communication	Shop No.-24/75, Thapar Colony, OPPOSITE SWANTANTAR FANCY LADIES SUITS, NEAR FOUNTAIN CHOWK, YAMMUNAGAR HARYANA-135001	200610	Mr. Harsh/Mr. Pradeep
Himachal Pradesh	Dharamshala	Deepsun	Near Sharma Studio, opp Mickey tour and travel, kotwali bazar Dharamshala, 176215	9318679122	Mr.Deepak
Himachal Pradesh	Mandi	VM.Communication	NEAR PNB MOTI BAZAAR, MANDI-175001	9318666005	MrM Mahender Singh Thakur
Himachal Pradesh	Palampur	Electronic Home	Kallu Di Hatti, PO Maranda Thasil, Palampur, Distt-Kangra-176102	238463	Mr.Ravi Kumar
Himachal Pradesh	Poanta Sahib	Singal Marketing	Badri Nagar, Near LIC Office, Poanta Sahib	9318785154	Mr.Rajesh Singal
Himachal Pradesh	Shimla	Hanu Computers	76/ 9, 2nd floor Lower Bazar Shimla	2650560	Mr.Sandeep Patial
Himachal Pradesh	Solan	Vikas Mobile Repair Center	MOHAN COMPLEX, First Floor Upper Bazar-173212	9816271183	Mr.Vikas
Jammu & Kashmir	Jammu	Mobile Care	608-A Gandhi Nagar Behind Laami Narayan Mandir	2436814	Mr.Dixit Gupta
Jammu & Kashmir	Srinagar	The Net Surfer	2nd Floor Mohi-ud-Din Building, Polowiew, srinagar	2459549	Mr.Wasim
Jammu & Kashmir	Udhampur	Service Solutions	Ward No. 15 Shakti Nagar Opp. Old ITI Udhampur	276724	Mr.Rakesh

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Jharkhand	Bokaro	Digital Equipment Centre	GB-11, City Palace, Opp.Indian Bank, Bokaro.	9334072270	Mr.Dewabish Ojha
Jharkhand	Daltonganj	Maa Mobiles	Jail Road, Jail Hata, Dalton Ganj-822101	9304285663	Mr.Navin Kc Kashyap
Jharkhand	Deoghar	Kanan Electronics	Hotel Relax Complex, BLC Road, Deoghar-814112	9304059528	Mr.Mahesh Sharma
Jharkhand	Dhanbad	Nirmala Enterprises	Ground Floor, Muskan Complex, NeSubhash Chowk, Dhanbad.	9334027583	Mr.Niraj Sinha
Jharkhand	Godda	Karan Mobilink	Maa Kalyani, Katra, Main Market, Godda, Jharkhand-814133	9334449900	Mr.Saroj Kumar Jha
Jharkhand	Hazaribagh	Digital Services	Plaza Mit, pugmill road, NcKallu Chowk, Hazaribagh.	9334599570	Mr.Shish Alam
Jharkhand	Jamshedpur	Prasad Electronics	N-Bus stand, Community Center, Kagal Nagar, Jamshedpur.	2226077	Mr.Raju/ Sanitha
Jharkhand	Jamshedpur	Tirupati Teletech	Chakravarti Compound, Near Hotel Castel, Contractors area, Bistupur, Jamshedpur-831001	3293331	Mr.Abhijeet Mukherjee
Jharkhand	Ramgarh	Shreyas Empaire	Bus Stand Complex, Ramgarh-829122	9334085642	Mr.Pyush
Jharkhand	Ranchi	Balaji Infotech	Near DcKashyap Eyeclinic, Purulia Road, Ranchi.	3205400	Mr.Sanjeev, Mr.Sunil Kedia
Jharkhand	Ranchi	Satya Systems & Solutions	158, Opp Hotel Palace, Kadru, Ranchi-834002	3291019	Mr.Amit Rastogi
Karnataka	Anekal	Sri Venkateshwara Communications	# 37, KSRTC COLONY, HOSUR MAIN ROAD, ANEKAL TALLUK, BANGALORE - 562106	320078	Mr.R.Jaganath
Karnataka	Bailhongal	3G Communication	Shop No 4591/2 Near Inchal Cross Belgaum Road Bailhongal-591102	9343815097	Mr.Vishwanath
Karnataka	Bangalore	Ascent Communication	No:113, St Johns Church road, Bangalore - 560005	32914856	Mr.Kumaresan
Karnataka	Bangalore	CRYSTAL INFOCOM	SRI LAKSHMI VENKATESHWARA COMPLEX, SHOP No. B-5, 33RD Cross, 11 th Main, 4th Block Jayanagar, Bangalore-560010	32710202	Mr.Prasad
Karnataka	Bangalore	LG Direct Service Centre	No: 93, TKN Mansion, KH Road (Double Road), Bangalore	41145345 / 9739983435	Mr.Raju Naik
Karnataka	Bangalore	Optima Mobile Services	24/2, Dr.Rajkumar Road, Near Subramanyanagar Police Station, 2nd Block, Rajajinagar, Bangalore - 560 010	23131953 / 65722205	Mr.Unni Krishnan
Karnataka	Belgaum	Hello India Telecom	G-4, Maratha Mandir Complex, Khanapur Road, Near Railway Flyover, Belgaum - 590 001.	4211329 / 2420533	Mr.Mohan
Karnataka	Bellary	MAKAM ELECTRONICS	# 90 C/16 HIMALAYA BUILDING K.C.COLONY BELLARY 583101	655043	Mr.Krishna Murthy Makam

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Karnataka	Bhadraoti	Digital Communication	SR Complex 4th cross B H Road Bhadravathi- 577301	9341081291	Mr.Nagabushan
Karnataka	Bhatkal	Vijay Communication	Hussian Complex Bunder road Bhatkal - 581320	300027	Mr.Vital H.Naik
Karnataka	Bidar	Mayuri Infotech	Ravi complex, shop no: 4, Udgir road, Bidar-585401	225544	Mr.Ravi Halhalli
Karnataka	Bijapur	Turning Point Computers	Khed building, opp Vijaya college, Sholapur road, Bijapur-586103	329318 / 300005	Mr.S.M.Hiremath
Karnataka	Channapatna	C&C Technology	"Ramanujam Nilaya" No.2104, 11 th Cross, Kuvempunagar B M Road, Channapatna - 571501	7251716	Mr.Charan
Karnataka	Chikaballpur	Sri Ram Prasad Enterprises	1st Floor: BB Road, Beside State Bank of Mysore, Chikballapur-562101	325567	Mr.Vardharaj
Karnataka	Chikmagalur	Cell Tec Electronics	Ragavendra complex, NMC circle, Neharu road, Chikmagalur - 577101	9341013183	Mr.Prem Kumar
Karnataka	Chintamani	Amrutha Mobiles	# 5, Venkatasdri Complex, M.G. Road, Opp to Adarsha Theater, Chintamani - 563125	9342262811	Mr.Sudarshan Reddy
Karnataka	Davangere	Kruthika Communication	Shop No: 6, Park View Plaza, (Income Tax Office's Ground Floor), 4th Main, Near Vishweshwaraiah Park, P.J. Extension, Davangere-577002	325444	Mr.Sujay
Karnataka	Golak	Cell World	Banshankri Complex, Basaweshwara circle, opp to court Golak - 591307	9343441777	Mr.Shivanand / Chougala
Karnataka	Gulbarga	Aishwarya Communication	C-9, Asian Plaza S.V.P.Chowk Main road Gulbarga-585102	329447	Mr.Mallikarjun
Karnataka	Hassan	Sree Digital Solutions	1380 Mission Hospital road opp Hindbed college - 573201	9343566658	Mr.Vidya Shankar
Karnataka	Hosakote	Exposys Communication	Shop no 1, Mahalatha Devi Complex M V Badavane, College Road, Hoskote-562114	7931229	Mr.Raghubandan
Karnataka	Hubli	Shruti Services	A-115, (Lower Ground Floor), IT PARK, Opp. Glass House, Hubli - 580029.	3290671	Mr.Mahendar
Karnataka	Hunsur	Sriram Infocom	No.6, Municipal complex, H.D.Kote road circle - 571105	253699	Mr.H.H.Pradeep
Karnataka	Kadur	Ashwa Tele Mobiles	Opp. Basaweshara Hospital, T.B Road Kadur	9341033310	Mr.R.Ananda Murthy
Karnataka	Kanakapura	Sumukh Communications	Harshitha Complex, Budkere, Bangalore main rd, Near KSTC Bus stand Kanakapura-562117	9342743344	Mr.R.C.Harish
Karnataka	KGf	Global Net Communications	Opp. King George Hall, Geetha road Robetson pet, KGf - 563122	329559	Mr.Shiva Kumar
Karnataka	Kolar	Seanmatrix	No:384, Suguna complex, Near KSTC bus stand, Arthnagange road, Kolar 560101	2228714	Mr.Nithyanada Shetty
Karnataka	Kumta	Krishna Mobiles	938, College road, NH 17, opp RWW, Kumta - 581343	329607	Mr.D.V.Prabhu

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Karnataka	Madikeri	CM.Communications	Shop no. 8, First Floor, M A Complex, Kohinoor Road, Madikeri	9343837555	Mr.Mohamad Shanief
Karnataka	Mandya	C & C Technology	2068, First Cross, Subhash Nagar, Krishna Krupa Nilaya, Mandya-571401	402007	Mr.Charan
Karnataka	Mangalore	Innovative Infocom	15-10-537/11, Jayavarma Centre, Mallikatte Circle, Kadri, Mangalore - 575002.	6563244	Mr.Sebastian Fernandes
Karnataka	Moodabidri	Media Guard Technologies	Rajeev Gandhi complex main road Moodabidri - 574227	325909	Mr.Vishwas Kumar
Karnataka	Mysore	K.K.Marketing	1432/9, Tribhuvan Towers, opp Veterinary Hospital, Dewari's Road, Dhamwantri Road Cross, Mysore - 570001	4258613	Mr.Karunakaran.
Karnataka	Nipani	Manusoft Computers	Dumale Complex Chikodi road Nipani - 591257	222005 / 9448148005	Mr. Pavan / Mahesh Dumale
Karnataka	Raichur	Akshay Electronics	Shop No.2 Ground Floor, Hotel UMA Complex, Station Road, Raichur - 584101	225300	Mr.Narasimhu
Karnataka	Ranibennur	Kruthika Communication	OLD LIC Building, Opp Gupta Petrol Bunk, PB Road, Ranebennur-581115	321444	Mr.Sujay
Karnataka	Shimoga	Chetan Electronics	C-5, Kenchappa complex, Durgigudi main road, Shimoga-577201	401889	Mr.Panduranga Rao
Karnataka	Tiptur	Shree Digital Solutions	Nanjappa complex, opp city union bank, BH road, Tiptur - 572201	9343817331	Mr.Ravi
Karnataka	Tumkur	Durga Communication	No.14 CMI Complex, Near Gayatri Theater, Below Navratna Silks & Sarees, B.H.Road Tumkur - 572101	2256184	Mr.Naveen Kumar
Karnataka	Udupi	Sanman Mobile Services	Shop No: 15, Simaz complex, Diana circle, Court road, Udupi- 576101.	3255770	Mr.Prakash
Kerala	Alappuzha	Getronics	FIRST FLOOR, KARTHIKA BUILDING, OPP SDV BOYS HIGH SCHOOL, COURT ROAD, ALLEPPY.	3290446	Mr.Omprakash
Kerala	Alathur	Marstek	12/950, Ground Floor, AR Complex, Opp. Munniff's Court, Alathur, Palakkad Dt.- 678 541	321311	Mr. Rajesh. V.
Kerala	Aluva	Sed Infosys	BUILDING NO 12/57 DOOR NO 8, FIRST FLOOR, POOTHULLIL BUILDING, ALUVA - 683 101.	3235599	Mr.Sudheesh
Kerala	Attingal	AM Technologies	Mamam, Near Dreams Theater, Attingal	3290301	Mr.Saji
Kerala	Badagara	Amarkish Communications	1st Floor, Sarala Complex, Near KVR Motors, N.H. Bypass Road, Nut Street, Vadakara-673101.	3255756	Mr.Jeeju / Mr. Baiju
Kerala	Cherthala	Cherukattu Phones	Krishna Building, Opp govt boys high school, AC road, Cherthali	9388910703	Mr.Mahesh C D

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Kerala	Ernakulam	Guidelines	CC28/902, Ground Floor, Mundukottackal Estates, S A Road, Kadavantham, Cochin-682020	4000113	Mr:Manoj G
Kerala	Ernakulam	Teletech Systems	20, First Floor, Penta Estate, above Airtel office, Janatha Junction, Palairattom, Cochin-25	3207554	Mr:Sony Thomas
Kerala	Ernakulam	Zenicon Infocom(P) Limited	Above Syndicate Bank, Opp Cochin Shipyard, M.G.Road, Cochin-15	2359511	Mr:Jamon Joseph
Kerala	Irinjalakuda	Nice Mobiles	NICE BUILDING, ST. JOSEPH'S COLLEGE JUNCTION, IRINJALAKKUDA - 680121	3291515	Mr:Sebastian
Kerala	Kalpetta	Mobi Care	Ground Floor, Rawuthar Building, Opp. Vijaya Bank, Chungam, Kalpetta.	329366	Mr:Thanseer
Kerala	Kanhangad	XIN Computers & Datacare	1st Floor, BENGACHERY COMPLEX, OPPVYAPARA BHAVAN, T B ROAD JN, KANHANGAD.	3259755	Mr:Sandeep
Kerala	Kannur	Sahar Communications	5B-666-C & D, PRESTIGE CENTRE, GROUND FLOOR, SUB REGISTER OFFICE ROAD, KANNUR.	3258585	Mr:Ajai Abhiam
Kerala	Karunagapally	Supreme Enterprises	Opp to KSRTC Bus stand, Karunagapally-690518	2620282	Mr:Ratish / Premkumar
Kerala	Kasargode	XIN Computers & Datacare	BENDICHAL COMMERCIAL COMPLEX, PRESS CLUB JN, MG ROAD, KASARGOD.	324755	Mr:Mr:Sandeep
Kerala	Kollam	Digital Infosystems	MC-3087, New Block, Bishop Jeromi Nagar, Chinnakada, Kollem-691001	2760647	Mr:Johnson Lawrence
Kerala	Kottarakkara	Sivashakthi Communications	KP-II/1574, Valiyavila Building, Near Marthoma Girls High School, Pulamon PO, Kottarakkara	3298191	Mr:Suresh
Kerala	Kottayam	Svm Technologies	M:PM COMPLEX, Near Popular Maruti Show Room, M.C ROAD, S.H MOUNT, KOTTAYAM, KERALA- 686 006	2565303	Mr:Rajesh K S
Kerala	Kozhikode	Domain Systems & Services	17/1178E, 1st floor AL FAHAD, SABA school cross road, Putiyara, Kozhikode	2722222 / 3243745	Mr:Mukundan
Kerala	Kunnamkulam	V Star Mobiles	ROOM NO 4/289/B2 2nd floor, City complex, Opp Tempo Park, Town Hall road, Kunnamkulam.	320009	Mr:Vijumon.K.V.
Kerala	Manjeri	Integrated Computer Systems	Royal Tower, TB Road, Manjeri - 676121	3299686	Mr:Thomason Chacko
Kerala	Mavelikara	Ettutharayil Agencies	GROUND FLOOR, KOIPPALLIL ROYAL ARCADE, PUTHIYAKAVIL, MAVELIKARA-690101	3293340	Mr:Biji
Kerala	Palai	Cyriac TV Plaza	Vypana Building, Petta Road, Palai.	329746	Mr:Tom Cyriac
Kerala	Palakkad	Orion Techno Solutions	12/310/15, FIRST FLOOR, METRO COMPLEX, HEAD POST OFFICE ROAD, PALAKAD-678001	3200255	Mr:Khaja Hussain

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Kerala	Pathanamthitta	Melamparambil Agencies	10/264, Main Road, Town, Pathanamthitta - 689645	2223132	Mr.M.V.Francis Oommen
Kerala	Thalassery	Sahar Communication	44-1929, 1st Floor, MACKSON MONOR, OPP: PARIS RESIDENCY, LOGANS ROAD, THALASSERY	3208585	Mr.Ajai
Kerala	Thiruvalla	Sangeetha Electronics	524/17, Central Tower, Cross Junction, Thiruvalla	3203000	Mr.Ranjeev Kumar
Kerala	Thiruvananthapuram	Appolo Systems	Thelungu Chetty Complex, Shop No 23-24, Kalpalayam JN Karamana, Thiruvananthapuram 695 002.	2340523	Mr.Santosh
Kerala	Thiruvananthapuram	Smart Mobile	TC 2/3554(5), First Floor, Opp. Petrol Pump, Kesavadasapuram, Trivandrum-695004	3200105	Mr.Krishnakumar P B
Kerala	Thodupuzha	National Electronics	Shop No 5, Aswathy Shopping Complex, Temple Junction, Thodupuzha	220320	Mr.Aneesh M A
Kerala	Thriprayar	Nice Mobiles	382J, 1st floor, Century Plaza, N.H.17, Near Bus Stand, Thriprayar	3240400	Mr.TPSebastian
Kerala	Tirur	Telit Telecom Shop	GROUND FLOOR, AL AMAL COMPLEX, PAN BAZAR, TIRUR	3295623	Mr.Vasan.K.Nair
Kerala	Trichur	Cell Tech	Shop No 5/2, TC25/326, N.P.Tower Guruvayoor Road, Near Bindu Theatre, West Fort, Thrissur.	2387386	Mr.Santom Kalloor
Kerala	Vaikom	Vaikundam Electronics	II/ 214C, Mannamkeril Complex, Bus stand Road, Vallyakavala, Vaikom	32616	Mr.Sreekumar.G
Madhya Pradesh	Balaghat	Shri Computers	Keshar Plaza Complex, Hanuman Chowk, Balaghat	9300632132	Mr.Deepak Bajaj
Madhya Pradesh	Betul	Shivam Electronics	Jiaprakash Chowk, Kothi Bazar, Auto Stand, Betul - 460001	9329099071	Mr.Vikram Motwani
Madhya Pradesh	Bhopal	Akansa Enterprises	25-26, CENTRAL MARKET, ROSHANPURA SQUARE, BHOPAL MP	7553201626	Mr. Dinesh Asija
Madhya Pradesh	Bhopal	GSM Solution	M-2 CHETAK COMPLEX, ZONE -2 M.P NAGAR	4229213	Mr.Neeraj
Madhya Pradesh	Bhopal	Music Mahal Bhopal	SHOPNO.1 NEW MARKET NEAR HANUMAN MANDIR, BHOPAL	5220725 / 2579178	Mr.Shinu
Madhya Pradesh	Chindwara	Bunty Photoelectronics	Shop No.33, Jiji Bai Complex, Parasra Road, Chindwara	230358	Mr.Ritesh Shukla
Madhya Pradesh	Dewas	New Taj Electronics	4, New Market, Moti Bunglow Main Road, Dewas	220005	Mr.Shabbir Shaikh
Madhya Pradesh	Guna	Mobile Junction	Jai Stambh Chauraha, N:Central Bank, Guna-473001	329277	Mr.Deepak Arya
Madhya Pradesh	Gwalior	Galar Computers	Ground floor, Ganpati Plaza, City Centre, Gwalior	4013311	Mr.Pradeep Dixit
Madhya Pradesh	Gwalior	Versha Sales & Service-Asp	GROUND FLOOR SARAFI BAZAR LASHKAR, GWALIOR	4060444	Mr.Ajit Kumar
Madhya Pradesh	Indore	Ayushi Electronics	UG-10, Ratnamani Complex, 7/1, New Palasia, Indore-452001	3251284	Mr.Santosh Dwivedi

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Madhya Pradesh	Indore	IT Customer Care	UG- 11, B. M TOWER, OPP. LOTUS, SAPNA SANGITA ROAD, INDORE	3207283	Mr. Sanjay Dhanekar
Madhya Pradesh	Indore	Pioneer Marketing	Prem Trade center Opp.Gujarati Girls collage, Indore	4006503	Mr.Ritesh
Madhya Pradesh	Itarsi	S.S. Telecommunications	Vijayshree Complex 5, Line Sarafa Bazar, Itarsi - 461111	9300272505	Mr.Akilesh Saxena
Madhya Pradesh	Jabalpur	Sri Sai Communication	C/O MUSKAN CARD GALLERY, 766, SHAHID SMARK MARG, NEAR RANITAL SQUARE, JABALPUR-482001	4046831	Mr.Mohit Sareen
Madhya Pradesh	Jabalpur	IT Solution	Opp Dr.Grover Hospital, Gate No-3, Wright Town, Jabalpur	4014064 / 4064370	Mr.Sanjeev Choubey
Madhya Pradesh	Katni	Excellent Infosys	20/306, Gununak Road, Katni	406047	Mr.Prafull Agrwal
Madhya Pradesh	Khandwa	Naman Refrigeration	TAPAL CHALL, KHANDWA	2230089	Mr.Yashwant Mali
Madhya Pradesh	Mandsaur	Sky Link Mobile Services	Payas Ice Cream Parlour, 16, Opium Godown Road, Nai Abadi, Mandsaur 458001 (M.P)	243978	Mr.Gaurav B. Mittal
Madhya Pradesh	Morena	Mobile Plaza	M S ROAD, JIWAJI GUNJ, OPP BANK OF INDIA, MORENA	400886	Mr.T C Shivhare
Madhya Pradesh	Neemuch	Shree Balaji Mobiles	Jain Bhawan Road, Near Ganganagar Off, NEEMUCH (M.P)	320033	Mr.Suresh Goyal
Madhya Pradesh	Ratlam	Kirti Telecom	124 Station road Opp.Raj Towes, Ratlam - 457001	239346	Mr.Kirti Jain
Madhya Pradesh	Sagar	Neeta Computers	Hanuman Mandir Gali 5, Civil Lines, Sagar -470001	329951	Mr.Ramesh Gupta
Madhya Pradesh	Satna	Akashwani Agencies	OPPCMA SCHOOL, SHOP NO.2, ANNAM CHHAYA, REWA ROAD	416455	Mr.Ajay Sukhrmani
Madhya Pradesh	Satna	Maa Shaarda Communication	Gali No 1, C/o Shri Gopal Sharan Singh, Pushp Raj Colony, Satna	7672320797	Mr.Prashant Singh
Madhya Pradesh	Shivpuri	Ocean Computer Corporation	1st Floor, Vishnu Mandir Market, Near Panipat Handloom, Shivpuri	225505	Mr.Sameer Saxena
Madhya Pradesh	Ujain	Galaxy Computers & Communication	43/2, Varruchi Marg, Opp Madhav Nagar Police Station, Freeganj, Ujain	2515995 / 253999	Mr.Anurag Chhajlani
Maharashtra	Ahmednagar	T V Spot	B-3, ADARSH SAMRUDDHI, NR. CHOLUPATI, KARANJA-414001	2326267	Mr Anil Apte
Maharashtra	Akola	Supra Computers	Lshakiran Complex, Shastri Nagar, Opp. Hotel Surya, Akola.	9326866469	Mr.Prashant
Maharashtra	Amravati	Scorpio Services	Shop No. 84, Ground Floor, Gulshan Towers, Nr. Panacheel Cinema, Amravati, Pin-444601	2567302	Mr. Pramod
Maharashtra	Aurangabad	Electronics World	Sahyadri Building, opp. To Shivaji School, Khokadpura, Aurangabad-431001	6454532	Mr. Rauf

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Aurangabad	Unique Telematics	SHOP NO. 108A, FIRST FLOOR, TAPADHYA SUPAR MARKET, NIRALA BAZAR, AURANGABAD -	2356447	Mr.Mahesh
Maharashtra	Beed	Shree Enterprises	Behind Raj Hotel, A H Wadia vachnaly rd, Beed	9373701010	Mr. Rajiv Joshi
Maharashtra	Chaligaon	Mobile Point	SHOP-22, MOMAYA COMPLEX, NEAR BUS STAND, CHALISGAON	9372712777	Mr. Dashrath Vaishnav
Maharashtra	Chandrapur	Shiv Communications	Rammagar, Near Durga Mata Mandir, Sindhi Colony, Chandrapur-442 401	329546	Mr.Mahesh
Maharashtra	Chinchwad (Pimpri)	Ritz Communication	Shop No 10, "A" wing, Jai Ganesh Vision, Next to Hotel Neelkanth, Near Fam Multiplex, Akurdi, Pune-411033	27485613 / 32661900	Ms Nikita
Maharashtra	Dhule	Pearl Communications	Shop no 3, CKB arcade, Near Devpur Bus stand, Agra rd, Dhule	324666	Mrs. Sonu Atul Bang
Maharashtra	Gondia	M/S V2 Care	Opp. Cofee house, Railholi, Gondia 441614	329322	Mr. Krishna Sargam
Maharashtra	Hatkangale (Ichalkaranji)	Sai Vision Services	T1/236 MOHAN ARCADE SHOP NO B14, STATION ROAD, TAL- HATKANGALE, CITY-ICHALKARANJI-416115	2439989	Mr. Sameer Bhonsale
Maharashtra	Islampur	Solar Shoppo	Kachare Lane Islampur, Distt Sangli	9326777603	Mr. D.H.Patil
Maharashtra	Jalgaon	TelUs Associates	Shop No 16, 'G' Wing 1st Floor Near Tarun Bharat Office, Golani Market, Jalgaon Maharashtra.	9370164545	Mr. Shaikh
Maharashtra	Jalna	Megha Multi Serices	Shop no 04, A wing, Udhan complex, Jalna	9326201408	Mr. Narendra Kulkarni
Maharashtra	Kolhapur	Sms Services	55, Diwan Tower, Opp. Nutan Marathi School, Near Mirajkar Tikky, Kolhapur, Pin -416005.	2541120	Mr. Prakash Patil
Maharashtra	Kopergaon	Om Sai Mobile	Opp. ST Bus Stand, Daharangaon Road, Kopergaon, Dist Ahmednagar.	9373295009	Mr.Mahendra Devkar
Maharashtra	Latur	Hindustan Mobiles Services	Side no, 111, Shop 59, 49 Gandhi Market, Near Bhalchandra Blood Bank, Latur-413512	641111 / 982345500	Mr. Sandeep Parande
Maharashtra	Malegaon	Cell Care	Shop no 59, SR no 57, New Islampurn, Malegaon	9326211996	Mr Ansari Mohd Israfil
Maharashtra	Mumbai	Cyber-Gyan Convergence & Services (India) Pvt. Ltd.	43/44, Gold Filled Plaza, Sion Bandra Link Road, Sion, Mumbai-400017	24075939	Mr. Jatin Parekh
Maharashtra	Mumbai	G.P.Electronic	Shop No 6 Ambika Cooperative Housing Society, Jawahar Nagar Road No 2, Near Railway Crossing, Goregaon West, Mumbai 400062	2232633960	Mr.Mayur

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Mumbai	Grace Tele Services	Shop no 3, C/1, Manik Nagar Soc, Punjabi lane, Borivali (W). Mumbai 400092	32455033	Mr. Daniel
Maharashtra	Mumbai	Komplex Telecom Corporation	Shop no.A/19, Nootan Nagar Premises Co. Op. Htg. Society, Near Bandra Rly. Stn., Towards Bandra Talav, Turner Road, Bandra (West) Mumbai 400050	64147153	Mr. Sutar
Maharashtra	Mumbai	LG Service Centre	Shop No.1, 2, 3 Ground Floor, Rajakamal Bldg, Opp.Ram Mandir, Subhash Road, Vile Parle(E) Mumbai 400 057	26134917	Mr. Rakesh / Omkar
Maharashtra	Mumbai	Paras Telecom	2nd floor, Rear Side Capital Cinema Building, Wauddy Road, Opp. Mumbai CST Railway Station, Mumbai	65279042	Mr. Ravindra
Maharashtra	Mumbai	Sai Tele Services	A-110, Satyam Commercial Complex, M.G.Road, Chhatkoper (E), Mumbai - 400 077.	4011264	Ms. Isha
Maharashtra	Mumbai	Sierra Mobiles	Opp Prabhu Darshan, L.J.Road, Shivaji Park, Near Shiv Sena Bhavan, Mumbai 400016	24382200	Mr. Anurag
Maharashtra	Mumbai	Trident Communications	B-A, Vasant Smruti, Dadasaheb Phalke Road, Beside "BharatKshetra Building", Near Dadar station(E), Dadar -East, Mumbai - 400 014.	65047270	Mr. Kalpesh
Maharashtra	Mumbai	Yash Telecom	Dadarkar Tower, Shop no.1, Opp.Film Centre, Near Crossroads, Tardeo, Mumbai - 400 034	23522702	Mr.Girish
Maharashtra	Mumbai	KBs Communications	Shop No.2A, Maharashtra Seva Sangh, Near Apra Bazar, Nehru Road, Malund (West). Mumbai-400080.	32107410	Ms. Harsha
Maharashtra	Nagpur	Epoch Services	Shope No. LIG-9, Bhalati Vihar Complex, Chapru Nagar Square, Lakadgarji, Nagpur -440008	3246777	Mr. Girish
Maharashtra	Nagpur	Shivatronics	B-31 Sai Regency Complex Ravi Nagar Square Nagpur Maharashtra 440044	9300892579	Mr. Ravi Gupta
Maharashtra	Nagpur	Spectrum Marketing	Shop No.2, Dharampeth Towers, West High Court (WHC) Road, Dharampeth, Nagpur - 440010	22527823	Ms. Sonali
Maharashtra	Nanded	Devansh Microtronics	Beside Forest office Nr. Ranbidkar Resi.Nanded	249789	Mr. Prashant Palnate
Maharashtra	Nasik	Mobs Associates	SHOP NO. 8A, FIRST FLOOR, 'KAPOTE-MEHER' MARKET, RENLIKA NAGAR, WADALA NAKA, DAWRIKA, NASIK	6523613	Mr. Alim Kazi
Maharashtra	New Mumbai	Beekeyen Enterprises	Block No 1, Shop No.17, Mahaveer Milan, Sector 28, Near Blue Diamond, Hotel, Vashi, New Mumbai	65114304	Mr. Shailesh
Maharashtra	New Mumbai	LG Service Centre- Dak	H Block, Ground floor, Dhirubhai Ambani Knowledge City, Navi Mumbai-400709	30386032	Mr. Sachin

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Panvel	Oceanic Tele System	Shop No. 3, Sai Arcade, Sector 15, New Panvel (E), Dist. Raigad.	9322217221	Mr. Chetan
Maharashtra	Pen	Slyphone Enterprises	SHOP NO 3, SHREE COMPLEX, OPP LNIQUE BAZAR, PEN KHOPOLI ROAD, PEN, DIST RAIGAD-402107	9373435000	Mr Kuldeep
Maharashtra	Pune	Horizon	32A, Lotus Court, Near Hotel Panchami, Pune Satara Road, Pune.	32501222	Mr. Nilesh Pundye
Maharashtra	Pune	Microchip Solutions	Akhay Chambers 216 Naryan Peth, Near Bhide Bridge, N C Kellar Rd, Pune-411030	24471155	Mr Mahyesh Bhosale
Maharashtra	Pune	Mobile World	C-25, AKSHAY COMPLEX, DHOLE PATIL ROAD, PUNE-411 001	30942268	Mr Pawan Mantri
Maharashtra	Pune	Viki Info Technologies	Shop No.4, Amit Complex, 474, Sadashiv Peth, Opp New English School, Tilak Road Pune Maharashtra	24434134 / 9322206000	Mr Vivek Surve
Maharashtra	Ratnagiri	S P Electronics-Pune	shop no-19, Parasmani Complex, K C Jain Nagar, Nr Maruthi Mandir, Ratnagiri-415612	329556 / 221982	Mr.Santosh Prabhu
Maharashtra	Sangamner	Rajpal Telecom	Yashodhan complex, New Nagar Rd, Near hotel Chaitali, Sangamner	320888	Mr Harish Rajpal
Maharashtra	Sangli	Ramesh Electronics	Dr. C. S. Joshi Banglow, Opp. B.Ed Collage, Rajwade, Sangli., Tq. Miraj, Dist.- Sangli.	2327601 / 09372107601	Mr. Suresh Shegane
Maharashtra	Satara	Shivkal Mobilink	173/6/7 Raviwarpath shop no-11, Vithal Lika Complex, Powai Naka, opp Janta Bank, Satara-415002	325212	Mr. Mahesh Shinde
Maharashtra	Shrirampur	Siddharth Infocom	Shop No 1, Hotel Sidhartha Building, Sidhartha Stop, Sagamaner Road, Shirampur-413709	9326611445	Mr. Kedar Fargade
Maharashtra	Solapur	Atharva Electronics Pun	940/2 NORTH SADR BAZAR, GARUD BUNGLROW, SOLAPUR-413003	2317595	Mr. Umesh Kamalapurkar
Maharashtra	Solapur	Jawaharal Radio Service	184, Gold Finch Peth, nr Hotel Ritesh, Solapur - 413007.	2725030	Mr. Prasanna J Chavan
Maharashtra	Thane	Ekadant Corporation	Shop No.1, Ground Floor, Laxmi Smruti CHS, Opp Bal Ganesh Temple, Near Makhmal Talao, Eduji Road, Charai, Thane (W) 400602.	32130222	Mr. Paresh
Maharashtra	Thane	E-Link Solutions	Shop No.5, Type C. Bldg no.5/6, Shanti Vihar, Mira Road -E	9322839386	Mr.Omkar
Maharashtra	Kalyan	Sky Lark Associates	Shop: 1, 'A' Wing, Suresh Tower Co-op. Hsg. Soc. Opp. Municipal Vegetable Market, Santoshi Mata Road, Kalyan (W)	3209899	Mr. Pravin
Maharashtra	Bhiwandi	Varad Electronics	SHOP NO.2, PRABHU CHAYA BLDG, PRABHU ALI, NEAR OLD GOVT. HOSPITAL, MANDAL, BHIWANDI, DIST THANE.	222653	Ms. Swati
Maharashtra	Vashi	Beekeyen Enterprises	Block No 1, Shop No. 17, Mahaveer Milan, Sector 28, Near Blue Diamond, Hotel, Vashi, New Mumbai	65114304	Mrs. Kartiki

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Maharashtra	Virar	Siddhivinyak Tele Services	Shop no 5&6, Vishnu Prasad Complex, Opp Ulkarsha School, Near S.T. Bus stand, P.P. Marg., Virar (West)	3258111	Mrs. Vaishali
Maharashtra	Wardha	Libra Electronics	C/o Anand Opticals, Soshalist Chowk, Main Road Wardha Maharashtra-442001	2242109	Mrs.Manjusha
Maharashtra	Yavatmal	Combine Electronics & Services	Shop No 13, 1st floor, Old Indira Gandhi Market, Azad Maidan Road, Yavatmal-445001	9822200166	Mr. Ajay Shukla
Maharashtra	Yavatmal	I T Services	Nr datey college, C/o Yahoo cyber cafe, Yavatmal 445001	9372610121	Mr.Umesh Gadwe
Maharashtra	Yavatmal	Star Electronics	Near Shyam Talkies Ram Mandir Road Yavatmal Maharashtra 445001	2324106	Mr.Smjay Chabda
Meghalaya	Shillong	Rhapsody Care	E N COMPLEX, G.S. ROAD, Below Town Pharmacy	2547946	Mr.R.R. Wazi
Orissa	Anugul	Creative Solution	Hanuman Bazar, Near gundicha mandir, Angul-759122	329207	Mr. Tapas Sahu
Orissa	Balasore	Raghuath It Solutions	Azimabad, Proof Road, Balasore-756001	329267	Mr.Sujit Kr. Sen
Orissa	Berhampur	Rashmi Electronics & Computers	Shop No.19, Sai Complex, Main Road, Gandhi Nagar, Berhampur, Orissa	3290409	Mrs. Rashmi Ranjan Sharma
Orissa	Bhadrak	A B Associates	Nr.Reliance Web World Express, Bypass Road, BHADRAK-756100	9337040450	Mr. Kartik Chandra Rout
Orissa	Bhubaneswar	Miracle Services It Extn.	Plot No. 136, Fr. Lane of Vigilance Office, Beh. Passport Office, Surya Nagar, BBSR.	2532383	Mr.Chaco/ Suprava
Orissa	Bhubaneswar	S.A.Infosys	291 ,Bomkhal, Opp.Akamra cinema hall, Bhubaneswar-751010	2573114	Mr. Ashwini K Sahoo
Orissa	Cuttack	O.A.Infotech	Behind Govt Bus Stand, Badambadi, Cuttack -753012	9338912613	Mr. Arabind Rout Ray
Orissa	Puri	Bajinath Infocomm	At Municipal Mkt, Grand Road, Puri-752001	9337032005	Mr.Ajay/ Sandeep Agrawal
Orissa	Rourkela	Infosys	T3, Bira Road, subhadra complex Opp.Choudhary Petrol Pump, Rourkela	9337403999	Mr. Arun Ghosh
Orissa	Sambalpur	A.N.Communication	Inf. Of Zilla School, Pensionpara, Sambalpur-768001	9337660919	Mr. Md. Abdul Aziz
Punjab	Amritsar	Bajaj Telecommunication	87, G Floor, Nehru Complex, Lawrence Road, Amritsar-143001	3258599	Mrs.Suman Bajaj
Punjab	Barnala	Unique Infotech	Mittal Street, Near M C Office, Barnala-148101	238007	Mr.Pankaj Goyal

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Punjab	Batala	Dream Services	Shop No 111 Opp Improvement trust office, Dharamsingh Market, Batala.	9316676018	Sandeep Singh
Punjab	Bhatinda	Lali's Electronic Gallery	1139-A, First Floor, Amrik Singh Road, Nr Gole Diggi, Bhatinda-151005	2239500	MrAshok Kalra
Punjab	Chandigarh	New Tech	SCO 495/496 SEC 35C First floor	9814244862	MrPawan
Punjab	Chandigarh	Vignesh Services	S.C.O- 189-90, Sec- 34, Chandigarh	3018028	MrMukesh Arya
Punjab	Hoshiarpur	Kuldip's Mobile Care	Dhobian Wali Gali, Phagwara Road, Hoshiarpur-146001	226906/ 2232906	MrKuldip
Punjab	Jalandhar	Mobile Center	233/1, Saheed Udham Singh Nagar, Backside Hotel Preet, Nakodar Road, Jalandhar-144001.	3292666	MrVikas Sangar
Punjab	Kapurthala	Arun Electronics	217, C Block, Jama Masjid, Shopping Complex-144601	329254	MrArun Khosla
Punjab	Kotkapura	Om Mobile Service Centre	1ST FLOOR DHANU RAM PANSARI, Railway Road-151204	223069 / 9815759239	MrRohit Mittal
Punjab	Ludhiana	Anant Shree Comp	19K Opp PAU Gate no 1 Ferozpur Road	3245386	Ms Moria chaudhary
Punjab	Ludhiana	Shahi Communication	Shop No.5, Revolving Restaurant 4X International, 583 L, Model Town, Ludhiana	3244190	MrAmit Shahi and mrvimal
Punjab	Malaut	Khurana Mobile Solution	SHOP NO 7 OPP. NEW TELEPHONE EXCHANGE G T ROAD MALLUAT PIN NO = 152107	9316940003	MrRamesh Khurana
Punjab	Malerkotla	Prime Infocomm	Opp. Main gate, Govt College, Malerkotla-148025	253899	MrRohit Bansal/ Raj Verma
Punjab	Mandi Gobindgarh	Aditya Infocom	Main Iron Market, custom and eise office Mandi Gobindgarh	326896	MrNaresh Aggarwal
Punjab	Mansa	Sharma Telecom	Cinema Road NAGINA MARKET OPPPARKASH BOOK DEPOT, Mansa	9316173009	MrLidesh Kumar Sharma
Punjab	Moga	Rashpal Telecom	6, Red Cross Road, Court Road, Near Old Court, Moga-142001	222468	Mr. Rashpal Singh
Punjab	Nabha	Echo Telecom	Opp. Milan Palace Circular Road, NABHA 147201	504501	Mr.Girish Garg
Punjab	Nawashar	Kapoor Electronics	Ikothi Road, Opp Kumar Hotel, Nawashahr-144514	508085	MrNarender Pal
Punjab	Pathankot	Leo Comp	Near Tourist hotel, military ground, Pathankot	9814586406	MrMr Kamal
Punjab	Pathankot	Touch Infosys	189 Opp. Guru Nanak Park, Model Town, Pathankot.	3290300	MrNavdeep Singh Bedi

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Punjab	Patiala	Image Services	Shop No.84, First Floor, Leela Bhawan Opp Punjab National Bank, Patiala-147001	2222796 / 9872281524	Mr.Rohit Bansal
Punjab	Phagwara	Bansal Telecom	G T Road, Railway Road Chowk Near Connect Office, Phagwara-144401	461321 / 9888005339	MrMangalesh
Punjab	Rajpura	M K Enterprises	Shop no.6, Gurudwara Singh Sabha Market, Rajpura Town-140401	2652569	MrJohny
Punjab	Ropar	Arora Communication	Shop No.1, Lehari Shah Mandir Road, Ropar	9872363032	MrAmit Arora
Punjab	Samana	Sangam Mobile Care	Tehsile Road, Near Garg Laboutry	505648	MrYaneet Kumar
Punjab	Sangrur	National Computers	SUNAMI GATE, Near Guru Nanak School, SANGRUR PIN NO = 148001	233335 / 9814586196	Mr.Sarabjit Singh
Punjab	Sarhind	A.S. Infocom	Grain Market, Cinema Road Sirhind City-140406	500726	MrJaspreet Singh
Rajasthan	Ajmer	Nehal Infotech	F-3, FIRST FLOOR, AMAR PLAZA, Opp. DAULAT BAGH, AJMER-305001	3291404	Mr.Suresh Sharma
Rajasthan	Ajmer	Prangan	112/110, Civil lines, Ajmer	9828503092	Mr.Pareek
Rajasthan	Alwar	R.K.Telecom	SHOP NO.112, FIRST FLOOR, GANPATI TOWER NEAR NANGLI CIRCLE, Alwar	9351390057	Umesh sharma
Rajasthan	Beawar	Srikrishna Infocom	Chaoni Road, Bhagat Chauraha, Near Roadways Bus Terminus, Beawar	329675	Mr. Dheerendra Agrawal
Rajasthan	Bhilwara	Ajanta Communications	No3, Bapna Complex, Pur Road, Bhilwara	329549	Rafiq
Rajasthan	Bikaner	Tech Solutions	1st Floor, 222 & 223, Ganpati Plaza, KEM Road, Bikaner	3292423	MrAziz/Vika
Rajasthan	Chittorgarh	Arihant Infotech	A46, Meera Market, Near Rajasthan Patrika Office, Chittorgarh-312001	325933	MrAbhishek
Rajasthan	Chomu	Tambi Telelink	Kotwali chabutra, dhan ji ki gali, Sadar Bazar Chomu-303702	9314090400	MrAnup Tambi/ Dp Saini
Rajasthan	Dholpur	Tirupati Telecom	14, Bhagwati Market, Near Jagan Cinema hall, Jagan Tiraha, Dholpur	9314014093	Mr.Moshin/ Devender
Rajasthan	Jaipur	Alpha Infotech Systems	F-1, First Floor, Krishna Mall, Lakshmi Mandir Crossing, Tonk Road, Jaipur-302015	3299724	Shatrugan mangal
Rajasthan	Jaipur	Alliance Communication	G6, City plaza, Space Cinema Hall, Jhotwara Road, Jaipur-16	9351371549	Amit/Bhushan
Rajasthan	Jaipur	Solution Computers	Plot No.4 Krishna Nagar StationJanpath Near Hotel Paradise Jaipur	5106388	Mr.Dhreej Mathur
Rajasthan	Jhunjunu	M S Mobile Point	Kaswan Complex, Opp Roadways Bus Stand, Jhunjunu	9314011951	MrAbhishek / Mr.Sunil
Rajasthan	Jodhpur	Omega Electronics	Plot No.196 SS Tower, AkhalyaChowraha Jodhpur-342003	3291214	MrPratap Singh

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Rajasthan	Kishangarh	Capital Enterprises	5, Radha Krishan market, Opp. Sardul school, Kishangarh-305801	326550	Mr.Shatrughan
Rajasthan	Kota	Cyber Infosystems	26, Ground floor, Kalawati Palival market, Gumanpura, Kota-324007	2392153	Mr Rajnish
Rajasthan	Kota	Saya Electronics	1-TA-16, Vigyan Nagar, Kota	9828503246	MrLalit
Rajasthan	Kotputli	Isha Communications	11, ground floor, Govardhan plaza, Nehru Bazar, Kotputli	9314140001	Mr.Vijender
Rajasthan	Nagaur	Jam Appex	Shop num.7, Opp. Old power house Ram Poll, Station road, Nagaur	329595	MrAmit
Rajasthan	Nathdwara	Geniune Infotech	Shop num.10, Suriya apartments, Opp.Vandana talkies, Bus stand, Nathdwara.	329208	Mr.Gajender/Mr Ashwini Purohit
Rajasthan	Pali	Mansi Mobile	9, Vasant Vihar, Opp. Bangur college, Pali-306401	9352766555	MrAbhishek
Rajasthan	Shriganganagar	Telecare Servieces	33, J Block, Near Birbal Circle, SriGanga nagar	3207687	Abhishek
Rajasthan	Sikar	Rita Computers	Shop No.4, Kabra Market, Shramdan Marg, Sikar-332001	329520	Mr.Saurav Chakravarthy
Rajasthan	Udaipur	Shree Telelinik	31, First floor, Indra prash complex, Delhi gate, Udaipur-313001	3261777	Tanujay Jain
Tamilnadu	Ambasamudram	A to Z Communications	63-D, KNV Complex, Santhai Bazaar, Ambasamudram-627401	251143	Mr Raja Selvakumar
Tamilnadu	Arkonam	G.M. Marketing	NO.3/4, SUBURAYAN STREET, ARAKONAM-631001	231395	Mr.Mr.P.Gajapathi
Tamilnadu	Arni	Digitech Computers	Shop No. 201/82- B1, SM Road, Arani - 623101	223929	Mr.D.Mohan Ram
Tamilnadu	Aruppukottai	The Mercury Computers	607, MADURAI ROAD, NEAR NEW BUS STAND, ARUPPUKOTTAI-626101	222552	Mr. R. Boominathan
Tamilnadu	Attur	VR. Net	VR.Net, DrArumugam complex, salem main road, ATTUR	243585	Mr.Senthil Kumar
Tamilnadu	Batlagundu	Karthik Communications	No 221, Main Road, Batlagundu- 624202	9360019090	Mr Lakshmanan
Tamilnadu	Bhavani	Sri Abirami Electronics	2E, Pavadi Street, Anthiyar Corner, Bhavani-638301	230919	Mr Balamurugan
Tamilnadu	Chegalapatu	SKB Electronics	No-42 Devarajanar pillai Street, Vedachalam Nagar, Chengalpet	37406080	Mr.Balaji
Tamilnadu	Chennai	Genesis Communication	63/3, First main road, Gandhi Nagar, Adyar, Chennai-600020	24401188	Mr Suresh
Tamilnadu	Chennai	GS Systems	547/352, F M Towers, Mount Road, Nandanam, Chennai-6000035	24330889	Mr.Nicholus
Tamilnadu	Chennai	Sabisu	B2, Golden Enclave, New 275, Old 184, Poonamallee High Road, Kilpauk, CHENNAI 600 010.	26612347	MrPalani
Tamilnadu	Chennai	Unicare Infocomm Services	No.293, Arcot Road, Next to Indian Overseas Bank, Kodambakkam Chennai - 24	24724666 / 52047059	MrKartik
Tamilnadu	Chennai	Garage De Telecom	OLD No:30- NEW No:10, KMBF BUILDING, 1ST FLOOR, DURAISAMY ROAD, NEAR POTHYS, TNAGAR, CHENNAI 600017	28143454	

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Chidambaram	Future Tech	Hasan Towers, 1st Floor No. 14, V.C.PStreet, Near Hotel Ritz, Chidambaram	222150	Mr:Shaker
Tamilnadu	Coimbatore	Classic Electronics	No 1/1, Alagappa Road, 6th St, Tatabad, Coimbatore - 640012	4374875	Mr Arivadhagan
Tamilnadu	Coimbatore	Fast Track	138-C, TV Swamy Road (West), RS Puram, Coimbatore - 641002	2551155	Mr Anand
Tamilnadu	Coimbatore	Nucom Services	3/61, Master Building, Kattoor Road, Pappa Naicken, Palayam, Coimbatore - 641037	4351569	Mr:Uthaman
Tamilnadu	Cuddlore	Kasturi Cellular Service	NO: 37 (2C) BHARATHI ROAD, CUDDALORE. 607 001, CUDDALORE DISTRICT, TAMIL NADU.	220183	Mr Raghupati
Tamilnadu	Cumbum	LG Mobile Service Gallery	No 52, Gandhiji Street, CLMBUM-625516	320800	Mr:Senthil Kumar
Tamilnadu	Dharapuram	IT Zone	40-A-1, Bye Pass Corner, Dharapuram-624202	329293	Mr Ramakrishnan
Tamilnadu	Dharmapuri	Calrity Digital Photo&Audio	98/29C KANDASAMY VADIYAR STREET, DHARMAPURI, 636701	329707	Mr:Raj Murugesan
Tamilnadu	Dindigul	Padma Electronics	15, Dudley high School, Dindigul	9367927080	Mr. Murali Chandra
Tamilnadu	Erode	Jans Electronics	29, Sathy Road, Near Hotel Oasis, Erode - 638004	3258526	Mr Kannan
Tamilnadu	Gobichettipalayam	Best Electronics	47a/1, kms complex kacherry medu, gobichettipalam	225598	Mr.G.A.Jayakumar
Tamilnadu	Hosur	Suryas Will Of People	R S Towers, Opp Traffic Police Station, Bangalore By Pass Road, Hosur-635109	246687	Mr:Shanmugam
Tamilnadu	Kallikuruchi	New Magestic Cell Sales&Service	OPP TO TELEPHONE EXCHANGE, GANDHI ROAD KALLAKURICHI	228270	Mr. Murugesan
Tamilnadu	Kanchipuram	Classic Mobile Care Centre	Door No.67 -A, (Shop No.5), P.S.K. Street, Kancheepuram-631 501	9345636900	Mr:Damodaran
Tamilnadu	Karaikal	Shree Harini Cellular Service	OPP TO NEW BUS STAND, BHARATHI MAIN ROAD, KARAIKAL-609602	320544	Mr. K. Selvaganapathy
Tamilnadu	Karaikudi	Sitiyees Electronics	10 A / 3, Muthulakshmi Complex, Opp to Income Tax Office, Sekkalai, Karaikudi - 630002	9362611455	Mr. S. Veerapandian
Tamilnadu	Karur	Aswathi Electronics	No 90 / 102, Old Bye pass Road, Karur-639001	9843045555	Mr Satish Kumar
Tamilnadu	Kovilpatti	St.Marys Cellphones	No.6, Rajakumari Towers, AKS Theater Road, Kovilpatti	9360533649	Mr:Jyappan
Tamilnadu	Krishnagiri	Madura Care Centre	No 361, Crown Complex, Bangalore Main Road, Krishnagiri-635001	9364258223	Mr Suresh Kumar
Tamilnadu	Kumbakonam	Fargan Electronics	NO.5 VRS COMPLEX, HAJIAR STREET, KUMBAKONAM- 612001,	2401123 / 3290303	Mr. Surbudeen

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Kuzhithurai	Mobile Care	Shop no 211, SM Arcade, Main Road, Marthandam, Kuzhithurai - 629165	270587	Mr Surendra Kumar
Tamilnadu	Madurai	Devas Electronics	No.4, Thirumakulam North Street, Near Ayyappan koil, Thallakulam, Madurai-625002	4360995	Mr. Guna
Tamilnadu	Mayiladuthurai	Nrs Mobile City	NO-28 - C/14, R.R.COMPLEX, MAILADUTHURAI	223277	Mr Abdul Rahim
Tamilnadu	Nagercoil	Redeemer Electronics	Shop no 2, Pillars Gate, Balamore Road, Nagercoil-629001	327788	Mr.Dinkar
Tamilnadu	Namakkal	VR Care	77/2, Veera Vilas, Trichy Main Road, Namakkal - 637001	329304	Mr. R Vijayalakshmi
Tamilnadu	Ooty	Mountain Cell Com	NO-302, Band lane, Commercial road, Near Liberty Theatre, Ooty-643001.	2443787	Mr.Sujith & Miss Geetha
Tamilnadu	Palani	Hi-Tech Electronics	No.76, New Dharapuram Road, Opp. ICICI Bank, Palani - 624601	320264	Mr. R. Ramachandran
Tamilnadu	Paramathy Velur	Vishwak Mobiles	No 5, KK High School Building, 98, High school Road, Paramathy Velur - 638182	224348	Mr Mohan
Tamilnadu	Pattukottai	Mobile Care	127, BIG STREET, PATTUKOTTAI	9842653921	Mr.Arul Alagan
Tamilnadu	Perambalur	The Best	Vivkanand st., M.P. office opp., Perambalur	275717	Mr.PKumar
Tamilnadu	Perundurai	Sree Baby Electronic	483 mainroad, perundurai	221800	Mr.Shiva Balan
Tamilnadu	Pollachi	Star Mobiles	SHOP NO. 5 Ground Floor, Vasanth Complex, Immaman Street, POLLACHI.	222230	Mr.Senthil Kumar
Tamilnadu	Pondicherry	Digital Logistics	126/2, Perumal Koil Street (Bharathi Street Cutting), Pondicherry-605001	4210148 / 9843093348	Mr.G Singaravelu
Tamilnadu	Pondicherry	Balaji Electronics	No:21, 3rd CROSS STREET, Annamanger, PONDICHERRY,	3090414	
Tamilnadu	Ponneri	Sri Balaji Mobile Care Center	NO. 26, THALUKKA OFFICE ROAD, PONNERI, THIRUVALLUR DIST-601204	27973381	Mr.Balaji
Tamilnadu	Port Blair	Universal Service Care	R.G.T. ROAD, PORT BLAIR, ANDAMAN-744101	329588	Mr.Naveen
Tamilnadu	Pudukottai	Yem Kay Electronics	2, Subabharathi complex, 5378, 79, Alangudi Road, Pudukottai-622001.	9344038441	Mr.Rajesh Kannan
Tamilnadu	Rajapalayam	Sri Vignesh Mobiles	292\1, TENKASI ROAD, OPP BOMBAY LODGE, RAJAPALAYAM-626117	220398	Mr.Ku.C.Muthiah
Tamilnadu	Ramanathapuram	Zeenath Telecom	13-B/23, PAL LUCKY PLAZA, RAMANATHAPURAM-623501	226750	Mr.MS.Jahir Hussain

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Ranipet	Unicare Infocom Services	No.36, opp.Gangadhara Muddaliar Middle School, MBT Road, Novelpur, ranipet, Vellore Dist.	270806	Mr.Basker/ Mr.Karthik
Tamilnadu	Rasipuram	Sms Care Service	No 179 / 1, Anna Salai, Ground Floor, Rasipuram-637208	9345052553	Mr Manikavasagam
Tamilnadu	Salem	Vishwesh Mobiles	Sixer Complex, 121/19A, Sarada College Road, Next to Abi Medical Centre, Salem - 636007	3290535	Mr.Vasudev Nayak
Tamilnadu	Sivakasi	Tele World	78, PARSN PLAZA, OPP.TO.WATER TANK, SIVAKASI-626123	223283	Mr.B.Mathan Kumar
Tamilnadu	Tambaram	Saravanas Infocom Services Pvt Ltd	New No-43, Old No:3A, Mudichur road, Tambaram west, chennai 600045	32915599	Mr.Palani/ Mr.Kanjith
Tamilnadu	Tenkasi	Airtone	1/ 17, KMSS complex, west masi street, Tenkasi. 627811	227980	Mr.M.Nagaraja Sankar
Tamilnadu	Thanjavur	Z M Electronics	1006/1007, South East Rampart, Opp to Municipal Higher Sec School Tanjore - 613001	272595 / 329554	Mr.Ziauddin
Tamilnadu	Tindivanam	Reva Communications	Old No. 117/1, New No. 205/1, Nehru Street, Tindivanam - 604001	225250	Mr.Lakshmi Narayanan
Tamilnadu	Tiruchendur	Ark Mobile Solutions	ARK DTP centre, No. 1 a 7 North car street, Rayan Complex, Tiruchendur. 628215	329380	Mr.Mahesh
Tamilnadu	Tiruchengode	Balaji Electronics	108 s s d road, near lorry stand tiruchengode	325430	Mr.Sekar
Tamilnadu	Tirunelveli	Classic Electronic	39, Trivendrum Road, Opposite Kalmark, Welcome Complex, Palyamkottai, Tirunilveli-627002	2575801 / 3290339	Mr.Erkins
Tamilnadu	Tirupattur	Acal Computer Systems	52/1, kkc complex, krishnaginri road, tirupattur	325385	Mr.Sunder
Tamilnadu	Tirupur	Shri Vasavi Electronics	# 155-303, Mangalam Road, Karuvam palayam, Tirupur -641604	4244009	Mr.U.B. Bala Murail
Tamilnadu	Tiruvarur	Softel Teleservices	No 21, Municipal Complex, Ground Floor, Panagal Road, Tiruvarur-610001.	22110	Mr Ravi
Tamilnadu	Tiruvellore	Yamkarna Computer	38/186 JAWAHARLAL NEHRU ROAD, OPP TO SBI MAIN BRANCH, THIRUJALLUR - 602 001	37600329	Mr. Saravana
Tamilnadu	Trichy	S K Electronics	Raj Complex, 9/A EVR Road, Puthur, Trichy- 620017	277194	Mr.Krishnan
Tamilnadu	Tuticorin	Snows Cell Care	Kala Complex, No 20, B-1, W G C Road, Tuticorin-628002	2334043	Mr.Kennedy
Tamilnadu	Udumalpet	Allwa Electronics	5 Thulva vellar shopping complex, V.O.C. street, UDUMALPET-642126	223047	Mr. Sentamarai Kannan

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Tamilnadu	Vaniambadi	Reva Communications	No.848/3, Cl. Road, Vaniyambadi - 635 751	395023	Mr.Lakshmi Narayanan
Tamilnadu	Vellore	Matha Communication	4, S.L.N Plaza, Opposite Oda Pillar Koil, Gandhinagar, Vello - 632006	2240800	Mr.Gunaa Shekhar
Tamilnadu	Vilupuram	Broad Band	No 642, Nehruji Road, VILLUPURAM	222936	MrPragasam
Tamilnadu	Vrudhunagar	BBG Electronics	76/9, Lakshmi Complex, Pullalakkottai Road, (Opposite Uzhavar sandha), Vrudhunagar-626001.	420160	Mr Karupuswamy
Tripura	Agartala	VIDEO S R	7Melarmath, H.G. Basak Road, Agartala, West Tripura, Pin:799001	2328539	Arunabha Saha
Uttar Pradesh	Agra	Ankur Care Centre	27-G/111, Hotel Panchratna Building, Opp. Income Tax Building, Sanjay Place, Agra-282002	9412254152	MrAnkur Goyal
Uttar Pradesh	Aligarh	A.V.Computer Services	City Enclave opp. Kumar Nursing Home Ramghat Road	3200900	Mr.Vaibhav Gupta
Uttar Pradesh	Aligarh	Infocare	17, Vikram Arcade, Railway Road, Aligarh -202001	3258080	Mr. Prabal Bansal
Uttar Pradesh	Allahabad	Micronet Solution	B 38/1, SHOP NO. FE3 VASHITSTHA VINAYAK TOWER, TASHKAND MARG, CIVIL LINES, ALLAHABAD	9335395183, 3250231	Mr. Hashmi
Uttar Pradesh	Allahabad	Radio Centre	SHOP NO-3 1ST FLOOR MEENA BAZAR, Allahabad	3292488	Mr. Manish Khanna
Uttar Pradesh	Amroha	Shree Jee Traders	Bazar Zaiti, Near Tehsil Moc, J.P.Nagar AMROHA-244221	9319075289	MrArun bhargav
Uttar Pradesh	Azamgarh	Rajasthali	ASIF GANJ, CHOWK, AZAMGARH-276001	223644	Mr.Triloki Nath Jalaan
Uttar Pradesh	Badun	Customer Care Services	Plaza Market 1st Floor Near Ghanatghar sixroad Badun.	9319679338	Mr. Nazim
Uttar Pradesh	Bala	Sankatha Communications	Mall Godam road Dr.S. Npandey Clinic Chowk Bala-277001, UP	9307637850	Mr. Manish
Uttar Pradesh	Barabanki	Yash Enterprises	Rashid Enclave, Mugal Darbar, first Floor, Nagar Palika Road, Barabanki	9336323714	Mr. Ajay Srivastava
Uttar Pradesh	Bareilly	Jai infotech	SA-24 DEENDAYAL PURAM BAREILLY	3208484	Mr Rohit Tandon
Uttar Pradesh	Bareilly	Sapan Infotech	G - 64 A Kunwar Complex, Near Gupta Watch Co, 116 Civil Lines, Bareilly	3297933	Mr. Dhirendra Negi
Uttar Pradesh	Basti	Royal Enterprises	near ses agency, jamla hotel, gandhi nagar, basti	9336784054	Mr. Deepak shrivastav
Uttar Pradesh	Bhadoi	Kislay Communication	Station Road, Near Narmada Girls Inter College, Bhadohi-221401	9235506029	Mr.Kislay
Uttar Pradesh	Bijnor	Konark Service Centre	Shop No.7, 1st Floor, Near Ajaz Ali Hall, Nagar Palika Complex, Bijnor-246701	9358364067	MrPratyush Gupta

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Uttar Pradesh	Bulandshahr	MN Telecom	Shop No-1 BHARAMAPUTRA COMPLEX, KALA AAM, Bulandshahr	9358011688	Mr. Taukir Khan
Uttar Pradesh	Chandousi	Om Technologies	697, SITA ROAD, NEAR GANESH MANDIR, CHANDOUSI - 202412	9359986766	Mr.Sachin Gupta
Uttar Pradesh	Deoria	Atharav Communication	SHOP NO 5, SHANTI COMPLEX, HANJUMAN MANDIR ROAD	9335226799	Mr.K.N.Gupta
Uttar Pradesh	Etah	Triveni Computer Service	688/1 Vijay Nagar Infront of Shradha Cinema, Thandi Sadak, Etah-207001	9719398761	Mr.Vinod Kumar
Uttar Pradesh	Etawah	Frontline Computer	132, Civil lines, Pakka Talab X-ing, Opp. HeroHonda Showroom, Etawah-206001	9219404194	Mr.Puneet Kaushik
Uttar Pradesh	Faizabad	Microworld Computer Hardware Lab	1st floor, Baldev Plaza, Rekhabganj, Faizabad	395744	Mr.Kapil/Sunil
Uttar Pradesh	Farrukhabad	Wave Technologies	2 B /122 AVAS VIKAS, LOHIA PURAM, FARRUKHABAD-209625	9335921175	Mr.Dharamveer
Uttar Pradesh	Fatehpur	Trimurti Telecom Services	230, SHADI PUR CHAURAHA, NASEPEER ROAD, FATEHPUR-212601	9336223093	Mr.Sanjay Sachan
Uttar Pradesh	Ghaziabad	Azure Systems	F-28 Konark Building, RDC, Raj nagar GZB	2700717	Mr.Aseem Saraswat
Uttar Pradesh	Ghaziabad	Concessionair Documentation India Pvt Ltd (Cdi)	C-83, Rajnagar District Center (RDC), Ghaziabad	3292011	Mr.Anil Tiwari
Uttar Pradesh	Gonda	Digitelch Services	Suraj Complex Malviya Nagar, Ground Floor, In front of Distt. Mahila Hospital, Gonda	9336695719	Mr.Atul Singh Chauhan
Uttar Pradesh	Gorakhpur	Eternal Electronics	Shop No.11, Pandey Complex, 33, Kasya Road, Opp DIG Bunglow, Gorakhpur -273001	9336410222	Mr. Ajith
Uttar Pradesh	Gorakhpur	MM Communication	Udai Trade Centre, Opp Dr H.N.Singh Medical College road, Basharatpur, Gorakhpur	3250395	Mr.Ashwani
Uttar Pradesh	Hapur	Smart Solutions	10, 1st floor, City Plaza, Hapur, Ghaziabad - 388001	9219659957	Mr.Rajkumar Kanaojia
Uttar Pradesh	Hardoi	Shipra Electricals & Appliances	SHOP No.7 RD PLAZA, INFRONT OF VADIK VIDHYA MANDIR, NEAR AGARWAL DHRAMSALA & HOTEL UTSAV, CIRCULAR ROAD, HARDOI-241001	222384	Mr.Gaurav
Uttar Pradesh	Hathras	Arya Electricals	Bldg No.2206, Near Mayfair Hotel, Kamla Bazar, Hathras-204101	9319338655	Mr.Suneet Arya
Uttar Pradesh	Jaunpur	Shubham Pustakalya	Mandi Naseeb Khan, Near Siya College, Jaunpur	9336510130	Mr.Sudhir/Sanjay
Uttar Pradesh	Jaunpur	Supreme Communication	J.P. Complex, Oland Ganj, Jaunpur	9235407278	Mr.Mahatab Raja Beg
Uttar Pradesh	Jhansi	Krishna Enterprises	372/A CIVIL LINES, GWALIAR ROAD, JHANSI-284001	9335090997	Mr.Sujeet

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Uttar Pradesh	Kannoj	Dixit Mobile Lab	SHOP NO. A1 WARSI COMPLEX, LAKHAN TIRAHA, KANNOJ	9335042373	Mr.Sunil Dixit
Uttar Pradesh	Kanpur	Aakars Electronics	63/2 C(9)BALAJI COMPLEX, THE MALL, KANPUR	9335360303	Mr.Raman
Uttar Pradesh	Kanpur	LB Infotech	111A/409 1st floor, 80-ft road, ashok nagar, kanpur	3207303	Mr.Deepak Bhatia
Uttar Pradesh	Kasganj	Prem Computer Services	Roop Complex, Nadrai Gate, Kasganj-207123	9837403904	Mr.Vinay Agrawal
Uttar Pradesh	Khatauli	Sigma Systems	A-6, Shivlok Market, Near Indra Murti, G.T.Road, Khatauli-388001	9319660000	Mr.Alok Kumar
Uttar Pradesh	Lakhimpur	S S Electronics	GURDARSHAN BUILDING, KACHEHRI ROAD, LAKHIMPUR KHERI, LAKHIMPUR - 262701	9335038258	Mr.Saurabh Sinha
Uttar Pradesh	Lucknow	Alfa Electronics	Shop No.GF20 ABC Complex, Kanpur Road, Lucknow	3248730	Mr.Harjinder Singh
Uttar Pradesh	Lucknow	Hitech Communication	SS 205, Cross road Plaza, Badshah Nagar Crossing, Lucknow.	9335088061	Mr.Ravi Prakash
Uttar Pradesh	Lucknow	Mobile Dot Com	shop no. 111, 1st floor, Shri Ram Towers, Ashok Marg, Lucknow	9335819202	Mr Anand Jhouri/ Archana
Uttar Pradesh	Lucknow	Net Com	3 way road, City Point, Opp Krishi Bhawan, Lucknow-226024	3294222	Mr.Vinod Sharma
Uttar Pradesh	Lucknow	RR Enterprises	Shop No.3, first floor, Deewan Chand Complex, 292/11 Chowk, Lucknow	3262263	Mr.Rohan/Yogesh
Uttar Pradesh	Mainpuri	Raj Communication	1002, Sadar Bazar, Near PNB, Mainpuri-205001 (U.P)	9358090251	Mr.Roshabh Khirbat
Uttar Pradesh	Mathura	R K Infocare	G-1, Abithya Palace, Sonkh Adda, Junction Road, Mathura-281001	3292274	Mr.Alok Gupta
Uttar Pradesh	Meerut	Care Centre	C-19, Vardaman Plaza, Garh Road, Meerut-250005	3258427 / 4005019	Mr.Ajay Mittal
Uttar Pradesh	Meerut	Coincap Services	Labour Compound, Above Allahabad Bank, Near Akash Ganga Jewellers, Begum Bridge, Meerut	2667942	Mr.Atul Mittal
Uttar Pradesh	Meerut	Essar Services	F-132-1333, 1st Floor, Ganga Plaza, Begum Bridge Road, Meerut-250001.	4025863 / 9837067894	Mr.Rajiv Gupta
Uttar Pradesh	MIRZAPUR	Singh Cyber	IMARTI ROAD, OPP. LIC OFFICE, MIRJAPUR-231001	9335205600	MR.Anup Singh
Uttar Pradesh	Modinagar	Ananya Communications	24, K.N.MODI COMPLEX, Modinagar-201204	325424	Mr.Nitin
Uttar Pradesh	Moradabad	Bhavya Technologies	A12, 1st floor, Rampur Road, Gandhi Nagar, Moradabad	3292318	Mr.Vivek Kumar Singh
Uttar Pradesh	Mughalsarai	Sky Mobile World	SUPER MARKET, MUGALSARAI	9335251754	Mr.Vibhuti Jaiswal
Uttar Pradesh	Muzaffarnagar	Advance Series	Shop No-15 prakash chowk Muzaffarnagar-251001	9412210142	Mr. Rajiv

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
Uttar Pradesh	Muzaffarnagar	Jai Computers	Shop No. 4, 1st Floor, Roorkee road, Near Shiv Chowk, Central Bank Mkt. Muzaffarnagar-251001	3294447	Mr.Manohar Singh
Uttar Pradesh	Noida	M R Telecom	D-329, Sector 10, Noida, (Corner Building, Noida Stadium - Jhundpura Main Road)	4312715	Mr.Kalash Aggarwal
Uttar Pradesh	Pilibhit	Kamal Electronics	Station Road, Pilibhit	9319911226	Mr. M A Jilani
Uttar Pradesh	Pratapgarh	Chandra Pratap Veer & Co	KATCHERY ROAD, CHOWK BAZAR, PRATAPGARH -230001	9335050301	Mr.Rajesh Agarwal
Uttar Pradesh	Rai Bareilly	Karuna Enterprises	Shop No.6 & 7, City Complex, Kachary Road, Raebareilly	9336005741	Mr.Vikas
Uttar Pradesh	Rampur	Mamta Technologies	3Fs Shopping Complex, Rahe Murtaza Road, Civil Lines, Rampur-244901	3294923	Mr.Rajeev Yadav
Uttar Pradesh	Saharanpur	Maharaj Communications	1st Floor, Pradeep Hotel Compound, Court Road, Near Indiam bankSaharanpur-247001	3250239	Mr.Pankaj Malhotra
Uttar Pradesh	Shahjahanpur	Sunny Mobile Point	258 B TARIN BAHADURGANJ, SHAHJANPUR	9335019616	Mr.Rajaram Maurya
Uttar Pradesh	Sitapur	Higrade Computers	7, Municipal Market, Sitapur	9936819899	Mr.Sanjeev Goel
Uttar Pradesh	Sultanpur	S S Infocom	SHOP NO. 14&15 NANDINI COMPLEX NEAR SUPER MARKET SULTANPUR-228001	9335055217	Mr.Sachin Dwivedi/Abhinav
Uttar Pradesh	Unnao	Avijit Infocom	251 Opp Collector Ganj, Unnao-209801	6820020	Mr.Vishnu Pandey
Uttar Pradesh	Varanasi	Jaiswal Electronics	SIDDHARTH COPMPLEX, C-2/10-A, Ramkatora, Near Petrol Pump Lahurabai, Varanasi-221001	9335407000	Mr.Sujeet
Uttar Pradesh	Varanasi	Shivam Mobile Distributers	Shop No.5, B37/115-B-1 Baradari Complex, Rathyatra Crossing, Varansi Pin 221010	9335418998	Mr.Rakesh kumar singh
Uttaranchal	Almora	Kumar Telecommunications	Paltan Bazaar, Almora	9411525789	Mr. S Kumar
Uttaranchal	Dehradun	Krishna Communication	Shop No 15A, Meedo Plaza, Rajpur Road, Dehradun, Uttaranchal-248001	09358112922 / 09358119696	Mr.Vinod
Uttaranchal	Haldwani	Fairdeal Agencies	1st Floor, Nainital Road, Uttaranchal Trade Centre, Tikonia Chouraha, Tikonia, Haldwani	282116	Mr.Ajay Gupta
Uttaranchal	Haridwar	Maharaj Computer Services	B-7, Royal Plaza, Ranipur Mod, Haridwar	9359209901	Mr. Kamal Sachdeva
Uttaranchal	Kashipur	Tirpti Communications	Station Road, Main Market, Udamsingh Nagar	935900000	Mr.Ajay Gupta
Uttaranchal	Roorkee	Greetanjali Telecom	Shop No.6, Shyam Market, BSM Tiraha, NehruNagar, Dehradun Road, Roorkee-247667.	326510	Mr. Manish Kumar

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
West Bengal	Asansol	Sky Computer & Telecom	Islam Market, Naruddin Road, Assansol-713301	2207719	Ms.Syed Arshad Ali
West Bengal	Behrampur	Chaitannya Enterprise	152, B B Sen Road, Sadar bazar, PO Behrampur, Distt Murshidabad, pin-742101	9333310161	Mr.Subhas Chandra Basak
West Bengal	Bolpur	Cyber World	59, SUPER MARKET, SANTINIKETAN ROAD, BOLPUR - 731204	252542	Mr.Kishor Kumar Mukherjee
West Bengal	Burdwan	San Infosys	27/1 G.T Road, East End, Burdwan -713103.	3290265	Mr.Sanjit Debnath
West Bengal	Durgapur	Digitech Service	Ashok Bhavan J.K.Pal Lane .Benachity , Durgapur -713213	3293600	Mr.Pintu Chatterjee
West Bengal	Haldia	Digtronix	Holding no -25, PO Khanjanchak, PS Durgachak, Haldia, Dist- East Medinipur-721602	272727 / 9332987527	Mr.Suman Jana
West Bengal	Howrah	Joyram Infotech	51, Jessore Road, Habra Bazar, Das Market, Dist- 24th Fargana(North), PIN-743263	302399 / 329677	Mr. Malay Das
West Bengal	Katwa	Devarshi Mobile Communication	Bhutrath Tala, Besides Ram Bhavan, Post - Katwa, Burdwan - 713130	9333611904	Mr. Devananda Dutta
West Bengal	Kharagpur	S. J. Communication	Inda Main Road, Khudram Ram Market, Kharagpur .Shop No-53. Pin -721305	324056	Mr.Mr.Suman Jana
West Bengal	Kolkata	Berma Infosol Pvt Ltd.	P-168/1 CIT Road, Scheme VIII, KOLKATA 700 067	32943176	Mr.Arun Surana
West Bengal	Kolkata	Friends Communication	32(8) Barasat Road, N/L 15 no raigate, PO-nonachandrapukur, PS-Titagarh, Barrackpore, Dist- North 24PGS, PIN-743102	25921263	Mr.Arup Sarkar & Tarasankar Mukherjee
West Bengal	Kolkata	Jaksom Engineering Pvt Ltd	Block-A, Shop-1, Ambika Vihar, 1/1 Harduttrai Chamarua Road, Howrah- 711001	32950383	Mr.PMukherjee
West Bengal	Kolkata	JP Computers	5B Ekdalia Place, Kolkata - 700019	24401923	Mr.Somim Kabir
West Bengal	Kolkata	Skylink	B/1A, Little Russel Street, Calcutta-700071	32903814	Mr.H R Moila
West Bengal	Kolkata	Sun Mobile Service	15 B.T. Road, N/L Peikpara Bus Stop, Kolkata -700002	32505444	Mr.Vivek Kumar Gupta
West Bengal	Krishnanagar	Addya Electronics	Rajani mukharjee Lane, krishna Nagar, Nadia-741101	2329355	Mr Arijit Sen
West Bengal	Malda	Deb Infotech	PIROJPUR, WOMENS COLLEGE ROAD, MALDA-732101	9434345486	Mr.LITPAL DEY(DEBASIS)

STATE	CITY	ASC NAME	ASC ADDRESS	CONTACT NO.	CONTACT PERSON
West Bengal	Midnapore	Zerobit	Vill- Parbatipur, PO.-Tamluk, Dist- Purba Midnapur, PIN-721636	267476 / 9434110802	Mr.Chanakya Sengupta
West Bengal	Nadia	Prayash	30 SWAMI VIVAKNANDA SARANI, RANAGHAT, DIST-NADIA,	9333515949	Mr. Amar Nath Malick
West Bengal	North 24 Parganas	M/s Teelink	Bashirhat Old Market(Bowbazar) ,Bashirhat Dist, North 24pgs, Pin-743411	325499	Mr. Sukanta Debnath.
West Bengal	North 24 Parganas	Molina Traders	Jessore Road, Bongoan, Dist- North 24 th Pargana, PIN-743235	325433	Mr. Subir Dutta
West Bengal	Purulia	IT POINT	N.C DAS GUPTA ROAD, 2ND FLOOR, SONARTARI APPT (NAMO PARA), PURULIA -723101	9333441065	Mr.Pinaki Roy Choudhary
West Bengal	Serampore	Sri Guru Mobile Service	87 B/15 G.T.Road (West), Hooghly Pin-712203	32528581	Mr.Shyamal Kumar Das
West Bengal	Siliguri	Care	sumantra bhawan.S.B.I hakim para building, 160/1030 Haren Mukharejee Road, siliguri-734001	6450515	Mr.Srijoy Dutta

	SERVICE
	1800-180-9999*
<small>*MTNL / BSNL **Prefix STD Code</small>	39-01-0909**

