


OWNER'S MANUAL

Please read this manual carefully before operating your set and retain it for future reference.

TYPE : WALL MOUNTED



www.lge.com

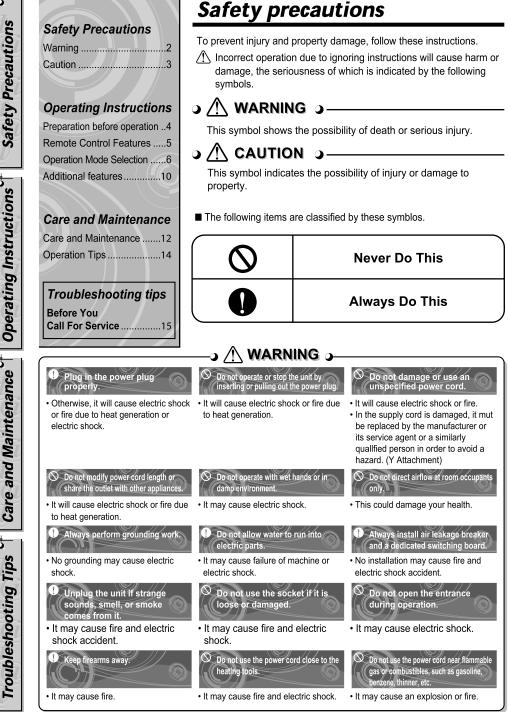

ာ 🕂 WARNING ၁—

Ventilate before operating air conditioner when gas goes out. O Do not disassemble or modify products randomly.

• It may cause explosion, fire and, burn.

• It may cause failure and electric shock.



Safety Precautions 1


Preparation before operation

How to Insert the Batteries

- Remove the battery cover by pulling it according to the arrow direction.
- Insert new batteries making sure that the (+) and (-) of 2 battery are installed correctly.
- Reattach the cover by sliding it back into position. 3


NOTES:

• Use 2 AAA(1.5volt) batteries. Do not use rechargeable batteries.



Storage and Tips For Using the Remote Control

- . The remote control may be stored by mounting it on a wall.
- •To operate the room air conditioner, aim the remote control at the signal receptor.






Signal Receptor


Receives the signals from the remote control. (Signal receiving sound: two short beeps or one long beep.)

Operation Indication Lamps


\bigcirc	On/Off	: Lights up during the system operation.
╚	Timer	: Lights up during Timer operation.
OUT DOOR	OUTDOOR UNIT OPERATION	: Lights up during outdoor unit operation. (Cooling model only)




About the remote control on the system

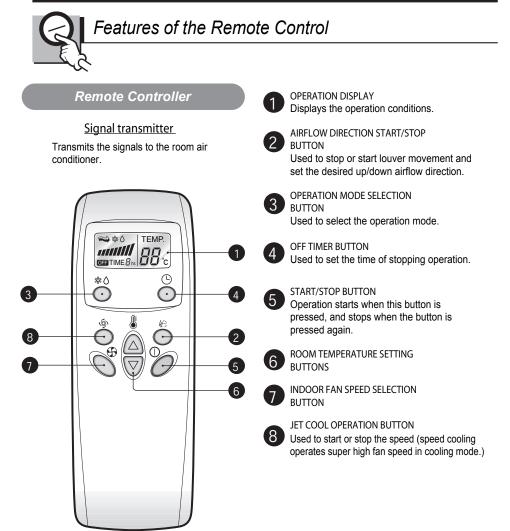



ENGLISH

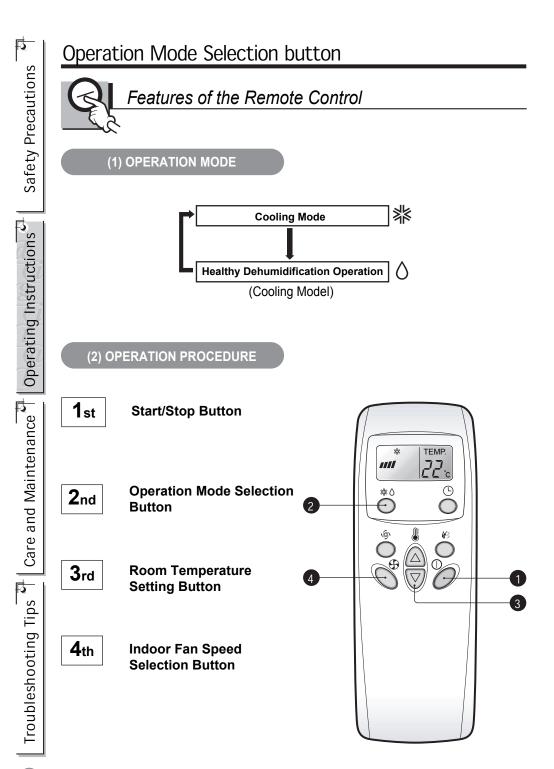


How to use the Operation Mode Selection button

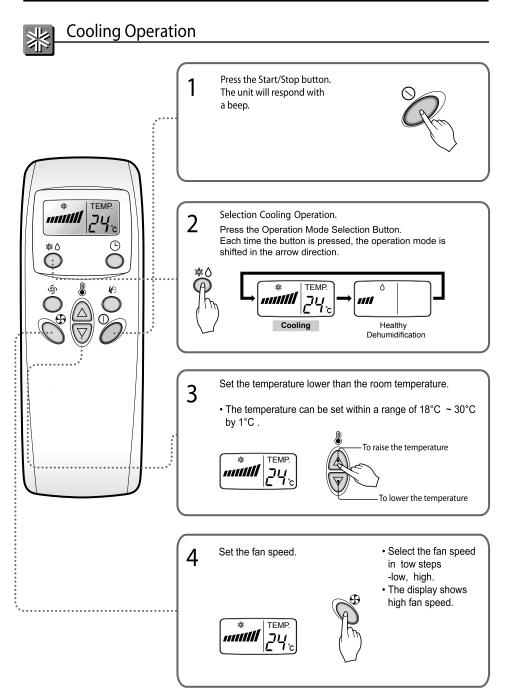

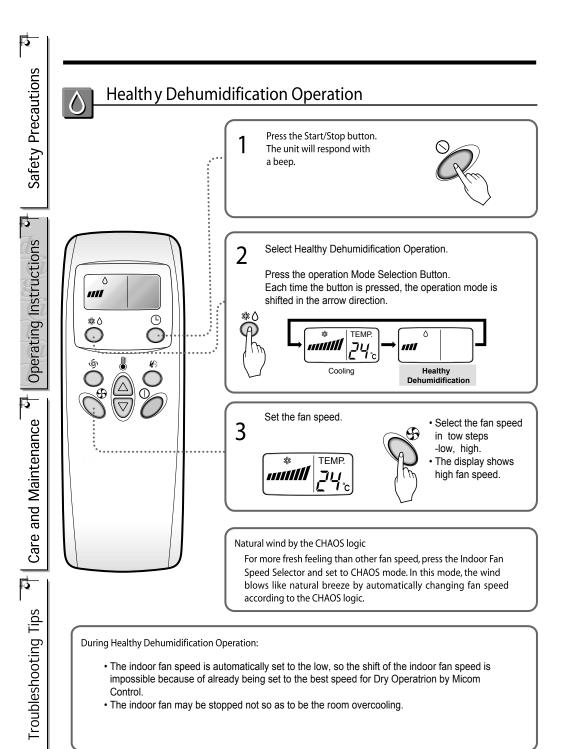

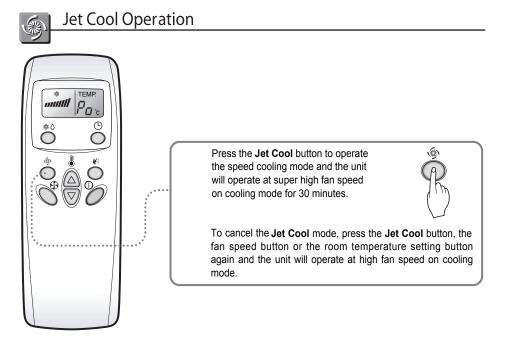

Timer Control Setting

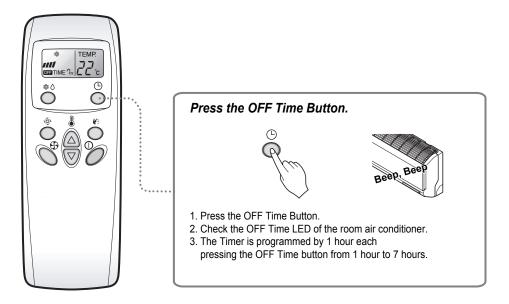


Additional features




Vertical Airflow Direction Control

Airflow Direction Control


The airflow direction can be adjusted as desired by using the remote controller. This is effective when you want to cool yourself directly, such as after taking a bath.



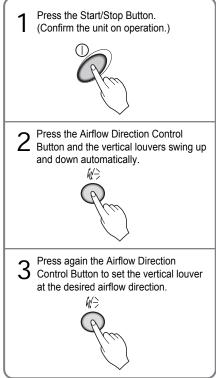

Horizontal Airflow Direction Control

 Adjust the horizontal airflow direction by manually moving the horizontal airflow direction louver by hand.






- Always use the remote controller to adjust the airflow direction. Manually moving the vertical airflow direction louver by hand could cause operation errors.
- When air conditioner operation is stopped, the vertical airflow direction louver will close the air outlet vent of room air conditioner.



Forced Operation

Operation procedures when the remote control can't be used. The operation will be started if the power button is pressed. If you want to stop operation, re-press the button.



	Cooling Model	Heat pump Model		
		Room Temp. 24 °C	21°C Room Temp. < 24 °C	R oom Temp. < 21 °C
Operating mode	Cooling	Cooling	Healthy Dehumidification	Heating
Indoor FAN Speed	High	High	High	High
Setting Temperature	22 °C	22°C	23°C	24°C

Test operation

During the TEST OPERATION, the unit operates in cooling mode at high speed fan, regardless of room temperature and resets in 18 minutes.

During test operation, if remote controller signal is received, the unit operates as remote controller sets. If you want to use this operation, Press and hold the ON/OFF button for 3~5 seconds, then the buzzer sound 1 "beep".

If you want to stop the operation, re-press the button.

Auto restart

In case the power comes on again after a power failure, Auto Restarting Operation is the function to operate procedures automatically to the previous operating conditions. So there is no need of activating this function by pressing any key or button.

In the initial mode, the fan operates at a low speed and the compression starts 2.5~3 minutes later.

As the compressor starts, the fan speed also resumes its previous setting mode.

Helpful information

Fan speed and cooling capacity.

The cooling capacity indicated in the specification is the value when the fan speed is set to high, and the capacity will be lower at low or medium fan speed.

High fan speed is recommended when you wish to cool the room quickly.



Care and maintenance of the air conditioner

CAUTION: Before performing any maintenance, turn off the main power to the system.

Indoor Unit

Grille, Case, and Remote Control

Turn the system off before cleaning. To clean, wipe with a soft, dry cloth. Do not use bleach or abrasives.


NOTE:

Supply power must be disconnected before cleaning the indoor unit.

Air inlet vent Air outlet vent Air filters (behind front panel) Vertical louver Horizontal louver

AIR FILTERS

The air filters behind the front grille should be checked and cleaned once in every 2 weeks or more often if neccessary.



Never use any of the followings:

• Water hotter than 40 °C Could cause deformation and/or discoloration.

Volatile substances

Could damage the surfaces of the air conditioner.





Lift the front access panel and pull the filter tab slightly forward to remove the filter.



- Clean the filter with a vacuum cleaner or warm, soapy water.
- If dirt is conspicuous, wash with a solution of detergent in lukewarm water.
- If hot water (40 °C or more) is used, it may be deformed.
- After washing with water, dry well in the shade.



Re-install the air filter.


Troubleshooting Tips


Outdoor Unit


The heat exchanger coils and panel vents of the outdoor unit should be checked regularly. If clogged with dirt or soot, the heat exchanger and panel vents may be professionally steam cleaned.

NOTE:

Dirty or clogged coils will reduce the operating efficiency of the system and cause higher operating costs.



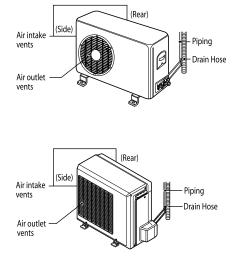

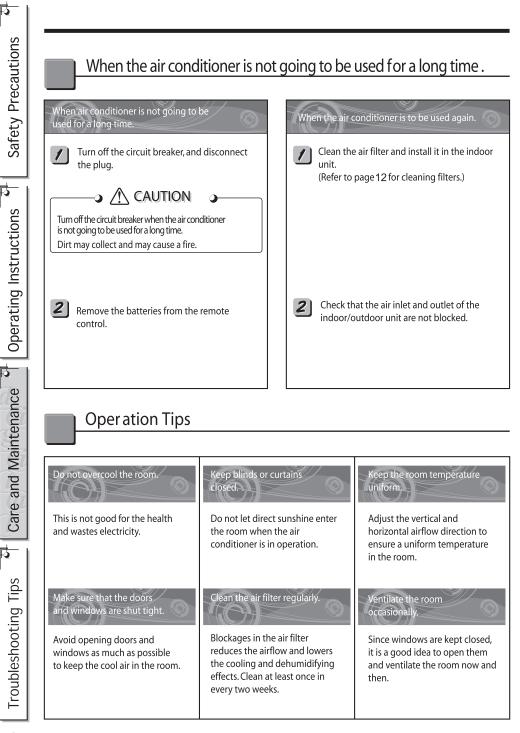



Troubleshooting Tips! Save time and money!

Check the following points before requesting repairs or service.... If the fault persists, please contact your dealer or service center.

Case	Explanation	See page
The air conditioner does not operate.	 Have you made a mistake in timer operation. Has the fuse blown or has the circuit breaker been tripped. 	9
The room has a peculiar odor.	•Check that this is not a damp smell exuded by the walls, carpet, furniture, or cloth items in the room.	-
It seems that condensation is leaking from the air conditioner.	•Condensation occurs when the airflow from the air conditioner cools the warm room air.	-
Air conditioner does not operate for about 3 minutes when restarted.	 This is the protector of the mechanism. Wait about three minutes and operation will begin. 	-
Does not cool or heat effectively.	 Is the air filter dirty? See air filter cleaning instructions. Has the temperature been set incorrectly. 	12
	Are the indoor unit's air inlet or outlet vents obstructed.	-
The air conditioner operation is noisy.	 For a noise that sounds like water flowing. This is the sound of freon flowing inside the air conditioner unit. For a noise that sounds like the compressed air releasing into atmosphere. This is the sound of the dehumidifying water being processed inside the air conditioning unit. 	-
Remote control display is faint, or no display at all.	 Are the batteries depleted. Are the batteries inserted in the opposite (+) and (-) directions. 	4
Crack sound is heard.	•This sound is generated by the expansion/constriction of the front panel, etc. due to changes of temperature.	-

NOTE WATER RESISTANT:

The outdoor side of this appliance is WATER RESISTANT.

The indoor side is not water resistant and should not be exposed to excess water.

