



SIMPLE MANUAL

# Wireless Sound Bar

ENGLISH

To view the instructions of advanced features,  
visit <http://www.lg.com> and then download Owner's Manual.  
Some of the content in this manual may differ from your unit.

MODELS  
LAS550H


LAS551H



[www.lg.com](http://www.lg.com)



## Front Panel

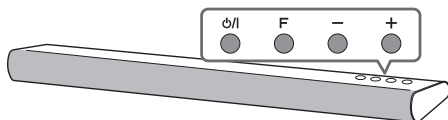

- P/** ..... Power On /Off
- F** ..... Selects Function
- +** ..... Adjusts Volume

## 1 Subwoofer Connection

Place the wireless subwoofer near the sound bar and follow steps below.

- 1 Connect the power cord of wireless subwoofer to the outlet.
- 2 Turn on the sound bar :  
The sound bar and wireless subwoofer will be **automatically** connected. A yellow-green LED on the wireless subwoofer will light on.



If no sound is heard from the wireless subwoofer, please follow as below.


- i. Adjust volume level of sound bar to minimum. "VOL MIN" appears on display window.
- ii. Press and hold  (Mute) button on the remote control about 3 seconds. "WL RESET" appears on display window and red LED on the sound bar blinks.
- iii. Press and hold PAIRING on the back of wireless subwoofer for more than 5 seconds using point of a pen.
- iv. Disconnect the power cord of the sound bar and the wireless subwoofer. Connect them again.

## Controller App



Download the **Music Flow Bluetooth** App to your device.

## Rear Panel

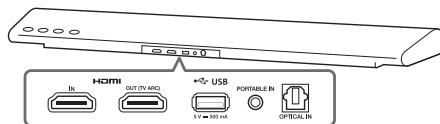


- HDMI IN ..... Connect to a device
- HDMI OUT (TV ARC) ..... Connect to a TV
- USB port ..... Connect to a USB device
- PORTABLE IN ..... Connect to a Portable device
- OPTICAL IN ..... Connect to an Optical device

## 2 TV Connection

Connect with the Sound Bar and TV using Optical (A) or HDMI ARC (B).


### A Optical Connection

- 1 Connect the sound bar to the TV using Optical cable.
- 2 Set up [External Speaker (Optical)] on your TV setting menu.



### B HDMI(ARC) Connection

- 1 Connect the sound bar to the TV using HDMI cable.
- 2 Set up [External Speaker (HDMI ARC)] on your TV setting menu.



## LG Sound Sync (Wireless)



For more information, download the online owner's manual. <http://www.lg.com>


## Additional Information

### Specification

|                                    |                                                                                                |
|------------------------------------|------------------------------------------------------------------------------------------------|
| Power requirements                 | Refer to the main label.                                                                       |
| Power consumption                  | Refer to the main label.<br>Networked standby : 2.5 W<br>(If all network ports are activated.) |
| Dimensions (W x H x D)             | Approx.<br>890 mm x 51 mm x 85 mm                                                              |
| Net Weight                         | Approx. 2.8 kg                                                                                 |
| Bus Power Supply (USB)             | 5 V  500 mA   |
| Amplifier (Total RMS Output power) | 320 W                                                                                          |

Design and specifications are subject to change without notice.

### Remote control




-  : Turns down the volume at night.
-  : Adjusts the volume level appropriately.
-  : Synchronizes the audio and video.
-  : Automatically turns on by an input source.

### How to disconnect the wireless network connection or the wireless device

Set up the AUTO POWER ON/OFF function to off and turn off the unit.

### Replacement of battery



|            | Телефон                                                 | Режим работы                                         | Интернет                                          |
|------------|---------------------------------------------------------|------------------------------------------------------|---------------------------------------------------|
| Россия     | 8-800-200-7676                                          | Круглосуточно                                        | <a href="http://www.lg.com">http://www.lg.com</a> |
| Беларусь   | 8-820-0071-1111                                         |                                                      |                                                   |
| Латвия     | 8-0200-201                                              | 9:00 - 17:00 (Пн.-Пт.)                               |                                                   |
| Литва      | 8-800-08-081                                            |                                                      |                                                   |
| Эстония    | 800-9990                                                |                                                      |                                                   |
| Украина    | 0-800-303-000                                           | 8:00 - 21:00 (Пон.-Пят.)<br>8:30 - 18:30 (Суб., Нд.) |                                                   |
| Казахстан  | 8-8000-805-805                                          | 9:00-20:00 (Пн.-Пят.)<br>9:00-18:00 (Суб., Вс.)      |                                                   |
|            | 2255 (GSM)                                              |                                                      |                                                   |
| Узбекистан | 8 800 120 2222                                          | 9:00 - 18:30 (Пн.-Пят.)<br>9:00 - 15:00 (Суб., Вс.)  |                                                   |
| Кыргызстан | 800 0071 0005                                           | Круглосуточно                                        |                                                   |
| Молдова    | 00-800-0071-0005<br>(Только для стационарных телефонов) | Круглосуточно                                        |                                                   |

### Российская Федерация

Импортер ООО "ЛГ Электроникс Рус"

Адрес импортера: 143160 Российская Федерация, Московская область, Рузский район, сельское поселение Дороховское, 86 км. Минского шоссе, д.9

Адрес производителя : ЛГ Электроникс (Хужоу) Инк., завод Хатаи  
516006, Китай, пров. ГуанДонг, г. Хужоу, Промышленная зона  
Жонгкай, Индустриальный парк Хутай, ХуФенг Донг Уи Роуд, 13.

Сделано в Китае

### Україна

Найменування та адреса імпортера

ПІІ «ЛГ ЕЛЕКТРОНІКС Україна» вул. Басейна, 6, м. Київ, 01004,  
Тел 044 201-43-50

### Қазақстан Республикасы

Импорттаушы АҚ "ЭЛ Джи Электроникс Алматы Қазақстан", 050061, Алматы қ., к. Көкорай, 2А

Өндірушінің мекенжайы: LG Electronics(Huizhou) Inc. Huitai Factory  
516006, Қытай, ГуанДонг ауданы, Хужоу қаласы, Жонгкай  
өнеркәсіптік аймағы,  
Хутай Индустриялық саябағы, ХуФенг Донг Уи Роуд, 13.

Қазақстан Республикасы территориясында тұтынушылардан келіп түскен талаптар мен ұсыныстарды қарайтын және тауарды жөндеу мен техникалық қызмет көрсететін ұжым:

АҚ «Эл Джи Электроникс Алматы Казахстан», 050061, Қазақстан Республикасы, Алматы қ., Көкорай, 2А. Басқа сервис орталықтары жайында мағлұматты "Тұтынушыға қызмет көрсету орталығына" телефон шалу арқылы білуге болады.

Қытайда жасалған

