

Owner's Manual

DLP PROJECTOR

Please read this manual carefully before operating your projector and retain it for future reference.

PG65U

www.lg.com

SAFETY INSTRUCTIONS

Please take note of the safety instructions to prevent any potential accident or misuse of the projector.

• Safety precautions are given in two forms, i.e. WARNING and CAUTION as detailed below.

WARNING: Failure to follow the instructions may cause serious injury and even death.
 CAUTION: Failure to follow the instructions may cause injury to persons or damage to the product.

• Read the owner's manual carefully and keep it to hand.







The lightning flash with arrowhead symbol within an equilateral triangle is intended to alert the user

to the presence of uninsulated dangerous voltage within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important

operating and maintenance (servicing) instructions in the literature accompanying the appliance.

WARNING/CAUTION

- TO REDUCE THE RISK OF FIRE AND ELECTRIC SHOCK, DO NOT EXPOSE THIS PRODUCT TO RAIN OR MOISTURE. Read these instructions. Keep these instructions. Heed all warnings. Follow all instructions.

Indoor Installation

WARNING

- Do not place the projector in direct sunlight or near heat sources such as radiators, fires, stoves, etc.
 - This may cause a fire.
- Do not place flammable materials such as aerosols near the projector.
 This may cause a fire.
- Do not allow your children to cling to or climb up to the projector.
 - The projector may fall down and cause personal injury or death.
- Do not place the projector directly on a carpet, rug, or place where ventilation is restricted such as a bookshelf or closet.
 - This may cause the projector's internal temperature to rise and cause a fire.
- Do not place the product close to sources of steam, oil or oil mist, such as humidifiers and kitchen counters.
 - Failure to do so may result in fire, electric shock, or corrosion.

 Do not install the product onto a wall or ceiling that is close to sources of oil or oil mist.

- The product may be damaged and fall, resulting in serious injury.

- Do not place the projector where it might be exposed to excessive dust.
 This may cause a fire.
- Do not use the projector in a damp place such as a bathroom where it is likely to get wet.
 - This may cause a fire or an electric shock.
- Do not allow a tablecloth or curtain to block the vents.
 - This may cause the internal temperature of the projector to rise and cause a fire.
- The distance between the projector and the wall should be more than 30 cm (11.8 inches) for ventilation purposes.
 - Otherwise, this may cause the internal temperature of the projector to rise and cause a fire.

▲ CAUTION

- When installing the projector on a table, be careful not to place it near the edge.
 - The projector may fall causing injury to persons or damage to the projector. Make sure that you use a stand suitable for the size of projector.
- Turn off the projector, disconnect the power supply, and remove all connec tions before moving the projector.
 - A damaged cord may cause a fire or an electric shock.
- Do not install the projector on an unstable or vibrating surface such as a vibrating shelf or tilted surface.
 - It may fall and cause injury.

- Be careful not to tip the projector over when connecting external devices to the projector.
 - This may cause injury to persons or damage to the projector.

Power

WARNING

 The ground wire should be connected.
 Inappropriate earth grounding may cause damage to the projector or an electric shock when there is an electrical surge.

If the projector must be installed at a place where earth grounding is not possible, purchase a circuit breaker and connect the projector to its wall outlet.

Do not ground the projector to a the gas pipe, water pipe, lightning rod, or telephone line, etc.

- The power plug should be fully inserted into the wall outlet.
 - Unstable connection may cause a fire.
- Do not place heavy objects on the power cord or place the cord underneath the projector.
 - This may cause a fire or an electric shock.
- Never touch the power plug with a wet hand.
 - This may cause an electric shock.
- Do not connect too many devices to the same power extension.

- Overheating may cause a fire.

- Remove dust or contaminants around power plug pins or wall outlets.
 This may cause a fire.
- To turn off the main power, remove the power plug, which should be positioned so it is easy to access for operation.

▲ CAUTION

- Hold the plug firmly when unplugging.
 - A broken wire in the cord may cause a fire.
- Ensure the power cord or plug is not damaged, modified, severely bent, twisted, pulled, sandwiched, or heated. Do not use a loose wall outlet.
 This may cause a fire or an electric
 - shock.
- Keep the power cord away from any heating devices.
 - The cord coating may melt and cause an electric shock.
- Place the projector where people will not trip over or tread on the power cord or plug to protect the power cord and plug from any damage.
 This may cause a fire hazard or an
 - electric shock.
- Do not turn the projector on or off by plugging in the power plug or unplugging it from the wall outlet.
 (Do not use the power plug as a switch.)
 - This may cause an electric shock or damage to the projector.
- Use the projector on a single outlet circuit.
 - In addition, do not touch the power plug immediately after it is disconnected from the wall outlet.
 - This may cause an electric shock.
- Use only the official power cord which is provided by LG Electronics, Inc. Do not use other power cords.
 - This may cause a fire or an electric shock.

When in Use

WARNING

- Do not place anything containing liquid, such as a vase, flowerpot, cup, cosmetics, chemicals, decorations, candles, etc., on top of the projector.
 Possible fire, electric shock, or falling may cause physical injury.
- In the event that there is a big impact to the projector or the cabinet is damaged, switch it off, unplug it from
 - rized service center. - Otherwise, this may cause a fire or an electric shock.

the wall outlet, and contact an autho-

- Do not insert pieces of metal such as coins, hairpins or metal debris, nor flammable materials such as paper or matches into the projector.
 - This may cause a fire or an electric shock.
- In the event that liquid or a foreign object falls into the projector, please switch it off and unplug it from the wall outlet and contact an LG Electronics Service Center.
 - Otherwise, this may cause a fire or an electric shock.
- When replacing a battery of the remote control, make sure a child does not swallow the battery. Keep the battery out of reach of children.
 - In the case of a battery being swallowed by a child, please consult a doctor immediately.
- Never open any cover on the projector. There is a high risk of electric shock.

- Do not look directly into the lens when the projector is in use. The strong light may damage your eyes.
- When the lamp is on or has just been turned off, avoid touching the air vent or lamp because these will be very hot.
- If there is a gas leak, do not touch the wall outlet. Open the window for ventilation.
 - A spark may cause a fire or burn.
- Never touch the projector or power cord during thunder or lightning.
 This may cause an electric shock.
- Do not use the projector near an electronic device which generates a strong magnetic field.
- Store the vinyl envelope used to pack the projector in a safe place away from children.
 - It could cause suffocation if used improperly.
- Do not keep your hand on the projector for a long time when it is running.
- When you play a game by connecting a game console to a projector, it is recommended that you maintain a distance of more than four times the diagonal length of the screen.
- Make sure that the length of connecting cable is long enough.
 Otherwise, the product may fall causing personal injury or damage to the product.

- Do not place a heavy object on the projector.
 - It may fall down and cause physical injury.
- Be careful to prevent the lens from heavy impact during transportation.
- Do not touch the lens. The lens may be damaged.
- Do not use any sharp tools on the projector such as a knife or hammer, because this may damage the casing.
- In the event that no image appears on the screen, switch the projector off, unplug it from the wall outlet and contact an authorized service center.
 Otherwise, this may cause a fire or an electric shock.
- Do not drop an object onto the projector or apply heavy pressure to it.
 - This may cause injury to persons or damage to the projector.
- The distance between your eyes and the screen must be around
 5 - 7 times the diagonal length of the screen.
 - If you watch the screen at a close distance for a long time, your eye sight may become worse.

Cleaning

WARNING

- Do not spray the projector with water when cleaning. Do not allow water to go into the projector or do not allow it to get wet.
 - This may cause a fire or an electric shock.
- When there is smoke or a strange smell coming out from the projector or a foreign object falls into the projector, please switch it off and unplug it from the power outlet and contact an LG Electronics Service Center.
 If not, this may cause a fire or an electric shock.
- Use an air spray or soft cloth or cotton swab moistened with a lens cleaning chemical or alcohol to remove dust or stains on the front projection lens.

▲ CAUTION

- Contact your seller or the Service Center once a year to clean the internal parts of the projector.
 - If you do not clean the contaminated interior of the projector for a long time, there may be a fire or damage to the projector.

- When cleaning plastic parts such as the projector case, unplug the power first and wipe with a soft cloth. Do not spray with water or wipe with a wet cloth. When cleaning the plastic parts, such as the projector case, do not use cleanser, automobile or industrial shiner, abrasive or wax, benzene, alcohol, etc., which can damage the product.
 - This can cause fire, electric shock or product damage (deformation, corrosion, and damage).

OTHERS

WARNING

- Only a qualified technician can disassemble or modify the projector. For inspection, adjustment, or repair, contact your seller or the Service Center.
 - Otherwise, this may cause a fire or an electric shock.
- Dispose of the used battery properly.
 Otherwise, this may result in

explosion or fire.

- The correct method of disposal may vary depending on your country or region. Dispose of the battery pack according to the appropriate instructions.
- Do not throw or disassemble the battery.
 - -Otherwise, this may result in fire or explosion due to damage to the battery.

- Always use batteries approved and certified by LG Electronics.
 - Otherwise, this may result in fire or explosion.
- Store the battery away from metallic objects, such as keys and paper clips.
- Excess current may cause a rapid increase in temperature, resulting in fire or burns.
- Do not store the battery near any heat source, such as a heater.
 - This may result in fire or damage the product.
- Do not store it at temperatures higher than 60 °C or in high humidity.
- Keep the battery out of reach of children.
 - This may result in personal injury or damage to the product.
- Make sure that the battery is installed correctly.
- Incorrect battery replacement may cause fire.
- Do not stare directly into lens when in operation, eye damage can occure.
- No user serviceable parts inside unit. High voltage parts can cause shock and even electrocution.
- Proper ventilation required, do not block airflow around unit.
 Doing so can cause injury and internal overheating.
- To prevent damage to lamp, unit must remain plugged in for approximately 3 minutes after power down to allow for proper cool down (not applicable on LED models).

- Do not touch the lens; doing so can result in burns or damage to lens.
 Lens and unit may be HOT during and immediately after use.
 Use caution when handling unit, allowing for proper cool down.
- Only use a grounded electrical outlet.
- Do not insert anything into or cover up the exhaust vents.
- Follow all maintenance guidelines for optimal use; service only at an authorized service center.
- Lamp contains mercury and as such must be disposed of according to local, state and federal laws (not applicable on LED models).


- Unplug the power cord if the projector is not used for a long period.
 - Accumulated dust may cause overheating, an electric shock from corroded insulation, or a fire from an electrical surge.
- Only use the specified type of battery.
 Otherwise, this may cause an electric shock caused by overheating and leakage.
- Make sure you use the same type of battery when replacing. (Battery CR2032/3 V)
 - In the case of a battery contact failure, the battery may drain quickly or the remote control may not work properly.

ANTENNA

Outdoor Antenna Grounding

 If an outdoor antenna is installed. follow the precautions below. An outdoor antenna system should not be located in the vicinity of overhead power lines or other electric light or power circuits, or where it can come in contact with such power lines or circuits as death or serious iniury can occur. Be sure the antenna system is grounded so as to provide some protection against voltage surges and built-up static charges. Section 810 of the National Electrical Code (NEC) in the U.S.A. provides information with respect to proper grounding of the mast and supporting structure, arounding of the lead-in wire to an antenna discharge unit. size of grounding conductors, location of antenna discharge unit, connection to grounding electrodes and requirements for the grounding electrode

Antenna grounding according to the National Electrical Code, ANSI/NFPA 70



FCC NOTICE

Federal Communications Commission (FCC) Statement

You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1) This device may not cause harmful interference, and

2) This device must accept any interference received, including interference that may cause undesired operation of the device of the device.

IC (CANADA)

Industry Canada Statement:

This device complies with RSS-210 of the Industry Canada Rules. Operation is subject to the following two conditions:

- 1) this device may not cause interference and
- this device must accept any interference, including interference that may cause undesired operation of the device.

Avis d'Industrie Canada :

Cet appareil est conforme à la norme CNR-210 des rvèglements d'Industrie Canada. Son fonctionnement est sujet aux deux conditions suivantes :

- Cet appareil ne doit pas provoquer d'interférences et
- Cet appareil doit accepter toutes les interférences, y compris celles pouvant entraîner son dysfonctionnement.

IC Radiation Exposure Statement:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment.

NOTE: THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

Avis d'Industrie Canada sur l'exposition aux rayonnements

Cet appareil est conforme aux limites d'exposition aux rayonnements d'Industrie Canada pour un environnement non contrôlé.

REMARQUE : LE FABRICANT N'EST PAS RESPONSABLE DES INTERFÉRENCES RADIOÉLECTRIQUES CAUSÉES PAR DES MODIFICATIONS NON AUTORISÉES APPORTÉES À CET APPAREIL. DE TELLES MODIFICATIONS POURRAIT ANNULER L'AUTORISATION ACCORDÉE À L'UTILISATEUR DE FAIRE FONCTIONNER L'APPAREIL.

For USA

NOTE TO CABLE/TV INSTALLER

This reminder is provided to call the CATV system installer's attention to Article 820 - 40 of the National Electric Code (U.S.A.). The code provides guidelines for proper grounding and, in particular, specifies that the cable ground shall be connected to the grounding system of the building, as close to the point of the cable entry as practical.

- This DLP Projector is a Risk Group 2 device that meets safety standard IEC 62471 standard.

Risk Group 2 Groupe exposé 2

CAUTION Possibly hazardous optical radiation emitted from this product. Do not stare at operating lamp. May be harmful to the eye.

MISE EN GARDE Risque de rayonnement optique nocif émis par ce produit. Évitez de fixer la lampe de fonctionnement. Cela pourrait endommager vos yeux.

LICENSES

Supported licenses may differ by model. For more information about licenses, visit www.lg.com.





Manufactured under license from Dolby Laboratories. Dolby and the double-D symbol are trademarks of Dolby Laboratories.

ABOUT DIVX VIDEO: DivX[®] is a digital video format created by DivX, LLC, a subsidiary of Rovi Corporation. This is an official DivX Certified[®] device that plays DivX video. Visit divx.com for more information and software tools to convert your files into DivX video.

ABOUT DIVX VIDEO-ON-DEMAND: This DivX Certified® device must be registered in order to play purchased DivX Video-on-Demand (VOD) movies. To obtain your registration code, locate the DivX VOD section in your device setup menu. Go to vod.divx.com for more information on how to complete your registration.

"DivX Certified® to play DivX® video up to HD 1080p, including premium content."

"DivX[®], DivX Certified[®] and associated logos are trademarks of Rovi Corporation or its subsidiaries and are used under license."

"Covered by one or more of the following U.S. patents : 7,295,673; 7,460,668; 7,515,710; 7,519,274"



The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

This device meets the EMC requirements for home appliances (Class B) and is intended for home usage. This device can be used in all regions.



- Image shown may differ from your projector.
- Your projector's OSD (On Screen Display) may differ slightly from that shown in this manual.

CONTENTS

SAFETY INSTRUCTIONS		
LICE	NSES	11
PREF	PARATION	13
Access	ories	13
Option	al Extras	14
Parts a	and Components	15
Installa	ation	16
- Ins	tallation Precautions	16
- Co	nnecting an adapter	16
- Pro	pjection Distance per	
Sci	reen Size	17
	ing the Lens Hood	18
	ing the cradle scene	18
	nnecting the battery	19
	w to Install the Projector On	~ ~
	ripod	20
- Ke	nsington Security System	21
REMO	OTE CONTROL	22
USIN	G THE PROJECTOR	24
Conne	cting to an Antenna or Cable	24
- Co	nnecting an Antenna or Basic	
Ca	ble	24
	nnecting a Cable Box	24
- Us	ing the battery	25
	ttery using time information	25
	ing the Projector	27
	rning on the Projector	27
	cus and Position of the Screer	
	age	27
	atching the Projector	27
-	ing Channels	28
	tting Up Channels	28
	Additional Options	30
	justing Aspect Ratio	30
	ing the Keystone Function	31 31
	ing the Input List Ink Function	31 32
	the Quick Menu	32 32
Jang	nie gulek menu	25

ENTERTAINMENT	33
Using SCREEN SHARE	33
MY MEDIA	34
- Connecting USB Storage Devices	34
- To disconnect the USB storage	
device	34
- MOVIE LIST	36
- PHOTO LIST	42
- MUSIC LIST	44
- FILE LIST	46
CUSTOMIZING SETTINGS	48
SETUP Menu	48
PICTURE Settings	49
AUDIO Settings	52
CHANNEL Settings	53
TIME Settings	54
LOCK Settings	55
OPTION Settings	57
MAKING CONNECTIONS	60
Connecting to an HD Receiver,	
DVD Player, or VCR	61
- HDMI Connection	61
Connecting to a PC	61
- RGB Connection	61
Connecting to the AV INPUT	62
 Component Connection 	63
Connecting to Headphones	63
MHL Connection	64
MAINTENANCE	64
Cleaning the Projector	64
- Cleaning the Lens	64

SPECIFICATIONS 65

64


- Cleaning the Projector Case

PREPARATION

Accessories

Check enclosed accessories.

The picture may be different from an actual product.

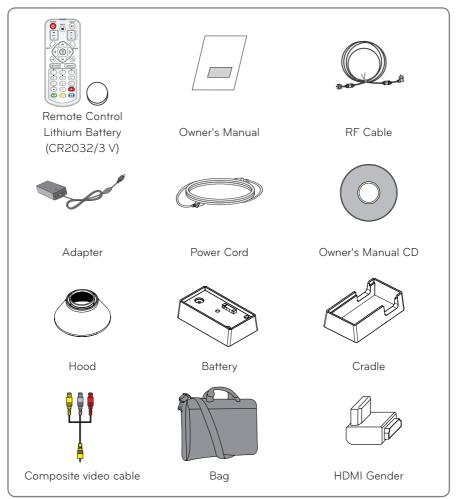

When connecting an HDMI or USB cable, or connecting a USB flash drive to the HDMI or USB port, use a product that has a width of 21 mm or less and a height of 12 mm or less. If the USB cable or USB flash drive does not fit the USB ports of the projector, use an extension cable that supports USB 2.0.





- If you do not use a certified HDMI cable, the screen may not display or a connection error may occur. (Recommended HDMI cable types)
 - High-Speed HDMI*/ $^{\rm TM}$ Cable
 - High-Speed HDMI®/™ Cable with Ethernet

Optional Extras

To purchase optional extras, visit an electronics store or online shopping site or contact the retail store where you purchased the product.

Without prior notice, optional extras are subject to change in order to improve the performance of the product, and new accessories may be added.

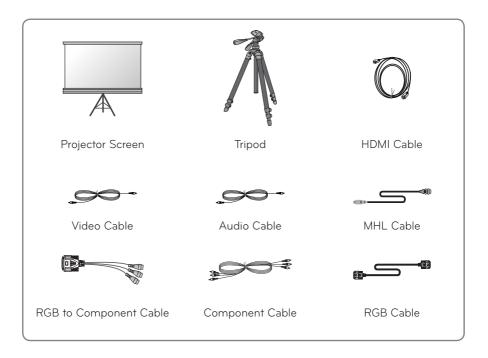




A≦12 mm , B≦21 mm

Parts and Components

* The projector is manufactured using high-precision technology. You may, however, see tiny black dots and/or bright colored dots (red, blue or green) that continuously appear on the projector screen. This is a normal result of the manufacturing process and does not indicate a malfunction. When powered on, the LED of the control panel turns on.

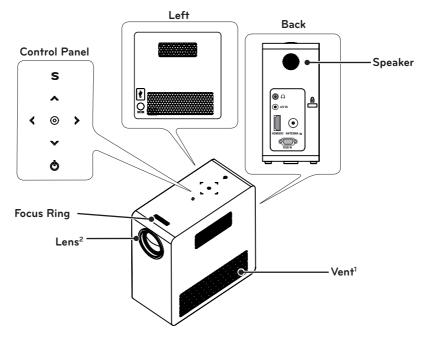

Button	Description
🕲 (Power)	Turns the projector on or off.
S (Settings)	Selects or closes menus.
	Moves between menus and changes the settings.
$\land,\lor,<,>$	(<,> button: The volume can be adjusted according to the
	input mode)
	Checks present mode and saves function changes.

- 1 Due to the high temperature air coming out of the vents, do not get close to the vents.
- 2 Do not touch the lens when using the projector. The lens may be damaged.

Installation

Installation Precautions

- Place the projector in a well-ventilated environment.
- To prevent internal heat from building up, install the projector in a wellventilated place.

Do not place anything near the projector as this may block the air vents. If the air vents are blocked, the internal temperature will increase.



 Do not place the projector on a carpet or rug. Do not block any vents on the bottom and use the projector on a leveled solid surface.



- Be sure to prevent foreign objects such as paper debris from entering the projector.




- Leave an adequate open area (30 cm (11.8 inches) or more) around the projector.



- Do not place the projector in a hot or humid environment.
 - Do not place the projector in a hot, cold, or humid environment.
- Do not place the projector in a place where it will easily attract dust.
 This may cause a fire.
- Never open any cover on the projector. There is a high risk of electric shock.
- The projector is manufactured using high-precision technology. You may, however, see tiny black dots and/ or bright colored dots (red, blue or green) that continuously appear on the projector screen. This is a normal result of the manufacturing process and does not indicate a malfunction.
- The remote control may not work in an environment where a lamp equipped with electronic ballasts or a three-wavelength fluorescent lamp is installed. Replace the lamp with an internationally standardized lamp for the remote control to work normally.


Connecting an adapter



Connect the DC adapter plug to the power input jack on the projector.

Projection Distance per Screen Size

- 1 Place the projector on a sturdy, level surface, together with the PC or audio/video source.
- **2** Place the projector at an appropriate distance from the screen. The distance between the projector and the screen determines the actual size of the image.
- **3** Position the projector so that the lens is set at a right angle to the screen. If the projector is not set at a right angle, the image on the screen will be tilted and the image quality will be poor. If the screen image is crooked, use the Keystone function.
- 4 Connect the power cords of the projector and the connected devices to the wall outlet.

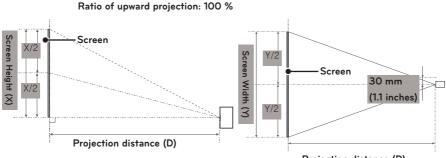


Projection	distance (D)
------------	--------------


16:10 Screen							
Screen Size (mm)	Screen Size (inches)	Screen Width (Y) (mm)	Screen Width (Y) (inches)	Screen Height (X) (mm)	Screen Height (X) (inches)	Projection Distance (D) (mm)	Projection Distance (D) (inches)
635	25	538	21.1	337	13.2	803	31.6
762	30	646	25.4	404	15.9	966	38.0
889	35	754	29.6	471	18.5	1130	44.4
1016	40	861	33.8	539	21.2	1293	50.9
1143	45	969	38.1	606	23.8	1456	57.3
1270	50	1077	42.4	673	26.4	1619	63.7
1397	55	1185	46.6	741	29.1	1783	70.1
1524	60	1292	50.8	808	31.8	1946	76.6
1651	65	1400	55.1	875	34.4	2109	83.0
1778	70	1508	59.3	943	37.1	2272	89.4
1905	75	1615	63.5	1010	39.7	2436	95.9
2032	80	1723	67.8	1077	42.4	2599	102.3
2159	85	1831	72.1	1145	45.0	2762	108.7
2286	90	1938	76.2	1212	47.7	2925	115.1
2413	95	2046	80.5	1279	50.3	3089	121.6
2540	100	2154	84.8	1347	53.0	3252	128.0

Using the Lens Hood

Turn the lens hood as shown by the arrow.

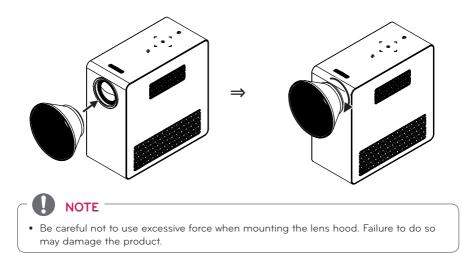


Using the cradle scene

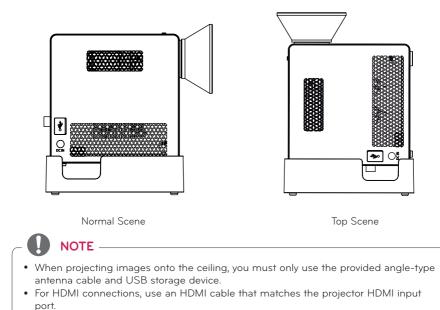



Connecting the battery

1 Remove the cover.




2 Assemble the projector as shown.






3 Turn the knob as shown by the arrow.



How to Install the Projector On a Tripod


- You can install this projector on a camera tripod as shown below.
- When stabilizing the tripod, we recommend using a locking bolt of standard size 4.5 mm (0.1 inches) or less. The maximum size allowed for the locking bolt is 5.5 mm (0.2 inches). (If it is longer than the maximum allowed size, it may damage the projector.)

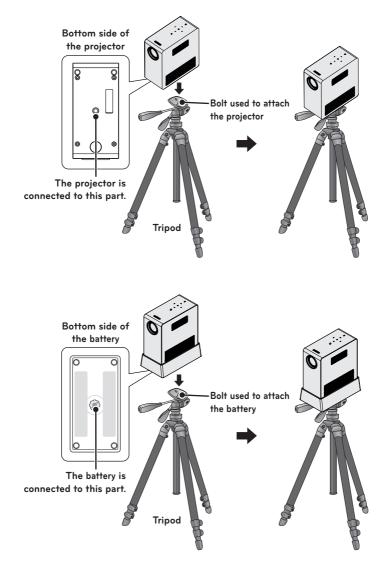

Kensington Security System

- This projector has a Kensington Security System Connector on the panel. Connect a Kensington Security System cable as below.
- For detailed installation and use of the Kensington Security System, refer to the user's guide included with the Kensington Security System set.
- The Kensington Security System is an optional item.
- What is Kensington?

Kensington is a company that sells security systems that prevent expensive electronic equipment such as a computer or laptop from being stolen. Internet Homepage: http://www.kensington.com

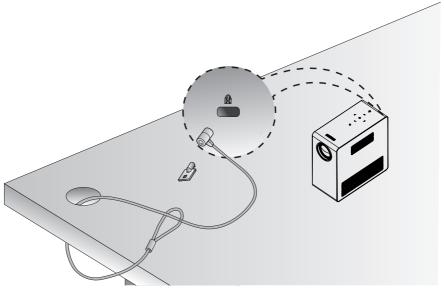

REMOTE CONTROL

Open the battery cover on the back of the remote control and insert the specified batteries as per instructions \bigoplus . The same type of batteries must be used.







Number buttons
Enter a number.
Playback Control Buttons
Controls playback of USB mode.
LIST
Accesses the saved channel list.
(Dash)
Inserts a dash between numbers such as 2 - 1 and 2 - 2.
FLASHBK
Tunes to the last channel viewed.
Color buttons
Access special functions in some menus.

- When using the remote control, the optimal remote range is less than 3 meters (9.8 feet) (left/right) and within a 30 degree arc of the IR receiver.
- For seamless operation, do not block the IR receiver.
- When you carry the remote control in the portable bag, make sure that the buttons on the remote control are not pressed by the projector, cables, documents, or any other accessories in the bag. Otherwise, it may significantly reduce the battery life.




USING THE PROJECTOR

Connecting to an Antenna or Cable

Connect an antenna, cable, or cable box to watch TV while referring to the following. The illustrations may differ from the actual items and a RF cable is optional.


Connecting an Antenna or Basic Cable

Connect the projector to a wall antenna socket with an RF cable (75 Ω).

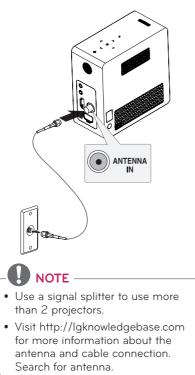


Connecting a Cable Box

Connect the projector to a cable box and the cable box to a wall antenna socket with 2 RF cables (75 Ω).

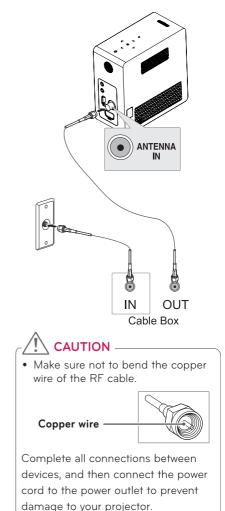

Using the battery



- * It is displayed when the battery is running out.
- * As your bettery is low, Projector will be turned off in a minute.

Battery using time information

Status	Time and Display
Charging	About 3 hours
Usage Hours	About 2 hour (Available battery using time About 2 hour when Energy Saving mode set to Max. Changing the Energy Saving mode default values will reduce battery life.)
Battery Level Indicator	Step 1Step 2Step 3Step 4

* If you do not use the projector for long periods of time, remove the battery from the projector and store it separately.

It is recommended to charge the battery to 40 - 50 percent for long-term storage.

- * The battery is automatically recharged when the projector is connected to a power supply.
- * Charge the battery fully when you first use the Projector.
- * The battery standard usage time given in the manual is based on measurements taken by LG; the actual time may vary depending on usage.
- * Battery usage time may vary depending on broadcast type, operating temperature, period of use, and user preferences.
- * As the battery is consumable, its lifetime gradually decreases. When the battery's life is reduced by half, replace it with a new battery from an LG Electronics customer center.
- * In battery mode, Energy Saving is set to maximum.
- * Do not charge the battery using any equipment other than that supplied with the product. This may damage the battery or cause a fire.

- * Dispose of the used battery appropriately. Failure to do so may result in an explosion or fire. Methods for disposing of batteries vary depending on your country or region. Ensure the battery is disposed of in accordance with applicable laws and regulations.
- * Do not throw or disassemble the battery. Damage to the battery may result in fire or an explosion.
- * Always use a battery that is approved and certified by LG Electronics, Inc. Failure to do so may result in an explosion or fire.
- * Store the battery away from metallic objects, such as keys and paper clips. Overcurrent may cause a rapid increase in temperature, resulting in fire or burns.
- * Do not store the battery near any heat source, such as a heater. This may cause a fire or malfunction.
- * Do not store the battery in temperatures higher than 60 °C or in a humid place. Failure to do so may result in an explosion or fire.
- * Keep away from children. Failure to do so may result in personal injury and damage to the product.
- * Make sure that the battery is connected correctly. Failure to do so may result in an explosion or fire.
- * If the battery leaks or smells, remove it from the projector immediately and contact an LG Electronics customer centre.
- * The battery contains lithium-ion, so please handle with care. Failure to do so may result in an explosion or fire.
- * Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type.


Watching the Projector

Turning on the Projector

- 1 Connect the power cord correctly.
- After waiting for a moment, press the **POWER** button on the remote control or the control panel. (The light on the control panel will be turned on.)
- **3** In the Language Selection screen, select a language.
- 4 Select an input signal by using the **INPUT** button on the remote control.

Focus and Position of the Screen Image

When an image appears on the screen, check if it is in focus and fits the screen properly.



- To adjust the focus of the image, rotate the focus ring.
- To adjust the focus ring, be careful not to touch the keys on the control panel.

Watching the Projector

- 1 In Standby mode, press the **POWER** button to turn the projector on.
- **2** Press the **INPUT** button and select the input signal you want.
- 3 Control the projector using the following buttons while watching projector.

Button	Description		
Сн ∧,∨	Scrolls through saved		
	channels.		
	Selects a channel on the		
LIST	saved or recent watched		
	channel list.		
0 - 9	Selects a channel by		
0-9	entering numbers.		
VOL -, +	Adjusts the volume level.		
MUTE	Mutes all sounds.		
Q.MENU	Accesses the quick menu.		
	Alternates between		
FLASHBK	the last two channels		
	selected.		

4 To turn the projector off, press the **POWER** button.

Managing Channels

Setting Up Channels

Storing Channels

To store channels automatically,

- Press **SETTINGS** to access the menu.
- 2 Press the Navigation buttons to scroll to CHANNEL and press OK.
- **3** Press the Navigation buttons to scroll to **Auto Tuning** and press **OK**.
- 4 Select Start to start automatic tuning. The projector scans and saves available channels automatically.
- 5 When you are finished, press **EXIT**.

To store channels manually,

- Press **SETTINGS** to access the menu.
- 2 Press the Navigation buttons to scroll to CHANNEL and press OK.
- **3** Press the Navigation buttons to scroll to **Manual Tuning** and press **OK**.
- **4** Scroll through the channel types, and then add or delete channels.
- **5** When you are finished, press **EXIT**.

- If the projector scans a blocked channel, you will be prompted to enter your password to keep the channel scanned.
- You can store up to 1000 channels. The number of channels that you can store differs depending on the broadcasting signal environment.
- The channels are stored in the order of DTV, TV, Cable DTV and Cable TV.

Editing Your Channel List

- 1 Press SETTINGS to access the menu.
- 2 Press the Navigation buttons to scroll to CHANNEL and press OK.
- **3** Press the Navigation buttons to scroll to **Channel Edit** and press **OK**.
- **4** Edit channels using the following buttons.

Channel Edit	Antena			Move	⊛ OK
	DTV	ти	Cable DTV	Cable TV	Page 1/1
3-1		5-1		7–1	
Add/Delete	🖽 Bisck/Unblo	×	EZ	Favorite Ch.	

Button	Description
Red	Adds or deletes a channel.
Green	Block or unblock a channel.
FAV	Adds a favorite channel.

5 When you are finished, press EXIT.

Favorite Channel Setup

- 1 Move to your desired CHANNEL.
- 2 Press FAV. to access the Favorite Channel Group.
- **3** Press the \bigwedge , \bigvee buttons to scrolls through channel group.
- **4** Press the **OK** button.



Using Additional Options

Adjusting Aspect Ratio

You can change the image size by pressing **Q.MENU** or **SETTINGS**.



- Some options may not be available depending on input signals.
- 16:9: Resizes images to fit the screen width.



 FULL: Changes to the full screen regardless of the aspect ratio.



 Just Scan: Displays video images in the original size without cutting off the edges.



- If you select **Just Scan**, you may see image noise at the edge or edges of the screen.
- Set By Program: Displays images in the same aspect ratio as the original image.

 4:3: Resizes images to the 4:3 aspect ratio.



- Zoom: Enlarges an image to fit the screen width. The top and bottom of the image may be truncated.
 - Press the < or > button to zoom in or out of the image.
 - Press the ∧ or ∨ button to move the image.



- Cinema Zoom 1: Formats an image to the cinemascope ratio, 2.35:1. It ranges from 1 to 16.
- Press the < or > button to zoom in or out of the image.
- Press the ∧ or ∨ button to move the image.



• If you enlarge or reduce an image, the image may be distorted.



Using the Keystone Function

To prevent the screen image from becoming trapezoidal, Keystone adjusts the top and bottom width of the image if the projector is not set at a right angle to the screen.

Because the **Keystone** function may cause inferior screen image quality, use this function only when it is not possible to set up the projector at an optimal angle.



- 1 Press the **SETTINGS** button.
- **2** Press the $\land, \lor, <$ or > button to select **OPTION** and press the **OK** button.
- 3 Press the ∧, ∨ button to select **Keystone** and press the **OK** button.
- 4 Press the < or > button to adjusted Keystone.
 - **Keystone** can be adjusted from **-40** to **40**.
- 5 Press the **OK** button after adjustment.

Using the Input List

Using the Input List

- Press the **INPUT** button to access the input sources.
 - The connected input mode appears first. However, AV / Component input is always activated.

Input List $ riangle Move \circledast 0K$					
CIT: TV	AV	Component	USB	RGB-PC	HDMI
			Input	Label	Exit

2 Select an input signal using the **INPUT** button and the projector is switched only to the connected input mode. You can use the \land , \lor , \lt or > button to switch between all the input modes.

Adding an Input Label

Displays which devices are connected to which input ports.



- Press the **INPUT** button to access the input sources.
- 2 Press the **RED** button.
- **3** Use the \wedge or \vee button to scroll to one of the input sources.
- 4 Use the < or > button to select one of the input labels.

Blank Function

Using the Blank Function

This function may be effective when you need to draw attention during a meeting or training.

Press the **BLANK** button, and the screen is covered by the background color.

You can change the background color by referring to "Selecting a Blank Image".

2 Press any button to clear the blank function.

To cover the screen temporarily, press the **BLANK** button on the remote control.

Do not block the lens with any object while the projector is running. It may become overheated and deformed or even cause a fire.

Selecting a Blank Image

- 1 Press the **SETTINGS** button.
- **2** Press the \land , \lor , \lt or > button to select **OPTION** and press the **OK** button.
- 3 Press the ∧, ∨ button to select Blank Image and press the OK button.
- **4** Use the ∧, ∨ button to move to the setting or option you want and press the **OK** button.

Using the Quick Menu

You can customize frequently used menus.

- Press **Q.MENU** to access the quick menus.
- 2 Press the < or > button to scroll through the following menus and press **OK**.

Menu	Description
Aspect	Changes the aspect ratio
Ratio	(see 30 page)
PJT Mode	Turns the projected image
	upside down or flips it
	horizontally.
Picture	Changes the picture
Mode	mode. (see 49 page)
Multi	Changes the audio
Audio	language (Digital signal)
SAP	Changes the MTS sound
	(Analog signal)
Sleep	Sets the Projector to be
Timer	turned off at the specified
	time.
Clear	Makes the voice from the
Voice II	projector crisp and clear.
Del/Add	Edits the channels to add
	or delete the channel.
USB	Disconnects a USB
Device	device.

3 Press the \land , \lor , \lt , or > button to scroll through the following menus.

ENTERTAINMENT

Using SCREEN SHARE

- 1 Enable related SCREEN SHARE function on the device you wish to connect.
- 2 Connect the Projector from the search list on the device you wish to connect.(When you connect the projector to your laptop, input the PIN code shown on your display. The request for a PIN will be shown only at the initial connection.)
- ${f 3}$ If the desired device accepts the request, SCREEN SHARE will be started.

- Windows 7 / 8 / 8.1 are compatible with SCREEN SHARE. However, other versions of Windows, and some other operating systems, may not be compatible with SCREEN SHARE.
- Ice Cream Sandwich, Jellybean, and KitKat versions of LG's Android devices are guaranteed to be compatible.
- When connecting via SCREEN SHARE, place the device close to the projector.
- The response rate and image quality may vary depending upon the user's environment.
- For more information on the device you want to connect to, refer to its owner's manual.

MY MEDIA

Connecting USB Storage Devices

Connect a USB flash drive as shown below.

When a USB storage device is connected, the USB adjustment screen appears. You cannot write to or delete data on the USB storage device.



To disconnect the USB storage device

- **1** Press the **Q.MENU** button.
- 2 Use the < or > button to move to USB Device and press the OK button.
- **3** Remove the USB device.

 After the USB storage device is disconnected, it cannot be read. Remove the USB storage device and connect it again.

Tips for Using USB Devices

- Only a USB storage device is recognizable.
- USB hubs are not supported.
- A USB storage device which uses its own driver may not be recognized.
- The recognition speed of a USB storage device will depend on each device.
- If a normal USB device does not work, disconnect and reconnect it.
 Please do not turn off the projector or unplug the USB device when the connected USB device is working.
 The USB device or stored files may be damaged.
- Please do not connect the USB storage device that has been manipulated on the PC. The projector may not operate properly or fail to play files. Use a USB storage device which contains normal music, photo, video, or document files.
- Please only use a USB storage device formatted as a FAT16, FAT32, or NTFS file system provided by Windows. In case a storage device formatted as a different utility program is not supported by Windows, it may not be recognized.
- Please connect power to a USB storage device which requires an external power supply. If not, the device may not be recognized.

- Please connect a USB storage device with a cable provided by the USB manufacturer. When you use a cable that is not provided by a USB manufacturer or an excessively long cable, the device may not be recognized.
- Some USB devices may not be supported or will not work properly.
- If the length of a folder or file is too long, the folder or file may not be recognized properly.
- The files in a USB storage device are sorted in the same way as Windows XP. Up to 100 English characters for a file name are allowed.
- The data of a USB device may be damaged, so it is recommended to backup any important files. Because a user is responsible for data management, the manufacturer is not responsible.
- It is recommended to use a USB flash drive which is 32 GB or less and a USB hard disk which is 1 TB or less. Any device with more than the recommended capacity may not work properly.
- If a USB storage device is not working properly, disconnect it and connect it again.
- If a USB external hard disk with the power saving function does not work, turn the hard disk off and on again to make it work properly.
- USB storage devices below USB 2.0 are supported as well. However, they may not work properly in the movie list.

MOVIE LIST

In the Movie List, you can watch movies stored on the connected USB device.

Tips for Playing Video Files

- Some subtitles created by a user may not work.
- Some special characters are not supported in subtitles.
- HTML tags are not supported in subtitles.
- Time information in a subtitle file should be arranged in ascending order to play the subtitle properly.
- Changing font and color in subtitles is not supported.
- A language which is not specified in the subtitle languages is not supported.
- Subtitle files of 1 MB or larger are not supported.
- The screen may suffer temporary interruptions (image stoppage, faster playback, etc.) when the audio language is changed.
- A damaged video file may not be played properly, or some functions may not be available.
- Video files created with some encoders may not be played properly.
- Either audio or video may only be supported depending on the video or audio packet structure of a video file.
- Video files with higher resolution than the maximum supported for each frame may not be played properly.
- Video files in formats other than the ones specified above may not be played properly.

- Streaming files which include GMC (Global Motion Compensation) or Qpel (Quarterpel Motion Estimation) is not supported.
- Up to 10,000 sync blocks are supported in the subtitle file.
- Seamless playback is not guaranteed for files encoded level 4.1 or higher in H.264/AVC.
- DTS audio codec is not supported.
- Video files larger than 30 GB (Gigabytes) are not supported.
- Playing a video via a USB connection that does not support high speed may not work properly.
- A video file and its subtitle file must be located in the same folder. A video file name and its subtitle file name must be identical in order to display the subtitle properly.
- While watching a video using the movie list function, you cannot adjust the picture mode.
- Trick Mode does not support other functions than ▶ if video files do not have index information.
- When playing a video file using network, the Trick mode is limited to 2X speed.
- Video file names that contain special characters may not be playable.

Supported Video Formats

File Extensions	Audio/ Video	Codec	Profile/Level Support
.asf .wmv	Video	VC-1 Advanced Profile	Advanced Profile @ Level 3 (e.g.720p60, 1080i60, 1080p30) Only streams compliant to SMPTE 421M VC-1 standard are supported.
		VC-1 Simple and Main Profiles	Simple Profile @ Medium Level (e.g.CIF,QVGA) Main Profile @ High Level (e.g.1080p30) Only streams compliant to SMPTE 421M VC-1 standard are supported.
	Audio	WMA Standard	
	Audio	WMA 9 Professional	
		DivX3.11	
	Video	DivX4 DivX5 DivX6	Advanced Simple Profile(720p/ 1080i)
.divx		XViD	Advanced Simple Profile(720p/ 1080i)
.avi		MPEG-1 Layer I,II	
		MPEG-1 Layer III (MP3)	
	Audio	Dolby Digital	
		WMA Standard	
		WMA 9 Professional	
.mp4	Video	H.264 /AVC	Main Profile @Level 4.1 High Profile @Level 4.1 (e.g.720p60, 1080i60, 1080p30)
.m4v		MPEG-4 Part 2	Advanced Simple Profile(720p/ 1080i)
	Audio	HE-AAC	HE-AAC-LC and HE-AAC
	Video	H.264 /AVC	Main Profile @Level 4.1 High Profile @Level 4.1 (e.g.720p60, 1080i60, 1080p30)
.mkv	Audio	HE-AAC	HE-AAC-LC and HE-AAC
	Audio	Dolby Digital	
	Video	H.264 /AVC	Main Profile @Level 4.1 High Profile @Level 4.1 (e.g.720p60, 1080i60, 1080p30)
.ts		MPEG-2	Main Profile @High Level (e.g.720p60, 1080i60)
.trp		MPEG-1 Layer I,II	
.tp	Audio	MPEG-1 Layer III (MP3)	
		Dolby Digital	
		HE-AAC	HE-AAC-LC and HE-AAC
	Video	MPEG-1	
.vob		MPEG-2	Main Profile @High Level (e.g.720p60, 1080i60)
	Audio	Dolby Digital	
		LPCM	
		MPEG-1 Layer I,II	
.mpg	Video	MPEG-1	
.mpeg .mpe	Audio	MPEG-1 Layer I,II	Only streams compliant configured properly for TS, PS or ES


Supported Audio Files

No	Audio Codec	Bit rate	Sampling rate	Remark
1	MP3	32 kbps - 320 kbps	32 kHz - 48 kHz	
2	AC3	32 kbps - 640 kbps	32 kHz, 44.1 kHz, 48 kHz	
3	MPEG	32 kbps - 448 kbps	32 kHz - 48 kHz	
4	AAC,HEAAC	24 kbps - 3844 kbps	8 kHz - 96 kHz	
5	CDDA	1.44 kbps	44.1 kHz	
6	LPCM	1.41 Mbps - 9.6 Mbps	Multi-channel : 44.1 kHz, 88.2 kHz/ 48 kHz, 96 kHz Stereo : 176.4 kHz, 192 kHz	

Browsing Movie List

Play a video file stored from a connected device.

- 1 Connect a USB storage device.
- 2 Press the **SETTINGS** button.
- **3** Accesses the **MY MEDIA**.
- 4 Use the ∧, ∨, < or > button to select Movie List and press the OK button.
- 5 Use the ∧, ∨, < or > button to select the file you want and press the OK button.



	Description		
0	Thumbnails		
	Abnormal file		
	File not supported		
0	File List		
B	Moves to the upper level folder.		
4	Current page/Total no. of folder pages		
6	Current page/Total no. of file		
	pages		
6	Moves to the top level folder.		
0	Moves to the upper level folder.		
8	Exit Movie List.		

6 Control playback by using the following buttons.

ø	ssesse Option	01:02:30 / 02:30:25

Setting	Description	
	Shows the current playing	
	position. Use $<,>$ buttons to	
	move forward or backward.	
	Stops playing and returns to	
	Movie List.	
	Returns to normal playback.	
	Pauses the media player.	
	If no button is pressed on the	
	remote control for 10 minutes	
	after pausing, the playback is	
	restarted.	
	■ Displays in slow motion.	
	Whenever this button is	
	pressed, the playback speed	
	is changed.	
	x2, x4, x8, x16, x32	
eø	You can use the Energy Sav-	
	ing mode.	
Option	A pop-up window will appear.	
Option	A pop-up window will appear.	
Hide	Hides the playback bar. Press	
	the \mathbf{OK} button to make it	
	appear.	
Exit	Returns to the Movie List	
	screen.	

Options for Movie List

- 1 Press the **Q.MENU** button.
- 2 Use the ∧ or ∨ button to move to a desired option and press the OK button.
- **3** Use \land , \lor , \lt or > button to set up each item.

Set Video Play.

Setting	Description		
Picture	Selects the size of a playback		
Size	 Full: Files are played in full screen mode according to the aspect ratio of video. Original: Displays the video in the original aspect ratio. 		
Audio	Allows you to select the lan-		
Lan-	guage you want for the file		
guage	with multiple audio tracks.		
	This option is not available		
	if the file has only one audio		
	track.		
Subtitle	The subtitle can be turned		
Lan-	on or off.		
guage	 Language: One of any of the available languages 		
	can be selected.		
	Code Page: A character set		
	used for a subtitle can be		
	selected.		
	By default, the subtitle is		
	displayed in a language		
	configured in OPTION →		
	Menu Language.		
	menu Language.		

Setting	Description	
Subtitle	- Sync : If a subtitle is not	
Lan-	synchronized with its	
guage	video, you can adjust its speed at 0.5 sec unit.	
	- Position: Moves the	
	location of a subtitle.	
	- Size: Changes the	
	subtitle font size.	
Repeat	at Turns the repeat function on	
	or off.	
	When it is set to off, the next	
	file can be played sequentially	
	if the file name is similar.	

• Subtitle Language

Subtitle		
Lan-	Language	
guage		
Latin1	English, Spanish, French,	
	German, Italian, Swedish,	
	Finnish, Dutch, Portuguese,	
	Danish, Romanian,	
	Norwegian, Albanian,	
	Gaelic, Welsh, Irish, Catalan,	
	Valencian	
Korean	Korean	

Set Video.

You can change video settings. (Refer to "PICTURE Settings" on 49 page)

Set Audio.

You can change audio settings. (Refer to "AUDIO Settings" on 52 page)

Registering the DivX code

Please check your DivX code. For more information on the registration process, visit www.divx.com/vod. After registration, your can enjoy DivX VOD content protected by the DivX DRM code.

- Press **SETTINGS** button to enter Setup menu.
- 2 Move to OPTION and press DivX(R) VOD.

Registration
Deregistration
Close

3 Press the ∧ or ∨ button to move to Registration and press the OK button.

(j	You must register your device to play DivX(R) protected videos. Registration Code: XXXXXXXXX Register at http://vod.divx.com
	Close


4 Check the **DivX** registration code.

- You cannot use DivX registration codes assigned to other devices. Make sure to use the DivX registration code assigned to your device.
- The video or audio files that are not converted by the standard DivX codec may be corrupted or not be played.

To deregister the DivX code

Use the DivX deregistration code to deactivate the DivX DRM function.

- Press **SETTINGS** button to enter Setup menu.
- 2 Move to OPTION and press DivX(R) VOD.
- 3 Use the ∧ or ∨ button to go to Deregistration and press the OK button.



4 Select Yes.

 What is DRM [Digital Rights Management]? This is a technology and service that prevents the illegal use of digital media to protect the benefits and rights of the copyright owner. Files can be played after the license is verified through an online method, etc.

PHOTO LIST

You can see the photos stored on a connected device.

Supported Photo Files

PHOTO (*.JPEG)


Baseline: 64-pixel (width) x 64-pixel (height) - 15360-pixel (width) x 8640-pixel (height)

Progressive: 64-pixel (width) x 64-pixel (height) - 1920-pixel (width) x 1440-pixel (height)

- Only JPEG files are supported.
- Non-supported files are displayed in the form of an icon.
- An error message is displayed for corrupted files or file formats that cannot be played.
- Corrupted files may not be displayed properly.
- It may take some time to view high-resolution images in full screen.

Browsing Photo List

- **1** Connect a USB storage device.
- 2 Press the **SETTINGS** button.
- 3 Accesses the MY MEDIA.
- 4 Use the ∧, ∨, < or > button to select Photo List and press the OK button.
- 5 Use the ∧, ∨, < or > button to select the file you want and press the OK button.



	Description	
0	Thumbnails	
	Abnormal file	
	File not supported	
0	File List	
ß	Moves to the upper level folder.	
4	Current page/Total no. of folder	
	pages	
Ø	Current page/Total no. of file	
	pages	
6	Moves to the top level folder.	
0	Moves to the upper level folder.	
8	Exit	

6 Control playback by using the following buttons.



Setting	Description
••	Selects the previous or next photo.
Slide- show	 All photos are displayed during slide show. Set the time interval of the Slide show in Option → Set Photo View. menu.
BGM	You can listen to music while viewing photos in full size. • Set the BGM in Option → Set Photo View. menu.
υ	 Rotates photos. Rotates a photo 90 °, 180 °, 270 °, 360 ° clockwise. Photos cannot be rotated if their width is greater than the height of the max. supported resolution.
Q	You can move between screens using the navigation buttons. Press the blue button to enlarge the image.
eØ	You can use the Energy Saving mode.
Option	A pop-up window will appear.

Setting	Description				
Hide	Hides the menu on the full				
	size screen.				
	• To see the menu, press				
	the OK button on the				
	remote control.				
Exit	Exit from full screen photo				
	view.				

Options for Photo List

- **1** Press the **Q.MENU** button.
- 2 Use the ∧ or ∨ button to move to a desired option and press the **OK** button.
- **3** Use \land , \lor , \lt or > button to set up each item.

Set Photo View.

Setting	Description			
Slide	Selects a slideshow speed.			
speed				
BGM	Selects a music folder for			
(Back-	the background music.			
ground	 You cannot change the 			
Music)	music folder while the			
	background music is			
	playing.			
	 For background music, 			
	only the folder from the			
	same device can be			
	selected.			
Repeat	Selects repeat.			
Exit	Selects random play.			

Set Video.

You can change video settings. (Refer to "PICTURE Settings" on 49 page)

Set Audio.

You can change audio settings. (Refer to "AUDIO Settings" on 52 page)

MUSIC LIST

You can play audio files stored on the connected device.

Supported Music Files


*.MP3

Bit rate range 32 Kbps - 320 Kbps

- Sampling rate MPEG 1 Layer 3: 32 kHz, 44.1 kHz, 48 kHz
- Sampling rate MPEG 2 Layer 3: 16 kHz, 22.05 kHz, 24 kHz

Browsing Music List

- **1** Connect a USB storage device.
- 2 Press the **SETTINGS** button.
- 3 Accesses the MY MEDIA.
- 4 Use the $\land, \lor, <, >$ button to select **Music List** and press the **OK** button.
- 5 Use the ∧, ∨, < or > button to select the file you want and press the OK button.



	Description				
0	Thumbnails				
	Abnormal file				
	File not supported				
0	File List				
B	Moves to the upper level folder.				
4	Current page/Total no. of folder pages				
6	Current page/Total no. of file pages				
6	Moves to the top level folder.				
0	Moves to the upper level folder.				
8	Exit				

6 Control playback by using the following buttons.



Setting	Description				
	Changes the playing position.				
	Stops playing.				
	Returns to normal playback.				
II	Pauses the media player.				
* *	Plays the previous/next file.				
e∅	You can use the Energy Sav-				
	ing mode.				
Option	Sets up the options of Music				
	List.				

Setting	Description			
Hide	Hides the playback bar.			
	Press the OK button to			
	make the playback bar			
	appear.			
Exit	Returns to the Music List			
	screen.			

Options for Music List

- 1 Press the **Q.MENU** button.
- 2 Use the ∧ or ∨ button to move to a desired option and press the **OK** button.
- **3** Use \land , \lor , \lt or > button to set up each item.

Set Audio Play.

Setting	Description			
Repeat	Selects repeat play.			
Random	Selects random play.			

Set AUDIO.

You can change audio settings.

(Refer to "AUDIO Settings" on 52 page)

FILE LIST

You can see document files stored on a connected device.


Supported File Formats

XLS, XLSX, DOC, DOCX, PPT, PPTX, TXT, PDF Microsoft Office 97/ 2000/ 2002/ 2003/ 2007 Adobe PDF 1.0/ 1.1/ 1.2/ 1.3/ 1.4

- File Viewer realigns a document, so it may look different from what is displayed on a PC.
- For documents that include images, the resolution may look lower during the realigning process.
- If the document volume is big or it has many pages, it may take longer to load the document.
- Unsupported fonts may be replaced by other fonts.
- The file viewer may not open for Office documents that contain many high resolution images. In that case, reduce the image file size, save it on a USB storage device and run the file viewer again or connect your PC to the projector and open the file on your PC.

Browsing File List

- **1** Connect a USB storage device.
- 2 Press the **SETTINGS** button.
- 3 Accesses the MY MEDIA.
- 4 Use the ∧, ∨, < or > button to select File List and press the OK button.
- 5 Use the ∧, ∨, < or > button to select the file you want and press the OK button.



	Description				
0	File List				
0	Moves to the upper level folder.				
Ø	Current page/Total no. of folder				
	pages				
4	Current page/Total no. of file				
	pages				
6	Moves to the top level folder.				
6	Moves to the upper level folder.				
0	Exit				

- 6 Control playback by using the following buttons.
 - Click **Go Page** then the pop-up window for selecting the number of page appears. Input the page to move to the page you want.
 - Press the volume button to zoom in or zoom out.
 - 1. Press OK.

2. Press the Up/Down/Left/Right buttons to move to Go Page or Zoom.

🕞 Go Page	Q Zoom	EXECUTE Option	🗈 Hide	Exit

Setting	Description			
Go	Moves to the page you want.			
Page	Use the Up/Down/Left/Right buttons to select a page and press the OK button.			
Zoom	Views the photo in full mode or original mode.			
Option	Sets up the options of File			
	Viewer.			
Hide	Hides the menu.			
	 Press the OK button to 			
	make it appear.			
Exit	Returns to the File Viewer			
	screen.			

Set FileViewer Option

Satting	Description			
Setting	•			
Single Page Loading	On	Loads and displays pages one by one. The initial loading time is short but a content- heavy page may be displayed slowly.		
	Off	Loads all pages of a file to memory before it starts to display them. The initial loading time is long but you can navigate pages quickly after loading is complete. If a file is too large, it may fail to load all the pages.		
lmage Quality	You can set the quality of the image included in the document. The following three options are available for the image quality: High, Medium, Low. Higher the image quality, lower the display time.			
Docu- ment Align	Selects initial document align method.			

File View settings are default, so close the currently opened document to apply changes to the new document, if any.

CUSTOMIZING SETTINGS

SETUP Menu

- **1** Press the **SETTINGS** button.
- **2** Use the \land, \lor, \lt or > button to select a desired item and press the **OK** button.
- **3** Use the \land , \lor , \lt or > button to set up a desired item and press the **OK** button.

Menu		Description			
	PICTURE	Adjusts the image quality for optimal viewing.			
\bigcirc	AUDIO	Adjusts the sound quality and volume level.			
(°)	CHANNEL	Sets up and edit channels.			
\bigcirc	TIME	Sets the time and time-related features.			
	LOCK	Locks or unlocks channels and programs.			
r X	OPTION	Customizes the general settings.			
	INPUT	Selects the desired input source.			
	MY MEDIA	Accesses photo, music, movie, and document files.			

PICTURE Settings

- 1 Press the **SETTINGS** button.
- **2** Use the \land, \lor, \lt or > button to select **PICTURE** and press the **OK** button.
- **3** Use the $\land, \lor, <$ or > button to set up a desired item and press the **OK** button.
 - To return to the previous menu, press the **5** button.

	PICTURE			¢ Move ⊛ OK
•	Energy SavingPicture Mode			
	•	Contrast	100	
1		Brightness	50	
\boldsymbol{e}	•	Sharpness	15	
6	•	Color	65	
-	•	Tint	0	<u>© </u>

The available picture settings are described as follows.

Setting	Description				
Energy Saving	Reduces power consumption by adjusting peak screen brightness.				
Picture Mode	Selects one of the preset images or customizes options in each mode for the best screen performance. You are also able to customize advanced options of each mode.				
	Mode				
	Vivid	Maximizes the visual effect of video. Displays a crystal clear picture by enhancing contrast, brightness, and sharpness.			
	Standard	Has the contrast, brightness and sharpness at normal levels.			
	Eco	The Energy Saver feature changes settings on the Projector to reduce power consumption.			
	Cinema	Optimizes the image for movie.			
	Game				
	Expert 1/2	Adjusts the detailed image settings.			
Contrast	Increases or decreases the gradient of the video signal.				
Brightness	Adjusts the base level of the video signal to make the image brighter or darker.				
Sharpness	Adjusts the level of sharpness in the edge between the light and dark areas of the picture. The lower the level is, the softer the image looks. Horizontal and Vertical Sharpness are available only in Expert1/2.				
Color	Adjusts the intensity of all colors.				
Tint	Adjusts the balance between red and green levels.				
Advanced Control	Customizes the advanced settings.				
Picture Option	Sets optional settings.				

50 CUSTOMIZING SETTINGS

Setting	Description	
Picture Reset	Restores the options of each mode to the factory default.	
Aspect Ratio	Resizes the picture.	
Screen	Adjusts the	picture quality of RGB-PC input.
(RGB-PC)	Option	
	Resolution	Available resolutions is 768
		(1024 x 768/ 1280 x 768/ 1360 x 768, 60 Hz).
	Auto	Provides optimized picture quality by automatically calibrating
	Config.	the mismatch of horizontal width and picture shake caused by
		clashes between the internal settings of the projector and vari-
		ous PC graphic signals.
	Position Moves the image up/down/left/right. Size Changes the screen size.	
	Phase	Makes the picture look clear by removing horizontal noise.
	Reset Restores all the settings to the factory default.	

Advanced Control

Setting	Description	
Dynamic	Adjusts the contrast to keep it at the best level according to the bright-	
Contrast	ness of the screen.	
Dynamic Color	Adjusts screen colors so that they look natural.	
Skin Color	Adjusts the skin color in the picture to your preference.	
Sky Color	Adjusts only the color of the sky.	
Grass Color	Adjusts only the natural color area of e.g., field and mountain.	
Gamma	Sets a gradation curve between video input and output signal.	

Expert Control

Setting	Description	
Dynamic	Adjusts the contrast to keep it at the best level for the brightness of	
Contrast	the screen.	
Color Gamut	Selects the range of colors to display.	
	Standard : Displays the original colors of an input signal regardless of	
	the display features.	
	Wide: Sets to use the rich colors of the display.	
Edge Enhancer	Provides much sharper and clearer edges to the picture.	
Expert Pattern	Patterns used for expert adjustment.	
Color Filter	Accurately adjusts color and tint by filtering a specific color area of	
	RGB space.	

Setting	Description
Color Temperature	 Gamma :Sets a gradation curve between video input and output signal. a. Method: 2 points Pattern: Inner, Outer Points: Low, High Red/Green/Blue: The adjustment range is -50 - +50. Apply to all inputs: The values of the Color Temperature is applied to all the input modes. b. Method: 10 point IRE Pattern: Inner, Outer Institute of Radio Engineers (IRE) is the unit indicating the size of a video signal and can be set to 5, 10, 15, 100. You can fine-tune for each setting as shown below. Luminance: If you set up luminance for 100 IRE, a luminance value satisfying each gamma is automatically calculated for each step from 10 IRE to 90 IRE. Red/Green/Blue: The adjustment range is -50 - +50. Apply to all inputs: The values of the Color Temperature is applied to all the input modes.
Color Management system	Adjusts Red/Green/Blue/Cyan/Magenta/Yellow colors. Allows an expert to adjust the tint using a test pattern. Six colors (Red/Green/ Blue/Cyan/Magenta/Yellow) can be selectively adjusted without affecting other colors. You may not see colors change on a normal picture even after adjustment. - Chroma Red/Green/Blue/Yellow/Cyan/Magenta, Tone Red/Green/ Blue/Yellow/Cyan/Magenta: The adjustment range is -30 - +30 each.

Available options may differ depending on the input signal or video mode, etc.

Picture Option

Setting	Description	
Noise	Removes noises in the picture.	
Reduction		
MPEG Noise	Reduces the noise produced while creating digital video signals.	
Reduction		
Black Level	Compensates the brightness and contrast of a screen to balance with the black level of the video input.	
Real Cinema	Provides optimal picture quality for watching a movie.	
Color Temperature	Adjusts the overall color of the screen to suit your preference. You can select Warm , Cool , Medium or Natural .	

AUDIO Settings

- 1 Press the **SETTINGS** button.
- **2** Use the \land , \lor , <, > buttons to select **AUDIO** and press the **OK** button.
- **3** Use the $\land, \lor, <$ or > button to set up a desired item and press the **OK** button.
 - To return to the previous menu, press the **5** button.

0	AUDIO	↔ Move ⊛ OK
	Sound Mode	: Standard
0	Clear Voice II	: Off 📌 3
	Auto Volume	: Off
3		
${}^{\bigcirc}$		
ō		
1		

The available audio settings are described as follows.

Setting	Description		
Sound Mode	Adjusts sound.		
	Option	Option	
	Standard	Select when you want standard-quality sound.	
	Music	Select when you listen to music.	
	Cinema	Select when you watch movies.	
	Sport Select when you watch sports events.		
	Game Select when you play games.		
	User setting Adjusts the volume to the desired level using the		
	User EQ.		
	Audio-band(100 Hz / 300 Hz/ 1 kHz/ 3 KHz/		
	10 KHz) can be adjusted from -10 to 10		
	Reset : Restores all the settings to the factory		
		default.	
Clear Voice II	Makes the voice from the projector crisp and clear.		
Auto Volume	Automatically adjusts the volume level.		

CHANNEL Settings

- **1** Press the **SETTINGS** button.
- **2** Use the $\land, \lor, <$ or > button to select **CHANNEL** and press the **OK** button.
- **3** Use the \land, \lor, \lt or > button to set up a desired item and press the **OK** button.
 - To return to the previous menu, press the **5** button.

1	CHANNEL	¢ Move ⊛ OK
-	Auto Tuning	
٥	Manual Tuning	
	Channel Edit	
\mathbf{e}		
ô		
1		

The available channel settings are described in the following.

Setting	Description	
Auto Tuning	Tunes and stores all available channels through antennas or cable inputs.	
Manual Tuning	Tunes and stores the channels you want manually.	
Channel Edit Deletes or remembers a channel.		
	Block or unblock a channel.	
	Adds a favorite channel.	

TIME Settings

- 1 Press the **SETTINGS** button.
- **2** Use the \land, \lor, \lt or > button to select **TIME** and press the **OK** button.
- **3** Use the $\land, \lor, <$ or > button to set up a desired item and press the **OK** button.
 - To return to the previous menu, press the **5** button.

\odot	TIME		∲ Move ⊛ OK
	 Clock Off Time On Time Sleep Timer Auto Off Automatic Standby 	: Off : Off : Off : 60 min. : Off	, Muve & Ux

The available time settings are described as follows.

Setting	Description	
Clock	Sets the time, date, or timer feature.	
Off Time	Sets the time to turn on or off the projector automatically. To use this	
/On Time	function, you should set the current time and date in advance.	
	NOTE	
	• If you set both Off time and On time features to the same time, the Off time feature overrides the On time feature.	
	• If you do not press any button within 2 hours after the projector turns on by the On Time feature, the projector enters the Standby mode automatically.	
Sleep	Sets the length of time until the projector turns off.	
Timer		
Auto Off	If there is no signal, the projector automatically turns off after the preset	
	time has elapsed.	
Automatic	If there is no press any button when Automatic Standby function is on,	
Standby	the projector automatically switches to the standby mode.	

LOCK Settings

- 1 Press the **SETTINGS** button.
- 2 Press the Navigation buttons to scroll to LOCK and press OK.
- **3** Press the Navigation buttons to scroll to the setting or option you want and press **OK**.
 - To return to the previous menu, press the **5** button.

6	LOCK 💠 Move @ OK
-	Set Password
٥	Lock System : Off
	Block Channel
~	 Movie rating
$\boldsymbol{\Theta}$	 TV Rating-Children
8	 TV Rating–General
	Downloadable Rating
ŝ	

The available lock settings are described in the following.

Setting		Description	
Set Password	Changes the	e 4-digit password. The default PIN is 0 0 0 0.	
	If you forget	your password, press 1-2-9-4-7-2 on the remote control.	
Lock System	Activates or	deactivates the lock system.	
	Option		
	Off	Locks the selected channel. When you enter the	
		password for a locked channel, the channel is unlocked	
		temporarily.	
	On	Locks the selected input.	
Block Channel	Blocks the ch	nannels that contain inappropriate contents for children.	
	The channels can be selected but the screen is blanked and the audio is		
	muted.		
	To watch a l	ocked channel, enter the password.	
Movie rating	Blocks the movies that are only broadcasted on the projector		
	and contain inappropriate contents, based on the Motion Picture		
	Association of America (MPAA) rating.		
	Rating		
	G	General audiences – All ages admitted	
	PG	Parental guidance suggested – Some material	
		may not be suitable for children	
	PG-13	Patents strongly cautioned – Some material may	
		be inappropriate for children under 13	
	R	Restricted – Under 17 requires accompanying	
		parent or adult guardian	
	NC-17	No one 17 and under admitted.	
	Х	Adults only	
	Blocking Of	f Permits all programs	

Setting		Description				
TV Rating-	Blocks the childre	n's TV programs that parents do not want their				
Children	children to watch. To block other TV programs, you should set the ${\sf TV}$					
	Rating-General fe	ature.				
	Rating					
	Age	Applies to TV-Y, TV-Y7				
	Fantasy Violence	Applies to TV-Y7				
TV Rating-	Blocks the TV prog	grams that you want based on the ratings by using				
General	the Parental Contr	ol Function (V-Chip).				
	The V-Chip ele	ectronically reads TV program ratings and allows				
		ck program that are unsuitable for children.				
	Rating					
	-					
		(sexual situations) applies to TV-PG, TV-14, TV-MA applies to TV-PG, TV-14, TV-MA				
Downloadable		ates only when projector has received Region5				
Rating	Rating data. The name of the rating option may differ.					
ranng						
	• This feature is available only for digital channels.					
Input Block	Block the input so	urces.				
Key Lock		e used to prevent unauthorized viewing by locking				
		rols, so that it can only be used with the remote				
	control.					
		the projector is turned off, press the Power button.				
		On, the display Key Lock appears on the screen if				
		panel is pressed while viewing the projector.				

OPTION Settings

- **1** Press the **SETTINGS** button.
- **2** Use the \land , \lor , \lt or > button to select **OPTION** and press the **OK** button.
- **3** Use the $\land, \lor, <$ or > button to set up a desired item and press the **OK** button.
 - To return to the previous menu, press the $\star{5}$ button.

OPTION				
	• Language			
۲	SCREEN SHARE	: [PJTR][LG]PG6XX[0000]		
		Group		
1		• Channel		
Θ	 Caption 	: Off		
0	 KeyStone 	0		
ō	Auto Keystone	: On		
	PJT Mode	: Front		

The available option settings are described as follows.


Setting	Description		
Language	Selects a desired Menu Language.		
SCREEN SHARE	The SCREEN SHARE displays the screen of the connected device. You can check the SCREEN SHARE's ID.		
	Mode		
	Group This is the Group setting for each device sup the SCREEN SHARE feature. When the wirele connection is weak or unstable, adjust the Gr setting to correct the problem.		
	Channel	 You can change the channel used for wireless connections. Search Channels: Select channel searching methods. Auto: The projector searches for available channels and automatically selects the least used channel. Manual: You can select a channel manually. Channel: This is shown when Search Channels is set to Manual. It allows you to specify a channel number to use. 	

Setting		Description		
Caption	Sets whether to display captions and customize your option in each			
	mode.			
	Mode			
	CC 1-4 (Closed	Displays the audio portion of a TV program as text		
	Captioning)	on the screen. CC1 is the most common mode in		
	Text 1-4	use.		
		- Field 1 data channels		
		: two Captions (CC1, CC2) and two Text (T1, T2).		
		- Field 2 data channels		
		: two Captions (CC3, CC4) and two Text (T3, T4).		
	Service 1-6	This is only available for the digital broadcasting		
		system.		
	Option (For Dig	ital Broadcasting)		
	Size	Selects the wordsize.		
	Font	Selects a typeface for the text.		
	Text Color	Selects a color for the text.		
	Text Opacity	Adjusts the opacity for the text color.		
	Bg Color	Selects a color for the background color.		
	Bg Opacity	Adjusts the opacity for the background color.		
	Edge Type	Selects an edge type.		
	Edge Color	Selects a color for the edges.		
Keystone	one To prevent the screen image from becoming trapezoidal			
	adjusts the top and bottom width of the image if the projector is not			
		gle to the screen.		
Auto		provides a rectangular screen image by automatically		
Keystone	adjusting the Keystone number when there is a trapezoidal screen			
	image caused by tilting of the projector.			
	Option	Automotically adjusts the Koysten environment		
	On Off	Automatically adjusts the Keystone number.		
PJT Mode		Manually adjusts the Keystone number.		
FUT Mode	This function turns the projected image upside down or flips horizon- tal.			
	 Select Rear when projecting from the back of the transparent 			
	 Select real when projecting from the back of the transparent screen purchased separately. Select Ceiling when installing the product on the ceiling. When PJT Mode is Front/Front Ceiling/Rear/Rear Ceiling, the 			
	right of the speaker changes automatically.			
Blank Image		round for blank Image. (see 32 page)		

Setting		Description			
Auto Power	Makes the projector turn on automatically when the adaptor plug is				
	inserted.				
	Option				
	On	When the DC plug is connected to the projector, it			
		turns on automatically.			
	Off	When the DC plug is connected to the projector, it			
		goes into standby mode.			
Auto Input	Automatically se	earches and displays an input signal type when it is			
Search	received.				
High Altitude	If the projector i	s used at an altitude higher than 1200 meters, turn			
	this on.				
	Otherwise, the projector may overheat or its protection function may				
	be activated. If this happens, turn the projector off and then on again				
	after waiting for several minutes.				
Standby Light	t Adjusts the LED button indicator. Option				
	On	When the buttons are touched, their indicators are			
		all turned on at maximum brightness. In standby			
		mode, all LED indicators are turned on at 20 % of			
		the maximum brightness.			
	Off	When the buttons are touched, their indicators are			
		all turned on at maximum brightness. In standby			
		mode, all LED indicators are turned off.			
DivX(R) VOD	Sets DivX related settings.				
Initial Setting	Resets all the projector settings to the factory default.				
Self Diagnosis	Troubleshoots functional problems that can arise while using the product.				

MAKING CONNECTIONS

You can connect various external devices to the ports on the projector.

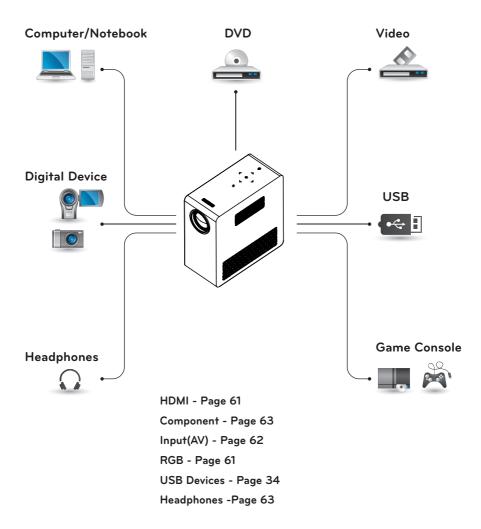


Connecting to an HD Receiver, DVD Player, or VCR

Connect an HD receiver, DVD Player, or VCR to the projector and select an appropriate input mode.

HDMI Connection

With an HDMI cable, you can enjoy high quality picture and sound. Press the **INPUT** button on the remote control to select **HDMI**.

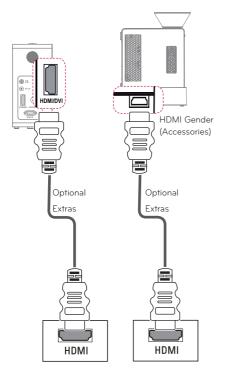


Connecting to a PC


The projector supports Plug & Play. A PC will automatically recognize the projector and requires no driver to be installed.

RGB Connection

Connect the PC output and the PC video input port of the projector with the RGB cable.

For audio signal, connect the PC and the projector with an optional audio cable.

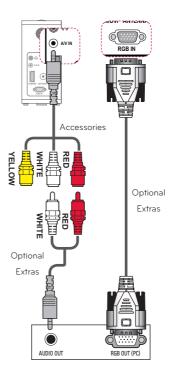


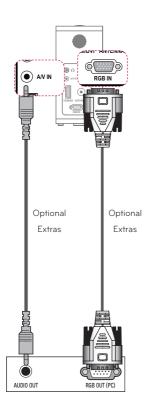

You can connect the audio cable without using a gender as shown in the illustration above.


Connecting to the AV INPUT

Connect the output ports of an external device and the AV INPUT port of the projector. Press the **INPUT** button to select **AV**.

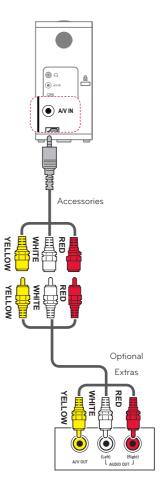


Component Connection

You can enjoy vivid images when you connect an external device with a **RGB IN** port to the component port of the projector. Press the **INPUT** button on the remote control to select **Component**.

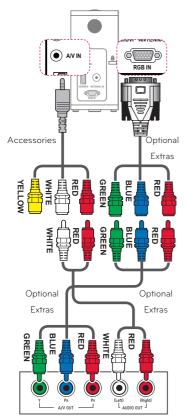


Connecting to Headphones

You can listen to the audio through a headphone.

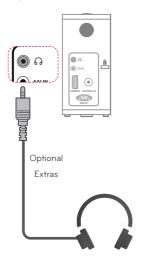

MHL Connection

Mobile High-definition Link (MHL) is an interface for transmitting digital audiovisual signals from mobile phones to projector sets.

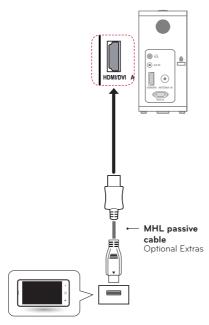

Mobile phone

- Connect the mobile phone to the HDMI IN port to view the phone screen on the Projector.
- The MHL passive cable is needed to connect the Projector and a mobile phone.
- Only MHL-certified mobile devices can be connected properly. To find out whether your device is MHL-certified, please contact your device manufacturer.

MAINTENANCE

Clean your projector to keep it in optimum condition.

Cleaning the Projector

Cleaning the Lens

If there is any dust or staining on the lens surface, you must clean the lens. Use an air spray or a cleaning cloth to clean the lens.

To remove dust or stains, use an air spray or apply a small amount of cleaning agent onto a swab or soft cloth to lightly rub the lens.

Please be aware that liquid may flow onto the lens if the product is sprayed directly onto the lens.

Cleaning the Projector Case

To clean the projector case, first unplug the power cord.

To remove dust or stains, use only a dry, lint-free, nonabrasive cloth to polish the lens.

Do not use alcohol, benzene, thinners, or other chemicals, which may damage the case.

SPECIFICATIONS

MODELS	PG65U (PG65U-JE)		
Resolution (Pixel)		1280 (Horizontal) × 800 (Vertical)	
Aspect ratio	16:10 (Horizontal:Vertical)		
Panel size (mm)		11.623 (0.4 inches)	
Projection distance	0.80 m to 3.25 m (63.5 cm to 254.0 cm)		
(Video size)	31.4 incł	nes to 127.9 inches (25 inches to 100 inches)	
Ratio of upward		100 %	
projection		100 %	
Working range of the		3 m (118.1 inches)	
remote control		S III (IIO.I IIICIIES)	
Video input		PAL-B, D, G, H, I / PAL M / PAL N / PAL 60 / SECAM	
AC-DC Adaptor		.5 V, 4.62 A) / 110 W (19.0 V, 5.79 A)	
	(Ad	aptor Input 100 ~ 240 @ 50 Hz/60 Hz)	
Audio Output	3 W MONO		
Television System	ATSC/NTSC-M, 64QAM & 256QAM		
Program Coverage	VHF 2 - 13, UHF 14 - 69, CATV 01 - 135,		
	DTV 2 - 69, DTV 1 - 135		
External Antenna	75 Ω (VHF/ UHF)		
Impedance	/5 (2 (VHF/ UHF)		
	125 (without foot) (4.9 inches)		
Height (mm)	127.5 (with foot) (5.0 inches)		
Width (mm)		60 (2.3 inches)	
	125 (without ANT) (4.9 inches)		
Depth (mm)	131 (with ANT) (5.1 inches)		
Weight (kg)	0.68 (1.4 lbs)		
USB Device	5 V, 0.5 A (Max.)		
	Temperature	,	
	Operation	0 °C to 40 °C (32 °F - 104 °F)	
Operation	Storage	-20 °C to 60 °C (-4 °F - 140 °F)	
environment	Relative Hum		
	Operation	0 % to 80 %	
	Storage	0 % to 85 %	
	Jiorage		

* Contents in this manual may be changed without prior notice due to upgrade of product functions.

Supported Monitor Display

Resolution	Horizontal Frequency (kHz)	Vertical Frequency (Hz)
640 x 350	31.468	70.09
720 x 400	31.469	70.08
640 x 480	31.469	59.94
800 x 600	37.879	60.31
1024 x 768	48.363	60.00 119.99
1152 x 864	54.348	60.053
1280 x 800	49.68	60
1360 x 768	47.712	60.015
1280 x 1024	63.981	60.020
1400 x 1050	65.317	59.979
1680 x 1050	65.3	60

- If an invalid signal is input into the projector, it will not be displayed properly on the screen or a message such as No Signal or Invalid Mode will be displayed.
- The projector supports the DDC1/2B type as the Plug & Play function (Auto-recognition of PC monitor).
- PC synchronization signal types supported: Separate type synchronization.
- In PC mode, 1280 x 800 is recommended for the best picture quality.

HDMI/DVI-DTV supported mode

Resolution	Horizontal Frequency (kHz)	Vertical Frequency (Hz)
720 x 480	31.469 31.5	59.94 60
720 x 576	31.25	50
1280 x 720	37.5 44.96 45	50 59.94 60
1920 x 1080	33.72 33.75 28.125 26.97 27 33.716 33.75 56.25 67.43 67.5	59.94 60 50 23.97 24 29.976 30.00 50 59.94 60

Component port connecting information

Signal	Component
480i / 576i	0
480p / 576p	0
720p / 1080i	0
1080p	o (50 Hz / 60 Hz only)

Open Source Software Information

To obtain the source code under GPL, LGPL, MPL and other open source licenses, that is contained in this product, please visit http://opensource.lge.com . In addition to the source code, all referred license terms, warranty disclaimers and copyright notices are available for download. LG Electronics will also provide open source code to you on CD-ROM for a charge covering the cost of performing such distribution (such as the cost of media, shipping and handling) upon email request to opensource@lge.com. This offer is valid for three (3) years from the date on which you purchased the product.



The model and serial number of the projector are located on the back or on the side of the projector. Record them below should you ever need service.

Μ	Ο	D	E	L

SERIAL_____