LG
Life's Good

SIMPLE MANUAL

Wireless Sound Bar

Please read this manual carefully before operating your set and retain it for future reference.
To view the instructions of advanced features, visit http://www.lg.com and then download Owner's Manual. Some of the content in this manual may differ from your unit.


MODEL

SN6


MFL71850711
2107_Rev01

www.lg.com
Copyright © 2021-2022 LG Electronics Inc. All Rights Reserved.

ENGLISH




Front Panel



⏻ (Standby) ····· Switches the unit ON or OFF.
F (Function) ····· Selects function.
—/+ (Volume) ····· Adjusts volume.

Rear Panel



DC IN ····· Connect to the AC adapter.
USB (Service only) ····· S/W download connector.
OPTICAL IN ····· Connect to an optical device.
HDMI IN ····· Connect to device with HDMI OUT.
(TV ARC) HDMI OUT ····· Connect to a TV.

- It is recommended that you purchase a USB gender separately for the convenience of USB insertion and extraction. (Recommended USB gender type : USB 2.0 extension cable)
- Make sure to properly align and connect the optical cable; improper alignment may cause damage to the jack.

Subwoofer Connection

Place the wireless subwoofer near the sound bar and follow steps below.


1. Connect the power cord of the sound bar and the wireless subwoofer to the outlet.
2. Turn on the sound bar.
   - The sound bar and wireless subwoofer will be **automatically** connected. The subwoofer's green LED turns on.

Manual Subwoofer Connection

If the subwoofer does not make sound, try to connect manually.

1. Press **PAIRING** on the rear of the wireless subwoofer.
   - The green LED on the rear of the wireless subwoofer blinks quickly. (If the green LED does not blink, press and hold the **PAIRING**.)
2. Turn on the sound bar.
   - Pairing is completed. The green LED on the rear of the wireless subwoofer turns on.

Keep the sound bar and the subwoofer away from the device (ex. wireless router, microwave oven, etc.) over 1 m to prevent wireless interference.




TV Connection

Connect the sound bar and TV using Optical (Ⓐ) or HDMI ARC (Ⓑ).


Ⓐ Optical Connection

1. Connect the sound bar to the TV using Optical cable.
2. Set up [External Speaker (Optical)] on your TV setting menu.



Ⓑ HDMI (ARC) Connection


1. Connect the sound bar to the TV using HDMI cable.
2. Set up [External Speaker (HDMI ARC)] on your TV setting menu.



- HDMI connection is unavailable if your TV does not support HDMI ARC.
- If this unit is connected by OPTICAL and ARC at the same time, the ARC signal has a higher priority.

Additional Device Connection

1. Connect to the external device like as follow.




2. Set the input source by pressing **F** repeatedly.

Remote control



Replacement of Battery



⏮/⏭: Skip
⏯: Play/Pause
- **Bluetooth connection lock (BT LOCK):** Select the **Bluetooth** function by pressing **F** repeatedly. Long press ⏯ and press it again to limit Bluetooth connection to only BT and LG TV.

SOUND EFFECT: Selects a sound effect mode.
- **TV remote:** Long press **SOUND EFFECT** and press it again to use TV remote control.

⏻ : Turns on or off the Night time mode.
ⓘ : Displays the information of a file, an input source or connected **Bluetooth** device name.
- **Auto Power ON/OFF:** Long press ⓘ and press it again.

⁂ : Adjusts sound level of each speaker.
*** :** This button is not available.

Additional Information

Specification

Power consumption	Refer to the main label.
AC adapter	• Model : DA-50F25 • Manufacturer : Asian Power Devices Inc • Input : 100 - 240 V ~ 50 - 60 Hz • Output : 25 V ⎓ 2 A
	• Model : MS-Z2000R250-050D0-P • Manufacturer : MOSO POWER SUPPLY TECHNOLOGY CO., LTD. • Input : 100 - 240 V ~ 50/60 Hz • Output : 25 V ⎓ 2 A
Dimensions (W x H x D)	Approx. 1060.0 mm X 57.0 mm X 85.0 mm With foot
Amplifier (Total RMS Output power)	420 W RMS

Design and specifications are subject to change without notice.

After Sales Service (Egypt Only)
Shelf Life Time : 2 Years
LG is committed to providing all spare parts of this device during the shelf life time.

Open Source Software Notice Information

To obtain the source code under GPL, LGPL, MPL, and other open source licenses that have the obligations to disclose source code, that is contained in this product, and to access all referred license terms, copyright notices and other relevant documents please visit https://opensource.lge.com.

LG Electronics will also provide open source code to you on CD-ROM for a charge covering the cost of performing such distribution (such as the cost of media, shipping, and handling) upon email request to opensource@lge.com.

This offer is valid to anyone in receipt of this information for a period of three years after our last shipment of this product.

HDMI™ HIGH-DEFINITION MULTIMEDIA INTERFACE

LG Life's Good

الدليل البسيط

المكبر الصوتي اللوحي اللاسلكي


يُرجى قراءة هذا الدليل بعناية قبل تشغيل الجهاز الذي بحوزتك واحتفظ به للرجوع إليه في المستقبل.
لعرض تعليمات الخصائص المتقدمة، تفضل بزيارة موقعنا http://www.lg.com وقم بتحميل دليل المالك. يمكن أن تختلف بعض محتويات هذا الدليل عن المشغل الخاص بك.

الطراز


SN6

MFL71850711
2107_Rev01

www.lg.com
حقوق النشر والتأليف © لعام ٢٠٢١-٢٠٢٢ لـ LG Electronics Inc. جميع الحقوق محفوظة.

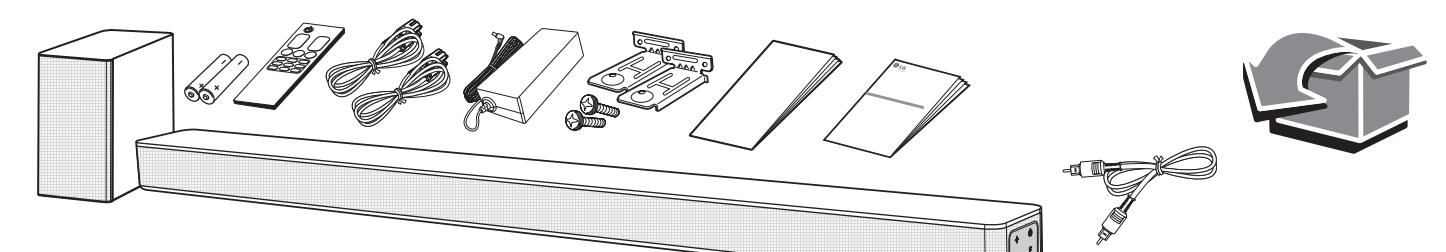


اللوحة الأمامية

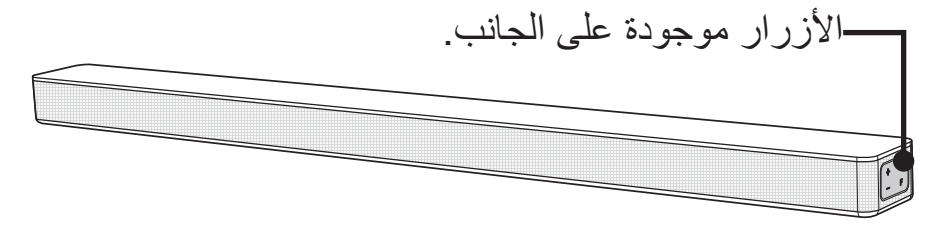

⏻ (استعداد) ·········· لتشغيل الوحدة أو إيقاف تشغيلها.
F (الوظيفة) ······················ يحدد الوظيفة.
+/— (التحكم بالصوت) ········ يضبط مستوى الصوت.

اللوحة الخلفية

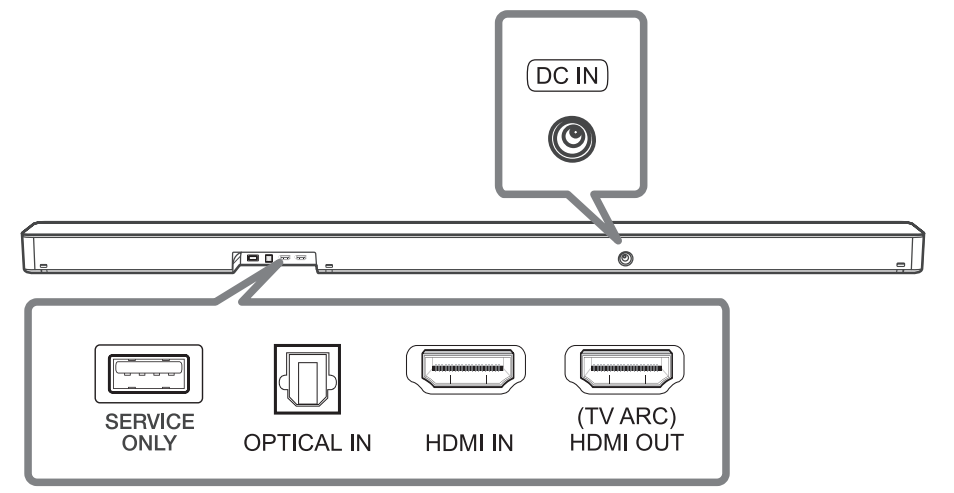

DC IN ············· قم بتوصيل محول التيار المتردد.
USB (لعمليات الصيانة فقط) ······ موصل تنزيل البرامج.
OPTICAL IN ········ يُستخدم للتوصيل بجهاز بصري.
HDMI IN ······· للتوصيل بجهاز به منفذ HDMI OUT.
HDMI OUT (TV ARC) ····· يُستخدم للتوصيل بجهاز التلفزيون.

- من المستحسن أن تقوم بشراء USB gender منفصلة لراحة إدخال وإخراج USB. (نوع USB gender الموصى به :سلك تمديد ال USB 2.0)
- إذا لم يوصل الكابل البصري بالإتجاه الصحيح، عندها قد يسبب التلف للمقبس البصري.

توصيل مضخم الصوت

ضع مضخم الصوت بالقرب من مكبر الصوت واتبع الخطوات الواردة أدناه.


1. وصّل سلك الطاقة لمكبر الصوت ومضخم الصوت اللاسلكي بمأخذ التيار الكهربائي.
2. قم بتشغيل مكبر الصوت.
   - سيتم توصيل السماعة اللوحية ومضخم الصوت اللاسلكي تلقائيًا. يعمل الضوء الأخضر لمكبر الصوت.

توصيل مكبر الصوت يدوياً

إذا لم يصدر مضخم صوت فحاول التوصيل يدويا.

1. اضغط **PAIRING** على الجزء الخلفي من مضخم الصوت اللاسلكي.
   - يومض المصباح الأخضر على الجانب الخلفي من مكبر الصوت بالاتصال اللاسلكي بسرعة. (إذا لم يظهر المؤشر الأخضر، اضغط مطولاً على **PAIRING**.)
2. قم بتشغيل مكبر الصوت.
   - اكتمل الإقران. يعمل المصباح الأخضر على الجانب الخلفي من مكبر الصوت بالاتصال اللاسلكي.

احفظ مكبر الصوت الأفقي و مكبر الصوت بعيداً عن الأجهزة (مثل: الراوتر اللاسلكي و فرن الميكرويف إلخ) بمسافة ١ متر لمنع التداخل اللاسلكي.

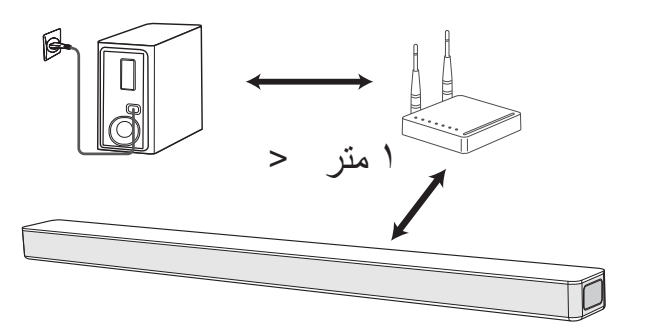


توصيل التليفزيون

وصل مكبر الصوت والتلفاز باستخدام Optical (Ⓐ) أو HDMI ARC (Ⓑ).


Ⓐ التوصيل البصري

1. وصل مكبر الصوت بالتلفاز باستخدام الكابل الضوئي.
2. قم بإعداد [External Speaker (Optical)] في قائمة الضبط بالتلفزيون.

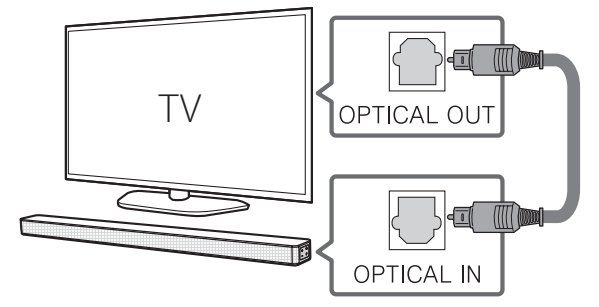

Ⓑ HDMI (ARC) اتصال


1. وصل مكبر الصوت بالتلفاز باستخدام كابل HDMI.
2. قم بإعداد [External Speaker (HDMI ARC)] في قائمة الضبط بالتلفزيون.

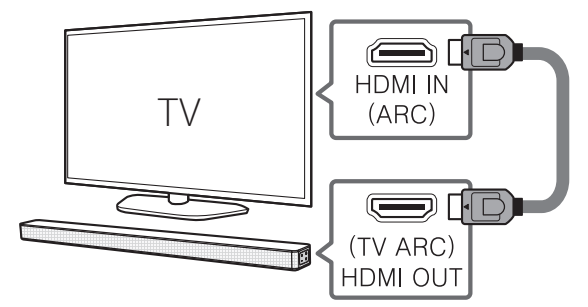

- لن تكون خاصية التوصيل HDMI إذا لم يكن بجهاز التلفاز مقبس HDMI ARC.
- إذا كانت الوحدة متصلة عن طريق OPTICAL و ARC في نفس الوقت، فسيكون لإشارة ARC الأولوية.


توصيل الجهاز الإضافي

1. وصلّه بالجهاز الخارجي كما يلي.

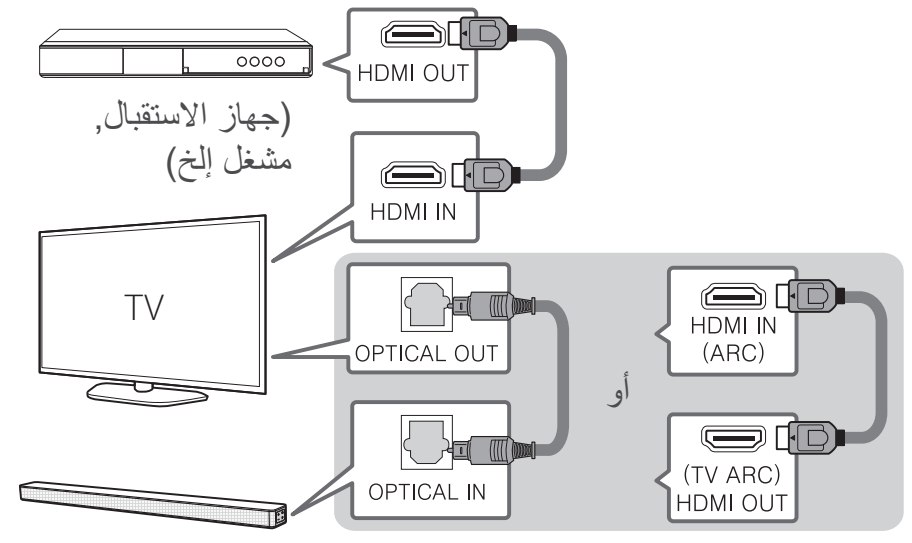


2. قم بضبط مصدر الإدخال بالضغط على **F** بشكل متكرر.

جهاز التحكم عن بعد

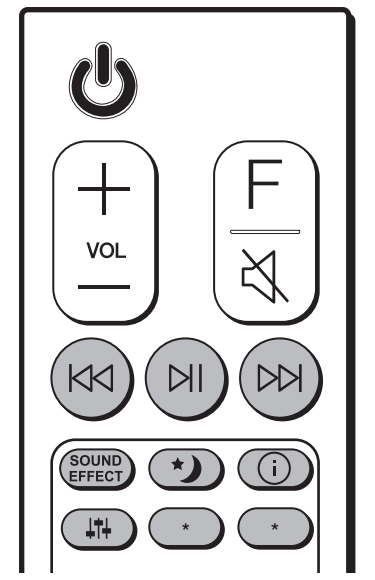

استبدال البطارية

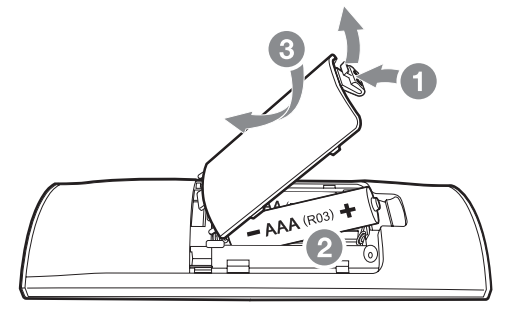

⏮/⏭**:** تخطي
⏯ **:** تشغيل/إيقاف
- **قفل اتصال BLUETOOTH (BT LOCK) :** اختر وظيفة **Bluetooth** بالضغط على **F** بشكل متكرر. اضغط مطولاً على ⏯ ثم اضغط مجدداً لتحديد إتصال Bluetooth فقط ب BT أو LG TV.

SOUND EFFECT: قم باختيار نمط تأثير الصوت
- **جهاز التحكم في التلفاز:** اضغط مطولاً على **SOUND EFFECT** ثم اضغط مجدداً لاستخدام جهاز التحكم بالتلفاز.

: قم بتشغيل أو إغلاق نمط وقت المساء.
ⓘ : قم بعرض المعلومات الخاصة بالملف، مصدر إدخال، أو اسم جهاز **Bluetooth** متصل.
- **التشغيل التلقائي تشغيل/إيقاف:** اضغط مطولاً على ⓘ ثم اضغط مجدداً.

: قم بتعديل مستوى الصوت لكلا مكبري الصوت.
* **:** إن الزر غير متاح.

معلومات إضافية

المواصفة

استهلاك الطاقة	ارجع إلى الملصق الرئيسي.
محول التيار المتردد AC	• الطراز : DA-50F25 • المصنّع : Asian Power Devices Inc. • الدخل : ١٠٠ - ٢٤٠ فولت ~ ٥٠ - ٦٠ هرتز • الخرج : ٢٥ فولت ⎓ ٢ أمبير
	• الطراز : MS-Z2000R250-050D0-P • المصنّع : MOSO POWER SUPPLY TECHNOLOGY CO., LTD. • الدخل : ١٠٠ - ٢٤٠ فولت ~ ٥٠/٦٠ هرتز • الخرج : ٢٥ فولت ⎓ ٢ أمبير
الأبعاد (العرض × الارتفاع × العمق)	تقريبًا ١٠٦٠,٠ مم X ٥٧,٠ مم X ٨٥,٠ مم مع قدم
مضخم الصوت (إجمالي طاقة خرج RMS)	٤٢٠ وات RMS

يخضع التصميم والمواصفات للتغيير دون إخطار مسبق.

خدمة ما بعد البيع (مصر فقط)

العمر الافتراضي : سنتان

تلتزم شركة LG بتوفير جميع قطع الغيار الخاصة بهذه الأجهزة خلال فترة العمر الافتراضي.

معلومات حول إشعار البرامج مفتوحة المصدر

للحصول على التعليمات البرمجية للمصدر ضمن GPL، و LGPL، وMPL، والحصول على التراخيص مفتوحة المصدر الأخرى التي لديها التزامات للكشف عن التعليمات البرمجية الخاصة بالمصدر، المضمنة في هذا المنتج، وللوصول إلى كل أحكام الترخيص المشار إليها، وإشعارات حقوق النشر وكل الوثائق ذات الصلة، يرجى زيارة https://opensource.lge.com.

ستوفر LG Electronics أيضاً التعليمات البرمجية المفتوحة المصدر على قرص CD-ROM مقابل رسم يغطي تكلفة القيام بهذا التوزيع (مثل تكلفة وسائل النقل والشحن والتسليم) بناءً على طلب يُرسل عبر البريد الإلكتروني إلى opensource@lge.com.

يسري هذا العرض لأي شخص يتسلم هذه المعلومات لمدة ثلاث سنوات بعد آخر عملية شحن لهذا المنتج.

HDMI™ HIGH-DEFINITION MULTIMEDIA INTERFACE