

SIMPLE MANUAL

# Wireless Sound Bar

Please read this manual carefully before operating your set and retain it for future reference.  
To view the instructions of advanced features, visit <http://www.lg.com> and then download Owner's Manual. Some of the content in this manual may differ from your unit.

## MODELS

SJ7

SJ7-C



[www.lg.com](http://www.lg.com)




## Front/Side Panel

Primary unit



-/+ : Adjusts Volume  
F : Selects Function  
Power : Standby


Secondary unit



>|| : Starts or pauses playback.  
Bluetooth : Connects Bluetooth device.  
Bluetooth LED : Bluetooth LED

## TV Connection

Connect with the Sound Bar and TV using Optical or HDMI ARC.

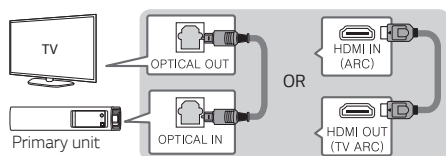


- 1 Connect the sound bar to the TV using Optical or HDMI cable.
- 2 Set up [External Speaker (Optical)] or [External Speaker (HDMI ARC)] on your TV setting menu.



- HDMI connection is unavailable if your TV does not support HDMI ARC.
- If this unit is connected by OPTICAL and ARC at the same time, the ARC signal is a high priority.

## Additional Device Connection

- 1 Connect to the external device. It is recommended to connect as follows.

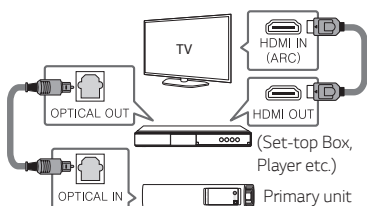

- 2 Set the input source by pressing F on the remote control or unit repeatedly.


## Speaker Connection

You can use speaker connection in the SOUND BAR or REAR usage mode only.

### Secondary unit connection

Place the Secondary unit near the Primary unit and follow steps below.

- 1 Connect the power cord of Secondary unit and Primary unit to the outlet.
- 2 Turn on the Primary unit by pressing Power. Turn on the Secondary unit by switching the Usage Mode Switch to REAR or SOUND BAR.



The Primary unit and Secondary unit will be **automatically** connected. The Secondary unit's white LED turns on.

### Secondary unit Connection Manually

If the Secondary unit does not make sound, try to connect manually.

- 1 Turn off the Primary unit.
- 2 Press **PAIRING** button on the rear of the Secondary unit. The white LED on the front of Secondary unit blinks.
- 3 Turn on the Primary unit.
- 4 Pairing is completed. The white LED on the front of Secondary unit turns on.

### Subwoofer connection

Place the wireless subwoofer near the speaker and follow steps below.

- 1 Connect the power cord of wireless subwoofer and sound bar to the outlet.
- 2 Turn on the Primary unit :  
The sound bar and wireless subwoofer will be **automatically** connected. The subwoofer's green LED turns on.

### Subwoofer Connection Manually

If the subwoofer does not make sound, try to connect manually.

- 1 Press **Pairing** button on the rear of the wireless subwoofer. The green LED blinks quickly.
- 2 Turn on the Primary unit.
- 3 Pairing is completed. The green LED turns on.

## Positioning the Unit


### SOUND BAR usage mode

Primary unit and Secondary unit play as FRONT L/ R(Left/Right) speaker like a sound bar.

Turn on the Primary unit by pressing .

Turn on the Secondary unit by switching the Usage Mode Switch to SOUND BAR.

When disconnecting AC Adapter of Secondary unit, the audio output may be reduced.

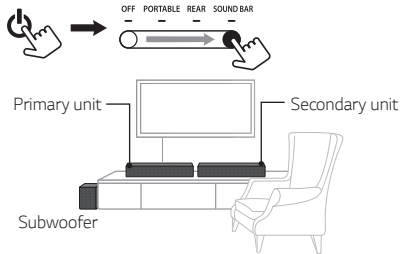


### PORTABLE usage mode

You can play Secondary unit without Primary unit.

**Primary unit and Secondary unit play separately with each connected device.**

Turn on the Secondary unit by switching the Usage Mode Switch to PORTABLE.

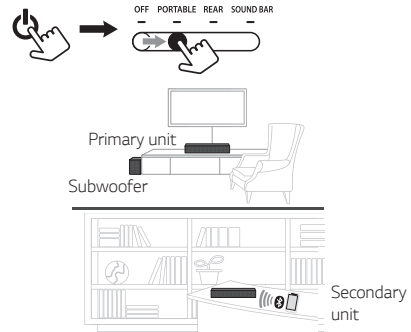


### REAR usage mode

Primary unit plays as front speaker and Secondary unit plays as rear surround speaker.

Turn on the Primary unit by pressing .

Turn on the Secondary unit by switching the Usage Mode Switch to REAR.

When disconnecting AC Adapter of Secondary unit, the audio output may be reduced.



### BLUETOOTH Connection (Secondary unit)

Select LG SJ7-2ND (xx) from device list to pair your mobile device.

When successfully Paired, Bluetooth LED turns on white with beep sound.

### BLUETOOTH Connection (Primary unit)

- ① Press F button to select the BT (Bluetooth) Function.
- ② Select LG SJ7 (xx) from device list to pair your mobile device.


When successfully Paired, "PAIRED" Your device's name "BT" appears in the display window in this order.

### OFF usage mode

Primary unit plays alone without Secondary unit


Turn on the Primary unit by pressing .

Turn on the Secondary unit by switching the Usage Mode Switch to OFF.



## Charging the Unit

Before using it, charge the battery by connecting the AC Adapter (Secondary unit only)

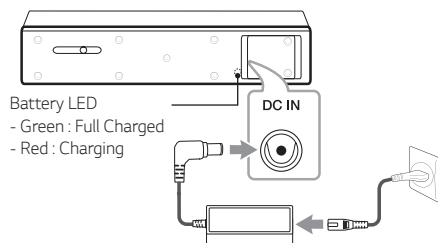

## Remote control



**+**: Turns down the volume at night.

**REAR LEVEL -/+**: Adjusts rear level of Secondary unit on the REAR usage mode.


**SURROUND**: Turns on/off Surround function.

**AV SYNC**: Synchronizes the audio and video.

**AUTO VOL**: Automatically adjusts too loud or low output volume level appropriately.

**AUTO POWER**: Automatically turns on by an input source.

## Replacement of battery

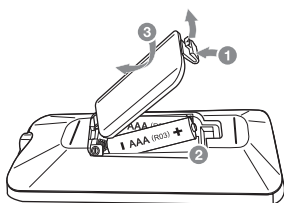

## Additional Information

### Specification

|                                    |                                                                                                                                                                                                                                      |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Power consumption                  | Refer to the main label.                                                                                                                                                                                                             |
| AC adapter                         | <ul style="list-style-type: none"> <li>Model : DA-38A25</li> <li>Manufacturer : Asian Power Devices Inc.</li> <li>Input : 100 - 240 V ~ 50 - 60 Hz 1.2 A</li> <li>Output : 25 V <math>\overline{\text{---}}</math> 1.52 A</li> </ul> |
| Dimensions (W x H x D)             | Approx.<br>340 mm x 74 mm x 110 mm<br>With foot<br>(In each of Primary unit and Secondary unit)                                                                                                                                      |
| Amplifier (Total RMS Output power) | 320 W RMS (In state of connecting AC Adapter).                                                                                                                                                                                       |
| Operating time (Battery)           | Approx. 4 hours (Varies by volume level and audio content.)                                                                                                                                                                          |

Design and specifications are subject to change without notice.

## OPEN SOURCE SOFTWARE NOTICE INFORMATION

To obtain the source code under GPL, LGPL, MPL, and other open source licenses, that is contained in this product, please visit <http://opensource.lge.com>.

In addition to the source code, all referred license terms, warranty disclaimers and copyright notices are available for download.

LG Electronics will also provide open source code to you on CD-ROM for a charge covering the cost of performing such distribution (such as the cost of media, shipping and handling) upon email request to [opensource@lge.com](mailto:opensource@lge.com). This offer is valid for three (3) years from the date on which you purchased the product.

**HDMI**  
HIGH-DEFINITION MULTIMEDIA INTERFACE

### Industry Canada Statement

This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:

- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

### CAN ICES-3 (B)/NMB-3 (B)

#### IC Radiation Exposure Statement

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20 cm (7.8 inches) between the antenna & your body.

NOTE: THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.

### WARNING

[For product having the wireless function using 5 GHz frequency bands]

- (i) the device for operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems;
- (ii) for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the bands 5250–5350 MHz and 5470–5725 MHz shall be such that the equipment still complies with the e.i.r.p. limit;
- (iii) for devices with detachable antenna(s), the maximum antenna gain permitted for devices in the band 5725–5850 MHz shall be such that the equipment still complies with the e.i.r.p. limits specified for point-to-point and non-point-to-point operation as appropriate; and
- (iv) the worst-case tilt angle(s) necessary to remain compliant with the e.i.r.p. elevation mask requirement set forth in Section 6.2.2(3) shall be clearly indicated. (devices operating in the band 5250–5350 MHz with a maximum e.i.r.p. greater than 200 mW)
- (v) High-power radars are allocated as primary users (i.e. priority users) of the bands 5250–5350 MHz and 5650–5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.



LG Customer Information Center

1 888 542-2623

CANADA

Register your product Online!

[www.lg.com](http://www.lg.com)