

EASY SETUP GUIDE

LG Digital Signage

(MONITOR SIGNAGE)



<https://youtu.be/6t5lcuROngM>

Please read this manual carefully before operating your set and retain it for future reference.

55EH5C




* M F L 6 9 5 8 8 4 1 0 *

www.lg.com

P/No.: MFL69588410 (1703-REV00)

Printed in Korea

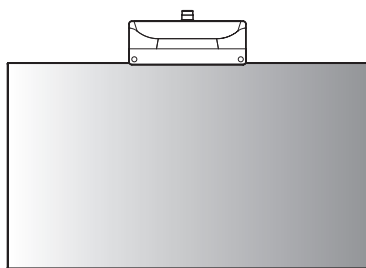





(Φ3 x L6)






(Φ3 x L10)



(M4 x L10)




(M3 x L4.5)

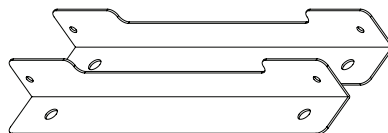



(M3 x L4.5)



(M4 x L8)



AAA







You can download the web manuals for this product at the following websites.
(Keyword: EH5C)

- www.lg.com




SuperSign: <http://partner.lge.com>

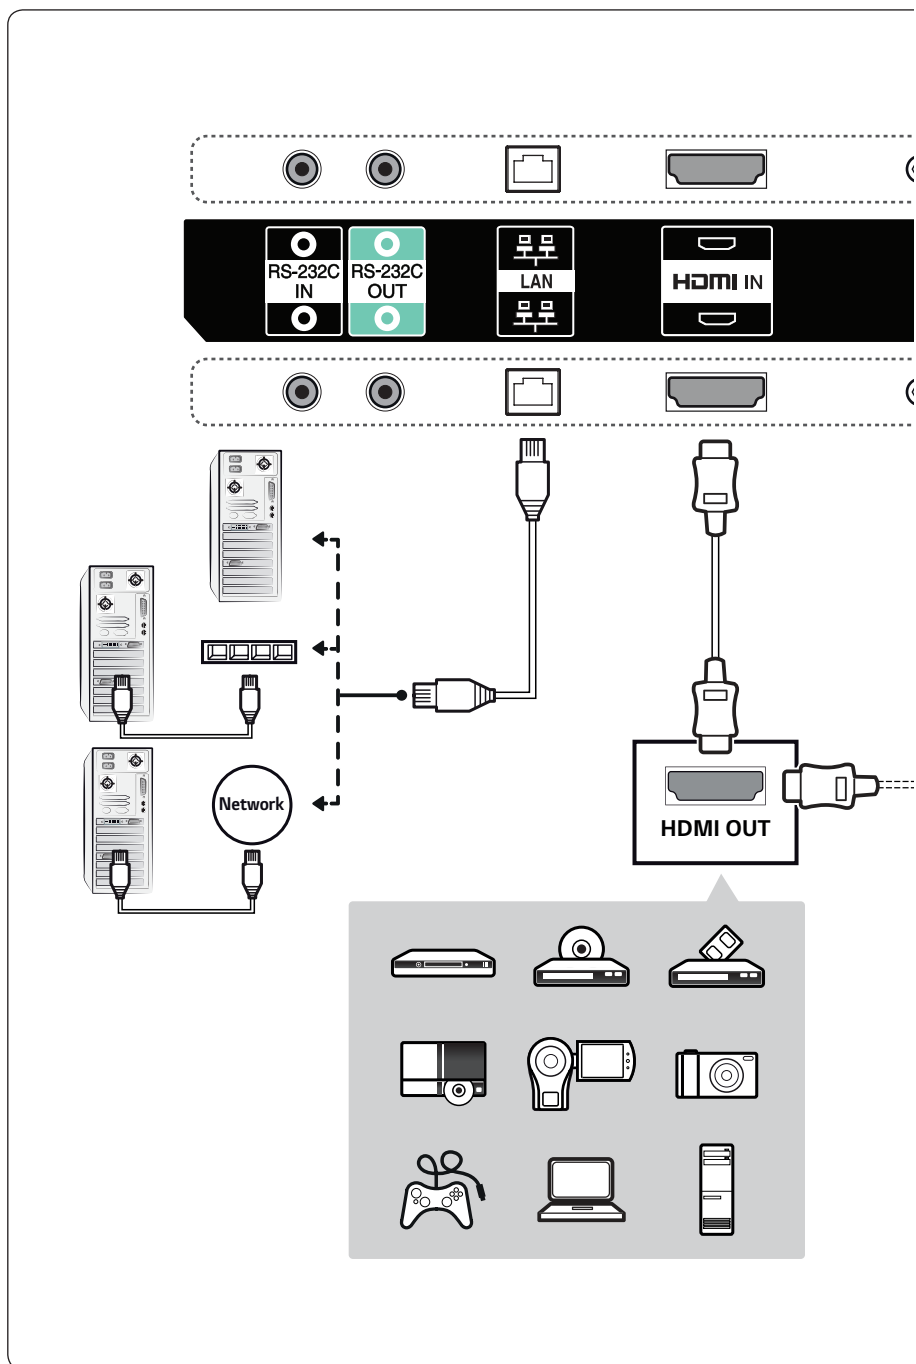

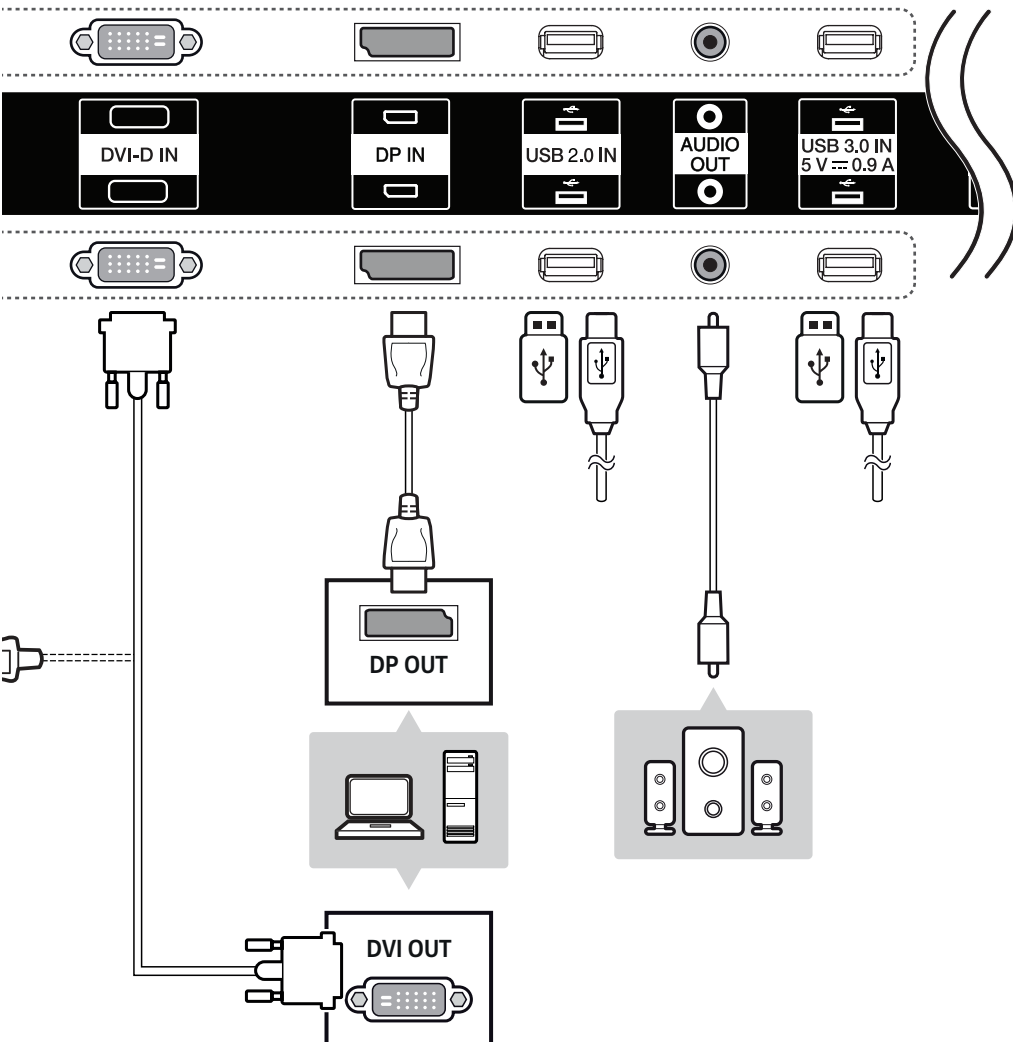





- 1 Open the product box, then remove the packaging materials and the T-con box in the order they appear.

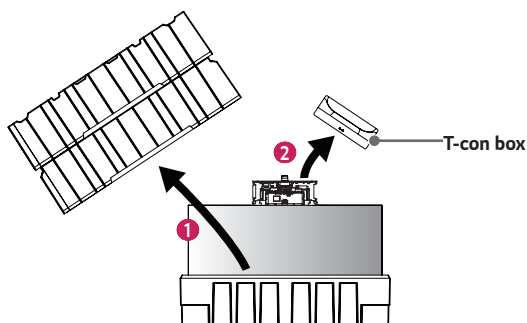


- 2 Connect the cables to the Signage box. At this stage, the HDMI cable with the label marked 'FRONT' must be connected to the upper part and the Rear cable must be connected to the lower part. In the case of 16/22 pin cables, connect the cable with the red mark to the upper part. Connect the 16/22 pin cable with the longer neck to the display set.

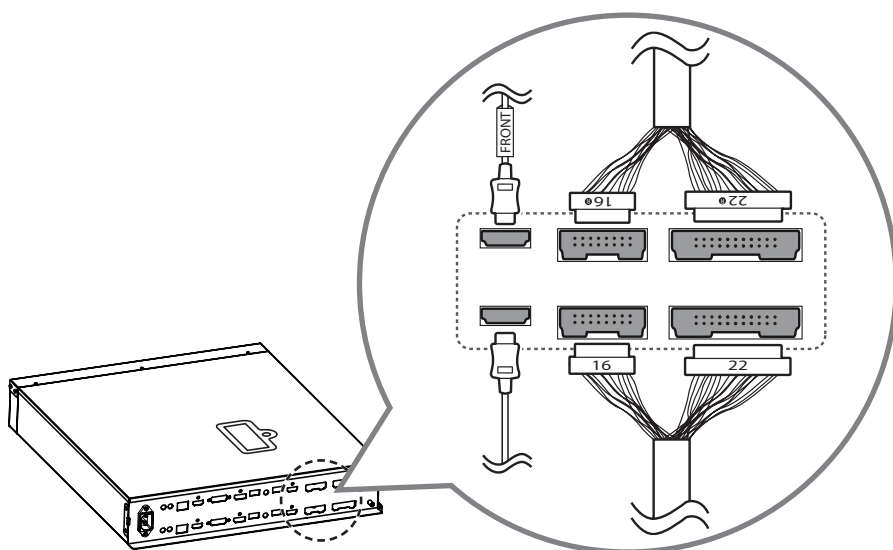


- 3 Attach the 16/22 pin cables using the 2 screws (M3 x L4.5).

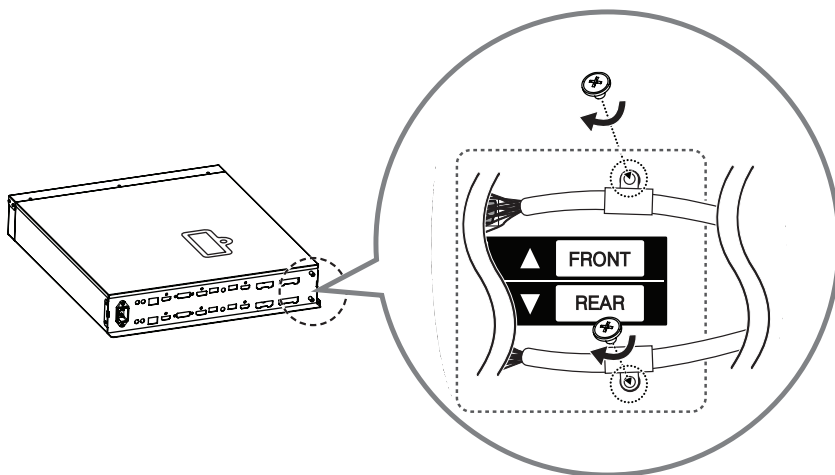


- 4 If installing onto a ceiling or wall, attach the mounting brackets to the Signage box using four screws (M4 x L8).

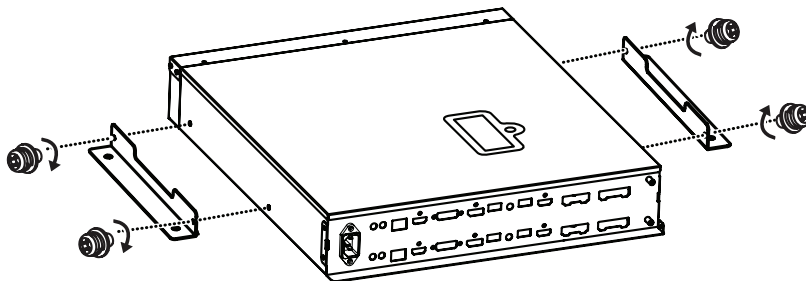


- 5 Position the jack cover to fit the cables to the cut spaces and then attach it using the 2 screws (M3 x L4.5).

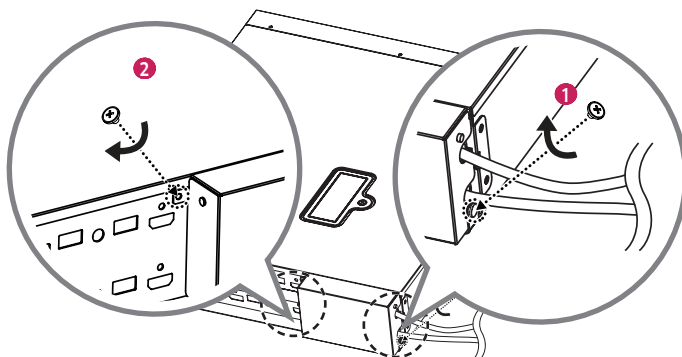


- 6 Fold the connectors on the opposite side of the 16/22 pin cables to make them parallel to the cable.

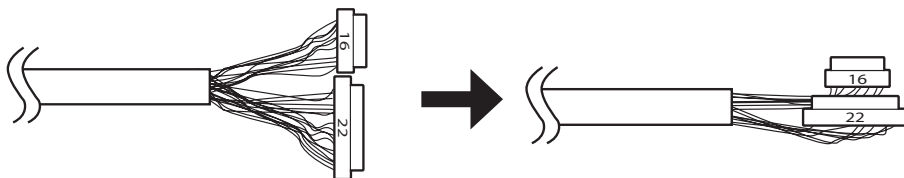


- 7 Insert the connectors of the 16/22 pin cables into the tubes.




- 8 Pass the cables through the hole in the middle of the SET.

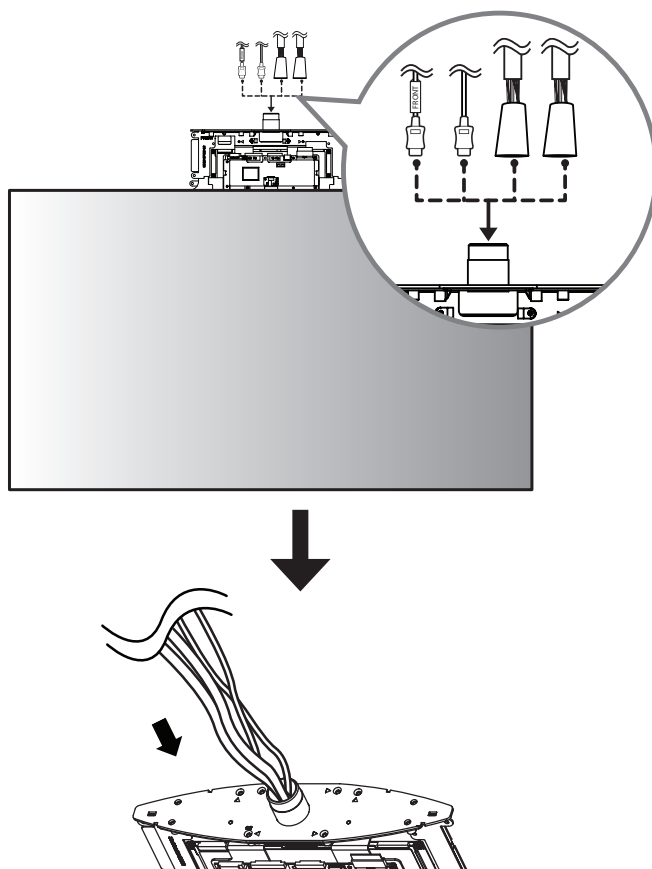


- 9 Connect the HDMI cable with the label marked 'FRONT' to the FRONT side. Insert the 16/22 pin cable with the red mark to the cable holder and connect it using a screw (M3 x L4.5).

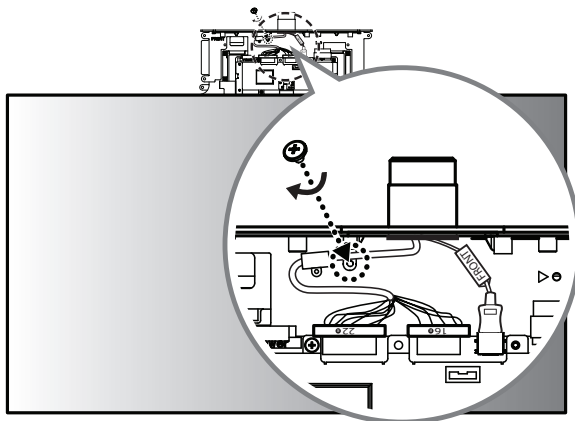


- 10 Connect the HDMI cable (without the label marked 'FRONT') to the REAR side. Insert the 16/22 pin cable (without the red mark) to the cable holder and connect it using a screw (M3 x L4.5).

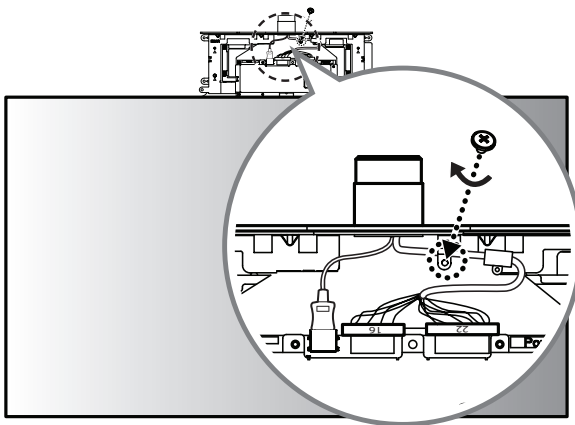


- 11 When installing the product to a stand (excluding a ceiling mount or a wall mount), remove the 2 screws, change the direction of the LG logo, and then reassemble it.

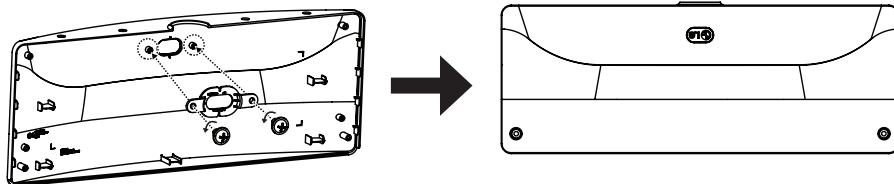


- 12 Cover the FRONT side with the T-con box cover (with the IR receiver) and attach it using 4 screws ($\Phi 3 \times L6$) on the opposite side.

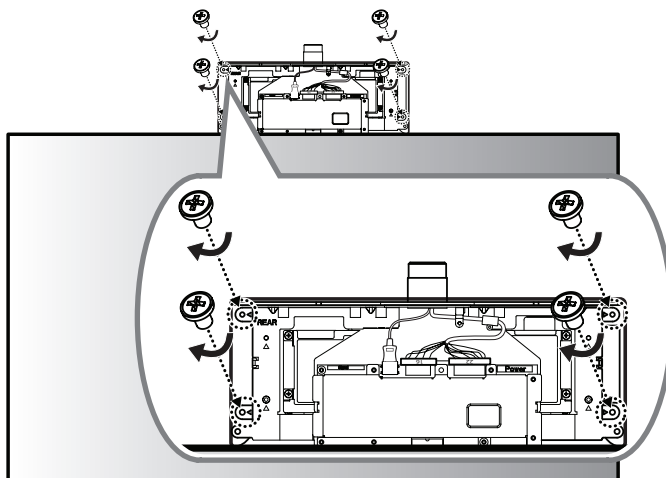


- 13 Cover the REAR side with the other T-con box cover and attach it using 2 screws ($\Phi 3 \times L10$).




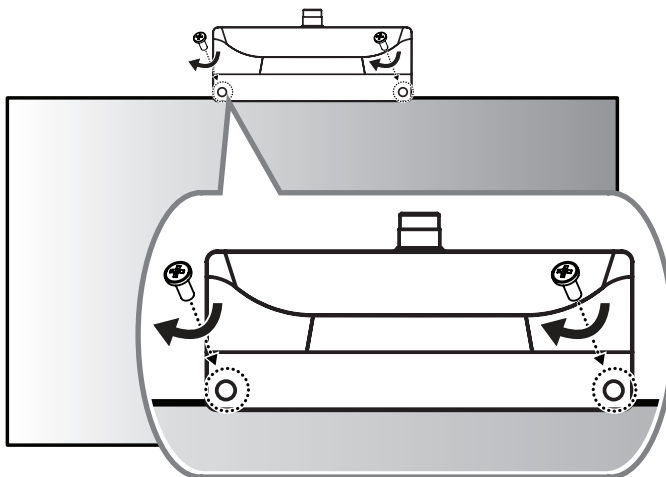



- 14 Attach the bottom part of the T-con cover using 6 screws (M4 x L10).

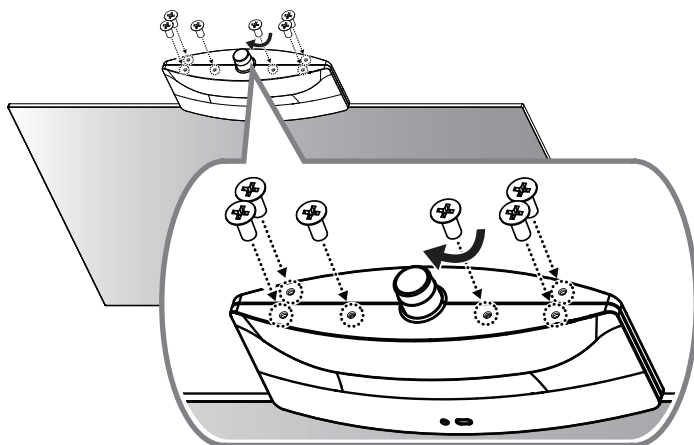

Connect the power cable to the Signage box.

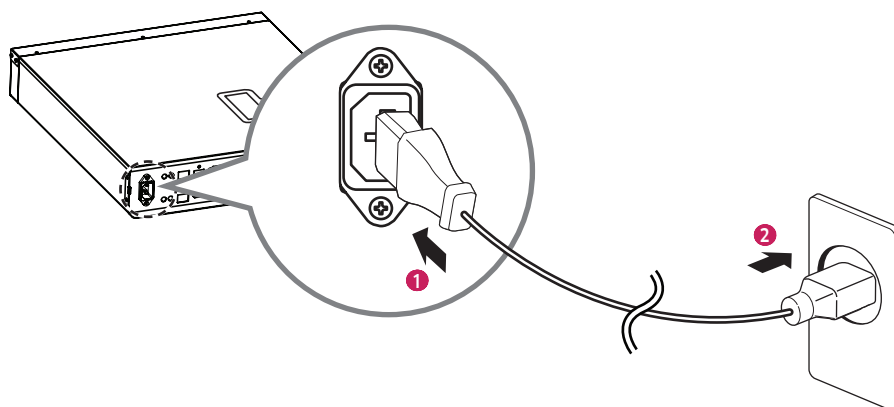



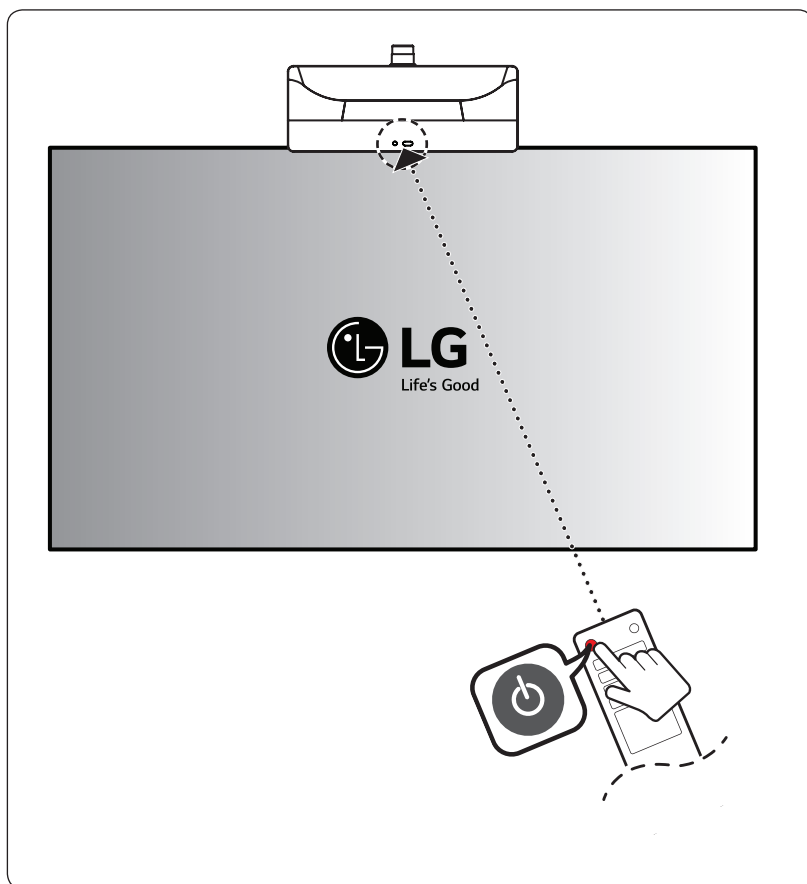



Make sure to read the Safety Precautions before using the product.

The model and serial numbers of the SET are located on the back and one side of the SET. Record it below should you ever need service.

MODEL _____

SERIAL _____

WARNING -This is a class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

Temporary noise is normal when powering ON or OFF this device.