

QUICK GUIDE

AIR CONDITIONER

Please read this installation manual completely before installing the product.
Installation work must be performed in accordance with the national wiring standards by authorized personnel only.
Please retain this installation manual for future reference after reading it thoroughly.

PDI (PDI Premium)
PQNUD1S40
Original instructions

[Representative] LG Electronics Inc. EU Representative : LG Electronics European Shared Service Center B.V.
Krijgsman 1, 1186 DM Amstelveen, The Netherlands

[Manufacturer] LG Electronics Inc. Changwon 2nd factory 84, Wanam-ro, Seongsan-gu, Changwon-si,
Gyeongsangnam-do, KOREA

For more information, Refer to the CD or LG Web site (www.lg.com).



ENGLISH
PORTUGUÊS
MALTI

ITALIANO
MAGYAR
SLOVENČINA

ESPAÑOL
БЪЛГАРСКИ
SLOVENŠČINA

FRANÇAIS
SRPSKI
LATVIŠU VALODA

DEUTSCH
HRVATSKI
LETUVŲ KALBA

ΕΛΛΗΝΙΚΑ
SVENSKA
GAELIGE

ČEŠTINA
NORSK
МАКЕДОНСКИ

NEDERLANDS
SUOMI
SHQIP

POLSKI
DANSK
ISLENSKA

LIBRA ROMÂNĂ
EESTI KEEL
BOSANSKI

SAFETY PRECAUTIONS

- This product must be installed by an installation professional from an LG authorized service center.
- Any issues stemming from an installation by an unauthorized person is the responsibility of the user and will not be covered by warranty.
- The following safety precautions are to prevent any unforeseen dangers or damage.
- This product has been designed for business use, or for areas outside the home, and has passed the Electromagnetic Interference Test.

WARNING

It can result in serious injury or death when the directions are ignored.

CAUTION

It can result in minor injury or product damage when the directions are ignored.

WARNING

Installation

- To reinstall the product, please contact the dealer from where you purchased the product, or a service center for reinstallation service.
 - Installation of the product by an unauthorized person may result in fire, electric shock, explosion, injury, or a malfunctioning of the product.
- Do not twist or damage the power cord.
 - It may cause fire or electric shock.
- For electrical work, please contact the dealer from where you purchased the product, or a service center.
 - Disassembly or repair by an unauthorized person may result in fire or electric shock.
- Install the product in an area shielded from rain.
 - If water gets into the product, it may malfunction.
- Do not install the product in a humid area.
 - If the product is damp, it may malfunction.

- For installation of the product, please contact the dealer from where you purchased the product, or a service center.
 - Installation of the product by an unauthorized person may result in fire, electric shock, explosion, injury, or a malfunctioning of the product.
- For electrical work, please have an electrician do the work based on the installation manual and specified circuit diagram.
 - Using an unsuitable cord, or having a non-professional work on the electricals may result in fire or electrical shock.
- Do not place the product near a fire source.
 - It may result in the product catching fire.
- If the product is installed in a hospital or a communication base station, provide sufficient protective equipment against electrical noise.
 - The product may malfunction or other products may work abnormally.
- Securely install the product.
 - If the product is not secured during installation, it may fall or malfunction.
- Read the manual thoroughly to correctly install the product.
 - If not, an incorrect installation may cause fire or electric shock.
- When wiring the product, do not use a non-standard cable, nor extend the cable excessively.
 - It may cause a fire or electric shock.
- Securely install the power cord and communication cable.
 - An unsecure installation may result in a fire or electric shock.
- Do not connect the power cord to the communication terminal.
 - It may cause a fire, electric shock, or a product malfunction.
- Do not install the product in an area near combustible gas.
 - It may result in fire, electric shock, explosion, injury, or a malfunctioning of the product.
- Always ground the product.
 - There is risk of fire or electric shock.

Use

- Do not place a heavy object on the power cord.
 - It may cause a fire or electric shock.
- Do not change or extend the power cord arbitrarily.
 - It may cause a fire or electric shock.
- Use the cord specific to the product.

- Using an unauthorized non-standard cord may result in a fire or electric shock.
- Do not use a heat device near the power cord.
 - It may cause a fire or electric shock.
- Ensure that water never gets into the product.
 - It can result in an electric shock, or the product may malfunction.
- Do not place any container with liquid on the product.
 - The product may malfunction.
- Do not touch the product with wet hands.
 - It may cause a fire or electric shock.
- Use standard components.
 - Use of an unauthorized product may result in fire, electric shock, explosion, injury, or a malfunctioning of the product.
- If the product has been submerged in water, you should contact a service center.
 - It may cause a fire or electric shock.
- Do not shock the product.
 - The product may malfunction.
- Do not store or use any combustible gas or flammable substances near the product.
 - It may cause a fire, or a product malfunction.
- Do not disassemble, repair, or revamp the product arbitrarily.
 - It may cause a fire or electric shock.
- Children and the elderly should use the product under the supervision of a guardian.
 - Carelessness may cause an accident, or the product to malfunction.
- The guardian should prevent children from accessing the product.
 - The product may be damaged or it may fall, causing injury to children.
- Keep in mind the operating temperature range specified in the manual. If there is no operating temperature range in the manual, use the product between 0 °C ~ 40 °C (32 °F ~ 104 °F).
 - If the product is used outside this range, the product may be severely damaged.
- Do not press the switch or button with a sharp object.
 - It can result in an electric shock, or the product may malfunction.
- Do not wire the product while it is turned on.
 - It may cause a fire or electric shock.

- If the product sounds or smells different, stop using the product.
 - It may cause a fire or electric shock.
- Do not place a heavy object on the product.
 - The product may malfunction.
- Do not spray water on the product, or clean it with a water-soaked cloth.
 - It may cause a fire or electric shock.
- Do not use the product for the preservation of animals and plants, precision instruments, art pieces, or for other special purposes.
 - It may cause property damage.
- Dispose the packing material safely.
 - The packing material may result in personal injuries.

CAUTION

Installation

- Securely install the product in an area where the weight of the product can be supported.
 - The product may fall and be destroyed.
- Do not use the product where there is oil, steam, or sulfuric gas.
 - It may effect the product's performance, or damage it.
- Check the rated power capacity.
 - It may cause a fire, or a product malfunction.
- Use the adaptor provided with the product or power from a class 2 24 V~ transformer, depending on model.
 - If a non-standard adaptor is used, the product may malfunction.
The adaptor is not provided with the PDI package sold in the U.S.
- Be careful not to drop or damage the product when moving it.
 - The product may malfunction or the person may sustain an injury.
- Ensure that the cord is connected securely to prevent dew, water, or insects from getting into the product.
 - If a foreign substance gets inside, it may cause an electric shock or the product may malfunction.

Use

- Clean the product with a soft cloth, but not with a solvent-based detergent.
 - The use of a solvent-based detergent may cause a fire or deform the product.
- Do not touch the panel using a pointy or sharp object.

- It can result in an electric shock, or the product may malfunction.
- Do not let the product come into contact with a metal substance.
 - The product may malfunction.
- When sterilizing or disinfecting, stop using the product.
 - The product may work abnormally.
- Do not touch inside the product.
 - The product may malfunction.
- Check the condition of the product after using the product for an extended period of time.
 - If the product is used for an extended period of time, the product's condition may be worsen, causing injury to the user.
- Do not leave the product near a flower base, water bottle, or any other liquids.
 - It may cause a fire or electric shock.
- If the liquid crystal of the product is broken, please do not let your skin such as face or hands contact with.
 - Personal injury or property damage may occur.
- If the supply cord is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.
- Appliance shall be disconnected from its power source during service and when replacing parts.

According to IEC 60335-1


This appliance is not intended for use by person (including children) with reduced physical, or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.

According to EN 60335-1

This appliance can be used by children aged from 8 years and above and person with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.


**CAUTION**

Changes or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment.


**Disposal of your old appliance**

1. When this crossed-out wheeled bin symbol is attached to a product it means the product is covered by the European Directive 2002/96/EC.
2. All electrical and electronic products should be disposed of separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities.
3. The correct disposal of your old appliance will help prevent potential negative consequences for the environment and human health.
4. For more detailed information about disposal of your old appliance, please contact your city office, waste disposal service or the shop where you purchased the product.


COMPONENTS




Power distribution indicator



Power supply



Manual



Front cover




Screw

Item	Specification
Protection class	IP20

NAME OF EACH PART



① Front cover

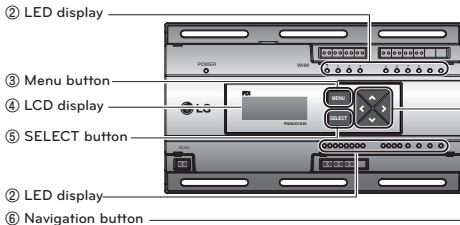

② LED display

③ Menu button

④ LCD display

⑤ SELECT button

② LED display

⑥ Navigation button



⑦ Power supply


- ① **Front cover**
- ② **LED display** Displays current status of power indicator
- ③ **Menu button** Use for checking initial setting and electric power
- ④ **LCD display** Displays setting information and power usage
- ⑤ **SELECT button** Use for initial setting
- ⑥ **Navigation button** Use for checking initial setting and electric power
- ⑦ **Power supply** Supply power for power indicator

INSTALLATION METHOD

Diagram of overall product configuration

When interlocked to pulse type wattmeter

- Interlocked Operation with Central Controller (interlocked to EHP product)

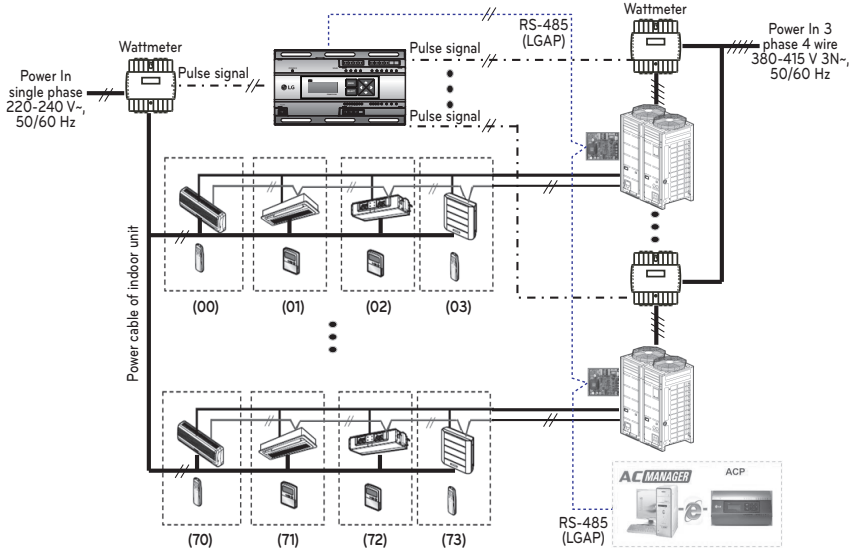

- ////** : Power cable for 3 phase 4 wire
- ///** : Power cable for single phase
-** : Communication cable (2 wire shielded cable): Between outdoor unit and central controller
- : Communication cable (2 wire shielded cable): Between indoor unit and outdoor unit
- . . .** : Pulse signal wire
- : Refrigerant pipe


⚠ CAUTION

- Depending on the electric power, use the wattmeter for remote reading by sending the pulse signal.
- Use the wattmeter with the pulse width of 50 ms ~ 400 ms.
- The wattmeter pulse must be able to sink at least 3 mA or more of current in the power indicator.
- Use the wattmeter of 1 W/Pulse, 2 W/Pulse, 4 W/Pulse, 6 W/Pulse, 8 W/Pulse, 10 W/Pulse, 100 W/Pulse and PT/CT (1 ~ 50 000).
- When setting the wattmeter, set it to Slave Mode.
- Maximum of 8 wattmeters can be installed.
- The distance between power indicator and wattmeter should be shorter than 10 m in normal circumstance.
- When electrical or mechanical noise is expected, more shorter wiring is needed.

* EHP (Electric Heat Pump): It is an electric air conditioner to drive the compressor by electric power.

• When interlocked to GHP product

- When linked with the GHP product, the central controller is linked only possible model of ACS IV series or later.

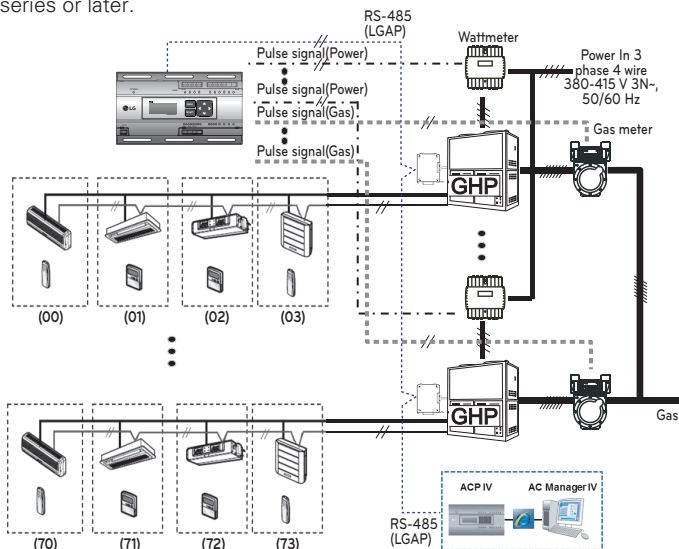

- : Power cable for 3 phase 4 wire
- : Power cable for single phase
- : Communication cable (2 wire shielded cable): Between outdoor unit and central controller
- : Communication cable (2 wire shielded cable): Between indoor unit and outdoor unit
- : Pulse signal wire
- : Refrigerant pipe
- : Gas pipe
- : Pulse signal wire(Gas)


⚠ CAUTION

- Use the wattmeter for remote reading to send pulse signal depending on wattage.
- Use the wattmeter with the pulse width of 50 ms ~ 400 ms.
- The wattmeter pulse must be able to sink at least 3 mA or more of current in the power indicator.
- Use the wattmeter for 1 W/Pulse, 2 W/Pulse, 4 W/Pulse, 6 W/Pulse, 8 W/Pulse, 10 W/Pulse, 100 W/Pulse, PT / CT (1 ~ 50 000).
- Use the gas meter for remote reading to send pulse signal depending on gas consumption.
- Use the gas meter with the pulse width of 50 ms or more.
- Use the gas meter containing the max. gas pressure of 0.2 m³/h ~ 10 m³/h.
- Gas meter pulse must be able to sink at least 3 mA of current or more in the power indicator.
- Use the gas meters for 1 l / Pulse, 2 l / Pulse, 4 l / Pulse, 6 l / Pulse, 8 l / Pulse, 10 l / Pulse, 100 l / Pulse, VT / Pr (1 ~ 50 000).
- Set to Slave Mode when setting the wattmeter or gas meter.
- Wattmeter or gas meter can be installed up to 4.
- Connection cable for the power indicator and wattmeter (gas meter) must not exceed 10 m in normal circumstance.
- Reduce the length of connection cable if there is any electrical or mechanical noise on the site.


* GHP (Gas engine Heat Pump): It is a gas air-conditioner to drive the compressor with LNG or LPG as a heat source and the gas engine electric power.

How to wire the product (when EHP product is connected)

Wiring Power Indicator

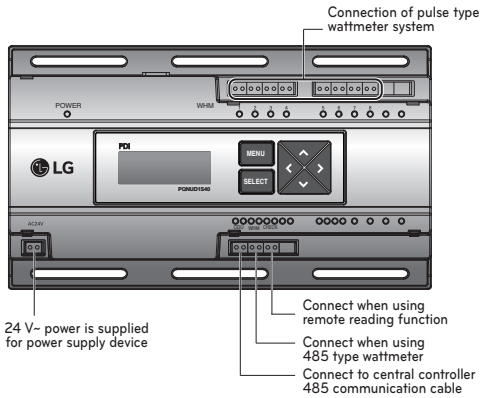

Wiring Power Supply

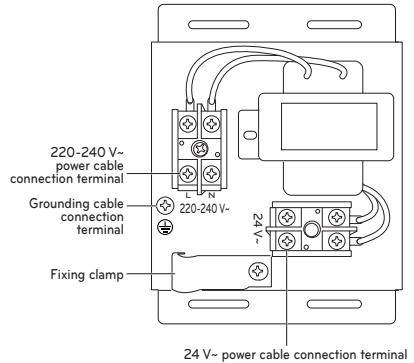


CAUTION


- Power must be turned on after the product is wired completely.

How to wire the product (when GHP product is connected)

Wiring Power Indicator

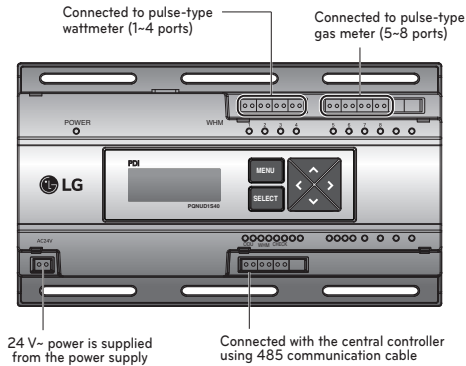

Wiring Power Supply

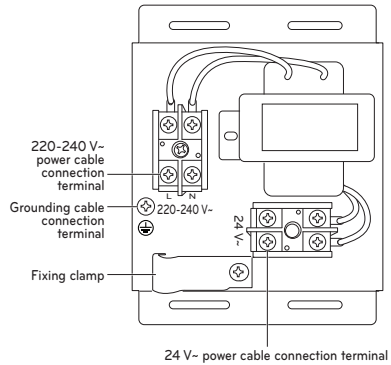

CAUTION

- Power supply must be applied after wiring the product is completed, if applicable.


Wiring

- Separate the power supply case.
- Loosen the clamp fixating the power supply.
- Connect the 220-240 V~ power cable to the black and grounding terminal.
- Connect the 24 V~ power cable to the yellow terminal.
- Use the clamp to fixate the 220-240 V~ and 24 V~ power cable.
- Use the screw to assemble the case.
- Use the included screws to fixate the power indicator and power supply at appropriate locations within the electric panel.
- Connect the 24 V~ power cable connected to the power supply to the power terminal of the power indicator.
- Wire wattmeter, gas meter, central controlled communication cable, and the repeater for remote reading.


! CAUTION

Means for disconnection must be incorporated in the fixed wiring in accordance with the wiring rules.

Power connection

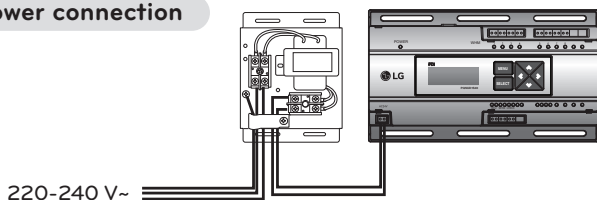


Mounting on wall

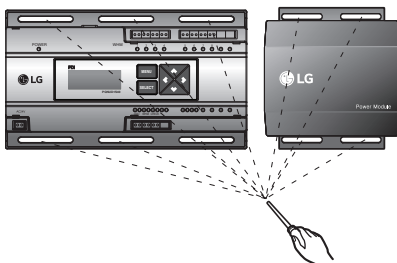

! WARNING

- Always tighten the terminal screws so that they do not become loose.
- When connecting the power and communication cable, always use the terminal (O-Ring, Y-Ring).
- For 220-240 V~ power cable, use (CV) 1.5 mm² x 3 and for 24 V~ power cable, use the CV wire.




! CAUTION

- Power must be turned on after the product is wired completely.

Connect the wattmeter and communication cable (EHP products)

When connecting the pulse-type wattmeter

- Independent Operation of Power Indicator (interlocked to EHP product)

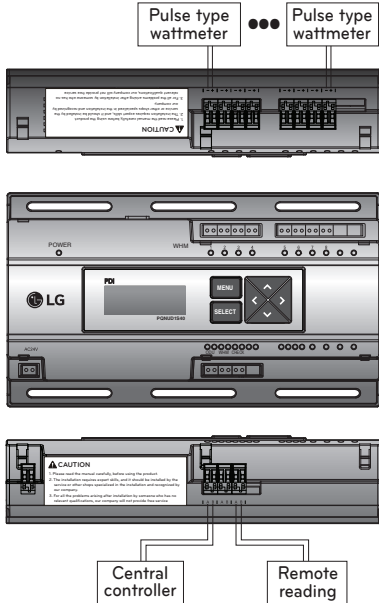


! CAUTION

- The color and polarity of the signal wire may be different from the details indicated on the case depending on the manufacturer of wattmeter. [Black: (-), white: (+)]
- When connecting the 485 communication cable, make sure to check the A, B polarity.
- After connecting the wattmeter, check whether the signal is connected through the LED.
- Power indicator and Pulse Type wattmeter must be installed in same panel.

Connection of wattmeter, gas meter and communication cable (GHP products)

When connecting the pulse-type wattmeter / gas meter

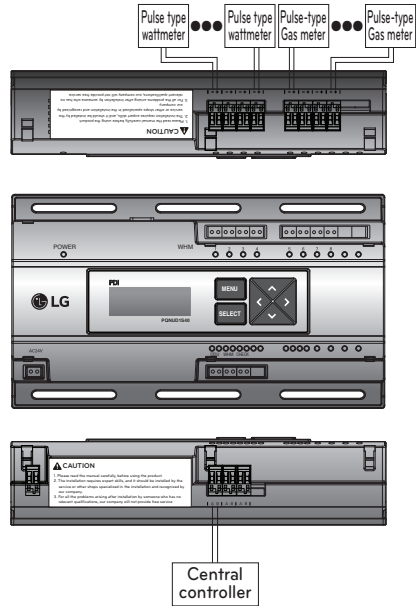

! CAUTION


- The color and polarity of the signal wire may be different from the details indicated on the case depending on the manufacturer of wattmeter. [Black: (-), white: (+)]
- When connecting the 485 communication cable, make sure to check the A, B polarity.
- After connecting the wattmeter, check whether the signal is connected through the LED.
- Install the power indicator and the pulse-type wattmeter on the same panel.
- Make sure that the pulse lines of the wattmeter and gas meter are connected to the correct positions (wattmeter : 1 ~ 4 ports, gas meter : 5 ~ 8 ports)

SETTING AND USING METHOD

Setting up detailed functions (EHP products)


Flowchart for how to set up functions (EHP products)

While EHP product is selected, set the detailed functions of the power indicator with reference to the flowchart below

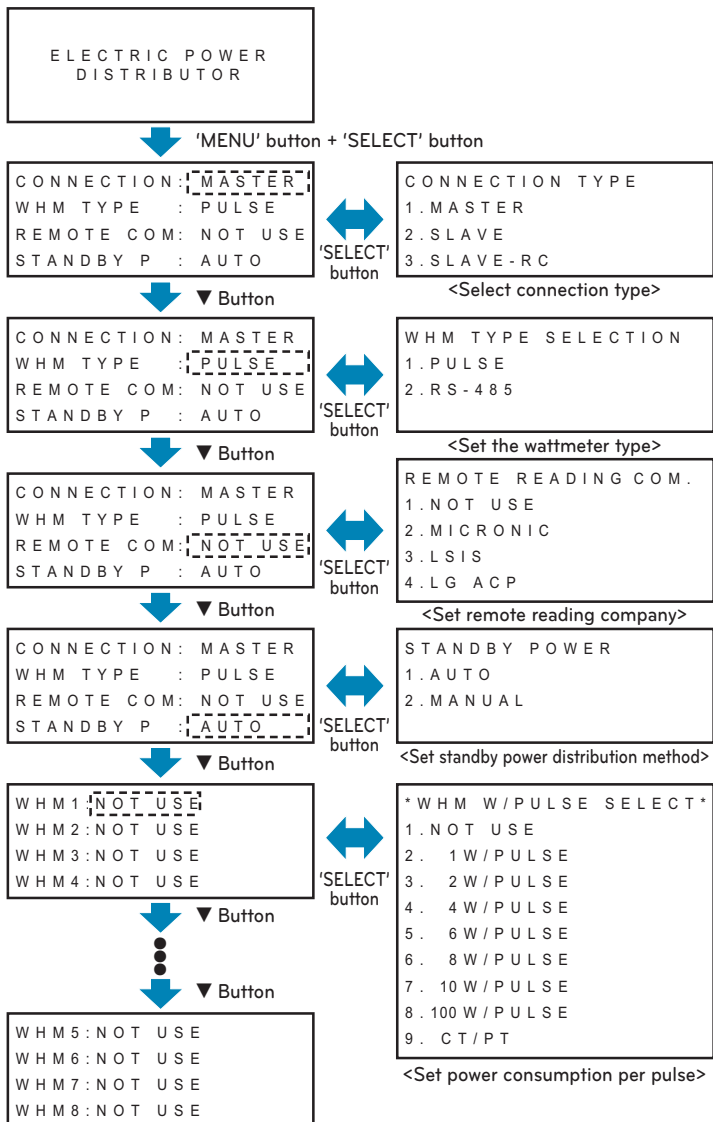

! CAUTION


- Power indicator setting only can be changed during the 20 minutes after turning on the power.
Twenty (20) minutes later, if you need to change settings, turn the power indicator on again.

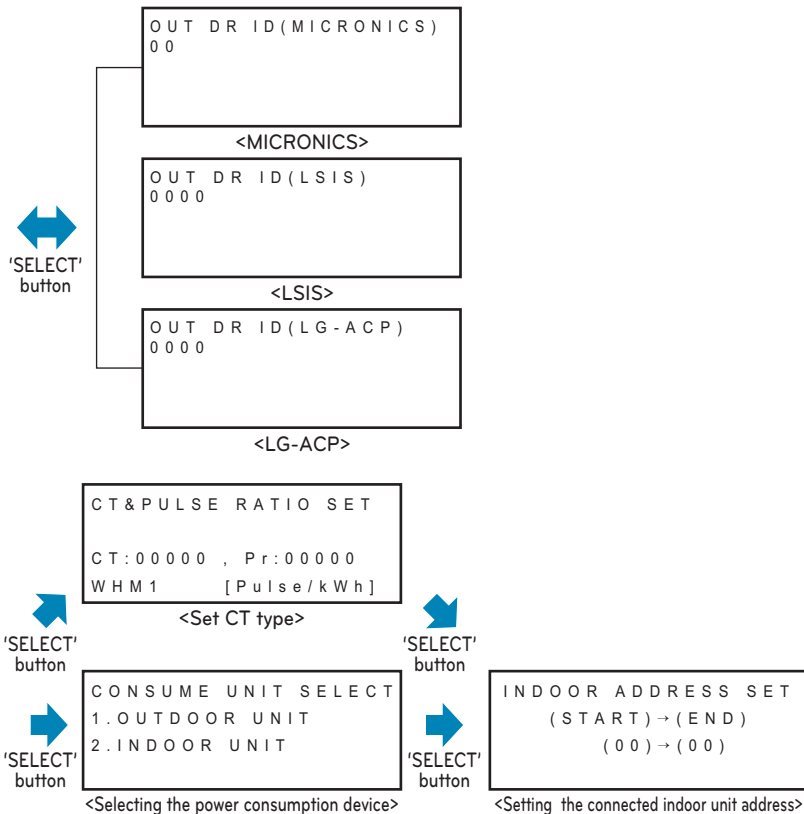

Setting detailed functions (GHP products)


Function Setting Method Flowchart (GHP products)

While GHP product is selected, set the detailed functions of the power indicator with reference to the following flowchart.

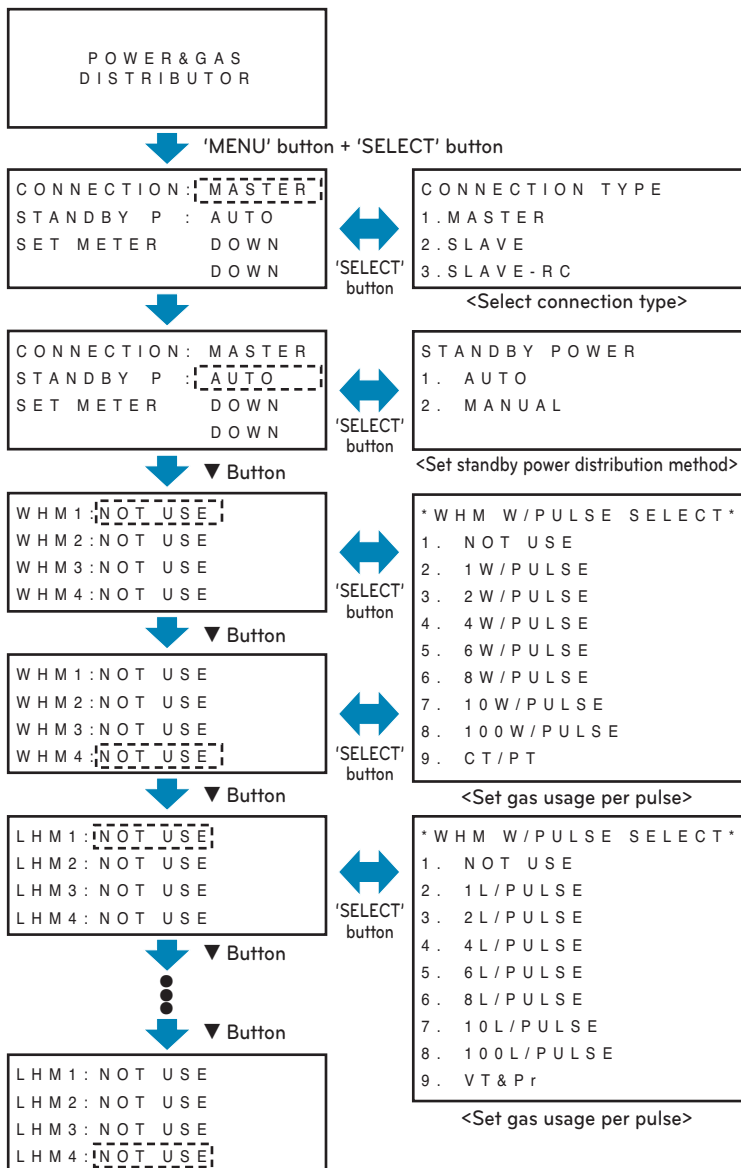


**CAUTION**

- Power indicator setting only can be changed during the 20 minutes after turning on the power.
Twenty (20) minutes later, if you need to change settings, turn the power indicator on again.

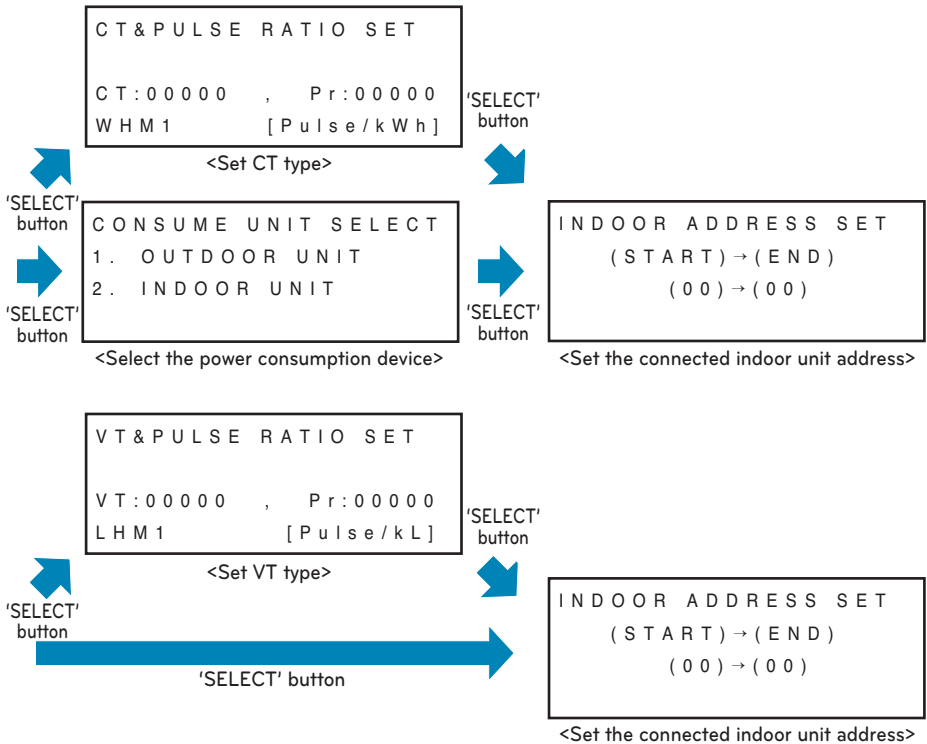

- **If entering the setting screen for the first time.**


- After turning power on, press the 'MENU' button and the 'SELECT' button at the same time and the screen will change to the screen where you can select the product connection type. Select the product type to connect, and then press the 'SELECT' button. Then, the selection of the product will be saved and the screen will be switched to the main standby screen.

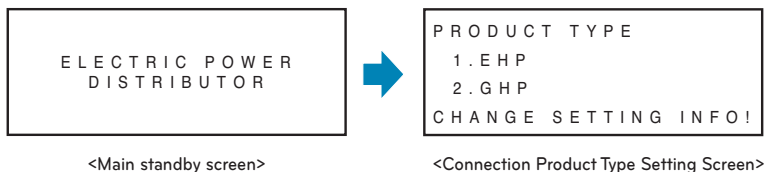


- **If after selecting the connection product type at least once, you are entering the setting screen.**

- After turning power on, press the 'MENU' button and the 'SELECT' button at the same time and then will be switched to the function setting screen.

- **After selecting EHP product**

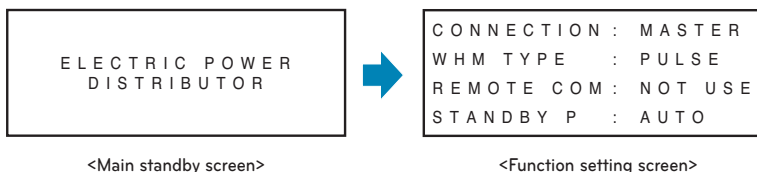

- **After selecting GHP product**

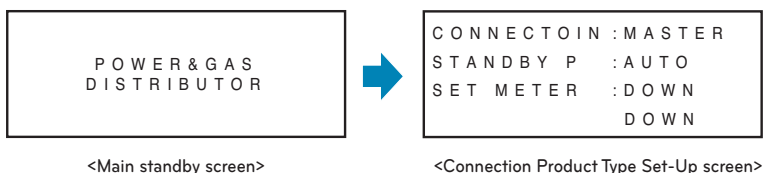

- **The item with letters blinking is the current setting location on the function setting screen.**

※ If you want to change the connection type of product

- On the function setting screen, press the (▲) button and (▼) button simultaneously, and then you can enter the connected product type setting screen.

! CAUTION

- Power indicator setting only can be changed during the 20 minutes after turning on the power. Twenty (20) minutes later, if you need to change settings, turn the power indicator on again.

