


50NANO86*



Quick Start Guide

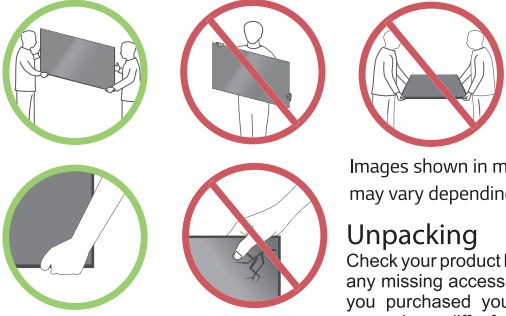


Images shown in manual
may vary depending on model

Unpacking


Check your product box for the following items. If there are any missing accessories, contact the local dealer where you purchased your product. The illustrations in this manual may differ from the actual product and item.

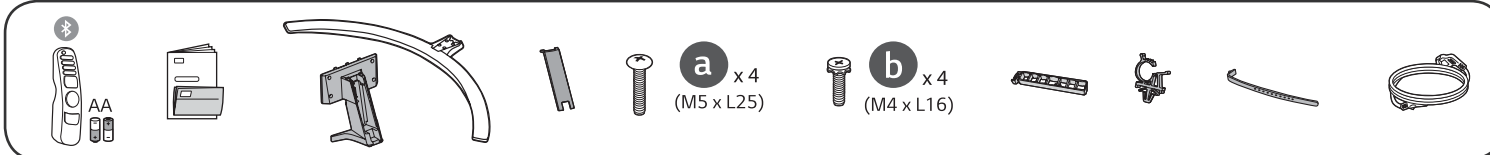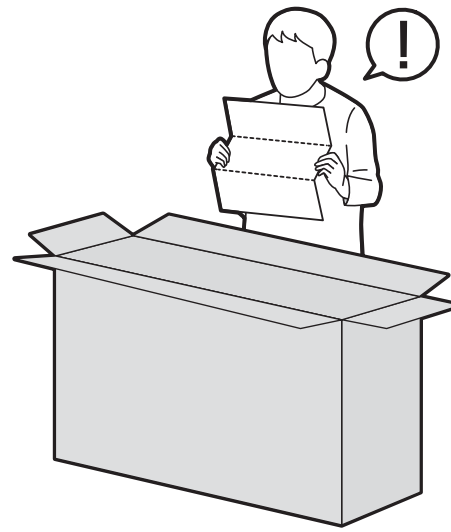


1



2

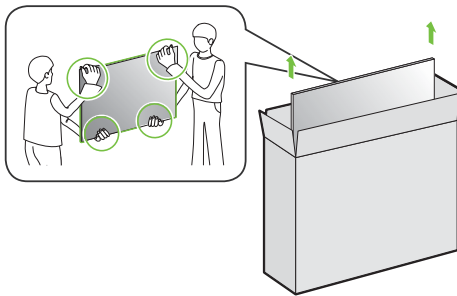


3




CAUTION

Image shown may differ from your TV
When attaching the stand to the TV set, place the screen facing down on a cushioned table or flat surface to protect the screen from scratches.


1

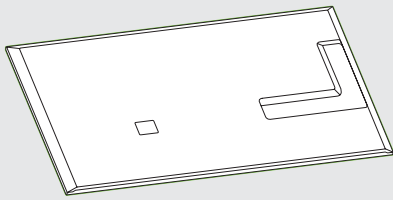


2

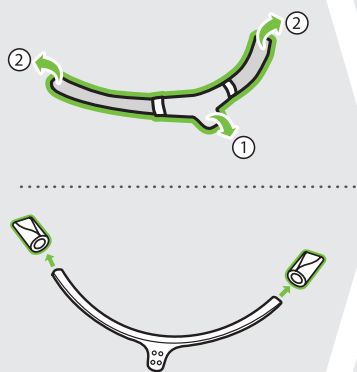


3

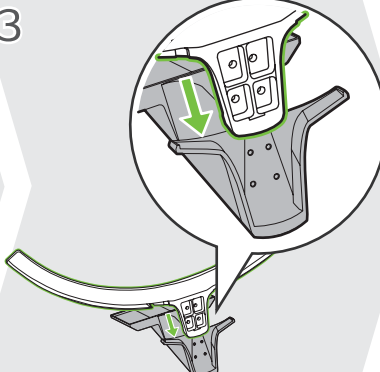


4

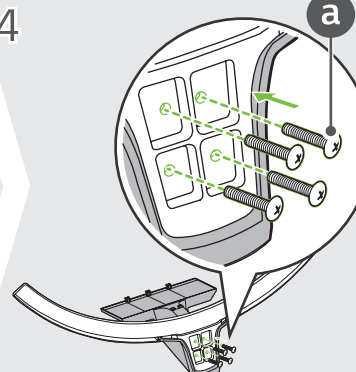


5

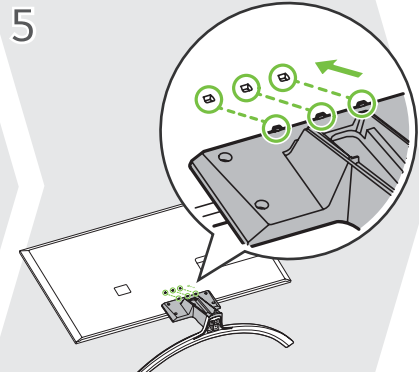



6

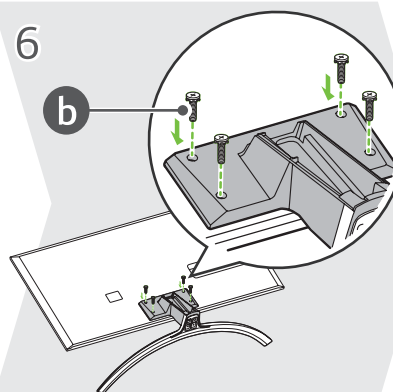




7

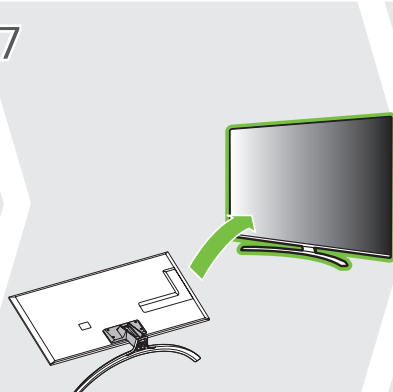


8

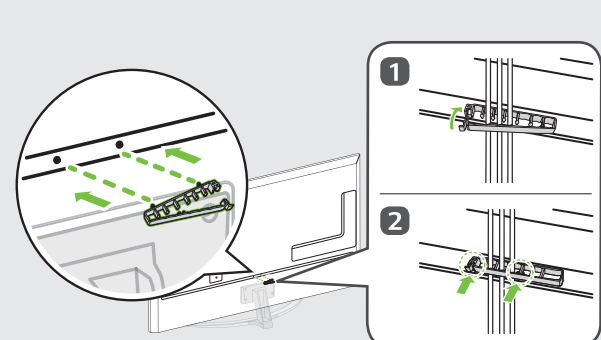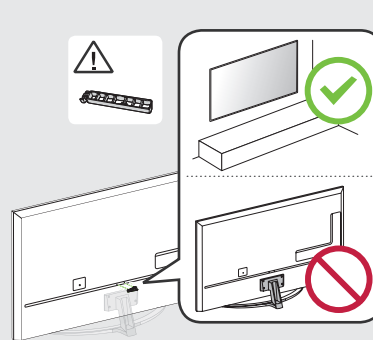


9

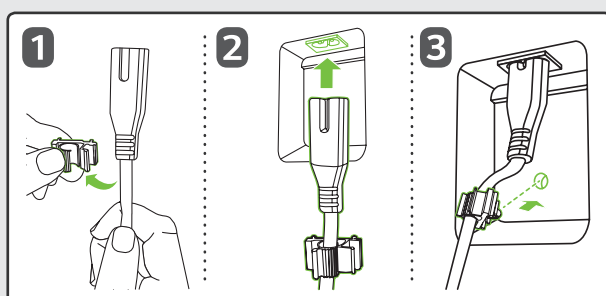



10-A




10-B



11

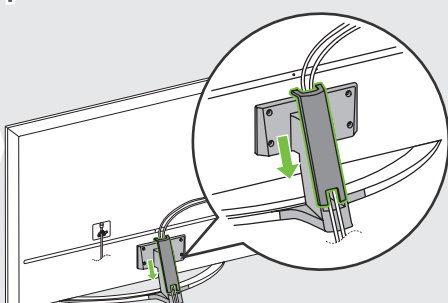

12

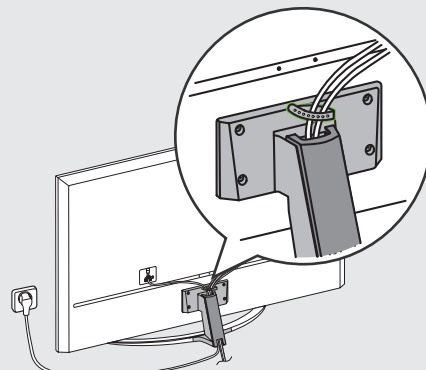



NOTE

- Some USB Hubs may not work. If a USB device connected using a USB Hub is not detected, connect it to the USB port on the TV directly.
- Connect the external power source if your USB is needed.

NOTE

- Do not look into the optical output port. Looking at the laser beam may damage your vision.
- Audio with ACP (Audio Copy Protection) function may block digital audio output.

OPTICAL DIGITAL AUDIO OUT



AUDIO OUT/ H/P OUT



LAN



Satellite IN



ANTENNA/ CABLE IN



USB IN



NOTE

- Some USB Hubs may not work. If a USB device connected using a USB Hub is not detected, connect it to the USB port on the TV directly.
- Connect the external power source if your USB is needed.

ARC (Audio Return Channel)

- An external audio device that supports S/PDIF and ARC must be connected using HDMI IN/ ARC port.
- When connected with a high-speed HDMI cable, the external audio device that supports ARC outputs SPDIF audio without additional audio cable and supports the S/PDIF function.


HDMI IN




HDMI IN eARC/ARC




COMMON INTERFACE



AV IN

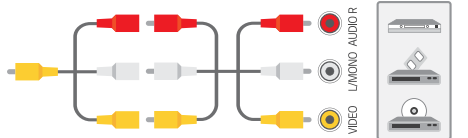


USB IN




5s



1s

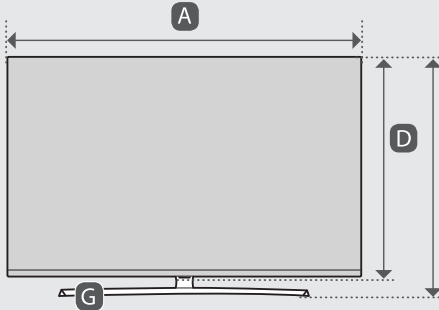

90°



	A	B	C	D	E	F	F - G
	(mm)					(kg)	
50NANO86TPA 50NANO86VPA 50NANO86TPZ	1120	718	264	653	49.2	15.6	14.0
Power requirement	AC 100-240 V ~ 50 / 60 Hz						



English

• Read **Safety and Reference**.

• The Analog Gender adapter can be purchased separately at Customer Service

+ : Depending on model