

OLED48C2*


Quick Start Guide




Images shown in manual may vary depending on model

Unpacking


Check your product box for the following items. If there are any missing accessories, contact the local dealer where you purchased your product. The illustrations in this manual may differ from the actual product and item.

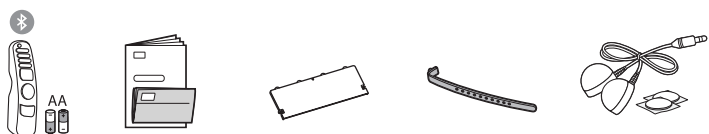


1

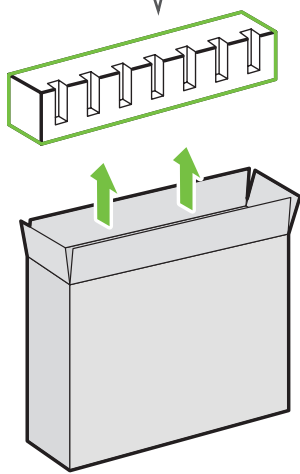


2

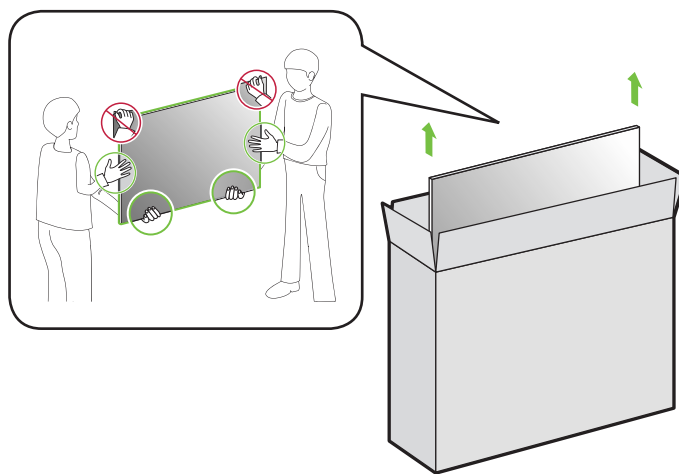



3

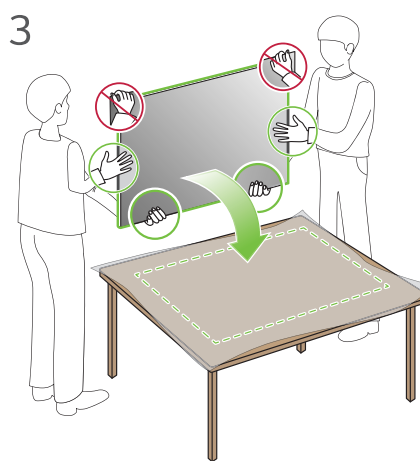


1

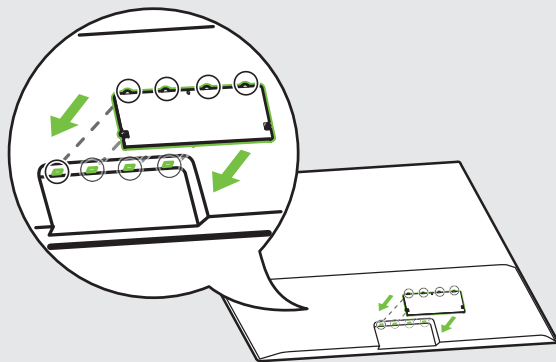

2

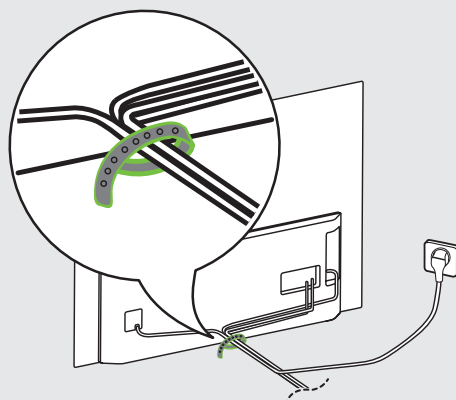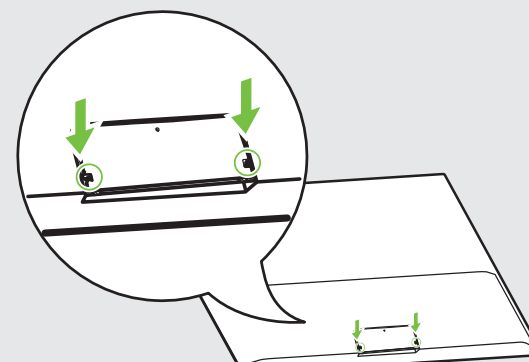


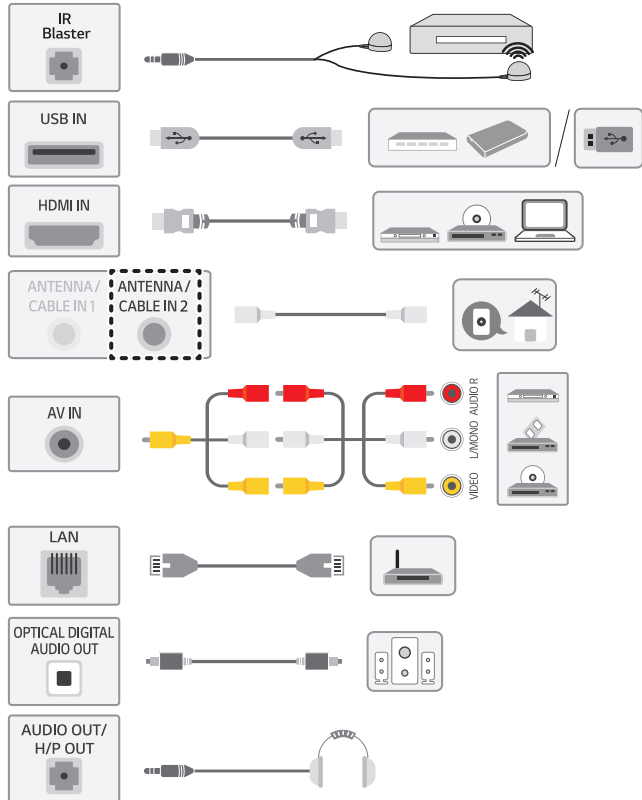


NOTE

- Do not look into the optical output ports, looking at the laser beam may damage your vision.
- Audio with ACP (Audio Copy Protection) function may block digital audio output.

NOTE

- Some USB Hubs may not work, if a USB device connected using a USB Hub is not detected, connect it to the USB port on the TV directly.
- Connect the external power source if your USB is needed.

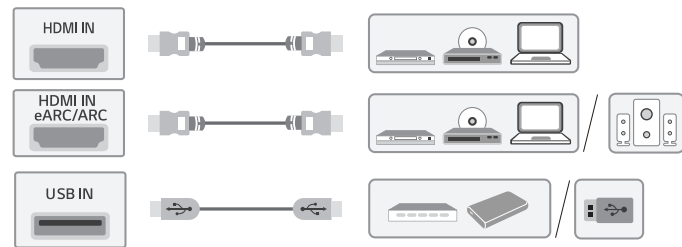



NOTE


- Some USB Hubs may not work, if a USB device connected using a USB Hub is not detected, connect it to the USB port on the TV directly.
- Connect the external power source if your USB is needed.

ARC (Audio Return Channel)

- An external audio device that supports SIMPLINK and ARC must be connected using HDMI IN/ARC port.
- When connected with a high-speed HDMI cable, the external audio device that supports ARC outputs SPDIF audio without additional audio cable and supports the SIMPLINK function.

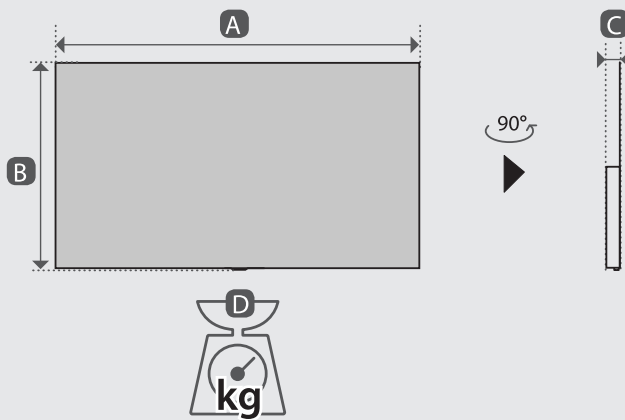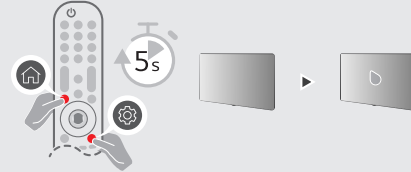

	A	B	C	D
	(mm)			(kg)
OLED48C2PSA OLED48C2XSA	1071	618	46.9	14.9
Power requirement			AC 100-240 V~50/60 Hz	

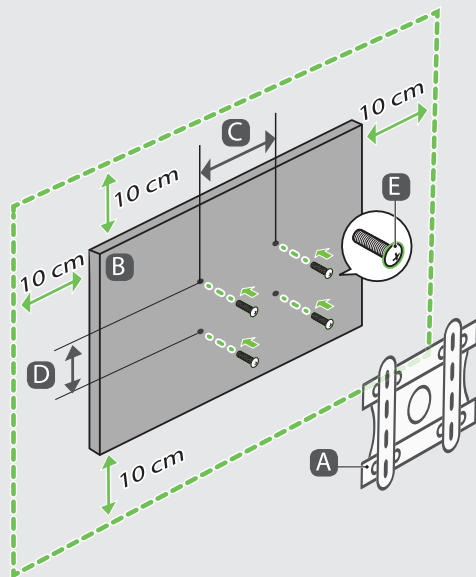

A	B	C x D (mm)	E
Wallmount	OLED48C2*	300 x 200	M6



English

• Read **Safety and Reference**.



: Depending on model

• The Analog Gender adapter can be purchased separately at Customer Service.