


OLED48C1*
OLED55C1*
OLED65C1*

Quick Start Guide

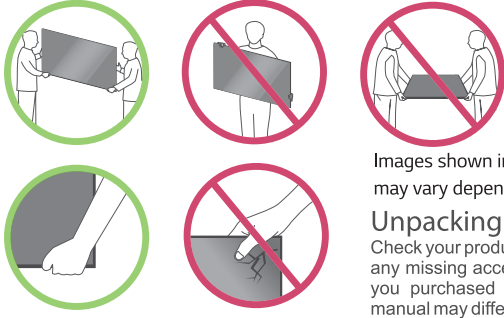


Images shown in manual
may vary depending on model

Unpacking



Check your product box for the following items. If there are any missing accessories, contact the local dealer where you purchased your product. The illustrations in this manual may differ from the actual product and item.




1-A OLED48C1*

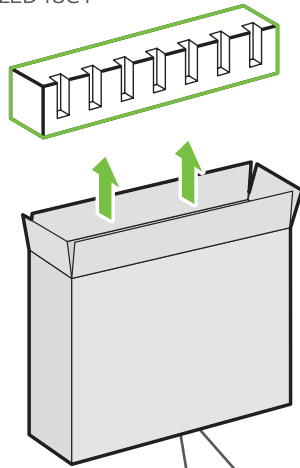


1-B OLED55/65C1*

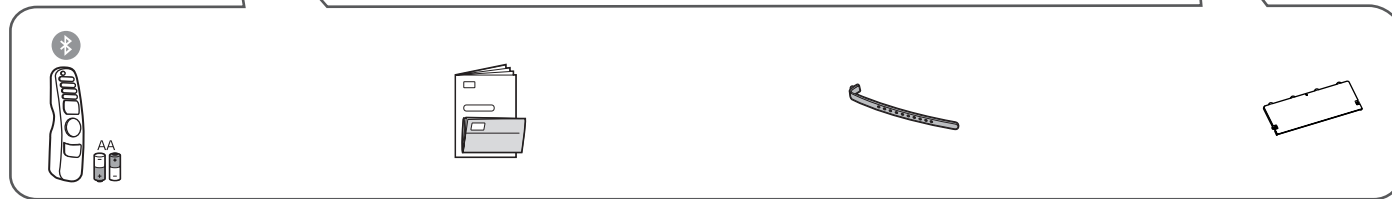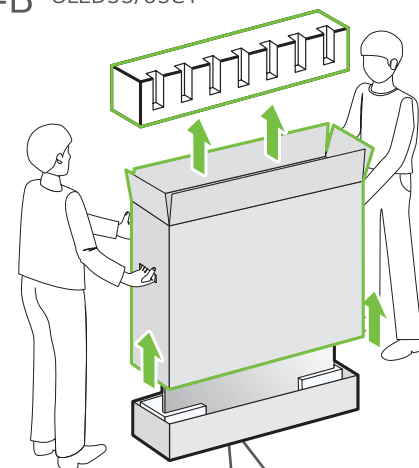


2-A OLED48C1*

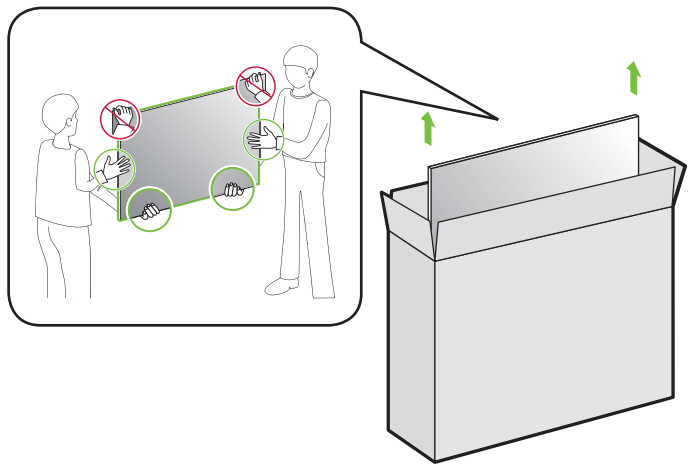

2-B OLED55/65C1*

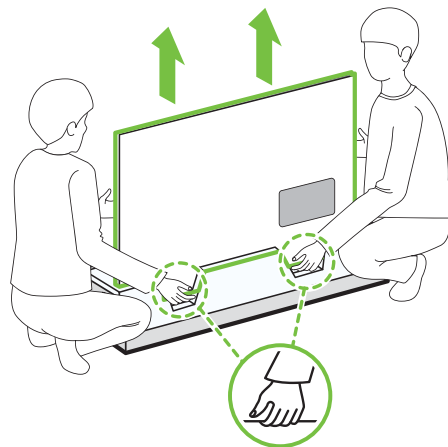


3

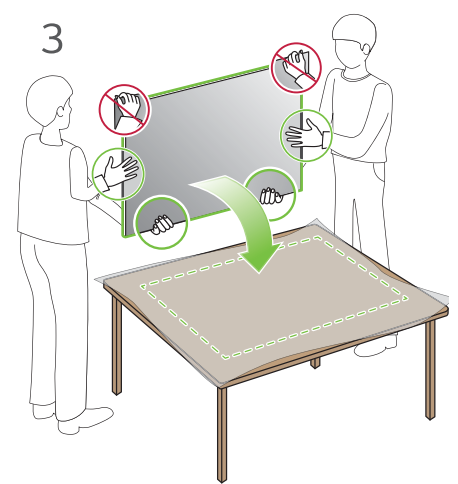


CAUTION
Image shown may differ from your TV
When attaching the cover to the TV set, place the screen facing down on a cushioned table or flat surface to protect the screen from scratches.

1

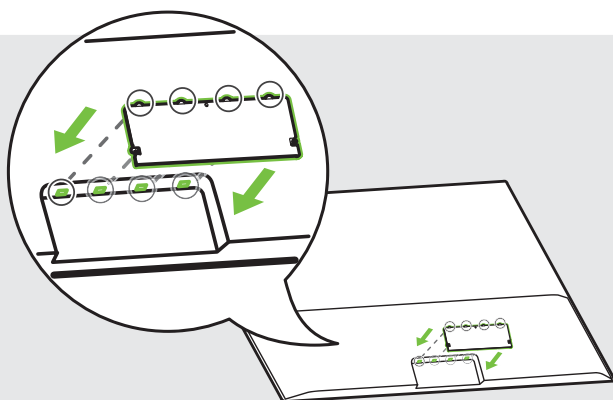

2

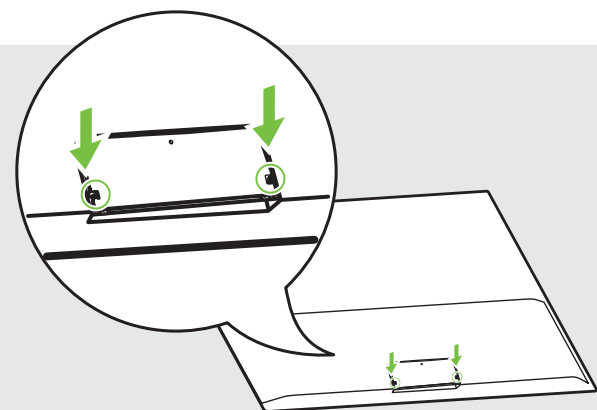



AUDIO OUT/
H/P OUT



OPTICAL DIGITAL
AUDIO OUT



LAN



ANTENNA/
CABLE IN





HDMI IN



USB IN



AV IN

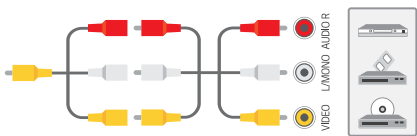

HDMI IN



HDMI IN
eARC/ARC



USB IN



NOTE

- Some USB Hubs may not work, if a USB device connected using a USB Hub is not detected, connect it to the USB port on the TV directly
- Connect the external power source if your USB is needed.

NOTE

- Do not look into the optical output port, looking at the laser beam may damage your vision.
- Audio with ACP (Audio Copy Protection) function may block digital audio output

NOTE


- Some USB Hubs may not work, if a USB device connected using a USB Hub is not detected, connect it to the USB port on the TV directly
- Connect the external power source if your USB is needed.

ARC (Audio Return Channel)



- An external audio device that supports SIMPLINK and ARC must be connected using HDMI IN/ARC port
- When connected with a high-speed HDMI cable, the external audio device that supports ARC outputs SPDIF audio without additional audio cable and supports the SIMPLINK function.



5s



1s

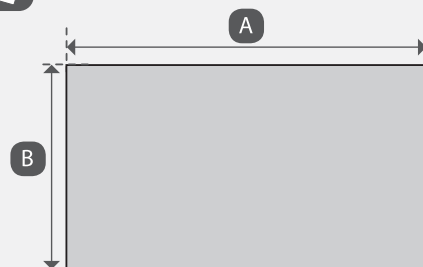

	A	B	C	D
	(mm)			(kg)
OLED48C1PTZ	1071	618	46.9	14.9
OLED55C1PTZ	1228	706	46.9	18.9
OLED65C1PTZ	1449	830	46.9	24.0
Power requirement			AC 100-240 V ~ 50 / 60 Hz	



- Read **Safety and Reference**.
- The Analog Gender adapter can be purchased separately at Customer Service.

+ : Depending on model