

NANO80*




Quick Start Guide



Images shown in manual may vary depending on model

Unpacking


Check your product box for the following items. If there are any missing accessories, contact the local dealer where you purchased your product. The illustrations in this manual may differ from the actual product and item.

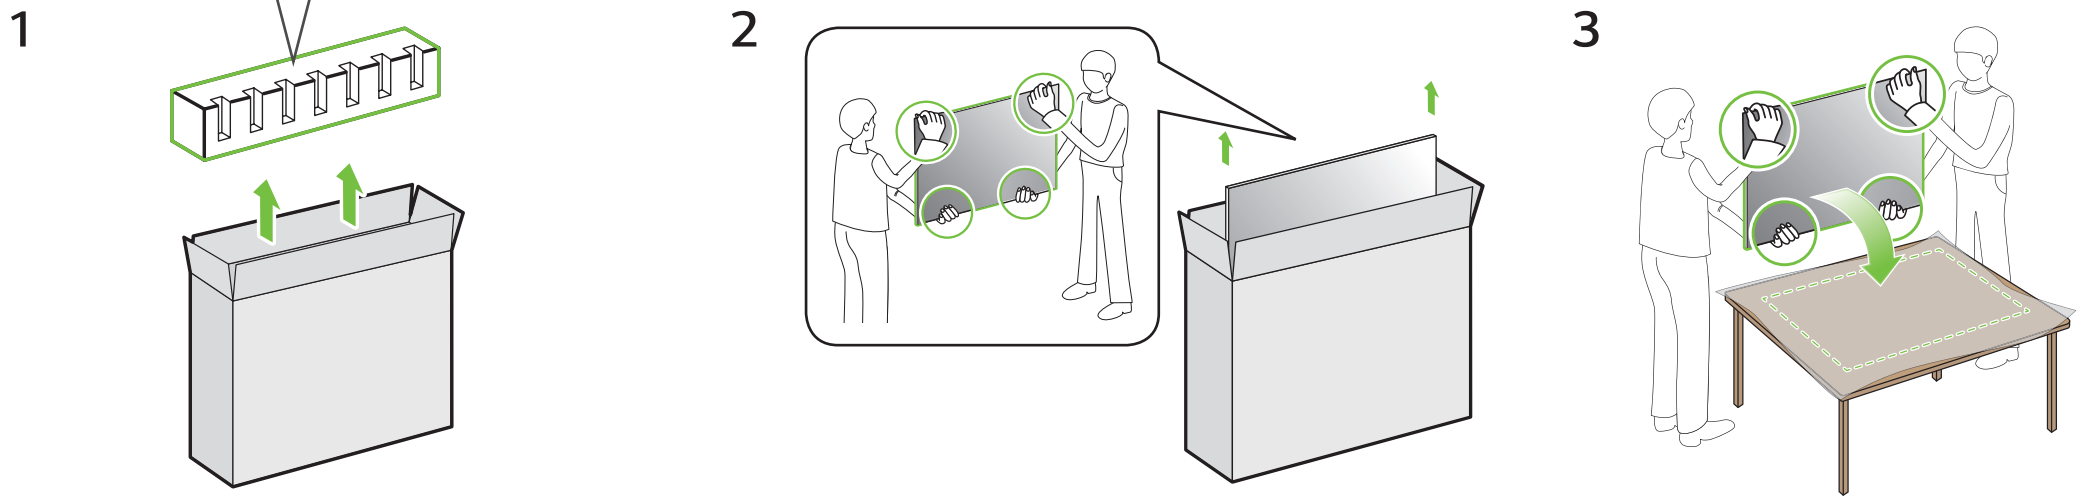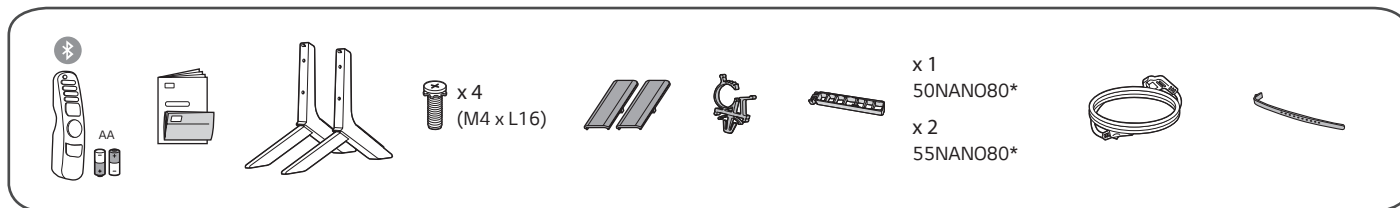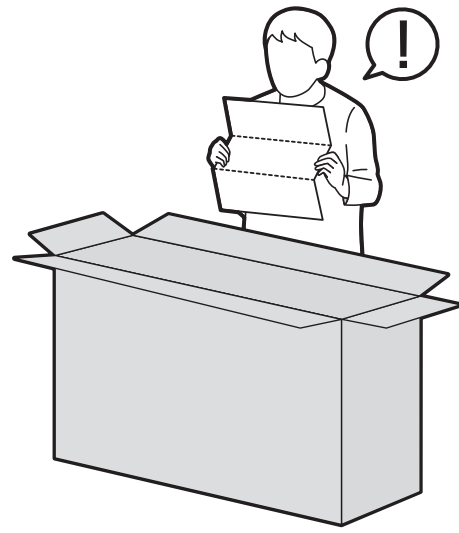

CAUTION

Image shown may differ from your TV

When attaching the stand to the TV set, place the screen facing down on a cushioned table or flat surface to protect the screen from scratches.

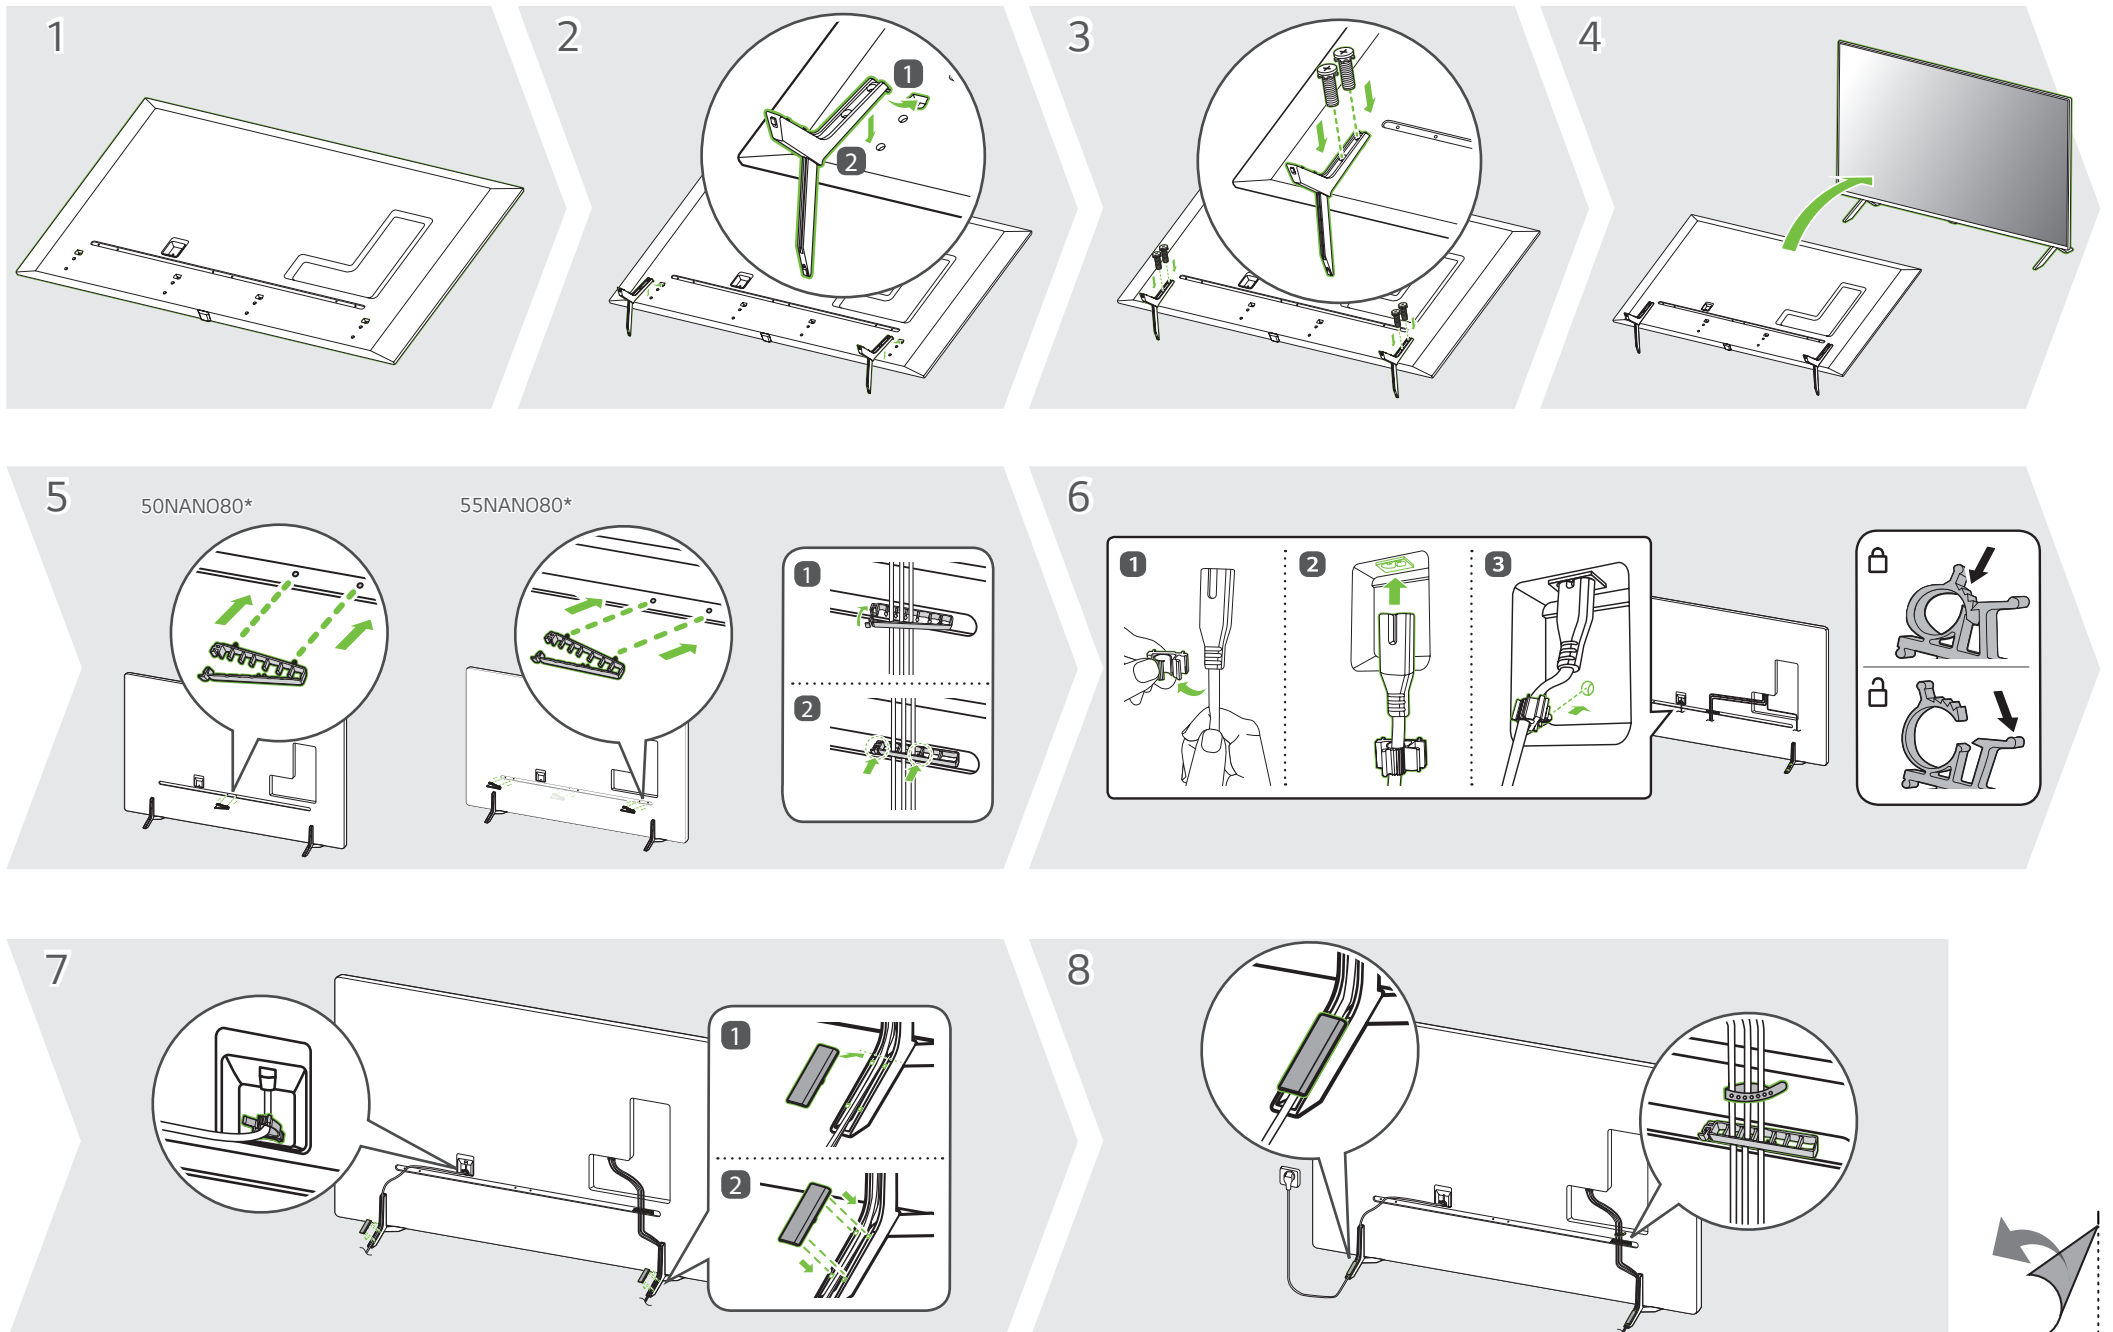



OPTICAL DIGITAL AUDIO OUT



LAN



Satellite IN



ANTENNA/
CABLE IN



ANTENNA/
CABLE IN 1



ANTENNA/
CABLE IN 2



USB IN

NOTE


- Do not look into the optical output ports, looking at the laser beam may damage your vision.
- Audio with ACP (Audio Copy Protection) function may block digital audio output.

NOTE


- Some USB Hubs may not work, if a USB device connected using a USB Hub is not detected, connect it to the USB port on the TV directly.
- Connect the external power source if your USB is needed.



USB IN

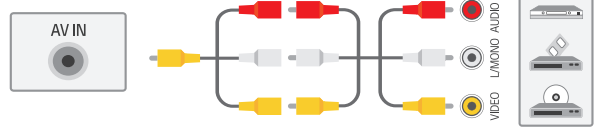

AV IN



HDMI IN



HDMI IN
eARC/ARC

ARC (Audio Return Channel)
An external audio device that supports SIMPLINK and ARC must be connected using HDMI IN eARC/ARC port.

When connected with a high-speed HDMI cable, the external audio device that supports ARC outputs SPDIF audio without additional audio cable and supports the SIMPLINK function.

NOTE

- Some USB Hubs may not work, if a USB device connected using a USB Hub is not detected, connect it to the USB port on the TV directly.
- Connect the external power source if your USB is needed.




Battery insertion steps:

- Remove the back cover.
- Insert the battery with the correct polarity.
- Close the back cover.




Power button and LG logo.

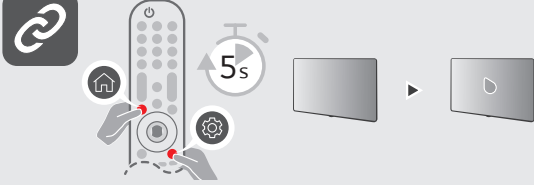

5s timer and screen transition.



9s timer and headset icon.

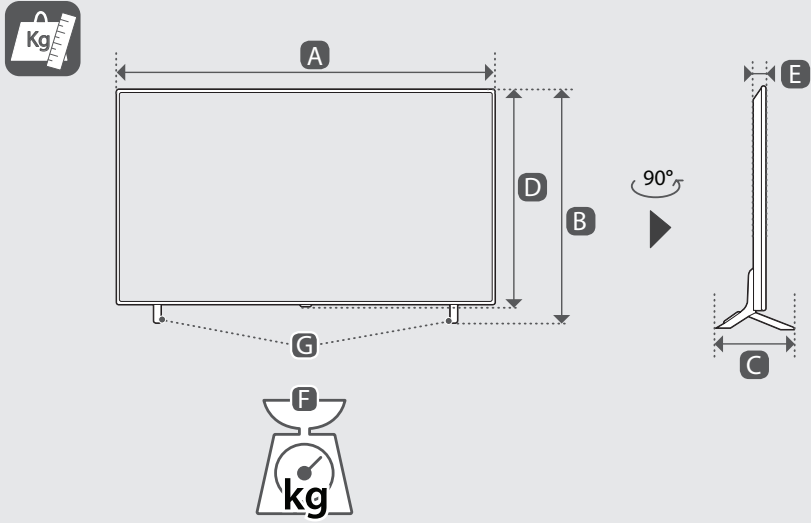


TV dimensions diagram showing A, B, C, D, E, F, G.

	A	B	C	D	E	F	F-G
	(mm)					(kg)	
50NANO80SQA / 50NANO806QA	1120	718	257	653	49.2	14.4	14.0
55NANO80SQA / 55NANO806QA	1233	781	257	716	44.2	16.7	16.3

Power requirement

AC 100-240 V ~ 50/60 Hz

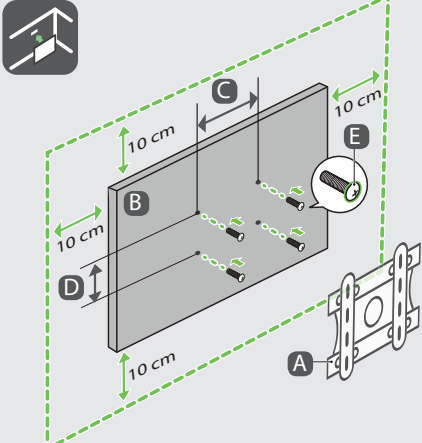

Wallmount installation diagram showing dimensions A, B, C, D, E.

A	B	C x D (mm)	E
Wallmount	50NANO80*	200 x 200	M6
Wallmount	55NANO80*	300 x 300	M6



Read **Safety and Reference**.

The Analog Gender adapter can be purchased separately at Customer Service.

+ : Depending on model

IN002043