


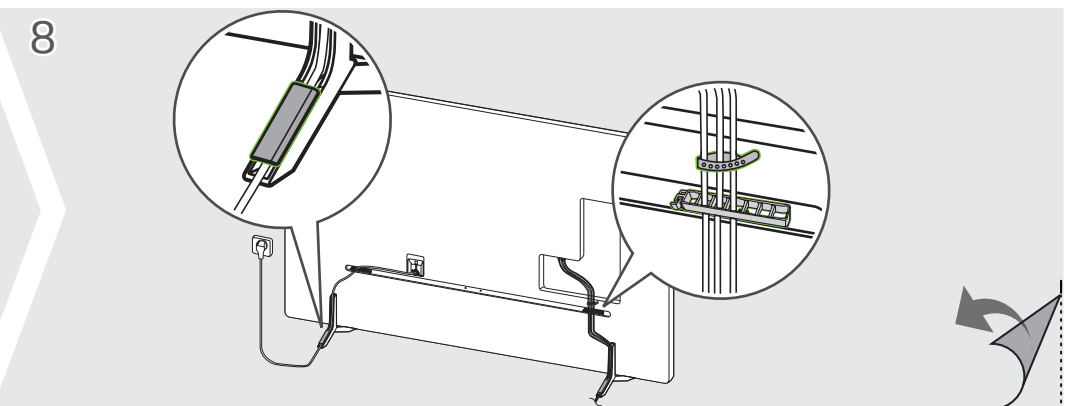
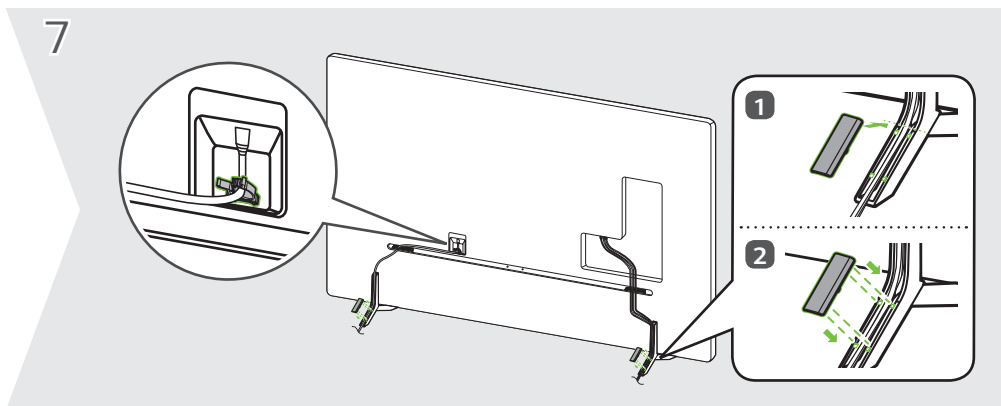
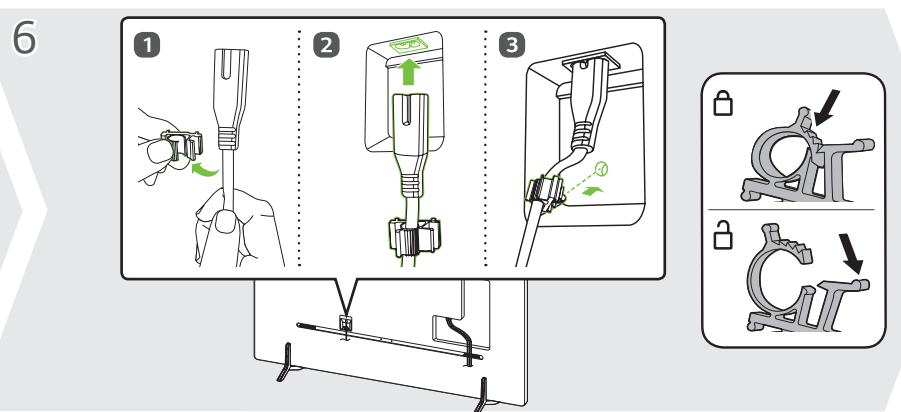
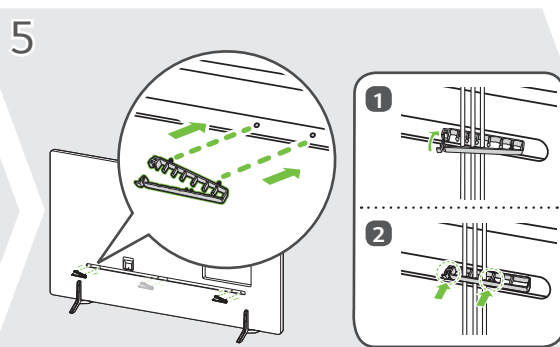
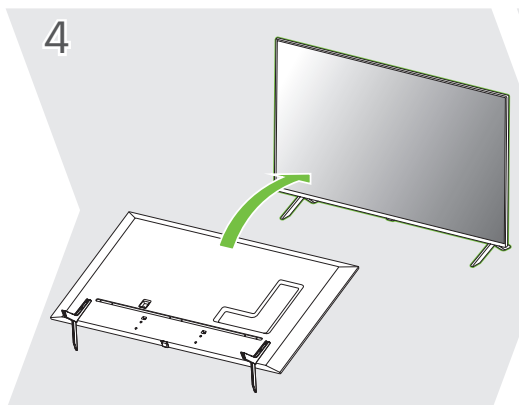
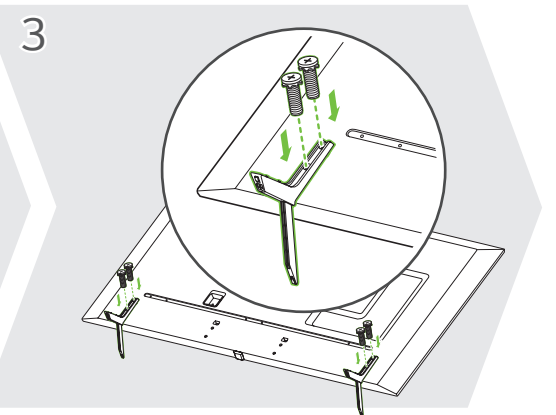
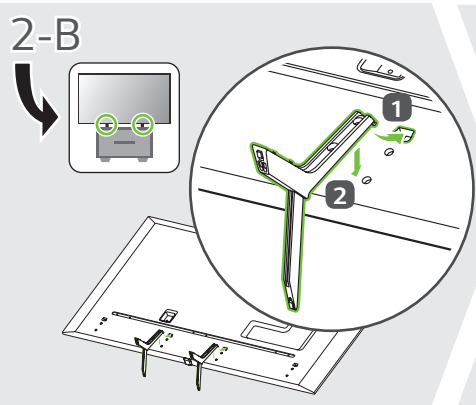
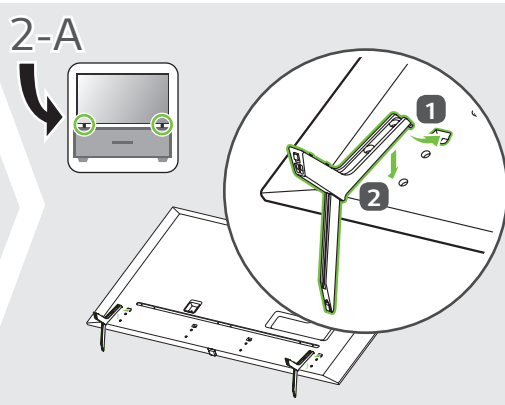
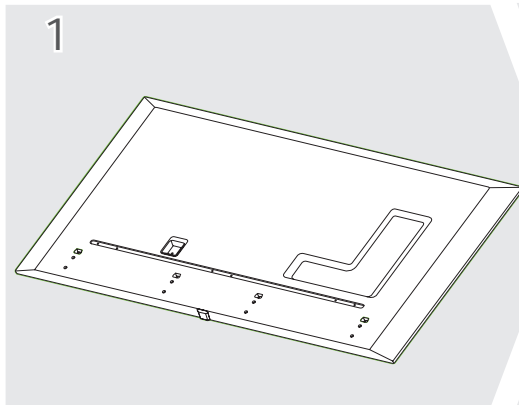
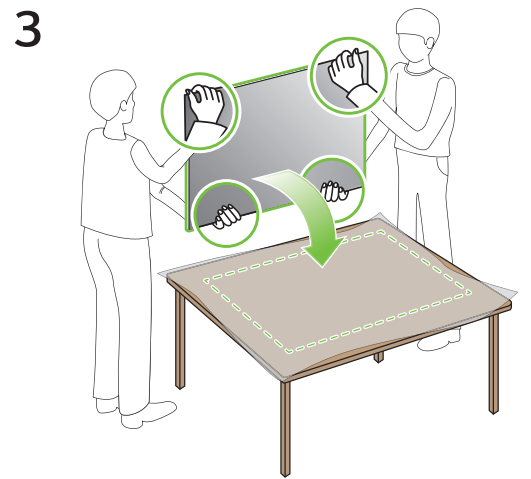
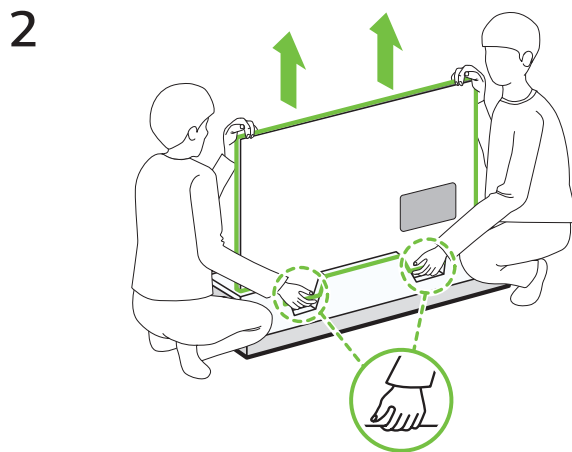
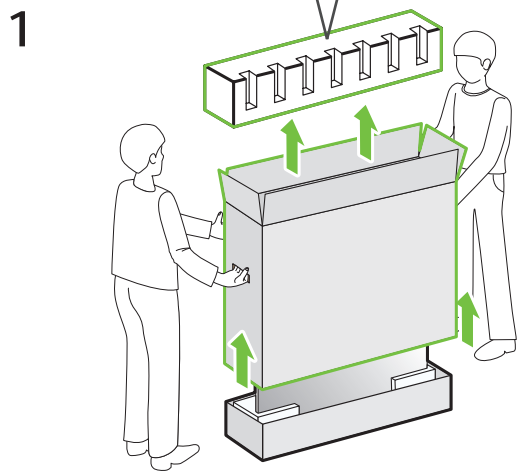
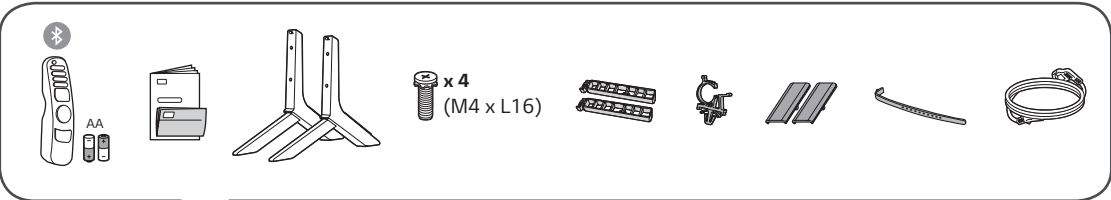
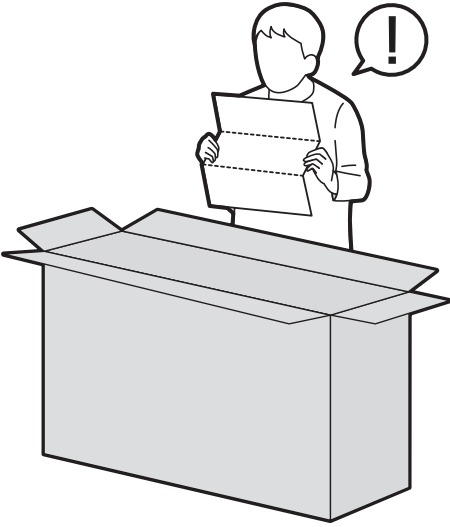
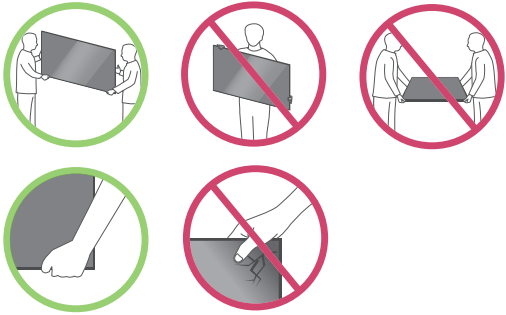
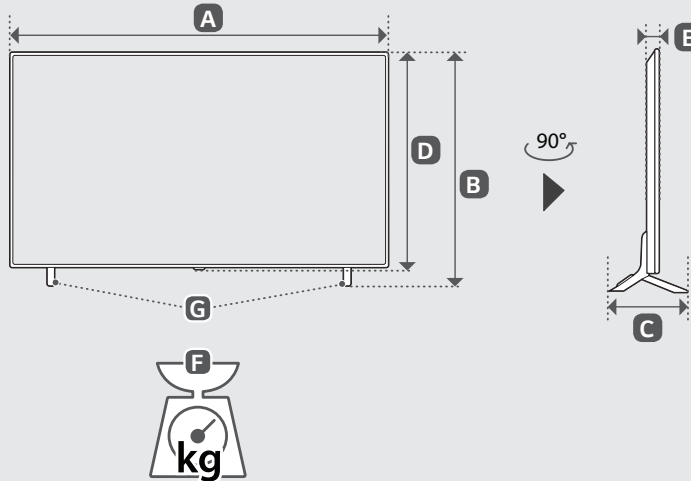
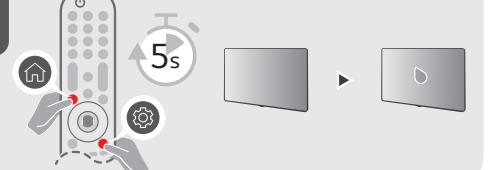


NANO80*

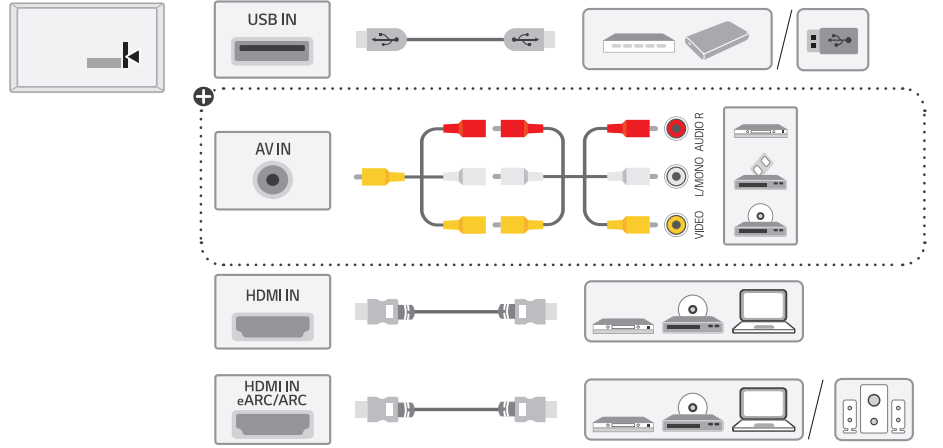


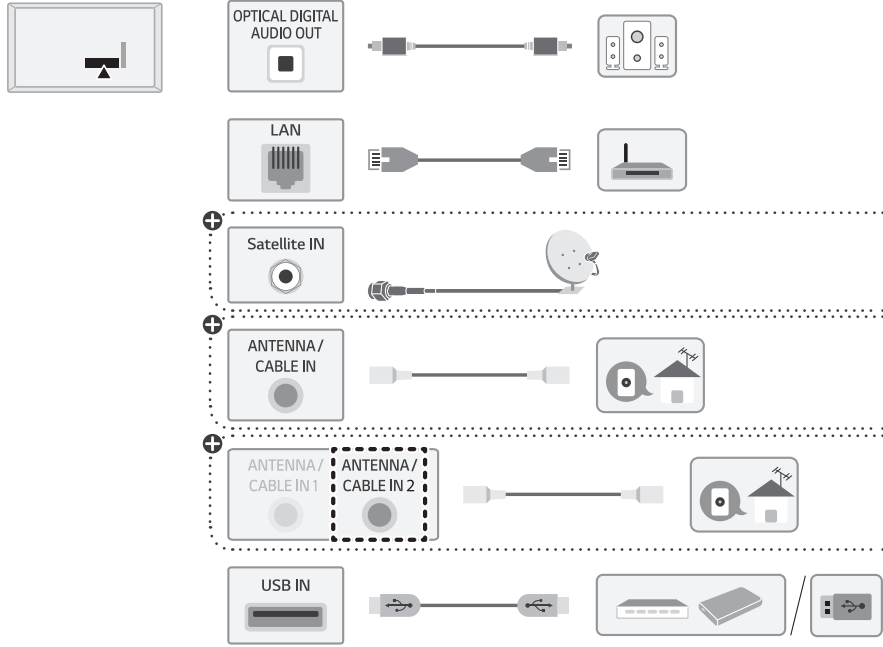

	A	B	C	D	E	F	F - G
	(mm)					(kg)	
65NANO80SQA	1452	906	295	839	44.3	24.9	24.5
Power requirement / Kebutuhan daya				AC 100-240 V ~ 50 / 60 Hz			

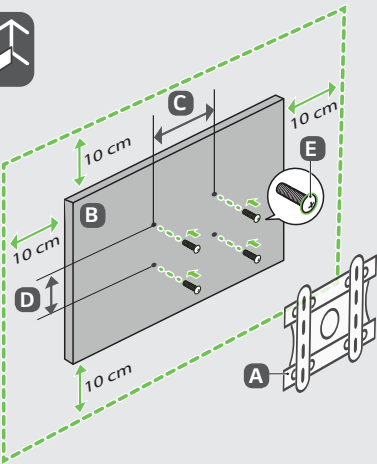

A	B	C x D (mm)	E
OLW480B	65NANO80*	300 x 300	M6

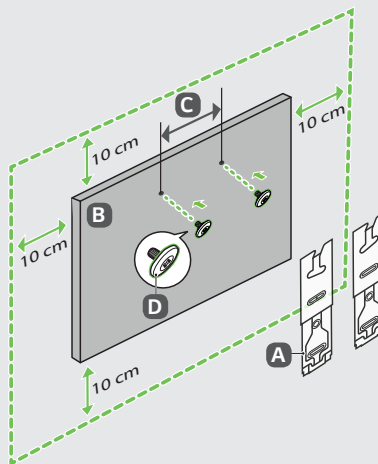

A	B	C (mm)	D
WB21LMB	65NANO80*	300	M6



English
Indonesia

• Read **Safety and Reference**.
• Baca **Keamanan dan Petunjuk**

+ : Depending on model / Tergantung pada model

English
Indonesia

• The Analog Gender adapter can be purchased separately at Customer Service.
• Adaptor Analog Gender dapat dibeli terpisah di Layanan Pelanggan.