

OWNER'S MANUAL LED TV*

* <u>Disclaimer</u>

LG LED TV applies LCD screen with LED backlights.

Please read this manual carefully before operating your set and retain it for future reference.

LN45**

P/NO: MFL67605618 (1305-REV00)

Printed in Korea

TABLE OF CONTENTS

| 3 | SAFETY | |
|---|--------|--|
| | | |

8 INSTALLATION PROCEDURE

| 8 ASSEMBLING AND PREPARING | ASSE | MBLING | AND P | REPA | RING |
|----------------------------|------|--------|-------|------|------|
|----------------------------|------|--------|-------|------|------|

- 8 Unpacking
- 10 Parts and buttons
- 11 Lifting and moving the TV
- 12 Setting up the TV
- 12 Attaching the Stand Base
- 12 Detaching the Stand Base
- 13 Mounting on a table
- 14 Mounting on a wall
- 15 Tidying cables

16 MAKING CONNECTIONS

- 16 Antenna connection
- 17 Adapter connection
- 17 HDMI connection
- 18 DVI to HDMI connection
- 18 RGB connection
- 19 Component connection
- 19 Composite connection
- 20 Headphone connection
- 20 MHL connection
- 21 USB connection

22 REMOTE CONTROL

23 USING THE USER GUIDE

24 MAINTENANCE

- 24 Cleaning your TV
- Screen, frame, cabinet and stand
- 24 Power cord

24 TROUBLESHOOTING

25 SPECIFICATIONS

28 LICENSES

28 OPEN SOURCE SOFTWARE NOTICE



WARNING

 If you ignore the warning message, you may be seriously injured or there is a possibility of accident or death.



CAUTION

 If you ignore the caution message, you may be slightly injured or the product may be damaged.



NOTE

 The note helps you understand and use the product safely. Please read the note carefully before using the product.

SAFETY INSTRUCTIONS

Please read these safety precautions carefully before using the product.



WARNING




- Do not place the TV and/or remote control in the following environments:
 - A location exposed to direct sunlight
 - An area with high humidity such as a bathroom
 - Near any heat source such as stoves and other devices that produce heat
- Near kitchen counters or humidifiers where they can easily be exposed to steam or oil
- An area exposed to rain or wind
- Near containers of water such as vases

Otherwise, this may result in fire, electric shock, malfunction or product deformation.



 Do not place the product where it might be exposed to dust.

This is a second of the product of the produc





 Mains Plug is the TV connecting/disconnecting device to AC mains electric supply. This plug must remain readily attached and operable when TV is in use.




 Do not touch the power plug with wet hands. Additionally, if the cord pin is wet or covered with dust, dry the power plug completely or wipe dust off. You may be electrocuted due to excess moisture.



 Make sure to connect Mains cable to compliant AC mains socket with Grounded earth pin. (Except for devices which are not grounded on earth.) Otherwise possibility you may be electrocuted or injured.







 Ensure the power cord does not come into contact with hot objects such as a heater. This may cause a fire or an electric shock hazard.



 Do not place a heavy object, or the product itself, on power cables.
 Otherwise, this may result in fire or electric shock.



 Bend antenna cable between inside and outside building to prevent rain from flowing in.
 This may cause water damaged inside the Product and could give an electric shock.



 When mounting TV onto wall make sure to neatly install and isolate cabling from rear of TV as to not create possibility of electric shock / fire hazard.



 Do not plug too many electrical devices into a single multiple electrical outlet.
 Otherwise, this may result in fire due to over-heating.



 Do not drop the product or let it fall over when connecting external devices.
 Otherwise, this may result in injury or damage to the product.



 Keep the anti-moisture packing material or vinyl packing out of the reach of children.
 Anti-moisture material is harmful if swallowed. If swallowed by mistake, force the patient to vomit and visit the nearest hospital.
 Additionally, vinyl packing can cause suffocation. Keep it out



 Do not let your children climb or cling onto the TV.
 Otherwise, the TV may fall over, which may cause serious injury.

of the reach of children.



 Dispose of used batteries carefully to ensure that a small child does not consume them.
 Please seek Doctor- Medical

Please seek Doctor- Medical Attention immediately if child consumes batteries.



 Do not insert any metal objects/conductors (like a metal chopstick/cutlery/ screwdriver) between power cable plug and input Wall Socket while it is connected to the input terminal on the wall. Additionally, do not touch the power cable right after plugging into the wall input terminal.
 You may be electrocuted. (Depending on model)



Do not put or store inflammable substances near the product. There is a danger of combustion/ explosion or fire due to careless handling of the inflammable substances.



Do not drop metallic objects such as coins, hair pins, chopsticks or wire into the product, or inflammable objects such as paper and matches. Children must pay particular attention. Electrical shock, fire or injury can occur. If a foreign object is dropped into the product, unplug the power cord and contact the service centre.



 Do not spray water on the product or scrub with an inflammable substance (thinner or benzene). Fire or electric shock accident can occur.



 Do not allow any impact, shock or any objects to fall into the unit, and do not drop anything onto the screen.
 You may be injured or the product can be damaged.



 Never touch this product or antenna during a thunder or lighting storm.
 You may be electrocuted.



 Never touch the wall outlet when there is leakage of gas, open the windows and ventilate.
 It may cause a fire or a burn by a spark.



 Do not disassemble, repair or modify the product at your own discretion.
 Fire or electric shock accident can occur.
 Contact the service centre for check, calibration or repair.



- If any of the following occur, unplug the product immediately and contact your local service centre.
- The product has been impacted by shock
- The product has been damaged
- Foreign objects have entered the product
- The product produced smoke or a strange smell

This may result in fire or electric shock.



 Unplug the TV from AC mains wall socket if you do not intend to use the TV for a long period of time.
 Accumulated dust can cause fire hazard and insulation deterioration can cause electric leakage/shock/fire.




 Apparatus shall not be exposed to dripping or splashing and no objects filled with liquids, such as vases, shall be placed on the apparatus.





Install the product where no radio wave occurs.





 Do not install the product on places such as unstable shelves or inclined surfaces. Also avoid places where there is vibration or where the product cannot be fully supported. Otherwise, the product may

Otherwise, the product may fall or flip over, which may cause injury or damage to the product.



- If you install the TV on a stand, you need to take actions to prevent the product from overturning. Otherwise, the product may fall over, which may cause injury.
- If you intend to mount the product to a wall, attach VESA standard mounting interface (optional parts) to the back of the product. When you install the set to use the wall mounting bracket (optional parts), fix it carefully so as not to drop.
- Only use the attachments / accessories specified by the manufacturer.



 When installing the antenna, consult with a qualified service technician. If not installed by a qualified technician, this may create a fire hazard or an electric shock hazard.



 We recommend that you maintain a distance of at least 2 to 7 times the diagonal screen size when watching TV.
 If you watch TV for a long

If you watch TV for a long period of time, this may cause blurred vision.



 Only use the specified type of battery.
 This could cause damage to the remote control.



- Do not mix new batteries with old batteries.
 This may cause the batteries to overheat and leak.
- Batteries should not be exposed to excessive heat. For example, keep away from direct Sunlight, open fireplace and electric heaters.
- Do not place non-rechargeable batteries in charging device.



 Make sure there are no objects between the remote control and its sensor.



 Signal from Remote Control can be interrupted due to external/internal lighting eg Sunlight, fluorescent lighting. If this occurs turn off lighting or darken viewing area.



 When connecting external devices such as video game consoles, make sure the connecting cables are long enough.
 Otherwise, the product may

Otherwise, the product may fall over, which may cause injury or damage the product.



 Do not turn the product On/Off by plugging-in or unplugging the power plug to the wall outlet. (Do not use the power plug for switch.) It may cause mechanical failure or could give an electric shock.



- Please follow the installation instructions below to prevent the product from overheating.
 - The distance between the product and the wall should be more than 10 cm.
- Do not install the product in a place with no ventilation (e.g., on a bookshelf or in a cupboard).
- Do not install the product on a carpet or cushion.
- Make sure the air vent is not blocked by a tablecloth or curtain.


Otherwise, this may result in fire.



- Take care not to touch the ventilation openings when watching the TV for long periods as the ventilation openings may become hot. This does not affect the operation or performance of the product.
- Periodically examine the cord of your appliance, and if its appearance indicates damage or deterioration, unplug it, discontinue use of the appliance, and have the cord replaced with an exact replacement part by an authorized servicer.



 Prevent dust collecting on the power plug pins or outlet.
 This may cause a fire hazard.





 Do not press strongly upon the panel with a hand or sharp object such as nail, pencil or pen, or make a scratch on it, as it may cause damage to screen.



 Avoid touching the screen or holding your finger(s) against it for long periods of time.
 Doing so may produce some temporary or permanent distortion/damage to screen.



- When cleaning the product and its components, unplug the power first and wipe it with a soft cloth. Applying excessive force may cause scratches or discolouration. Do not spray with water or wipe with a wet cloth. Never use glass cleaner, car or industrial shiner, abrasives or wax, benzene, alcohol etc., which can damage the product and its panel. Otherwise, this may result in fire, electric shock or product damage (deformation, corrosion or breakage).
- As long as this unit is connected to the AC wall outlet, it is not disconnected from the AC power source even if you turn off this unit by SWITCH.



When unplugging the cable, grab the plug and unplug it, by pulling at the plug. Don't pull at the cord to unplug the power cord from the power board, as this could be hazardous.



 When moving the product, make sure you turn the power off first. Then, unplug the power cables, antenna cables and all connecting cables. The TV set or power cord may be damaged, which may create a fire hazard or cause electric shock.



 When moving or unpacking the product, work in pairs because the product is heavy. Otherwise, this may result in injury.



 Contact the service centre once a year to clean the internal parts of the product. Accumulated dust can cause mechanical failure.



 Refer all servicing to qualified service personnel.
 Servicing is required when the apparatus has been damaged in any way, such as power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.



If the product feels cold to the touch, there may be a small "flicker" when it is turned on. This is normal, there is nothing wrong with product.



The panel is a high technology display product with resolution of two million to six million pixels. You may see tiny black dots and/ or brightly coloured dots (red, blue or green) at a size of 1 ppm on the panel. This does not indicate a malfunction and does not affect the performance and reliability of the product. This phenomenon also occurs in third-party products and is not subject to exchange or refund.





 You may find different brightness and colour of the panel depending on your viewing position(left/right/top/ down).

This phenomenon occurs due to the characteristic of the panel. It is not related with the product performance, and it is not malfunction.







 Displaying a still image (e.g., broadcasting channel logo, on-screen menu, scene from a video game) for a prolonged time may cause damage to the screen, resulting in retention of the image, which is known as image sticking. The warranty does not cover the product for image sticking.

Avoid displaying a fixed image on your television's screen for a prolonged period (2 or more hours for LCD, 1 or more hours for Plasma).

Also, if you watch the TV at a ratio of 4:3 for a long time, image sticking may occur on the borders of the panel.

This phenomenon also occurs in third-party products and is not subject to exchange or refund

Generated Sound

"Cracking" noise: A cracking noise that occurs when watching or turning off the TV is generated by plastic thermal contraction due to temperature and humidity. This noise is common for products where thermal deformation is required. Electrical circuit humming/panel buzzing: A low level noise is generated from a high-speed switching circuit, which supplies a large amount of current to operate a product. It varies depending on the product.

This generated sound does not affect the performance and reliability of the product.



NOTE

- · Image shown may differ from your TV.
- Your TV's OSD (On Screen Display) may differ slightly from that shown in this manual.
- The available menus and options may differ from the input source or product model that you are using.
- New features may be added to this TV in the future.
- The TV can be placed in standby mode in order to reduce the power consumption. And the TV should be turned off if it will not be watched for some time, as this will reduce energy consumption.
- The energy consumed during use can be significantly reduced if the level of brightness of the picture is reduced, and this will reduce the overall running cost.

INSTALLATION PROCEDURE

- 1 Open the package and make sure all the accessories are included.
- 2 Attach the stand to the TV set.
- 3 Connect an external device to the TV set.

ASSEMBLING AND PREPARING

Unpacking

Check your product box for the following items. If there are any missing accessories, contact the local dealer where you purchased your product. The illustrations in this manual may differ from the actual product and item.



CAUTION

- Do not use any unapproved items to ensure the safety and product life span.
- · Any damages or injuries by using unapproved items are not covered by the manufacturer's warranty.
- · Some models have a thin film attached on to the screen and this must not be removed.



NOTE


- The items supplied with your product may vary depending on the model.
- Product specifications or contents of this manual may be changed without prior notice due to upgrade of product functions.
- For an optimal connection, HDMI cables and USB devices should have bezels less than 10 mm thick and 18 mm width. Use an extension cable that supports USB 2.0 if the USB cable or USB memory stick does not fit into your TV's USB port.






*A ≤ 10 mm

*B ≤ 18 mm










Remote control and batteries (AAA) (See p.22)

Owner's manual

Cable Tie (Depending on model) (See p.15)

Stand Base (See p.12)






Power Cord AC-DC Adapter (Depending on model)
(See p.17) (See p.17)



AC-DC Adapter (Depending on model) (See p.17)

Parts and buttons

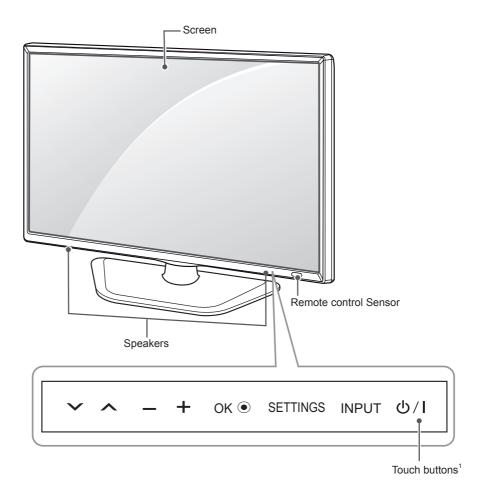

| Touch Buttons | Description | |
|---------------|--|--|
| ~ ^ | Scrolls through the saved programmes. | |
| - + | Adjusts the volume level. | |
| OK ⊚ | Selects the highlighted menu option or confirms an input. | |
| SETTINGS | Accesses the main menu, or saves your input and exits the menus. | |
| INPUT | Changes the input source. | |
| ტ/I | Turns the power on or off. | |

1 All of the buttons are touch sensitive and can be operated through simple touch with your finger.

Lifting and moving the TV


Please note the following advice to prevent the TV from being scratched or damaged and for safe transportation regardless of its type and size.



- Avoid touching the screen at all times, as this may result in damage to the screen.
- It is recommended to move the TV in the box or packing material that the TV originally came in
- Before moving or lifting the TV, disconnect the power cord and all cables.
- When holding the TV, the screen should face away from you to avoid damage.



 Hold the top and bottom of the TV frame firmly.
 Make sure not to hold the transparent part, speaker, or speaker grill area.



- When transporting a large TV, there should be at least 2 people.
- When transporting the TV by hand, hold the TV as shown in the following illustration.





- When transporting the TV, do not expose the TV to jolts or excessive vibration.
- When transporting the TV, keep the TV upright, never turn the TV on its side or tilt towards the left or right.
- Do not apply excessive pressure to cause flexing /bending of frame chassis as it may damage screen.

Setting up the TV

Image shown may differ from your TV.

Attaching the Stand Base








CAUTION


- Lay a foam mat or soft protective cloth on the surface to protect the screen from damage.
- When attaching the stand to the TV set, place the screen facing down on a cushioned table or flat surface to protect the screen from scratches.

Detaching the Stand Base





 When Detaching the stand from TV, Detach the stand with lifting up the lever in the direction of the arrow.






CAUTION

- Lay a foam mat or soft protective cloth on the surface to protect the screen from damage.
- When Detaching the stand to the TV set, place the screen facing down on a cushioned table or flat surface to protect the screen from scratches.

Mounting on a table

- 1 Lift and tilt the TV into its upright position on a table.
 - Leave a 10 cm (minimum) space from the wall for proper ventilation.



Connect the AC-DC Adapter and Power Cord to a wall outlet




CAUTION

• Do not place the TV near or on sources of heat, as this may result in fire or other damage.

Securing the TV to a wall

(This feature is not available for all models.)



- Insert and tighten the eye-bolts, or TV brackets and bolts on the back of the TV.
 - If there are bolts inserted at the eye-bolts position, remove the bolts first.
- 2 Mount the wall brackets with the bolts to the wall. Match the location of the wall bracket and the eyebolts on the rear of the TV.
- 3 Connect the eye-bolts and wall brackets tightly with a sturdy rope.
 - Make sure to keep the rope horizontal with the flat surface.



CAUTION

 Make sure that children do not climb on or hang on the TV.



NOTE

- Use a platform or cabinet that is strong and large enough to support the TV securely.
- Brackets, bolts and ropes are not provided. You can obtain additional accessories from your local dealer



WARNING


- If a television is not positioned in a sufficiently stable location, it can be potentially hazardous due to falling. Many injuries, particularly to children, can be avoided by taking simple precautions such as:
 - » Using cabinets or stands recommended by the manufacturer of the television.
 - » Only using furniture that can safely support the television.
 - » Ensuring the television is not overhanging the edge of the supporting furniture.
 - » Not placing the television on tall furniture (for example, cupboards or bookcases) without anchoring both the furniture and the television to a suitable support.
 - » Not standing the televisions on cloth or other materials placed between the television and supporting furniture.
 - » Educating children about the dangers of climbing on furniture to reach the television or its controls.

Using the Kensington security system

(This feature is not available for all models.)

The Kensington security system connector is located at the rear of the TV. For more information of installation and using, refer to the manual provided with the Kensington security system or visit http://www.kensington.com.


Connect the Kensington security system cable between the TV and a table.



Mounting on a wall

Attach an optional wall mount bracket at the rear of the TV carefully and install the wall mount bracket on a solid wall perpendicular to the floor. When you attach the TV to other building materials, please contact qualified personnel.


LG recommends that wall mounting be performed by a qualified professional installer.



Make sure to use screws and wall mount bracket that meet the VESA standard. Standard dimensions for the wall mount kits are described in the following table.

Separate purchase(Wall Mounting Bracket)

| Model | 22/24/26/28LN45** |
|--------------------|-------------------|
| VESA (A x B) | 100 x 100 |
| Standard screw | M4 |
| Number of screws | 4 |
| Wall mount bracket | LSW130B |
| | |





CAUTION

- Disconnect the power first, and then move or install the TV. Otherwise electric shock may occur.
- If you install the TV on a ceiling or slanted wall, it may fall and result in severe injury.
 Use an authorized LG wall mount and contact the local dealer or qualified personnel.
- Do not over tighten the screws as this may cause damage to the TV and void your warranty.
- Use the screws and wall mounts that meet the VESA standard. Any damages or injuries by misuse or using an improper accessory are not covered by the manufacturer's warranty.




NOTE

- Use the screws that are listed on the VESA standard screw specifications.
- The wall mount kit includes an installation manual and necessary parts.
- The wall mount bracket is not provided. You can obtain additional accessories from your local dealer.
- The length of screws may differ depending on the wall mount. Make sure to use the proper length.
- For more information, refer to the manual supplied with the wall mount.

Tidying cables

Use Cable Tie to neatly secure and position cables together.





CAUTION

 Do not move the TV by holding the cable tie, as the cable ties may break, and injuries and damage to the TV may occur.

MAKING CONNECTIONS

This section on **MAKING CONNECTIONS** mainly uses diagrams for the LN45** models.

Connect various external devices to the TV and switch input modes to select an external device. For more information of external device's connection, refer to the manual provided with each device.

Available external devices are: HD receivers, DVD players, VCRs, audio systems, USB storage devices, PC, gaming devices, and other external devices.




NOTE

- The external device connection may differ from the model.
- Connect external devices to the TV regardless of the order of the TV port.
- If you record a TV programme on a DVD recorder or VCR, make sure to connect the TV signal input cable to the TV through a DVD recorder or VCR.
 For more information of recording, refer to the manual provided with the connected device.
- Refer to the external equipment's manual for operating instructions.
- If you connect a gaming device to the TV, use the cable supplied with the gaming device.
- In PC mode, there may be noise associated with the resolution, vertical pattern, contrast or brightness. If noise is present, change the PC output to another resolution, change the refresh rate to another rate or adjust the brightness and contrast on the PICTURE menu until the picture is
- In PC mode, some resolution settings may not work properly depending on the graphics card.

Antenna connection

Connect the TV to a wall antenna socket with an RF cable (75 Ω).







NOTE

- · Use a signal splitter to use more than 2 TVs.
- If the image quality is poor, install a signal amplifier properly to improve the image quality.
- If the image quality is poor with an antenna connected, try to realign the antenna in the correct direction.
- · An antenna cable and converter are not supplied.
- Supported DTV Audio: MPEG, Dolby Digital, Dolby Digital Plus, HE-AAC

Adapter connection



or




P CAUTION

 Please be sure to connect the TV to the AC-DC power adapter before connecting the TV's power plug to a wall power outlet.

HDMI connection

Transmits the digital video and audio signals from an external device to the TV. Connect the external device and the TV with the HDMI cable as shown.

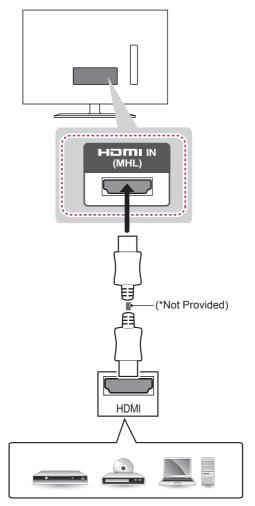


DVD/ Blu-Ray / HD Cable Box / HD STB / PC



- It is recommended to use the TV with the HDMI connection for the best image quality.
- Use the latest High Speed HDMI™ Cable with CEC (Customer Electronics Control) function.
- High Speed HDMI™ Cables are tested to carry an HD signal up to 1080p and higher.
- Supported HDMI Audio format: Dolby Digital, PCM (Up to 192KHz, 32KHz/44.1KHz/ 48KHz/88KHz/96KHz/176KHz/192KHz) *DTS Not Supported.

DVI to HDMI connection

Transmits the digital video signal from an external device to the TV. Connect the external device and the TV with the DVI-HDMI cable as shown. To transmit an audio signal, connect an audio cable.

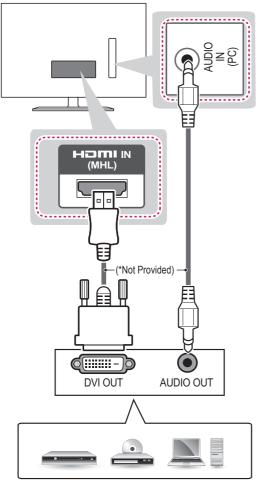


DVD/ Blu-Ray / HD Cable Box / HD STB / PC



- Depending on the graphics card, DOS mode may not work if a HDMI to DVI Cable is in use.
- When using the HDMI/DVI cable, only Single link is supported.

RGB connection

Transmits the analog video signal from your PC to the TV. Connect the PC and the TV with the D-sub 15 pin cable. To transmit an audio signal, connect an audio cable.

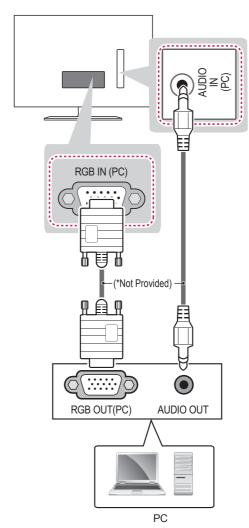




 If you do not use an optional external speaker, connect the PC to the TV with the optional audio cable.

Component connection

Transmits analog video and audio signals from an external device to the TV. Connect the external device and the TV with a component cable as shown.

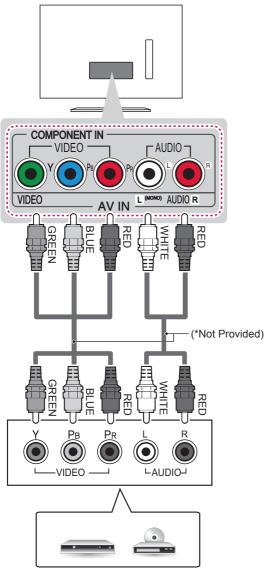


DVD/ Blu-Ray / HD Cable Box



 If cables are not installed correctly, it could cause this image to display in black and white or with distorted colours.

Composite connection


Transmits analog video and audio signals from an external device to the TV. Connect the external device and the TV with the composite cable as shown.

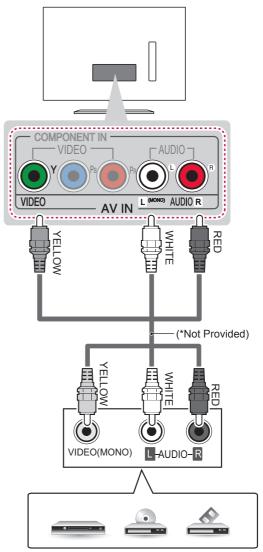

DVD/ Blu-Ray / HD Cable Box / VCR

Headphone connection

Transmits the headphone signal from the TV to an external device. Connect the external device and the TV with the headphone as shown.






- AUDIO menu items are disabled when connecting a headphone.
- When changing AV MODE with a headphone connected, the change is applied to video but not to audio.
- Headphone impedance: 16 Ω
- Max audio output of headphone: 9 mW to 15 mW
- Headphone jack size: 0.35 cm

MHL connection

Mobile High-definition Link (MHL) is an interface for transmitting digital audiovisual signals from mobile phones to television sets.

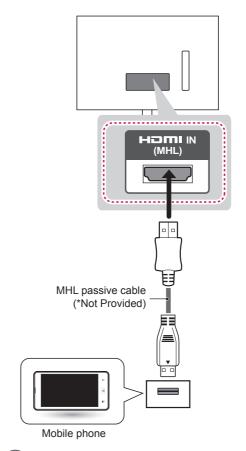




- Connect the mobile phone to the HDMI IN (MHL) port to view the phone screen on the TV.
- The MHL passive cable is needed to connect the TV and a mobile phone.
- · This only works for the MHL-enabled phone.
- Some applications can be operated by the remote control
- Remove the MHL passive cable from the TV when:
 - The MHL function is disabled.
 - Your mobile device is fully charged in standby mode.

USB connection

Connect a USB storage device such as a USB flash memory, external hard drive, or a USB memory card reader to the TV and access the My media menu to use various multimedia files.



REMOTE CONTROL

The descriptions in this manual are based on the buttons on the remote control.

Please read this manual carefully and use the TV correctly.

To replace batteries, open the battery cover, replace batteries (1.5 V AAA) matching the \oplus and

ends to the label inside the compartment, and close the battery cover.


To remove the batteries, perform the installation actions in reverse.





- Do not mix old and new batteries, as this may damage the remote control.
- In Analogue TV and some countries, some remote control buttons may not work.

Make sure to point the remote control toward the remote control sensor on the TV.

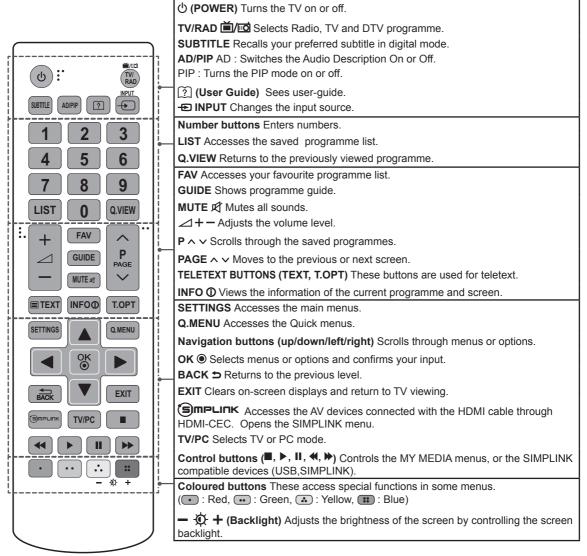



On MHEG programme, you cannot adjust the backlight with the yellow or blue button. (Depending on model)


USING THE USER GUIDE

User Guide allows you to more easily access the detailed TV information.

- 1 Press **SETTINGS** to access the main menus.
- 2 Press the RED button to access the Customer Support menus.
- 3 Press the Navigation buttons to scroll to User Guide and press OK.








- 1 Allows to select the category you want.
- Allows to select the item you want.
 You can use ^/ > to move between pages.
- Allows to browse the description of the function you want from the index.





- Shows the description of the selected menu. You can use ^/∨ to move between pages.
- Zooms in or out the screen.

MAINTENANCE

Cleaning your TV

Clean your TV regularly to keep the best performance and to extend the product lifespan.



CAUTION

- · Make sure to turn the power off and disconnect the power cord and all other cables first.
- When the TV is left unattended and unused for a long time, disconnect the power cord from the wall outlet to
 prevent possible damage from lightning or power surges.

Screen, frame, cabinet and stand

- To remove dust or light dirt, wipe the surface with a dry, clean, and soft cloth.
- To remove major dirt, wipe the surface with a soft cloth dampened in clean water or a diluted mild detergent. Then wipe immediately with a dry cloth.



CAUTION

- Avoid touching the screen at all times, as this may result in damage to the screen.
- Do not push, rub, or hit the screen surface with your fingernail or a sharp object, as this may result in scratches and image distortions.
- Do not use any chemicals as this may damage the product.
- Do not spray liquid onto the surface. If water enters the TV, it may result in fire, electric shock, or malfunction.

Power cord

Remove the accumulated dust or dirt on the power cord regularly.

TROUBLESHOOTING

| Problem | Solution |
|--|--|
| Cannot control the TV with the remote control. | Check the remote control sensor on the product and try again. Check if there is any obstacle between the product and the remote control. Check if the batteries are still working and properly installed (⊕ to ⊕, ⊝ to ⊝). |
| No image display and no sound is produced. | Check if the product is turned on. Check if the power cord is connected to a wall outlet. Check if there is a problem in the wall outlet by connecting other products. |
| The TV turns off suddenly. | Check the power control settings. The power supply may be interrupted. Check if the Auto sleep feature is activated in the Time settings. If there is no signal while the TV is on, the TV will turn off automatically after 15 minutes of inactivity. |
| When connecting to the PC (RGB/HDMI), 'No signal' or 'Invalid Format' is displayed. | Turn the TV off/on using the remote control. Reconnect the RGB/HDMI cable. Restart the PC with the TV on. |

SPECIFICATIONS

Product specifications may be changed without prior notice due to upgrade of product functions. For the power supply and power consumption, refer to the label attached to the product.

| | | 22LN45** | 24LN45** | 26LN45** |
|---------------|--------------------|---|----------------------------|--|
| MODELS | | 22LN4500-TA 22LN4500-TB | 24LN4500-TA 24LN4500-TB | 26LN4500-TA 26LN4500-TB |
| Dimensions | With stand (mm) | 513.0 x 362.0 x 140.0 | 557.0 x 390.0 x 140.0 | 621.0 x 431.0 x 162.1 |
| (W x H x D) | Without stand(mm) | 513.0 x 320.0 x 63.0 | 557.0 x 348.0 x 62.3 | 621.0 x 386.0 x 72.9 |
| Weight | With stand (kg) | 3.4 | 3.7 | 4.2 |
| | Without stand (kg) | 3.2 | 3.5 | 4.0 |
| Power require | ment | 19 V | 19 V | 19 V |
| AC/DC Adapter | | Manufacturer: Lien Chang Model: LCAP16B-E, LCAP16B-A, LCAP25B Manufacturer: LG Innotek Model: PSAB-L205B, PSAB-L205C, PSAB-L204B Manufacturer: APD Model: DA-40E19 | | Manufacturer : LG Innotek Model : PSAB-L101A Manufacturer : Lite-On Model : PA-1650-64 |
| | | 28LN45** | | |
| MODELS | | 28LN4500-TA 28LN4500-TB | | |
| Dimensions | With stand (mm) | 645.3 x 447.9 x 182.1 | | |
| (W x H x D) | Without stand(mm) | 645.3 x 401.6 x 78.7 | | |
| Weight | With stand (kg) | 5.1 | | |
| | Without stand (kg) | 4.7 | | |
| Power require | ment | 19 V | | |
| AC/DC Adapter | | Manufacturer: Lien Chang Model: LCAP16B-E, LCAP16B-A, LCAP25B Manufacturer: LG Innotek Model: PSAB-L205B, PSAB-L205C, PSAB- L204B Manufacturer: APD Model: DA-40E19 | | |

| Environment | Operating Temperature | 0 °C to 40 °C |
|-------------|-----------------------|-----------------|
| condition | Operating Humidity | Less than 80 % |
| | Storage Temperature | -20 °C to 60 °C |
| | Storage Humidity | Less than 85 % |

| | | Digital TV | Analogue TV |
|-----------------------------------|-------------------------------|-------------------------------|--|
| New Zealand, | Television System | DVB-T | PAL/SECAM-B/G/D/K, PAL-I |
| Singapore | Programme Coverage | UHF 21 to 69 | BG : VHF/UHF 1 to 69, CATV 01 to 47 I : VHF/UHF 1 to 69, CATV 01 to 47 DK : VHF/UHF 1 to 69, CATV 01 to 47 |
| Australia | Television System | DVB-T | PAL B/B |
| | Programme Coverage | VHF 06 to 12, UHF 27 to 69 | B/B : VHF/UHF 0 to 75, CATV : 2 to 44 |
| Indonesia, Israel, | Television System | DVB-T | PAL/SECAM-B/G/D/K, PAL-I, NTSC-M |
| Myanmar, Sri Lanka | Programme Coverage | UHF 21 to 69 | BG: VHF/UHF 1 to 69, CATV 01 to 47 I: VHF/UHF 1 to 69, CATV 01 to 47 DK: VHF/UHF 1 to 69, CATV 01 to 47 M: VHF/UHF 2 to 78, CATV 01 to 71 |
| Vietnam, Malaysia | Television System | DVB-T | PAL/SECAM-B/G/D/K, PAL-I, NTSC-M |
| | Programme Coverage | VHF 6 to 12, UHF 21 to 69 | BG: VHF/UHF 1 to 69, CATV 01 to 47 I: VHF/UHF 1 to 69, CATV 01 to 47 DK: VHF/UHF 1 to 69, CATV 01 to 47 M: VHF/UHF 2 to 78, CATV 01 to 71 |
| Iran, Algeria, | Television System | DVB-T | PAL/SECAM-B/G/D/K, PAL-I, NTSC-M |
| Tunisia, Digital model | Programme Coverage | VHF 5 to 12, UHF 21 to 69 | BG: VHF/UHF 1 to 69, CATV 01 to 47 I: VHF/UHF 1 to 69, CATV 01 to 47 DK: VHF/UHF 1 to 69, CATV 01 to 47 M: VHF/UHF 2 to 78, CATV 01 to 71 |
| Analogue model, | Television System | - | PAL/SECAM-B/G/D/K, PAL-I, NTSC-M |
| India, Thailand, South Africa, | Programme Coverage | - | BG: VHF/UHF 1 to 69, CATV 01 to 47 I: VHF/UHF 1 to 69, CATV 01 to 47 DK: VHF/UHF 1 to 69, CATV 01 to 47 M: VHF/UHF 2 to 78, CATV 01 to 71 |
| | External Antenna Impedance | 75 Ω | 75 Ω |

RGB (PC) / HDMI (PC) supported mode

| Resolution | Horizontal Frequency(kHz) | Vertical Frequency(Hz) |
|------------|------------------------------|---------------------------|
| 720 x 400 | 31.468 | 70.080 |
| 640 x 480 | 31.469 | 59.940 |
| 640 x 480 | 37.500 | 75.000 |
| 800 x 600 | 37.879 | 60.317 |
| 800 x 600 | 46.875 | 75.000 |
| 1024 x 768 | 48.363 | 60.004 |
| 1024 x 768 | 60.023 | 75.029 |
| 1280 x 800 | 49.702 | 59.810 |
| 1366 x 768 | 47.717 | 59.790 |



NOTE

- The optimal display resolution is 1366 X 768@60Hz.
 The optimal timing in each mode is vertical
- frequency 60Hz.

HDMI-DTV supported mode

| Resolution | Horizontal Frequency (kHz) | Vertical Frequency (Hz) |
|------------|-------------------------------|----------------------------|
| 720x480 | 31.469 31.500 | 59.940 60.000 |
| | 31.300 | 60.000 |
| 720x576 | 31.250 | 50.000 |
| 1280x720 | 37.500 | 50.000 |
| | 44.960 | 59.940 |
| | 45.000 | 60.000 |
| 1920x1080 | 33.720 | 59.940 |
| | 33.750 | 60.000 |
| | 28.125 | 50.000 |
| | 27.000 | 24.000 |
| | 33.750 | 30.000 |
| | 56.250 | 50.000 |
| | 67.430 | 59.940 |
| | 67.500 | 60.000 |

Component port connecting information

| Component ports on the TV | Υ | P _B | P _R |
|---------------------------|---|----------------|----------------|
|---------------------------|---|----------------|----------------|

| | Υ | P _B | P _R |
|---------------------------|---|----------------|----------------|
| Video output ports on DVD | Y | B-Y | R-Y |
| player | Y | Cb | Cr |
| | Y | Pb | Pr |

LICENSES

Supported licenses may differ by model. For more information about licenses, visit www.lg.com.



Manufactured under license from Dolby Laboratories. "Dolby" and the double-D symbol are trademarks of Dolby Laboratories.



The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries



ABOUT DIVX VIDEO: DivX® is a digital video format created by DivX, LLC, a subsidiary of Rovi Corporation. This is an official DivX Certified® device that plays DivX video. Visit *divx. com* for more information and software tools to convert your files into DivX video.

ABOUT DIVX VIDEO-ON-DEMAND: This DivX Certified® device must be registered in order to play purchased DivX Video-on-Demand (VOD) movies. To obtain your registration code, locate the DivX VOD section in your device setup menu. Go to vod.divx.com for more information on how to complete your registration.

"DivX Certified® to play DivX® video up to HD 1080p, including premium content."

"DivX®, DivX Certified® and associated logos are trademarks of Rovi Corporation or its subsidiaries and are used under license."

"Covered by one or more of the following U.S. patents: 7,295,673; 7,460,668; 7,515,710; 7,519,274"

OPEN SOURCE SOFTWARE NOTICE

To obtain the source code under GPL, LGPL, MPL and other open source licenses, that is contained in this product, please visit http://opensource.lge.com.

In addition to the source code, all referred license terms, warranty disclaimers and copyright notices are available for download.

LG Electronics will also provide open source code to you on CD-ROM for a charge covering the cost of performing such distribution (such as the cost of media, shipping and handling) upon email request to opensource@lge.com. This offer is valid for three (3) years from the date on which you purchased the product.



Record the model number and serial number of the $\mathsf{TV}.$

Refer to the label on the back cover and quote this information to your dealer when requiring any service.

MODEL ____

SERIAL _____

(Only DTV)





OWNER'S MANUAL

EXTERNAL CONTROL DEVICE SETUP

Please read this manual carefully before operating the set and retain it for future reference.

KEY CODES

• This feature is not available for all models.

| Code (Hexa) | Function | Note | Code (Hexa) | Function | Note |
|----------------|----------------------------|------------|----------------|-----------------------------|------------|
| 00 | CH +, PR + | R/C Button | 45 | Q.Menu | R/C Button |
| 01 | CH -, PR - | R/C Button | 4C | List, - (ATSC Only) | R/C Button |
| 02 | Volume + | R/C Button | 53 | List | R/C Button |
| 03 | Volume - | R/C Button | 5B | Exit | R/C Button |
| 06 | > (Arrow Key / Right Key) | R/C Button | 61 | Blue | R/C Button |
| 07 | < (Arrow Key / Left Key) | R/C Button | 63 | Yellow | R/C Button |
| 08 | Power | R/C Button | 71 | Green | R/C Button |
| 09 | Mute | R/C Button | 72 | Red | R/C Button |
| 0B | Input | R/C Button | 79 | Ratio / Aspect Ratio | R/C Button |
| 0E | SLEEP | R/C Button | 91 | AD (Audio Description) | R/C Button |
| 0F | TV, TV/RAD | R/C Button | 7A | User Guide | R/C Button |
| 10 - 19 | * Number Key 0 - 9 | R/C Button | 7C | Smart/ Home | R/C Button |
| 1A | Q.View / Flashback | R/C Button | 7E | Simplink | R/C Button |
| 1E | FAV (Favorite Channel) | R/C Button | 8E | ▶▶ (Forward) | R/C Button |
| 20 | Text (Teletext) | R/C Button | 8F | ◀ (Rewind) | R/C Button |
| 21 | T. Opt (Teletext Option) | R/C Button | AA | Info | R/C Button |
| 28 | Return (BACK) | R/C Button | AB | Program Guide | R/C Button |
| 30 | AV (Audio/ Video) Mode | R/C Button | В0 | ► (Play) | R/C Button |
| 39 | Caption/Subtitle | R/C Button | B1 | ■ (Stop/ Live TV) | R/C Button |
| 40 | Λ (Arrow Key/ Cursor Up) | R/C Button | ВА | II (Freeze/Slow Play/Pause) | R/C Button |
| 41 | V (Arrow Key/ Cursor Down) | R/C Button | BD | • (REC) | R/C Button |
| 42 | My Apps | R/C Button | DC | 3D | R/C Button |
| 43 | Menu / Settings | R/C Button | 9F | App/ * | R/C Button |
| 44 | OK / Enter | R/C Button | | | |

^{*} Key code 4C (0x4C) is available on ATSC/ISDB models which use major/minor channel. (For South Korea, Japan, North America, Latin America except Colombia models)

EXTERNAL CONTROL DEVICE SETUP

· Image shown may differ from your TV.

Connect the USB to Serial converter/RS-232C input jack to an external control device (such as a computer or an A/V control system) to control the product's functions externally.

Note: There are several ways to connect TV based on model's support port.

- * Please be advised that not all models support these connectivity.
- * Cable is not provided.

USB to Serial converter with USB Cable

USB Type




- LGTV supports PL2303 chip-based (Vendor ID : 0x0557, Product ID : 0x2008) USB to serial converter which is not made nor provided by LG.
- It can be purchased from computer stores that carry accessories for IT support professionals.


RS-232C with RS-232C Cable (Legacy)

Phone jack Type

- You need to purchase the phone-jack to RS-232 cable required for the connection between the PC and the TV, which is specified in the manual.
- * For other models, connect to the USB port.



This connection can only be used for the following models: 55/47/39LN5450-UA, 55/50/47/42LN5400-UA, 42/39/32LN5300-UA, and 37/32LN530B-UA.





This connection can only be used for the following models: 60PN6550-UA, 50/60PN6500-UA, 50/60PN5300-UF, and 42/50PN4500-UA.

Customer Computer

RS-232C configurations

3-Wire Configurations(Not standard)





Set ID

For Set ID number, see "Real Data Mapping" on p. 6

- 1. Press **SETTINGS** to access the main menus.
- 2. Press the Navigation buttons to scroll to **OPTION** and press **OK**.
- 3. Press the Navigation buttons to scroll to SET ID and press OK.
- 4. Scroll left or right to select a set ID number and select CLOSE. The adjustment range is 1-99.
- 5. When you are finished, press **EXIT**.

Communication Parameters

• Baud rate : 9600 bps (UART)

Data length: 8 bitsParity: None

• Stop bit : 1 bit

Communication code : ASCII codeUse a crossed (reverse) cable.

Command reference list

(Depending on model)

| | COMMAND1 | COMMAND2 | DATA (Hexadecimal) | | COMMAND1 | COMMAND2 | DATA (Hexadecimal) |
|------------------------------------|----------|----------|-----------------------|--|----------|----------|-----------------------|
| 01. Power off | k | а | 00 | 13. Balance | k | t | 00 to 64 |
| 02. Aspect Ratio | k | С | (See p.7) | 14. Color (Colour) Temperature | х | u | 00 to 64 |
| 03. Screen Mute | k | d | (See p.7) | 15. ISM Method (Only Plasma TV) | j | p | (See p.8) |
| 04. Volume Mute | k | е | 00 to 01 | 16. Energy Saving | j | q | 00 to 05 |
| 05. Volume Control | k | f | 00 to 64 | 17. Tune Command | m | а | (See p.8) |
| 06. Contrast | k | g | 00 to 64 | 18. Channel (Programme) Add/Del(Skip) | m | b | 00 to 01 |
| 07. Brightness | k | h | 00 to 64 | 19. Key | m | С | Key Codes |
| 08. Color/ Colour | k | i | 00 to 64 | 20. Control Back Light, Control Panel Light | m | g | 00 to 64 |
| 09. Tint | k | j | 00 to 64 | 21. Input select (Main) | х | b | (See p.10) |
| 10. Sharpness | k | k | 00 to 32 | 22. 3D (Only 3D models) | х | t | (See p.11) |
| 11. OSD Select | k | I | 00 to 01 | 23. Extended 3D (Only 3D models) | х | v | (See p.11) |
| 12. Remote Control Lock Mode | k | m | 00 to 01 | | | | |

^{*} Note: During USB operations such as DivX or EMF, all commands except Power(ka) and Key(mc) are not executed and treated as NG.

Transmission / Receiving Protocol

Transmission

[Command1][Command2][][Set ID][][Data][Cr]

[Command 1]: First command to control the TV. (j, k, m or x)

[Command 2]: Second command to control the TV.

[Set ID] : You can adjust the [Set ID] to choose desired monitor ID number in option menu.

Adjustment range in TV is 1 to 99. If [Set ID] value is selected to '0', every connected set

can be controlled.

* [Set ID] is indicated as decimal (1 to 99) on menu and as Hexadecimal (0x00 to 0x63) on

transmission/receiving protocol.

[DATA] : To transmit command data (hexadecimal). Transmit 'FF' data to read status of command.

[Cr] : Carriage Return - ASCII code '0x0D'

Space – ASCII code '0x20'

OK Acknowledgement

[Command2][][Set ID][][OK][Data][x]

* The set transmits ACK (acknowledgement) based on this format when receiving normal data. At this time, if the data is data read mode, it indicates present status data. If the data is data write mode, it returns the data of the PC computer.

Error Acknowledgement

[Command2][][Set ID][][NG][Data][x]

* The set transmits ACK (acknowledgement) based on this format when receiving abnormal data from nonviable functions or communication errors.

Data 00: Illegal Code

Real data mapping (Hexadecimal → Decimal)

- * When you enter the [data] in hexadecimal, refer to following conversion table.
- * Channel Tune (ma) Command uses two-byte hexadecimal value([data]) to select channel number.

 00 : Step 0
 32 : Step 50 (Set ID 50)
 FE : Step 254

 01 : Step 1 (Set ID 1)
 33 : Step 51 (Set ID 51)
 FF : Step 255

 ...
 ...
 ...

 0A : Step 10 (Set ID 10)
 63 : Step 99 (Set ID 99)
 01 00 : Step 256

 ...
 ...

 0F : Step 15 (Set ID 15)
 C7 : Step 199
 27 0E : Step 9998

 10 : Step 16 (Set ID 16)
 C8 : Step 200
 27 0F : Step 9999

* Commands may work differently depending on model and signal.

01. Power (Command: k a)

► To control Power Off of the set.

Transmission[k][a][][Set ID][][Data][Cr]

Data 00: Power Off

Ack [a][][Set ID][][OK/NG][Data][x]

► To Show Power On. (Works TV is On Only)

Transmission [k][a][][Set ID][][FF][Cr]

Ack [a][][Set ID][][OK][01][x]

* Similarly, if other functions transmit 'FF' data based on this format, Acknowledgement feedback presents status about each function.

02. Aspect Ratio (Command: k c) (Main Picture Size)

► To adjust the screen format. (Main picture format) You can also adjust the screen format using the Aspect Ratio in the Q.MENU. or PICTURE menu.

Transmission [k][c][][Set ID][][Data][Cr]

Data 01: Normal screen 07: 14:9

(4:3) (Europe, Colombia, Mid-East,
02 : Wide screen Asia except South Korea and
(16:9) Japan)

(Latin America (Europe, Colombia, Midexcept Colombia East, Asia except South

Only) Korea and Japan) 06 : Set by Program/ 10 to 1F : Cinema Zoom 1

Original to 16

Ack [c][][Set ID][][OK/NG][Data][x]

- * Using the PC input, you select either 16:9 or 4:3 screen aspect ratio.
- * In DTV/HDMI/Component mode (high-definition), Just Scan is available.
- Full wide mode may work differently based on model and is supported for DTV fully, and ATV, AV partially.

03. Screen Mute (Command: k d)

► To select screen mute on/off.

Transmission [k][d][][Set ID][][Data][Cr]

Data 00 : Screen mute off (Picture on)

Video mute off

01 : Screen mute on (Picture off)

10: Video mute on

Ack [d][][Set ID][][OK/NG][Data][x]

 In case of video mute on only, TV will display On Screen Display(OSD). But, in case of Screen mute on, TV will not display OSD.

04. Volume Mute (Command: k e)

To control volume mute on/off. You can also adjust mute using the MUTE button on remote control.

Transmission [k][e][][Set ID][][Data][Cr]

Data 00 : Volume mute on (Volume off) 01 : Volume mute off (Volume on)

Ack [e][][Set ID][][OK/NG][Data][x]

05. Volume Control (Command: k f)

▶ To adjust volume.

You can also adjust volume with the volume buttons on remote control.

Transmission [k][f][][Set ID][][Data][Cr]

Data Min: 00 to Max: 64

Ack [f][][Set ID][][OK/NG][Data][x]

06. Contrast (Command: k g)

► To adjust screen contrast.

You can also adjust contrast in the PICTURE menu

Transmission [k][g][][Set ID][][Data][Cr]

Data Min: 00 to Max: 64

Ack [g][][Set ID][][OK/NG][Data][x]

07. Brightness (Command: k h)

► To adjust screen brightness.

You can also adjust brightness in the PICTURE menu

Transmission [k][h][][Set ID][][Data][Cr]

Data Min: 00 to Max: 64

Ack [h][][Set ID][][OK/NG][Data][x]

08. Color/Colour (Command: k i)

To adjust the screen Color(Colour). You can also adjust colour in the PICTURE menu.

Transmission [k][i][][Set ID][][Data][Cr]

Data Min: 00 to Max: 64

Ack [i][][Set ID][][OK/NG][Data][x]

09. Tint (Command: k j)

► To adjust the screen tint.

You can also adjust tint in the PICTURE menu.

Transmission [k][j][][Set ID][][Data][Cr]

Data Red: 00 to Green: 64

Ack [j][][Set ID][][OK/NG][Data][x]

10. Sharpness (Command: k k)

► To adjust the screen sharpness.

You can also adjust sharpness in the PICTURE menu.

Transmission [k][k][][Set ID][][Data][Cr]

Data Min: 00 to Max: 32

Ack [k][][Set ID][][OK/NG][Data][x]

11. OSD Select (Command: k I)

➤ To select OSD (On Screen Display) on/off when controlling remotely.

Transmission [k][l][][Set ID][][Data][Cr]

Data 00 : OSD off 01 : OSD on

Ack [I][][Set ID][][OK/NG][Data][x]

12. Remote control lock mode (Command: k m)

➤ To lock the front panel controls on the monitor and remote control.

Transmission [k][m][][Set ID][][Data][Cr]

Data 00 : Lock off 01 : Lock on

Ack [m][][Set ID][][OK/NG][Data][x]

 If you are not using the remote control, use this mode.

When main power is off & on (plug-off and plug-in, after 20 - 30 seconds), external control lock is released.

* In the standby mode (DC off by off timer or 'ka', 'mc' command), and if key lock is on, TV will not turn on by power on key of IR & Local Key.

13. Balance (Command: kt)

▶ To adjust balance.

You can also adjust balance in the AUDIO menu.

Transmission [k][t][][Set ID][][Data][Cr]

Data Min: 00 to Max: 64

Ack [t][][Set ID][][OK/NG][Data][x]

- 14. Color(Colour) Temperature (Command: x u)
- ➤ To adjust colour temperature. You can also adjust Color(Colour) Temperature in the PICTURE menu.

Transmission [x][u][][Set ID][][Data][Cr]

Data Min: 00 to Max: 64

Ack [u][][Set ID][][OK/NG][Data][x]

15. ISM Method (Command: j p) (Only Plasma TV)

► To control the ISM method. You can also adjust ISM Method in OPTION menu.

Transmission [j][p][][Set ID][][Data][Cr]

Data Min: 02: Orbiter 08: Normal

20: Color(Colour) Wash

Ack [p][][Set ID][][OK/NG][Data][x]

16. Energy Saving (Command: j q)

➤ To reduce the power consumption of the TV. You can also adjust Energy Saving in PICTURE menu.

Transmission [j][q][][Set ID][][Data][Cr]

Data

00 : Off

01: Minimum

02 : Medium

03: Maximum

04 : Auto

05 : Screen off

* (Depending on model)

Ack [q][][Set ID][][OK/NG][Data][x]

17. Tune Command (Command: m a)

- * This command may work differently depending on model and signal.
- For Europe, Mid-East, Colombia, Asia except South Korea and Japan Model
- Select channel to following physical number.

Transmission [m][a][][Set ID][][Data 00][][Data 01] [][Data 02][Cr]

* Analogue Terrestrial/Cable

[Data 00][Data 01] Channel Data Data 00: High byte channel data Data 01: Low byte channel data

- 00 00 ~ 00 C7 (Decimal : 0 ~ 199)

Data 02 : Input Source (Analogue)
- 00 : Terrestrial TV (ATV)

- 80 : Cable TV (CATV)

* Digital Terrestrial/Cable/Satellite

[Data 00][Data 01]: Channel Data Data 00 : High Channel data Data 01 : Low Channel data

- 00 00 ~ 27 0F (Decimal: 0 ~ 9999)

Data 02: Input Source (Digital)

- 10 : Terrestrial TV (DTV)

- 20 : Terrestrial Radio (Radio)

- 40 : Satellite TV (SDTV)

- 50 : Satellite Radio (S-Radio)

- 90 : Cable TV (CADTV)

- a0 : Cable Radio (CA-Radio)

- * Tune Command Examples:
- 1. Tune to the analogue terrestrial (PAL) Channel 10. Set ID = All = 00

Data 00 & 01 = Channel Data is 10 = 00 0a

Data 02 = Analogue Terrestrial TV = 00

Result = ma 00 00 0a 00

2. Tune to the digital terrestrial (DVB-T) Channel 01. Set ID = All = 00

Data 00 & 01 = Channel Data is 1 = 00 01

Data 02 = Digital Terrestrial TV = 10

Result = ma 00 00 01 10

3. Tune to the satellite (DVB-S) Channel 1000.

Set ID = AII = 00

Data 00 & 01 = Channel Data is 1000 = 03 E8

Data 02 = Digital Satellite TV = 40

Result = ma 00 03 E8 40

Ack [a][][Set ID][][OK][Data 00][Data 01][Data 02][x] [a][][Set ID][][NG][Data 00][x]

- For South Korea, North/Latin America except Colombia Model
- To tune channel to following physical/major/minor number.

Transmission [m][a][][0][][Data00][][Data01] [][Data02][][Data03][][Data04][][Data05][Cr]

Digital channels have a Physical, Major, and Minor channel number. The Physical number is the actual digital channel number, the Major is the number that the channel should be mapped to, and the Minor is the sub-channel. Since the ATSC tuner automatically maps the channel from the Major / Minor number, the Physical number is not required when sending a command in Digital.

* Analogue Terrestrial/Cable

Data 00: Physical Channel Number

- Terrestrial (ATV): 02~45 (Decimal: 2 ~ 69)

- Cable (CATV): 01, 0E~7D (Decimal: 1, 14~125)

[Data 01 ~ 04]: Major/Minor Channel Number

Data 01 & 02: xx (Don't care)

Data 03 & 04: xx (Don't care)

Data 05: Input Source (Analogue)

- 00 : Terrestrial TV (ATV)

- 01 : Cable TV (CATV)

* Digital Terrestrial/Cable

Data 00: xx (Don't care)

[Data 01][Data 02]: Major Channel Number

Data 01 : High byte Channel Data

Data 02 : Low byte Channel Data

- 00 01 ~ 27 0F (Decimal: 1 ~ 9999)

[Data 03][Data 04]: Minor Channel Number

Data 03: High byte Channel Data

Data 04: Low byte Channel Data

Data 05: Input Source (Digital)

- 02 : Terrestrial TV (DTV) Use Physical Channel Number
- 06 : Cable TV (CADTV) Use Physical Channel Number
- 22 : Terrestrial TV (DTV) Don't Use Physical Channel Number
- 26 : Cable TV (CADTV) Don't Use Physical Channel Number
- 46 : Cable TV (CADTV) Use Major Channel Number Only (One Part Channel)

Two bytes are available for each major and minor channel data, but usually the low byte is used alone (high byte is 0).

- * Tune Command Examples:
- 1. Tune to the analogue cable (NTSC) channel 35. Set ID = All = 00

Data 00 = Channel Data is 35 = 23

Data 01 & 02 = No Major = 00 00

Data 03 & 04 = No Minor = 00 00

Data 05 = Analogue Cable TV = 01

Total = ma 00 23 00 00 00 00 01

2. Tune to the digital terrestrial (ATSC) channel 30-3. Set $\mbox{ID} = \mbox{All} = 00$

Data 00 = Don't know Physical = 00

Data 01 & 02 = Major is 30 = 00 1E

Data 03 & 04 = Minor is 3 = 00 03

Data 05 = Digital Terrestrial TV = 22

Total = ma 00 00 00 1E 00 03 22

Ack [a][][Set ID][][OK][Data 00][Data 01]
[Data 02][Data 03][Data 04][Data 05]
[x][a][][Set ID][][NG][Data 00][x]

- For Japan Model
- ▶ To tune channel to following physical/major/minor number.

Transmission [m][a][][0][][Data00][][Data01] [][Data02][][Data03][][Data04][][Data05][Cr]

* Digital Terrestrial/Satellite

Data 00: xx (Don't care)

[Data 01][Data 02]: Major Channel Number Data 01: High byte Channel Data Data 02: Low byte Channel Data - 00 01 ~ 27 0F (Decimal: 1 ~ 9999)

[Data 03][Data 04]: Minor/Branch Channel Number (Don't care in Satellite)

Data 03: High byte Channel Data Data 04: Low byte Channel Data

Data 05: Input Source (Digital/Satellite for Japan)

- 02 : Terrestrial TV (DTV)
- 07 : BS (Broadcasting Satellite)
- 08 : CS1 (Communication Satellite 1)
- 09 : CS2 (Communication Satellite 2)
- * Tune Command Examples:
- 1 Tune to the digital terrestrial (ISDB-T) channel 17-1. Set ID = AII = 00

Data 00 = Don't know Physical = 00

Data 01 & 02 = Major is 17 = 00 11

Data 03 & 04 = Minor/Branch is 1 = 00 01

Data 05 = Digital Terrestrial TV = 02

Total = ma 00 00 00 11 00 01 02

2. Tune to the BS (ISDB-BS) channel 30.

Set ID = AII = 00

Data 00 = Don't know Physical = 00

Data 01 & 02 = Major is 30 = 00 1E

Data 03 & 04 = Don't Care = 00 00

Data 05 = Digital BS TV = 07

Total = ma 00 00 00 1E 00 00 07

* This feature is varied based on the model.

Ack [a][][Set ID][][OK][Data 00][Data 01]

[Data 02][Data 03][Data 04][Data 05]

[x][a][][Set ID][][NG][Data 00][x]

18. Channel(Programme) Add/Del(Skip) (Command: m b)

To skip current channel(programme) for next time.

Transmission [m][b][][Set ID][][Data][Cr]

Data 00 : Del(ATSC,ISDB)/Skip(DVB) 01 : Add

Ack [b][][Set ID][][OK/NG][Data][x]

Set the saved channel status to del(ATSC, ISDB)/ skip(DVB) or add.

- 19. Key (Command: m c)
- To send IR remote key code.

Transmission [m][c][][Set ID][][Data][Cr]

Data Key code - See p.2.

Ack [c][][Set ID][][OK/NG][Data][x]

20. Control Back Light (Command: m g)

- For LCD TV / LED TV
- ▶ To control the back light.

Transmission [m][g][][Set ID][][Data][Cr]

Data Min: 00 to Max: 64

Ack [g][][Set ID][][OK/NG][Data][x]

Control Panel Light (Command: m g)

- For Plasma TV
- ► To control the panel light.

Transmission [m][g][][Set ID][][Data][Cr]

Data Min: 00 to Max: 64

Ack [g][][Set ID][][OK/NG][Data][x]

21. Input select (Command: x b) (Main Picture Input)

➤ To select input source for main picture.

Transmission [x][b][][Set ID][][Data][Cr]

Data

00: DTV 01: CADTV

10: ATV 02 : Satellite DTV

ISDB-BS (Japan) 03: ISDB-CS1 (Japan)

04: ISDB-CS2 (Japan)

11: CATV

20: AV or AV1 21: AV2

40 : Component1 41 : Component2

90: HDMI1 91: HDMI2 92: HDMI3 93: HDMI4

Ack [b][][Set ID][][OK/NG][Data][x]

* This function depends on model and signal.

22. 3D(Command: x t) (only 3D models)

(Depending on model)

► To change 3D mode for TV.

Transmission [x][t][][Set ID][][Data 00][][Data 01] [][Data 02][][Data 03][Cr]

Data Structure

[Data 00] 00:3D On

01 : 3D Off 02 : 3D to 2D 03 : 2D to 3D

[Data 01] 00: Top and Bottom

01 : Side by Side 02 : Checker Board 03 : Frame Sequential 04 : Column interleaving

05: Row interleaving

[Data 02] 00 : Right to Left

01 : Left to Right

[Data 03] 3D Effect(3D Depth): Min: 00 - Max: 14 (*transmit by Hexadecimal code)

- * If [Data 00] is 00 (3D On), [Data 03] has no meaning.
- If [Data 00] is 01 (3D off) or 02 (3D to 2D), [Data 01], [Data 02] and [Data 03] have no meaning.
- * If [Data 00] is 03(2D to 3D), [Data 01] and [Data 02] have no meaning.
- * If [Data 00] is 00 (3D On) or 03 (2D to 3D), [Data 03] works when 3D Mode (Genre) is manual only
- * All 3D pattern options ([Data 01]) may not be available according to broadcasting/video signal.

| | [Data 00] | [Data 01] | [Data 02] | [Data 03] |
|---|-----------|-----------|-----------|-----------|
| | 00 | 0 | 0 | 0 |
| ſ | 01 | Х | Х | Х |
| ſ | 02 | Х | Х | Х |
| | 03 | Х | Х | 0 |

X : don't care

Ack [t][][Set ID][][OK][Data00][Data01][Data02]

[Data03][x]

[t][][Set ID][][NG][Data00][x]

- 23. Extended 3D(Command: x v) (only 3D models) (Depending on model)
- ► To change 3D option for TV.

Transmission [x][v][][Set ID][][Data 00][]

[Data 01][Cr]

[Data 00] 3D option

00: 3D Picture Correction

01: 3D Depth (3D Mode is Manual Only)

02: 3D Viewpoint 06: 3D Color Correction 07: 3D Sound Zooming 08: Normal Image View 09: 3D Mode (Genre)

[Data 01] It has own range for each 3D option determined by [Data 00].

1) When [Data 00] is 00

00 : Right to Left 01 : Left to Right

2) When [Data 00] is 01, 02

Oata Min: 0 - Max: 14 (*transmit by Hexadecimal

code)

Data value range(0 - 20) converts Viewpoint range (-10 - +10) automatically (Depending on model)

- * This option works when 3D Mode (Genre) is manual only.
- 3) When [Data 00] is 06, 07

00 : Off 01 : On

4) When [Data 00] is 08

00 : Revert to 3D video from 3D-to-2D converted 3D video

01 : Change 3D video to 2D video, except 2D-to-3D video

- * If conversion condition doesn't meet, command is treated as NG.
- 5) When [Data 00] is 09

00 : Standard 01 : Sport 02 : Cinema 03 : Extreme

04: Manual

Ack [v][][Set ID][][OK][Data00][Data01][x] [v][][Set ID][][NG][Data00][x]

