

OWNER'S MANUAL LED TV*

* <u>Disclaimer</u>

LG LED TV applies LCD screen with LED backlights.

Please read this manual carefully before operating your set and retain it for future reference.

LA79**

LA97**

LA86**

I A98**

LA96**

www.lg.com

P/NO : MFL67706412 (1403-REV12)

Printed in Korea



TABLE OF CONTENTS

8 Viewing 3D Imaging (Only 3D models)

9 INSTALLATION PROCEDURE

9 ASSEMBLING AND PREPARING

- 9 Unpacking
- 13 Separate purchase
- 14 Parts and buttons
- 16 Lifting and moving the TV
- 17 Setting up the TV
- 17 Attaching the stand
- 20 Mounting on a table
- 21 Mounting on a wall
- 23 Tidving cables
- 24 Using Sliding Speaker
- 24 Using Built-in Camera
- 25 Preparing Built-in Camera
- 25 Name of Parts of Built-in Camera
- Checking the Camera's Shooting Range

26 MAKING CONNECTIONS

- 26 Antenna connection
- 27 HDMI connection
- 27 Headphone connection
- 28 DVI to HDMI connection
- 28 Component connection
- 29 Composite connection
- 29 Audio connection
- 29 Digital optical audio connection
- 30 USB connection
- 30 MHI connection

31 REMOTE CONTROL

33 MAGIC REMOTE CONTROL FUNCTIONS

- 35 Registering Magic Remote Control
- 35 How to use Magic Remote Control
- 35 Precautions to Take when Using the Magic Remote Control

36 USING THE USER GUIDE

37 MAINTENANCE

- 37 Cleaning your TV
 - Screen, frame, cabinet and stand
- 37 Power cord

37

37 TROUBLESHOOTING

38 ENVIRONMENTAL INFORMATION

38 WFFF

39 SPECIFICATIONS

46 LICENSES

46 OPEN SOURCE SOFTWARE NOTICE

46 EXTERNAL CONTROL DEVICE SETUP



WARNING

 If you ignore the warning message, you may be seriously injured or there is a possibility of accident or death.



CAUTION

 If you ignore the caution message, you may be slightly injured or the product may be damaged.



NOTE

 The note helps you understand and use the product safely. Please read the note carefully before using the product.

SAFETY INSTRUCTIONS

Please read these safety precautions carefully before using the product.



WARNING

- Do not place the TV and/or remote control in the following environments:
 - A location exposed to direct sunlight
 - An area with high humidity such as a bathroom
 - Near any heat source such as stoves and other devices that produce heat
 - Near kitchen counters or humidifiers where they can easily be exposed to steam or oil
 - An area exposed to rain or wind
 - Near containers of water such as vases Otherwise, this may result in fire, electric shock, malfunction or product deformation.



 Do not place the product where it might be exposed to dust.
 This may cause a fire hazard.



 Mains Plug is the TV connecting/ disconnecting device to AC mains electric supply. This plug must remain readily attached and operable when TV is in use.



 Do not touch the power plug with wet hands. Additionally, if the cord pin is wet or covered with dust, dry the power plug completely or wipe dust off.
 You may be electrocuted due to excess moisture.




 Make sure to connect Mains cable to compliant AC mains socket with Grounded earth pin. (Except for devices which are not grounded on earth.) Otherwise possibility you may be electrocuted or injured. Insert power cable plug completely into wall socket otherwise if not secured completely into socket, fire ignition may break out.



 Ensure the power cord does not come into contact with hot objects such as a heater.
 This may cause a fire or an electric shock hazard.



 Do not place a heavy object, or the product itself, on power cables.
 Otherwise, this may result in fire or electric shock.



outside building to prevent rain from flowing in.
This may cause water damaged inside the



 When mounting TV onto wall make sure to neatly install and isolate cabling from rear of TV as to not create possibility of electric shock /fire hazard.



 Do not plug too many electrical devices into a single multiple electrical outlet. Otherwise, this may result in fire due to over-heating.



 Do not drop the product or let it fall over when connecting external devices.
 Otherwise, this may result in injury or damage to the product.



 Keep the anti-moisture packing material or vinyl packing out of the reach of children. Anti-moisture material is harmful if swallowed. If swallowed by mistake, force the patient to vomit and visit the nearest hospital. Additionally, vinyl packing can cause suffocation. Keep it out of the reach of children.



 Do not let your children climb or cling onto the TV. Otherwise, the TV may fall over, which may cause serious injury.



 Dispose of used batteries carefully to ensure that a small child does not consume them. Please seek Doctor-Medical Attention immediately if child consumes batteries.



 Do not insert any metal objects/conductors (like a metal chopstick/cutlery/screwdriver) between power cable plug and input Wall Socket while it is connected to the input terminal on the wall. Additionally, do not touch the power cable right after plugging into the wall input terminal. You may be electrocuted. (Depending on model)



 Do not put or store inflammable substances near the product. There is a danger of combustion/explosion or fire due to careless handling of the inflammable substances.



 Do not drop metallic objects such as coins, hair pins, chopsticks or wire into the product, or inflammable objects such as paper and matches. Children must pay particular attention. Electrical shock, fire or injury can occur. If a foreign object is dropped into the product, unplug the power cord and contact the service centre.



 Do not spray water on the product or scrub with an inflammable substance (thinner or benzene). Fire or electric shock accident can occur.



 Do not allow any impact, shock or any objects to fall into the unit, and do not drop anything onto the screen.
 You may be injured or the product can be damaged.



 Never touch this product or antenna during a thunder or lighting storm. You may be electrocuted.



 Never touch the wall outlet when there is leakage of gas, open the windows and ventilate.
 It may cause a fire or a burn by a spark.



 Do not disassemble, repair or modify the product at your own discretion.
 Fire or electric shock accident can occur.
 Contact the service centre for check, calibration or repair.



- If any of the following occur, unplug the product immediately and contact your local service centre.
 - The product has been impacted by shock
 - The product has been damaged
 - Foreign objects have entered the product
 - The product produced smoke or a strange smell

This may result in fire or electric shock.



 Unplug the TV from AC mains wall socket if you do not intend to use the TV for a long period of time. Accumulated dust can cause fire hazard and insulation deterioration can cause electric leakage/ shock/fire.



 Apparatus shall not be exposed to dripping or splashing and no objects filled with liquids, such as vases, shall be placed on the apparatus.





CAUTION

Install the product where no radio wave occurs.



 There should be enough distance between an outside antenna and power lines to keep the former from touching the latter even when the antenna falls.
 This may cause an electric shock.



Do not install the product on places such as unstable shelves or inclined surfaces. Also avoid places where there is vibration or where the product cannot be fully supported. Otherwise, the product may fall or flip over, which may cause injury or damage to the product.



 If you install the TV on a stand, you need to take actions to prevent the product from overturning. Otherwise, the product may fall over, which may cause injury.



- If you intend to mount the product to a wall, attach VESA standard mounting interface (optional parts) to the back of the product. When you install the set to use the wall mounting bracket (optional parts), fix it carefully so as not to drop.
- Only use the attachments / accessories specified by the manufacturer.
- When installing the antenna, consult with a qualified service technician. If not installed by a qualified technician, this may create a fire hazard or an electric shock hazard.



 We recommend that you maintain a distance of at least 2 to 7 times the diagonal screen size when watching TV. If you watch TV for a long period of time, this may cause blurred vision.



 Only use the specified type of battery. This could cause damage to the remote control.



 Do not mix new batteries with old batteries. This may cause the batteries to overheat and leak.



- Batteries should not be exposed to excessive heat. For example, keep away from direct Sunlight, open fireplace and electric heaters.
- Do not place non-rechargeable batteries in charging device.
- Make sure there are no objects between the remote control and its sensor.



 Signal from Remote Control can be interrupted due to external/internal lighting eg Sunlight, fluorescent lighting. If this occurs turn off lighting or darken viewing area.



 When connecting external devices such as video game consoles, make sure the connecting cables are long enough. Otherwise, the product may fall over, which may cause injury or damage the product.



 Do not turn the product On/Off by plugging-in or unplugging the power plug to the wall outlet. (Do not use the power plug for switch.)
 It may cause mechanical failure or could give an electric shock.



- Please follow the installation instructions below to prevent the product from overheating.
 - The distance between the product and the wall should be more than 10 cm.
 - Do not install the product in a place with no ventilation (e.g., on a bookshelf or in a cupboard).
 - Do not install the product on a carpet or cushion.
 - Make sure the air vent is not blocked by a tablecloth or curtain.

Otherwise, this may result in fire.



 Take care not to touch the ventilation openings when watching the TV for long periods as the ventilation openings may become hot. This does not affect the operation or performance of the product.



 Periodically examine the cord of your appliance, and if its appearance indicates damage or deterioration, unplug it, discontinue use of the appliance, and have the cord replaced with an exact replacement part by an authorized servicer. Prevent dust collecting on the power plug pins or outlet.
 This may cause a fire hazard.



 Protect the power cord from physical or mechanical abuse, such as being twisted, kinked, pinched, closed in a door, or walked upon. Pay particular attention to plugs, wall outlets, and the point where the cord exits the appliance.



 Do not press strongly upon the panel with a hand or sharp object such as nail, pencil or pen, or make a scratch on it, as it may cause damage to screen.



 Avoid touching the screen or holding your finger(s) against it for long periods of time.
 Doing so may produce some temporary or permanent distortion/damage to screen.



 When cleaning the product and its components, unplug the power first and wipe it with a soft cloth. Applying excessive force may cause scratches or discolouration. Do not spray with water or wipe with a wet cloth. Never use glass cleaner, car or industrial shiner, abrasives or wax, benzene, alcohol etc., which can damage the product and its panel. Otherwise, this may result in fire, electric shock or product damage (deformation, corrosion or breakage).



 As long as this unit is connected to the AC wall outlet, it is not disconnected from the AC power source even if you turn off this unit by SWITCH. When unplugging the cable, grab the plug and unplug it, by pulling at the plug. Don't pull at the cord to unplug the power cord from the power board, as this could be hazardous.

 When moving the product, make sure you turn the power off first. Then, unplug the power cables, antenna cables and all connecting cables.

The TV set or power cord may be damaged, which may create a fire hazard or cause electric shock.



 When moving or unpacking the product, work in pairs because the product is heavy.
 Otherwise, this may result in injury.



 Contact the service centre once a year to clean the internal parts of the product. Accumulated dust can cause mechanical failure



 Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.



 If the product feels cold to the touch, there may be a small "flicker" when it is turned on. This is normal, there is nothing wrong with product.



 The panel is a high technology display product with resolution of two million to six million pixels. You may see tiny black dots and/or brightly coloured dots (red, blue or green) at a size of 1 ppm on the panel. This does not indicate a malfunction and does not affect the performance and reliability of the product.

This phenomenon also occurs in thirdparty products and is not subject to exchange or refund.



 You may find different brightness and colour of the panel depending on your viewing position(left/right/top/down).
 This phenomenon occurs due to the characteristic of the panel. It is not related with the product performance, and it is not malfunction.



 Displaying a still image (e.g., broadcasting channel logo, on-screen menu, scene from a video game) for a prolonged time may cause damage to the screen, resulting in retention of the image, which is known as image sticking. The warranty does not cover the product for image sticking. Avoid displaying a fixed image on your television's screen for a prolonged period (2 or more hours for LCD, 1 or more hours for Plasma).

Also, if you watch the TV at a ratio of 4:3 for a long time, image sticking may occur on the borders of the panel.
This phenomenon also occurs in third-party products and is not subject to exchange or refund.



Generated Sound
"Cracking" noise: A cracking noise that occurs when watching or turning off the TV is generated by plastic thermal contraction due to tempera-ture and humidity. This noise is common for products where thermal deformation is required. Electrical circuit humming/panel buzzing: A low level noise is generated from a high-speed switching circuit, which supplies a large amount of current to operate a product. It varies depend-ing on the product.
This generated sound does not affect the performance and reliability of the product.

Viewing 3D Imaging (Only 3D models)



WARNING

Viewing Environment

Viewing Time

 When watching 3D contents, take 5 -15 minute breaks every hour. Viewing 3D contents for a long period of time may cause headache, dizziness, fatigue or eye strain.

Those that have a photosensitive seizure or chronic illness

- Some users may experience a seizure or other abnormal symptoms when they are exposed to a flashing light or particular pattern from 3D contents.
- Do not watch 3D videos if you feel nausea, are pregnant and/ or have a chronic illness such as epilepsy, cardiac disorder, or blood pressure disease, etc.
- 3D Contents are not recommended to those who suffer from stereo blindness or stereo anomaly. Double images or discomfort in viewing may be experienced.
- If you have strabismus (cross-eyed), amblyopia (weak eyesight) or astigmatism, you may have trouble sensing depth and easily feel fatigue due to double images. It is advised to take frequent breaks than the average adult.
- If your eyesight varies between your right and left eye, revise your eyesight prior to watching 3D contents.

Symptoms which require discontinuation or refraining from watching 3D contents

- Do not watch 3D contents when you feel fatigue from lack of sleep, overwork or drinking.
- When these symptoms are experienced, stop using/watching 3D contents and get enough rest until the symptom subsides.
 - Consult your doctor when the symptoms persist. Symptoms may include headache, eyeball pain, dizziness, nausea, palpitation, blurriness, discomfort, double image, visual inconvenience or fatigue.



CAUTION

Viewing Environment

Viewing Distance

 Maintain a distance of at least twice the screen diagonal length when watching 3D contents. If you feel discomfort in viewing 3D contents, move further away from the TV.

Viewing Age

- Infants/Children
 - Usage/ Viewing 3D contents for children under the age of 5 are prohibited.
 - Children under the age of 10 may overreact and become overly excited because their vision is in development (for example: trying to touch the screen or trying to jump into it. Special monitoring and extra attention is required for children watching 3D contents.
 - Children have greater binocular disparity of 3D presentations than adults because the distance between the eyes is shorter than one of adults. Therefore they will perceive more stereoscopic depth compared to adults for the same 3D image.

Teenagers

- Teenagers under the age of 19 may react with sensitivity due to stimulation from light in 3D contents. Advise them to refrain from watching 3D contens for a long time when they are tired.
- Elderly
 - The elderly may perceive less 3D effect compared to the youth. Do not sit closer to the TV than the recommended distance.

Cautions when using the 3D glasses

- Make sure to use LG 3D glasses. Otherwise, you may not be able to view 3D videos properly.
- Do not use 3D glasses instead of your normal glasses, sunglasses or protective goggles.
- Using modified 3D glasses may cause eye strain or image distortion.
- Do not keep your 3D glasses in extremely high or low temperatures. It will cause deformation.
- The 3D glasses are fragile and are easy to be scratched. Always use a soft, clean piece of cloth when wiping the lenses. Do not scratch the lenses of the 3D glasses with sharp objects or clean/wipe them with chemicals.



- · Image shown may differ from your TV.
- Your TV's OSD (Ón Screen Display) may differ slightly from that shown in this manual.
- The available menus and options may differ from the input source or product model that you are using.
- New features may be added to this TV in the future.
- The TV can be placed in standby mode in order to reduce the power consumption. And the
 TV should be turned off if it will not be watched for some time, as this will reduce energy
 consumption.
- The energy consumed during use can be significantly reduced if the level of brightness of the
 picture is reduced, and this will reduce the overall running cost.

INSTALLATION PROCEDURE

- 1 Open the package and make sure all the accessories are included.
- 2 Attach the stand to the TV set.
- 3 Connect an external device to the TV set.
- 4 Make sure the network connection is available. You can use the TV network functions only when the network connection is made.

ASSEMBLING AND PREPARING

Unpacking

Check your product box for the following items. If there are any missing accessories, contact the local dealer where you purchased your product. The illustrations in this manual may differ from the actual product and item.




CAUTION

- Do not use any unapproved items to ensure the safety and product life span.
- Any damages or injuries by using unapproved items are not covered by the manufacturer's warranty
- Some models have a thin film attached on to the screen and this must not be removed.



NOTE

- The items supplied with your product may vary depending on the model.
- Product specifications or contents of this manual may be changed without prior notice due to upgrade of product functions.
- For an optimal connection, HDMI cables and USB devices should have bezels less than 10 mm thick and 18 mm width. Use an extension cable that supports USB 2.0 if the USB cable or USB memory stick does not fit into your TV's USB port.





*A ≤ 10 mm

*B ≤ 18 mm



Remote control, batteries (AAA) The remote control will not be included

will not be included for all sales market. (Depending on model) (See p. 31, 32)





Magic remote control, batteries (AA)

(Depending on model) (See p. 33, 34)



Owner's manual



Power Cord (Depending on model)









Dual play glasses (Depending on model)

Cinema 3D Glasses The number of 3D glasses may differ depending on the model or country.



Composite video cable (See p. 28, 29)









Tag on (Depending on model)

Isolator (Depending on model) (See p. 12)

Cable holder (Depending on model) (See p. 23)

Cable Management 2EA (Only LA79**) (See p. 23)







Stand Screws 4EA, M4 x L16 (Only LA86**) (See p. 17)



Stand Screws 4EA, M4 x L20 (Only LA960*, LA98**) (See p. 17, 19)



Stand Screws 6EA, M5 x L16 (Only LA98**) (See p. 19)




Stand Base/ Stand Body (Only LA79**) (See p. 17)



Stand Base (Only LA86**, LA960*) (See p. 17)



Stand Base (Only LA97**) (See p. 18)



Stand Base/ Stand Body (Only LA98**) (See p. 19)










Wall mount inner spacers 4EA (Only LA97**) (See p. 22)



Wall mount screws 4EA, M6 x L54 (Only 55LA97**) (See p. 22)



Wall mount screws 4EA, M8 x L44 (Only 65LA97**) (See p. 22)




Video call camera (Only 70LA86**)



NOTE

- · Antenna Isolator Installation Guide
 - Use this to install TV in a place where there is a voltage difference between TV Set and GND of antenna signal.
 - » If there is a voltage difference between TV Set and GND of antenna signal, the antenna contact might be heated and excessive heat might cause an accident.
 - You can improve the safety when watching TV by efficiently removing power voltage from TV
 antenna. It is recommended to mount the isolator to the wall. If it cannot be mounted to the
 wall, mount it on the TV. Avoid disconnecting the antenna Isolator after installation.
 - Before starting, be sure that the TV antenna is connected.

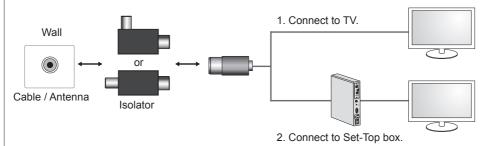

Connect one end of the isolator to cable/antenna jack and the other to TV set or set-top box.

"Equipment connected to the protective earthing of the building installation through the mains connection or through other equipment with a connection to protective earthing - and to a cable distribution system using coaxial cable, may in some circumstances create a fire hazard. Connection to a cable distribution system has therefore to be provided through a device providing electrical isolation below a certain frequency range (galvanic isolator, see EN 60728-11)"

When applying the RF Isolator, a slight loss of signal sensitivity can occur.

Separate purchase

Separate purchase items can be changed or modified for quality improvement without any notification. Contact your dealer to buy these items.

These devices only work with certain models.




AG-F***DP
Dual play glasses




AG-F*** Cinema 3D glasses



AN-MR400 Magic remote



AN-VC5** Video call camera



LG Audio device




Tag on

Compatibility	LA79**, LA965*, LA98**	LA86**	LA960*, LA97**
AG-F***DP Dual play glasses	•	•	•
AG-F*** Cinema 3D glasses	•	•	•
AN-MR400 Magic remote	•	•	•
AN-VC5** Video call camera	•	(Depending on model)	
LG Audio device	•	•	•
Tag on	•	•	•


The model name or design may be changed depending on the upgrade of product functions, manufacturer's circumstances or policies.

Parts and buttons


A type : LA79**

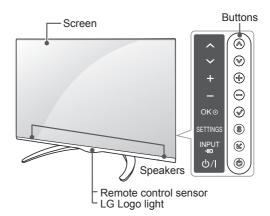


B type: LA86**, LA960*

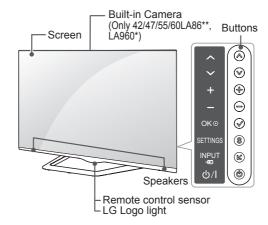


C type : LA965*

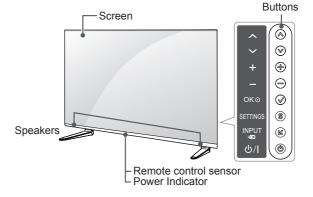

D type : LA97**

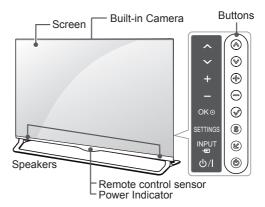

E type : LA98**

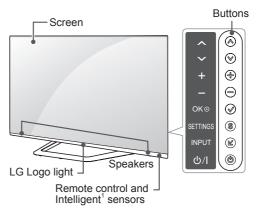

Button	Description	
^ ~	Scrolls through the saved programmes.	
+ -	Adjusts the volume level.	
✓	Selects the highlighted menu option or confirms an input.	
S	Accesses the main menu, or saves your input and exits the menus.	
K	Changes the input source.	
Ф	Turns the power on or off.	

1 Intelligent sensor - Adjusts the image quality and brightness based on the surrounding environment.



CAUTION -

 To avoid possible SPEAKER damage or degradation in performance please keep contact of TV/Speaker out of reach of Children. (Only LA965*)





NOTE

 You can set the LG Logo light to on or off by selecting OPTION in the main menus. (Depending on model)

Lifting and moving the TV

Please note the following advice to prevent the TV from being scratched or damaged and for safe transportation regardless of its type and size.




CAUTION

- Avoid touching the screen at all times, as this may result in damage to the screen.
- It is recommended to move the TV in the box or packing material that the TV originally came in
- Before moving or lifting the TV, disconnect the power cord and all cables.
- When holding the TV, the screen should face away from you to avoid damage.



 Hold the top and bottom of the TV frame firmly. Make sure not to hold the transparent part, speaker, or speaker grill area.

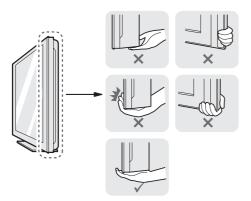

- When transporting a large TV, there should be at least 2 people.
- When transporting the TV by hand, hold the TV as shown in the following illustration.





- When transporting the TV, do not expose the TV to jolts or excessive vibration.
- When transporting the TV, keep the TV upright, never turn the TV on its side or tilt towards the left or right.
- Do not apply excessive pressure to cause flexing /bending of frame chassis as it may damage screen.

Setting up the TV


Image shown may differ from your TV.


Attaching the stand

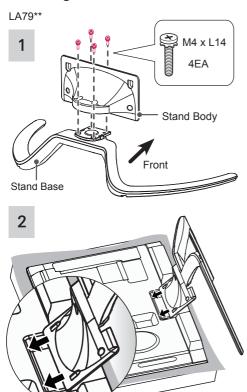

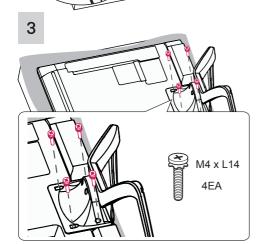






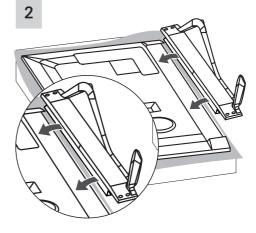



LA965*

1




1 2

- 1 Attach the stand to the TV using the upper mounting hole on the back of the TV.
- 2 Attach the stand to the TV using the lower connection on the back of the TV.




NOTE


 Be sure to attach the upper mounting hole first, and then attach the lower connection second.

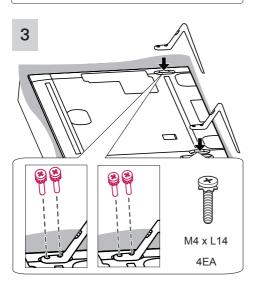


LA97**



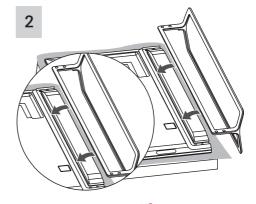








NOTE

 The stand screws are already attached at the back of the TV. Please use these attached screws to assemble the TV and stand. (Only 65LA97**)


M4 x L20 4EA

LA98**


1

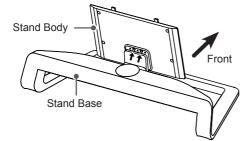


2

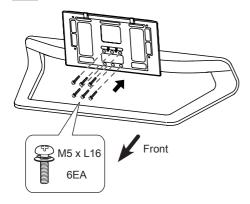

3







CAUTION

- When attaching the stand to the TV set, place the screen facing down on a cushioned table or flat surface to protect the screen from scratches.
- Make sure that the screws are fastened completely. (If they are not fastened securely enough, the TV may tilt forward after being installed.)
 Do not fasten the screws with excessive force otherwise they may be worn out and become loose.




NOTE

 Remove the stand before installing the TV on a wall mount by performing the stand attachment in reverse.

Mounting on a table

- Lift and tilt the TV into its upright position on a table.
 - Leave a 10 cm (minimum) space from the wall for proper ventilation.



2 Connect the power cord to a wall outlet.




CAUTION

 Do not place the TV near or on sources of heat, as this may result in fire or other damage.


Adjusting the angle of the TV to suit view

(This feature is not available for all models.)


Swivel 15 degrees to the left or right and adjust the angle of the TV to suit your view. (Only LA79**)




Swivel 10 degrees to the left or right and adjust the angle of the TV to suit your view. (Only 42/47LA86**)



Swivel 8 degrees to the left or right and adjust the angle of the TV to suit your view. (Only 55/60LA86**)



Swivel 7 degrees to the left or right and adjust the angle of the TV to suit your view. (Only LA98**)






CAUTION

 When adjusting the angle of the product, watch out for your fingers.


» Personal injury may occur if hands or fingers are pinched. If the product is tilted too much, it may fall, causing damage or injury.



Securing the TV to a wall

(This feature is not available for all models.)





- Insert and tighten the eye-bolts, or TV brackets and bolts on the back of the TV.
 - If there are bolts inserted at the evebolts position, remove the bolts first.
- Mount the wall brackets with the bolts to the
 - Match the location of the wall bracket and the eve-bolts on the rear of the TV.
- Connect the eye-bolts and wall brackets tightly with a sturdy rope.

Make sure to keep the rope horizontal with the flat surface



CAUTION

· Make sure that children do not climb on or hang on the TV.



NOTE

- Use a platform or cabinet that is strong and large enough to support the TV securely.
- Brackets, bolts and ropes are not provided. You can obtain additional accessories from your local dealer.




WARNING

- If a television is not positioned in a sufficiently stable location, it can be potentially hazardous due to falling. Many injuries, particularly to children, can be avoided by taking simple precautions such as:
 - » Using cabinets or stands recommended by the manufacturer of the television.
 - » Only using furniture that can safely support the television.
 - » Ensuring the television is not overhanging the edge of the supporting furniture.
 - » Not placing the television on tall furniture (for example, cupboards or bookcases) without anchoring both the furniture and the television to a suitable support.
 - » Not standing the televisions on cloth or other materials placed between the television and supporting furniture.
 - » Educating children about the dangers of climbing on furniture to reach the television or its controls.

Mounting on a wall

Attach an optional wall mount bracket at the rear of the TV carefully and install the wall mount bracket on a solid wall perpendicular to the floor. When you attach the TV to other building materials, please contact qualified personnel. LG recommends that wall mounting be performed by a qualified professional installer.





(Only LA97**)


- When TV Wall Mount installation is applied please consider adequate spacing around perimeter of TV and at bottom for proper operation of Sliding Speaker compartment. Inadequate space may interfere with normal operation of Sliding Speaker compartment.
- » Sliding Speaker OPEN state lowers/ extends to (25-35mm) below TV.

Make sure to use screws and wall mount bracket that meet the VESA standard. Standard dimensions for the wall mount kits are described in the following table.

Separate purchase(Wall Mounting Bracket)

Model	47/55LA79** 42/47/55LA86** 47/55LA96**	65LA965* 55LA97** 60LA86**
VESA (A x B)	400 x 400	400 x 400
Standard screw	M6	M6
Number of screws	4	4
Wall mount bracket	LSW430B MSW240	LSW430B
Model	65LA97** 84LA98**	70LA86**
VESA (A x B)	600 x 400	400 x 400
Standard screw	M8	M8
Number of screws	4	4
Wall mount bracket	LSW630B	LSW430BX

Wall mount bracket			
LSW430B LSW430BX			
LSW630B			
MSW240			






CAUTION

- Disconnect the power first, and then move or install the TV. Otherwise electric shock may occur.
- If you install the TV on a ceiling or slanted wall, it may fall and result in severe injury. Use an authorised LG wall mount and contact the local dealer or qualified personnel.
- Do not over tighten the screws as this may cause damage to the TV and void your warranty.
- Use the screws and wall mounts that meet the VESA standard. Any damages or injuries by misuse or using an improper accessory are not covered by the manufacturer's warranty.



NOTE

- Use the screws that are listed on the VESA standard screw specifications.
- The wall mount kit includes an installation manual and necessary parts.
- The wall mount brackét is not provided. You can obtain additional accessories from your local dealer.
- The length of screws may differ depending on the wall mount. Make sure to use the proper length.
- For more information, refer to the manual supplied with the wall mount.
- When attaching the LG wall mount bracket to the TV, do not use wall mount spacers and wall mount screws provided with the LG wall mount bracket. Please use wall mount inner spacers and wall mount screws provided with the TV accessory. (Only LA97**)





CAUTION

 Be sure to use the existing Components provided with the TV. Do NOT use components supplied with Wall Bracket to install Wall Bracket to TV. (Only LA97**)






Wall mount inner spacers 4EA

Wall mount screws 4EA, M6 x L54 (Only 55LA97**) 4EA, M8 x L44 (Only 65LA97**)


Tidying cables


- 1 Gather and bind the cables with the Cable Holder and the Cable Management.
- 2 Fix the Cable Management firmly to the TV.

(Only LA79**)

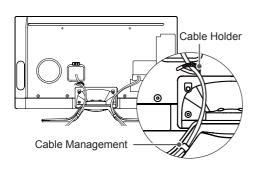


(Only LA86**, LA960*)

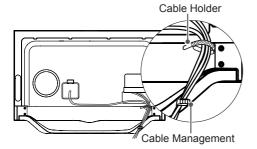

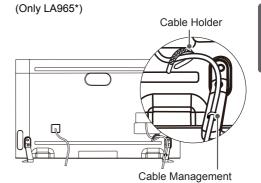


(Only LA98**)

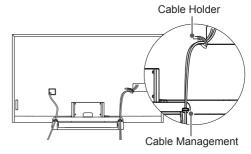

Gather and bind the cables with the Cable Holder.

(Only LA97**)






CAUTION

 Do not move the TV by holding the cable holders, as the cable holders may break, and injuries and damage to the TV may occur.

Using Sliding Speaker

(Only LA97**)



- When TV is turned ON the hidden Speaker slides out from inside the TV.
- 2 Go to More ⇒ Settings ⇒ SOUND ⇒ Sliding Speaker to set Sliding Speaker.
 - » If you are mounting TV on entertainment table/unit please make sure there is enough clearance between yourself and foreign objects to allow operation of internal sliding speaker otherwise injury to yourself or damage to TV could occur.
 - » Please Do NOT use excessive force during operation of internal sliding Speaker as it may cause it to malfunction.
 - » Make sure Speaker is in OPEN position when viewing TV as sound will be abnormal or distorted.
- When transporting the TV, make sure that the Sliding Speaker is closed. If the Sliding Speaker is open when being transported, it may become damaged, resulting in malfunction.
 - » To close the Sliding Speaker, go to SOUND ⇒ Sliding Speaker, select 'Open when TV is turned on' and press the POWER button

Using Built-in Camera

(Only 42/47/55/60LA86**, LA960*, LA97**)

This TV does not support the use of an external camera.




NOTE

- Before using the built-in camera, you
 must recognize the fact that you are
 legally responsible for the use or misuse
 of the camera by the relevant national
 laws including the criminal law.
- The relevant laws include the Personal Information Protection law which regulates the processing and transferring of personal information and the law which regulates the monitoring by camera in a workplace and other places.
- When using the built-in camera, avoid questionable, illegal, or immoral situations. Other than at public places or events, consent to be photographed may be required. We suggest avoiding the following situations:
 - (1) Using the camera in areas where the use of camera is generally prohibited such as restroom, locker room, fitting room and security area.
 - (2) Using the camera while causing the infringement of privacy.
 - (3) Using the camera while causing the violation of the relevant regulations or laws.


Preparing Built-in Camera

Pull up the slide at the back of the TV.

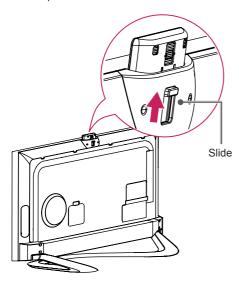





- Remove the protective film before using the built-in camera.
- You can adjust the angle of the camera with the angle adjustment lever on the back of the built-in camera (within 5 degrees vertically).

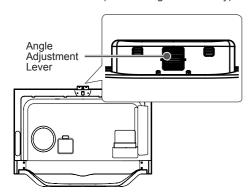

Push down the built-in camera when you are not using it.



Name of Parts of Built-in Camera

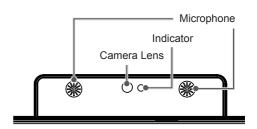

Checking the Camera's Shooting Range

- Press the **SMART** button on the remote control to display the More menu.
- Select Settings from the More menu and then press the Wheel(OK) button.
 Go to OPTION → Camera Setting Help
- and press the Wheel(OK) button.



NOTE -

The optimal distance from the camera to use the motion recognition function is between 1.5 and 4.5 m.

MAKING CONNECTIONS

This section on **MAKING CONNECTIONS** mainly uses diagrams for the LA86** models.

Connect various external devices to the TV and switch input modes to select an external device. For more information of external device's connection, refer to the manual provided with each device.

Available external devices are: HD receivers, DVD players, VCRs, audio systems, USB storage devices, PC, gaming devices, and other external devices.




NOTE

- The external device connection may differ from the model. (LA965*, LA97**, LA98** : HDMI/DVI IN 1/2/3)
- Connect external devices to the TV regardless of the order of the TV port.
- If you record a TV programme on a DVD recorder or VCR, make sure to connect the TV signal input cable to the TV through a DVD recorder or VCR. For more information of recording, refer to the manual provided with the connected device.
- Refer to the external equipment's manual for operating instructions.
- If you connect a gaming device to the TV, use the cable supplied with the gaming device.
- In PC mode, there may be noise associated with the resolution, vertical pattern, contrast or brightness. If noise is present, change the PC output to another resolution, change the refresh rate to another rate or adjust the brightness and contrast on the PICTURE menu until the picture is clear.
- In PC mode, some resolution settings may not work properly depending on the graphics card.

Antenna connection

Connect the TV to a wall antenna socket with an RF cable (75 Ω).

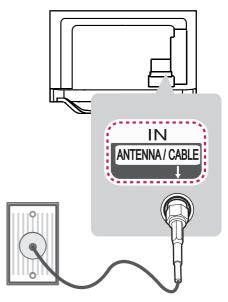




NOTE

- Use a signal splitter to use more than 2 TVs.
- If the image quality is poor, install a signal amplifier properly to improve the image quality.
- If the image quality is poor with an antenna connected, try to realign the antenna in the correct direction.
- An antenna cable and converter are not supplied.
- Supported DTV Audio: MPEG, Dolby Digital, Dolby Digital Plus
- Display of Ultra HD(3840 x 2160 pixels) content compatible; additional device capable of processing Ultra HD source content (in 2D or 3D) may be required and will be sold separately.

HDMI connection

Transmits the digital video and audio signals from an external device to the TV. Connect the external device and the TV with the HDMI cable as shown.

Choose any HDMI input port to connect. It does not matter which port you use.

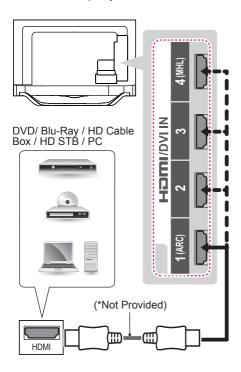

NOTE


- It is recommended to use the TV with the HDMI connection for the best image quality.
- Use the latest High Speed HDMI™ Cable with CEC (Customer Electronics Control) function.
- High Speed HDMI™ Cables are tested to carry an HD signal up to 1080p and higher.
- Supported HDMI Audio format: Dolby Digital, DTS, PCM (Up to 192 KHz, 32 KHz/44.1 KHz/48 KHz/88 KHz/96 KHz/176 KHz/192 KHz).

ARC (Audio Return Channel)

- An external audio device that supports SIMPLINK and ARC must be connected using HDMI/DVI IN 1 (ARC) port.
- When connected with a high-speed HDMI cable, the external audio device that supports ARC outputs optical SPDIF without additional optical audio cable and supports the SIMPLINK function.

Headphone connection

Transmits the headphone signal from the TV to an external device. Connect the external device and the TV with the headphone as shown on the following illustration.

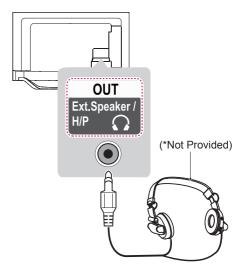




- AUDIO menu items are disabled when connecting a headphone.
- When changing AV MODE with a headphone connected, the change is applied to video but not to audio. (Depending on model)
- Optical Digital Audio Out is not available when connecting a headphone.
- Headphone impedance: 16 Ω
- Max audio output of headphone: 0.624 mW to 1.04 mW
- · Headphone jack size: 0.35 cm

DVI to HDMI connection

Transmits the digital video signal from an external device to the TV. Connect the external device and the TV with the DVI-HDMI cable as shown. To transmit an audio signal, connect an audio cable.

Choose any HDMI input port to connect. It does not matter which port you use.

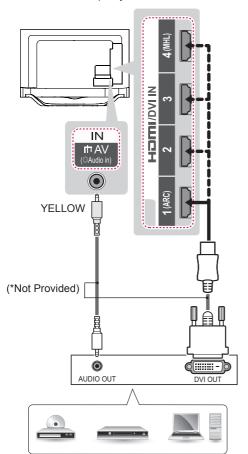


DVD/ Blu-Ray / HD Cable Box / PC



- Depending on the graphics card, DOS mode may not work if a HDMI to DVI Cable is in use.
- When using the HDMI/DVI cable, Single link is only supported.

Component connection

Transmits analog video and audio signals from an external device to the TV. Connect the external device and the TV with a component gender cable as shown.

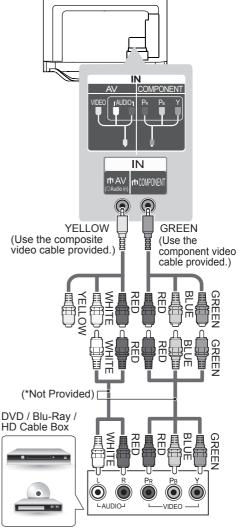




 If cables are not installed correctly, it could cause this image to display in black and white or with distorted colours.

Composite connection

Transmits analog video and audio signals from an external device to the TV. Connect the external device and the TV with the composite gender cable as shown.

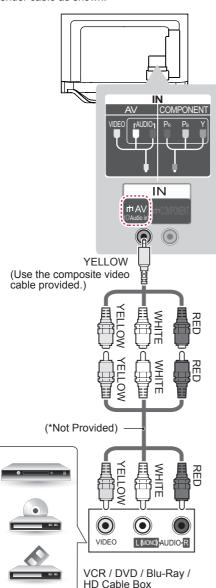


Audio connection

You may use an optional external audio system instead of the built-in speaker.

Digital optical audio connection

Transmits a digital audio signal from the TV to an external device. Connect the external device and the TV with the optical audio cable as shown.

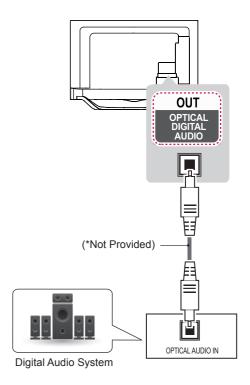




NOTE

- Do not look into the optical output port. Looking at the laser beam may damage your vision.
- Audio with ACP (Audio Copy Protection) function may block digital audio output.
- If you are using Built-in Sound bar (NB7530), please set the Settings ⇒ SOUND ⇒ Sound Out ⇒ Built-in Sound bar. (Only LA9800-TC)

USB connection

Connect a USB storage device such as a USB flash memory, external hard drive, or a USB memory card reader to the TV and access the SmartShare menu to use various multimedia files

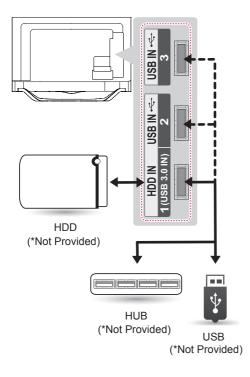


NOTE

- Some USB Hubs may not work. If a USB device connected using a USB Hub is not detected, connect it to the USB port on the TV directly.
- Connect the external power source if your USB is needed.

MHL connection

Mobile High-definition Link (MHL) is an interface for transmitting digital audiovisual signals from mobile phones to television sets.

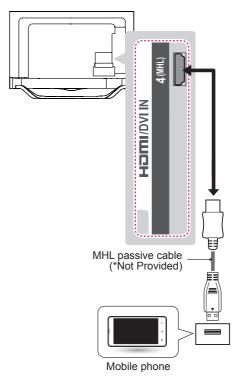




NOTE

- Connect the mobile phone to the HDMI/ DVI IN 4 (MHL) port to view the phone screen on the TV. (LA965*, LA97**, LA98** : HDMI/DVI IN 3 (MHI))
- The MHL passive cable is needed to connect the TV and a mobile phone.
- This only works for the MHL-enabled phone.
- Some applications can be operated by the remote control.
- For some mobile phones supporting MHL, you can control with the magic remote control.
- Remove the MHL passive cable from the TV when:
 - » the MHL function is disabled
 - » your mobile device is fully charged in standby mode

REMOTE CONTROL

The descriptions in this manual are based on the buttons on the remote control. Please read this manual carefully and use the TV correctly. To replace batteries, open the battery cover, replace batteries (1.5 V AAA) matching the ⊕ and ⊝ ends to the label inside the compartment, and close the battery cover. To remove the batteries, perform the installation actions in reverse.







CAUTION

- Do not mix old and new batteries, as this may damage the remote control.
- In Analogue TV and some countries, some remote control buttons may not work.
- The remote control will not be included for all sales market.

Make sure to point the remote control toward the remote control sensor on the TV. (Depending on model)

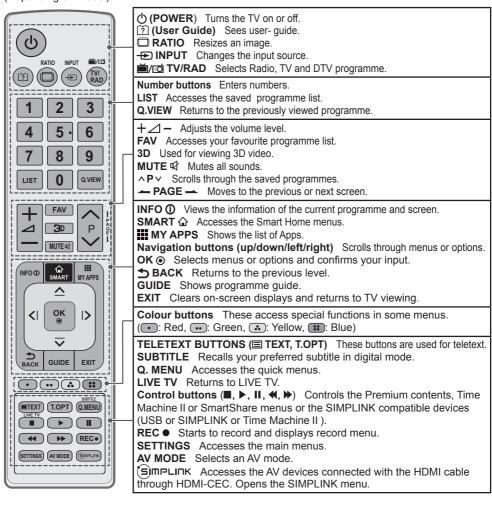

(Depending on model)

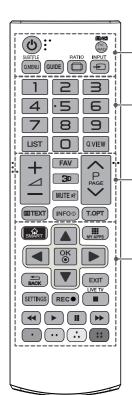

((POWER) Turns the TV on or off.

TV/RAD Selects Radio, TV and DTV programme.

SUBTITLE Recalls your preferred subtitle in digital mode.

Q. MENU Accesses the quick menus.

GUIDE Shows programme quide.

RATIO Resizes an image.

► INPUT Changes the input source.

Number buttons Enters numbers.

LIST Accesses the saved programme list.

Q.VIEW Returns to the previously viewed programme.

+ ∠ - Adjusts the volume level.

FAV Accesses your favourite programme list.

3D Used for viewing 3D video.

^ P ∨ Scrolls through the saved programmes.

^ PAGE ✓ Moves to the previous or next screen.

TELETEXT BUTTONS (IETEXT, T.OPT) These buttons are used for teletext. **INFO** ① Views the information of the current programme and screen.

SMART Accesses the Smart Home menus.

MY APPS Shows the list of Apps.

Navigation buttons (up/down/left/right) Scrolls through menus or options.

OK

Selects menus or options and confirms your input.

BACK Returns to the previous level.

EXIT Clears on-screen displays and returns to TV viewing.

SETTINGS Accesses the main menus.

REC • Starts to record and displays record menu.

LIVE TV Returns to LIVE TV.

Control buttons (■, ▶, II, ◄, ▶) Controls the Premium contents, Time Machine II or SmartShare menus or the SIMPLINK compatible devices (USB or SIMPLINK or Time Machine II).

Colour buttons These access special functions in some menus.

(Red. : Green. : Yellow. : Blue)

MAGIC REMOTE CONTROL FUNCTIONS

This item is not included for all models.

When the message "Magic Remote Control battery is low. Change the battery." is displayed, replace the battery. To replace batteries, open the battery cover, replace batteries (1.5 V AA) matching \bigoplus and \bigoplus ends to the label inside the compartment, and close the battery cover. Be sure to point the remote control toward the remote control sensor on the TV.




To remove the batteries, perform the installation actions in reverse.




CAUTION

- Do not mix old and new batteries, as this may damage the remote control.
- In Analogue TV and some countries, some remote control buttons may not work.

(Only LA79**, LA86**, LA960*, LA98**)

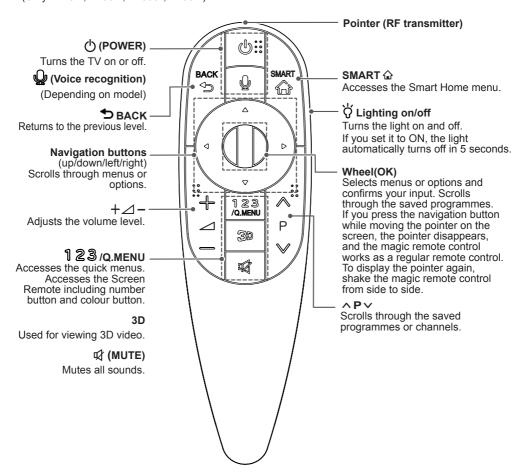

(Only LA965*, LA97**)

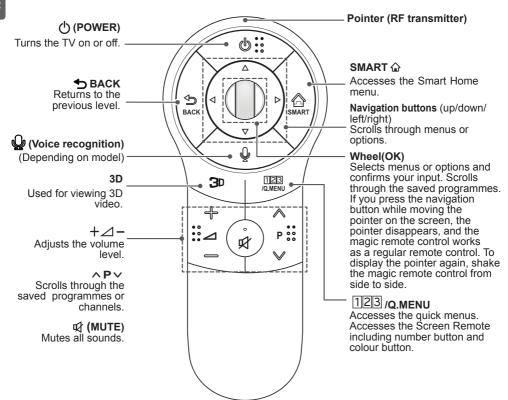

Voice recognition (Depending on model)

Network connection is required to use the voice recognition function. The recognition rate may vary depending on the user's characteristics (voice, pronunciation, intonation and speed) and the environment (noise and TV volume).

- 1 Press the Voice recognition button.
- 2 Speak when the voice display window appears on the left of the TV screen.
 - The voice recognition may fail when you speak too fast or too slow.
 - Use the Magic remote control no further than 10 cm from your face.

Registering Magic Remote Control

It is necessary to 'pair' (register) the magic remote control to your TV before it will work.

How to register the Magic Remote Control



- 1 To register automatically, turn the TV on and press the **Wheel(OK)** button. When registration is completed, the completion message appears on the screen.
- 2 If registration fails, turn the TV off and back on, then press the Wheel(OK) button to complete registration.

How to re-register the Magic Remote Control




- 1 Press and hold the **DBACK** and **SMART** buttons together for 5 seconds to reset, then register it by following "How to register the Magic Remote Control" above.
- 2 To re-register the Magic Remote Control, press and hold the **BACK** button for 5 seconds toward the TV. When registration is completed, the completion message appears on the screen.

How to use Magic Remote Control



- If the pointer disappears, move the Magic Remote Control slightly to left or right. Then, it will automatically appear on the screen.
 - » If the pointer has not been used for a certain period of time, it will disappear.
- 2 You can move the pointer by aiming the Pointer Receiver of the Magic Remote Control at your TV then move it left, right, up or down.
 - » If the pointer does not work properly, leave the Magic Remote Control for 10 seconds then use it again.

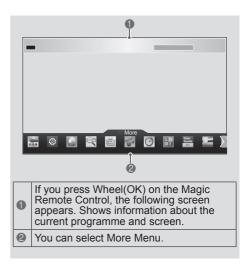

Precautions to Take when Using the Magic Remote Control

- Use the Magic Remote Control within the maximum communication distance (10 m).
 Using the Magic Remote Control beyond this distance, or with an object obstructing it, may cause a communication failure.
- A communication failure may occur due to nearby devices. Electrical devices such as a microwave oven or wireless LAN product may cause interference, as these use the same bandwidth (2.4 GHz) as the Magic Remote Control.
- The Magic Remote Control may be damaged or may malfunction if it is dropped or receives a heavy impact.
- Take care not to bump into nearby furniture or other people when using the Magic Remote Control.
- Manufacturer and installer cannot provide service related to human safety as the applicable wireless device has possibility of electric wave interference.
- It is recommended that an Access Point (AP) be located more than 1 m away from the TV. If the AP is installed closer than 1 m, the Magic Remote Control may not perform as expected due to frequency interference.

USING THE USER GUIDE

User Guide allows you to more easily access the detailed TV information.

- 1 Press the **SMART** ⊕ button to access the Smart Home menu.
- 2 Select User Guide and press Wheel(OK).






User Guide



 You can also access the User Guide by pressing (User Guide) in the remote control. (Depending on model)

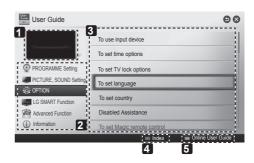

- Shows the current watching programme or input source screen.
- Allows to select the category you want.
- 3 Allows to select the item you want. You can use ^/∨(Navigation buttons) to move between pages.
- Allows to browse the description of the function you want from the index.
- Provides the detailed information on the functions of LG Smart TV when the Internet is connected.

 (It may not be available depending on the country/language.)



- Shows the description of the selected menu. You can use ^/∨ (Navigation buttons) to move between pages.
- Moves to the selected menu directly from the User Guide.

MAINTENANCE

Cleaning your TV

Clean your TV regularly to keep the best performance and to extend the product lifespan.



CAUTION

- Make sure to turn the power off and disconnect the power cord and all other cables first.
- When the TV is left unattended and unused for a long time, disconnect the power cord from the wall outlet to prevent possible damage from lightning or power surges.

Screen, frame, cabinet and stand

To remove dust or light dirt, wipe the surface with a dry, clean, and soft cloth.

To remove major dirt, wipe the surface with a soft cloth dampened in clean water or a diluted mild detergent. Then wipe immediately with a dry cloth.



CAUTION

- Avoid touching the screen at all times, as this may result in damage to the screen.
- Do not push, rub, or hit the screen surface with your fingernail or a sharp object, as this may result in scratches and image distortions.
- Do not use any chemicals as this may damage the product.
- Do not spray liquid onto the surface. If water enters the TV, it may result in fire, electric shock, or malfunction.

Power cord

Remove the accumulated dust or dirt on the power cord regularly.

TROUBLESHOOTING

Problem	Solution
Cannot control the TV with the remote control.	 Check the remote control sensor on the product and try again. Check if there is any obstacle between the product and the remote control. Check if the batteries are still working and properly installed (to to , c) to).
No image display and no sound is produced.	 Check if the product is turned on. Check if the power cord is connected to a wall outlet. Check if there is a problem in the wall outlet by connecting other products.
The TV turns off suddenly.	 Check the power control settings. The power supply may be interrupted. Check if the Sleep Timer or Off Time feature is activated in the TIME settings. If there is no signal while the TV is on, the TV will turn off automatically after 15 minutes of inactivity.
When connecting to the PC (HDMI DVI), 'No signal' or 'Invalid Format' is displayed.	 Turn the TV off/on using the remote control. Reconnect the HDMI cable. Restart the PC with the TV on.

ENVIRONMENTAL INFORMATION

(India only)

WEEE



Disposal of your old appliance

- 1. When this crossed-out wheeled bin symbol is attached to a product it means the product is covered by the e-waste (Management and Handling) Rules, 2011.
- 2. All electrical and electronic products should be disposed of separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities.
- The correct disposal of your old appliance will help prevent potential negative consequences for the environment and human health.
- For more detailed information about disposal of your old appliance, please contact your city office, waste disposal service or the shop where you purchased the product.
- 5. This product does not contain any of the hazardous substances as specified in the rule 13 (1) and (2) of the e-waste (Management and Handling) Rules, 2011.

पर्यावरणीय जानकारी

WEEE



अपने पुराने उपकरण का निपटान

- जब यह काटे गये पिहये वाले बिन का चिहन किसी उत्पाद के साथ संलग्न होता है तो इसका अर्थ है उत्पाद ई—अपिशष्ट (प्रबंधन और हथालन) नियम २०११ के अंतर्गत सिम्मिलित किया गया है।
- २. सभी इलेक्ट्रिकल एवं और इलेक्ट्रानिक उत्पादों को सरकार या स्थानीय अधिकारियों द्वारा नियुक्त नगरपालिका अपशिष्ट धारा से अलग प्राधिकृत की गई संग्रह सुविधाओं के माध्यम से निपटाया जाना चाहिए।
- ३. सही तरीके से अपने पुराने उपकरणों का निपटान वातावरण और मानवीय स्वास्थ्य के लिए संभावित नकारात्मक परिणामों को रोकने में मदद करेगा।
- अपने पुराने उपकरणों के निपटान के संबंध में और अधिक विसतृत जानकारी के लिए, कृपया अपने नगर कार्यालय, अपिशष्ट निपटान सेवा या जहां से आपने उत्पाद खरीदा था, वहां संपर्क करें।
- ५. इस उत्पाद में ई—अपशिष्ट(प्रबंधन और हथालन) नियम, २०११ के नियम १३ (१) और (२) में निर्देशानुसार कोई भी हानिकारक पदार्थ भाामिल नहीं है।

SPECIFICATIONS

Wireless LAN module(TWFM-B006D) specification			
Standard	IEEE802.11a/b/g/n		
	2400 to 2483.5 MHz		
Frequency Range	5150 to 5250 MHz		
	5725 to 5850 MHz (for Non EU)		
	802.11a: 11 dBm		
	802.11b: 14 dBm		
Output Power (Max.)	802.11g: 10.5 dBm		
	802.11n - 2.4GHz: 11 dBm		
	802.11n - 5GHz: 12.5 dBm		
Blueto	oth module (BM-LDS401) specification		
Standard	Bluetooth Version 3.0		
Frequency Range	2400 ~ 2483.5 MHz		
Output Power (Max.) 10 dBm or lower			

Because band channel used by the country could be different, the user can not change or adjust the operating frequency and this product is set for the regional frequency table.



Product specifications may be changed without prior notice due to upgrade of product functions. For the power supply and power consumption, refer to the label attached to the product.

		47LA79**	55LA79**		
MODELS		47LA7900-TA 47LA790Y-TA	55LA7900-TA 55LA790Y-TA		
Dimensions (W x H x D) With stand (mm) Without stand(mm)		1077.0 x 690.0 x 285.0	1247.0 x 789.0 x 326.0		
		1077.0 x 625.0 x 34.1	1247.0 x 722.0 x 34.1		
Weight	With stand (kg)	18.5	25.3		
	Without stand (kg)	16.8	23.0		
Power require	ement	AC 100-240 V~ 50 / 60 Hz	AC 100-240 V~ 50 / 60 Hz		
		42LA86**	47LA86**	55LA86**	
MODELS		42LA8610-TA 42LA8600-TA 42LA861Y-TA 42LA860Y-TA	47LA8610-TA 47LA8600-TA 47LA861Y-TA 47LA860Y-TA	55LA8610-TA 55LA8600-TA 55LA861Y-TA 55LA860Y-TA	
Dimensions (W x H x D)	With stand (mm)	948.0 x 631.0 x 269.0	1059.0 x 694.0 x 269.0	1229.0 x 788.0 x 316.0	
(VV X II X D)	Without stand(mm)	948.0 x 562.0 x 35.1	1059.0 x 625.0 x 35.1	1229.0 x 721.0 x 35.1	
Weight	With stand (kg)	15.6	19.3 26.2		
	Without stand (kg)	13.5	17.2	23.4	
Power require	ement	AC 100-240 V~ 50 / 60 Hz	AC 100-240 V~ 50 / 60 Hz	AC 100-240 V~ 50 / 60 Hz	
		60LA86**	70LA86**		
MODELS		60LA8610-TA	70LA8610-TA		
WODELS		60LA8600-TA 60LA861Y-TA 60LA860Y-TA	70LA8600-TA 70LA861Y-TA 70LA860Y-TA		
Dimensions	With stand (mm)	60LA861Y-TA	70LA861Y-TA		
	With stand (mm) Without stand(mm)	60LA861Y-TA 60LA860Y-TA	70LA861Y-TA 70LA860Y-TA		
Dimensions	. ,	60LA861Y-TA 60LA860Y-TA 1338.0 x 850.0 x 316.0	70LA861Y-TA 70LA860Y-TA 1582.0 x 997.0 x 401.0		
Dimensions (W x H x D)	Without stand(mm)	60LA861Y-TA 60LA860Y-TA 1338.0 x 850.0 x 316.0 1338.0 x 782.0 x 35.1	70LA861Y-TA 70LA860Y-TA 1582.0 x 997.0 x 401.0 1582.0 x 922.0 x 57.9		
Dimensions (W x H x D)	Without stand(mm) With stand (kg) Without stand (kg)	60LA861Y-TA 60LA860Y-TA 1338.0 x 850.0 x 316.0 1338.0 x 782.0 x 35.1 30.5	70LA861Y-TA 70LA860Y-TA 1582.0 x 997.0 x 401.0 1582.0 x 922.0 x 57.9 46.1		
Dimensions (W x H x D)	Without stand(mm) With stand (kg) Without stand (kg)	60LA861Y-TA 60LA860Y-TA 1338.0 x 850.0 x 316.0 1338.0 x 782.0 x 35.1 30.5 27.7	70LA861Y-TA 70LA860Y-TA 1582.0 x 997.0 x 401.0 1582.0 x 922.0 x 57.9 46.1 42.1		
Dimensions (W x H x D)	Without stand(mm) With stand (kg) Without stand (kg)	60LA861Y-TA 60LA860Y-TA 1338.0 x 850.0 x 316.0 1338.0 x 782.0 x 35.1 30.5 27.7 AC 100-240 V~ 50 / 60 Hz	70LA861Y-TA 70LA860Y-TA 1582.0 x 997.0 x 401.0 1582.0 x 922.0 x 57.9 46.1 42.1 AC 100-240 V~ 50 / 60 Hz		
Dimensions (W x H x D) Weight Power require MODELS Dimensions	Without stand(mm) With stand (kg) Without stand (kg)	60LA861Y-TA 60LA860Y-TA 1338.0 x 850.0 x 316.0 1338.0 x 782.0 x 35.1 30.5 27.7 AC 100-240 V~ 50 / 60 Hz 47LA960* 47LA9600-TA	70LA861Y-TA 70LA860Y-TA 1582.0 x 997.0 x 401.0 1582.0 x 922.0 x 57.9 46.1 42.1 AC 100-240 V~ 50 / 60 Hz 55LA960* 55LA9600-TA		
Dimensions (W x H x D) Weight Power require	Without stand(mm) With stand (kg) Without stand (kg) ement	60LA861Y-TA 60LA860Y-TA 1338.0 x 850.0 x 316.0 1338.0 x 782.0 x 35.1 30.5 27.7 AC 100-240 V~ 50 / 60 Hz 47LA960* 47LA9600-TA 47LA960Y-TA	70LA861Y-TA 70LA860Y-TA 1582.0 x 997.0 x 401.0 1582.0 x 922.0 x 57.9 46.1 42.1 AC 100-240 V~ 50 / 60 Hz 55LA960* 55LA9600-TA 55LA960Y-TA		
Dimensions (W x H x D) Weight Power require MODELS Dimensions	Without stand(mm) With stand (kg) Without stand (kg) ement With stand (mm)	60LA861Y-TA 60LA860Y-TA 1338.0 x 850.0 x 316.0 1338.0 x 782.0 x 35.1 30.5 27.7 AC 100-240 V~ 50 / 60 Hz 47LA960* 47LA960Y-TA 1050.0 x 684.0 x 266.0	70LA861Y-TA 70LA860Y-TA 1582.0 x 997.0 x 401.0 1582.0 x 922.0 x 57.9 46.1 42.1 AC 100-240 V~ 50 / 60 Hz 55LA960* 55LA9600-TA 55LA960Y-TA 1220.0 x 781.0 x 305.0		
Dimensions (W x H x D) Weight Power require MODELS Dimensions (W x H x D)	Without stand(mm) With stand (kg) Without stand (kg) ement With stand (mm) Without stand(mm)	60LA861Y-TA 60LA860Y-TA 1338.0 x 850.0 x 316.0 1338.0 x 782.0 x 35.1 30.5 27.7 AC 100-240 V~ 50 / 60 Hz 47LA960* 47LA960Y-TA 1050.0 x 684.0 x 266.0 1050.0 x 616.0 x 31.2	70LA861Y-TA 70LA860Y-TA 1582.0 x 997.0 x 401.0 1582.0 x 922.0 x 57.9 46.1 42.1 AC 100-240 V~ 50 / 60 Hz 55LA960* 55LA960Y-TA 1220.0 x 781.0 x 305.0 1220.0 x 712.0 x 31.5		
Dimensions (W x H x D) Weight Power require MODELS Dimensions (W x H x D)	Without stand(mm) With stand (kg) Without stand (kg) ement With stand (mm) With stand (mm) With stand (kg) Without stand (kg)	60LA861Y-TA 60LA860Y-TA 1338.0 x 850.0 x 316.0 1338.0 x 782.0 x 35.1 30.5 27.7 AC 100-240 V~ 50 / 60 Hz 47LA960* 47LA960Y-TA 1050.0 x 684.0 x 266.0 1050.0 x 616.0 x 31.2	70LA861Y-TA 70LA860Y-TA 1582.0 x 997.0 x 401.0 1582.0 x 922.0 x 57.9 46.1 42.1 AC 100-240 V~ 50 / 60 Hz 55LA960* 55LA960Y-TA 1220.0 x 781.0 x 305.0 1220.0 x 712.0 x 31.5 21.0		

		55LA965*	65LA965*	
MODELS		55LA9650-TA 55LA965Y-TA	65LA9650-TA 65LA965Y-TA	
Dimensions With stand (mm)		1234.0 x 790.0 x 261.0	1455.0 x 912.0 x 294.0	
(W x H x D)	Without stand(mm)	1234.0 x 755.0 x 41.9	1455.0 x 881.0 x 43.5	
Weight	With stand (kg)	26.1	36.8	
	Without stand (kg)	24.6	35.0	
Power require	ement	AC 100-240 V~ 50 / 60 Hz	AC 100-240 V~ 50 / 60 Hz	
		55LA97**	65LA97**	84LA98**
MODELS		55LA9700-TA	65LA9700-TA	84LA9800-TA
		55LA970Y-TA	65LA970Y-TA	84LA9800-TC 84LA980Y-TA 84LA980Y-TC
Dimensions	With stand (mm)			84LA980Y-TA
Dimensions (W x H x D)	With stand (mm) Without stand(mm)	55LA970Y-TA	65LA970Y-TA	84LA980Y-TA 84LA980Y-TC
2	, ,	55LA970Y-TA 1230.0 x 781.0 x 274.0 1230.0 x 714.0(*743.0)	65LA970Y-TA 1451.0 x 910.0 x 325.0 1451.0 x 838.0(*868.0)	84LA980Y-TA 84LA980Y-TC 1916.0 x 1214.0 x 399.0
(W x H x D)	Without stand(mm)	55LA970Y-TA 1230.0 x 781.0 x 274.0 1230.0 x 714.0(*743.0) x 40.2	65LA970Y-TA 1451.0 x 910.0 x 325.0 1451.0 x 838.0(*868.0) x 40.8	84LA980Y-TA 84LA980Y-TC 1916.0 x 1214.0 x 399.0 1916.0 x 1120.0 x 39.9

*: Sliding Speaker open state

Environment condition	Operating Temperature	0 °C to 40 °C
	Operating Humidity	Less than 80 %
	Storage Temperature	-20 °C to 60 °C
Storage Humidity		Less than 85 %

	Digital TV (Depending on Country)	Analogue TV (Depending on Country)
Television System	DVB-T	PAL B/B, PAL B/G, PAL D/K, PAL-I SECAM B/G, SECAM D/K NTSC-M
Programme Coverage	VHF, UHF	VHF, UHF, CATV
Maximum number of storable programmes	DVB-T & Analo	gue TV : 1,500
External Antenna Impedance	75 Ω	

HDMI/DVI-DTV supported mode (Only LA965*, LA97**, LA98** - HDCP1.4)

Resolution	Horizontal Frequency (kHz)	Vertical Frequency (Hz)
640 x 480	31.469 31.5	59.94 60
720 x 480	31.469 31.5	59.94 60
720 x 576	31.25	50
1280 x 720	37.5 44.96 45	50 59.94 60
1920 x 1080	33.72 33.75 28.125 26.97 27 33.716 33.75 56.25 67.43 67.5	59.94 60 50 23.97 24 29.976 30.00 50 59.94 60
3840 x 2160 (Only LA965* LA97**, LA98**)	53.95 54 56.25 61.43 67.5	23.976 24.00 25.00 29.970 30.00

HDMI/DVI-PC supported mode (Only LA965*, LA97**, LA98** - HDCP1.4)

Resolution	Horizontal Frequency (kHz)	Vertical Frequency (Hz)
640 x 350	31.468	70.09
720 x 400	31.469	70.08
640 x 480	31.469	59.94
800 x 600	37.879	60.31
1024 x 768	48.363	60.00
1152 x 864	54.348	60.053
1360 x 768	47.712	60.015
1280 x 1024	63.981	60.020
1920 x 1080	67.50	60.00
3840 x 2160 (Only LA965* LA97**, LA98**)	54 56.25 67.5	24.00 25.00 30.00

 You may experience video/sound lag when playing the ultra HD content (resolution: 3840 x 2160) on your computer, depending on your computer specifications.

Component port connecting information

Component ports on the TV	Y	P _B	P _R
Video output ports on	Υ	P _B	P _R
DVD player	Y	B-Y	R-Y
	Y	Cb	Cr
	Υ	Pb	Pr

Signal	Component
480i/576i	0
480p/576p	0
720p/1080i	0
1080p	O (50 Hz / 60 Hz only)

3D supported mode (Only 3D models)

• Video, which is input as below media contents is switched into the 3D screen automatically.

3D supported mode automatically					
Input	Signal	Horizontal Frequency (kHz)	Vertical Frequency (Hz)	Playable 3D video format	
640 ×	640 x 480	31.469 / 31.5		Top & Bottom, Side by Side(Half), Side by Side(Full)	
	040 x 400	62.938 / 63	59.94 / 60	Frame Packing, Line Alternative	
	480p	31.469 / 31.5		Top & Bottom, Side by Side(Half), Side by Side(Full)	
		62.938 / 63		Frame Packing, Line Alternative	
	576p	31.25	50	Top & Bottom, Side by Side(Half), Side by Side(Full)	
	'	62.5		Frame Packing, Line Alternative	
		37.50	50	Top & Bottom,	
	720p	44.96 / 45	59.94 / 60	Side by Side(Half), Side by Side(Full)	
	720p	75	50	Frame Packing, Line Alternative	
		89.91 / 90	59.94 / 60	Traine Facking, Line Alternative	
HDMI	1080i	28.125	50	Top & Bottom,	
		33.72 / 33.75	59.94 / 60	Side by Side(Half), Side by Side(Full)	
		56.25	50	Frame Packing, Field Alternative	
		67.432 / 67.5	59.94 / 60	Traine Facking, Field Alternative	
		26.97 / 27	23.97 / 24		
		28.125	25	Top & Bottom, Side by Side(Half), Side by Side(Full)	
		33.716 / 33.75	29.976 / 30		
	1080p	43.94 / 54	23.97 / 24		
	Тобор	56.25	25	Frame Packing, Line Alternative	
		67.432 / 67.5	29.976 / 30		
		56.25	50	Ton 9 Dottom Cida by Cida/U-15	
		67.432 / 67.5	59.94 / 60	Top & Bottom, Side by Side(Half)	
USB	1080p	33.75	30	Side by Side(Half), Top & Bottom,	
DLNA	1080p	33.75	30	Checker Board, MPO(Photo), JPS(Photo)	

3D supported mode manually					
	Signal				
Input	Resolution	Horizontal Frequency (kHz)	Vertical Frequency (Hz)	Playable 3D video format	
DTV	HD / SD	-	-		
ATV(CVBS)	SD	-	-		
Component	HD / SD	-	-	2D to 3D, Side by Side(Half), Top & Bottom	
	1024 x 768	48.36			
	1360 x 768	47.71			
HDMI-PC	1920 x 1080	67.5	60	2D to 3D, Side by Side(Half), Top & Bottom, Checker Board, Frame Sequential, Row Interleaving, Column Interleaving	
	3840 x 2160	54 56.25 67.5	24.00 25.00 30.00	2D to 3D, Top-and-Bottom(Half), Side-by-side(Half)	
	Others	-	-	2D to 3D, Side by Side(Half), Top & Bottom	
	480P	31.5	60	00 to 00 0ids to 0ids/UsIO	
	576P	31.25	50	2D to 3D, Side by Side(Half), Top & Bottom, Checker Board,	
	720p	37.5	50	Frame Sequential, Row Interleaving, Column Interleaving	
	720p	45	60	Column Interioaving	
	1080i	28.12	50	2D to 3D, Side by Side(Half),	
	10001	33.75	60	Top & Bottom	
		27	24	2D to 3D, Side by Side(Half),	
HDMI-DTV		28.12	25	Top & Bottom, Checker Board,	
	1090n	33.75	30	Row Interleaving, Column Interleaving	
	1080p	56.25	50	2D to 3D, Side by Side(Half), Top & Bottom, Checker Board,	
		67.5	60	Frame Sequential, Row Interleaving, Column Interleaving	
	2160p	53.95 54 56.25 61.43 67.5	23.976 24.00 25.00 29.970 30.00	2D to 3D, Top-and-Bottom(Half), Side-by-Side(Half)	

3D supported mode manually						
		Signal				
Input	Resolution	Horizontal Frequency (kHz)	Vertical Frequency (Hz)	Playable 3D video format		
	Under 704 x 480	-	-	2D to 3D		
	Over 704 x 480 interlaced	-	-	2D to 3D, Side by Side(Half), Top & Bottom		
USB ,DLNA (Movie)	Over 704 x 480 progressive	-	50 / 60	2D to 3D, Side by Side(Half), Top & Bottom, Checker Board, Frame Sequential, Row Interleaving, Column Interleaving		
	Over 704 x 480 progressive	-	others	2D to 3D, Side by Side(Half), Top & Bottom, Checker Board, Row Interleaving, Column Interleaving		
LICE DI NA	Under 320 x 240	-	-	2D to 3D		
USB, DLNA (Photo)	Over 320 x 240	-	-	2D to 3D, Side by Side(Half), Top & Bottom		
Miracast/ Widi	1024 x 768p	-	30 / 60			
	1280 x 720p	-	30 / 60	2D to 3D, Side by Side(Half), Top & Bottom		
	1920 x 1080p	-	30 / 60			
	Others	-	-	2D to 3D		

[ULTRA HD] Video Supported Codec

- Maximum: 3840 X 2160 @30p
- Maximum data transfer rate 3840 X 2160(H.264 L5.1): 50 Mbps (megabits per second) 3840 X 2160(HEVC L5.0): 25 Mbps (megabits per second)

Extension	Codec		
	Video	H.264/AVC	
.mkv / .mp4 / .ts	Audio	Dolby Digital, Dolby Digital Plus	
	Video	HEVC	
.ts	Audio	Dolby Digital, Dolby Digital Plus	



NOTE

- TV software update may enable new type of H.265(HEVC) codec.
- Video files created by some encoders may not be played back.
- LG ULTRA HD TV may not be compatible with certain types of HEVC codec contents.
- Video files in formats other than the ones specified here may not be played back.
- Playback of video files stored on the USB device that do not support High Speed, may not work properly. Some subtitles created by users may not work properly.
- The video and subtitle files should be placed in the same folder. For subtitles to display correctly, the video and subtitle files must have the same name.
- It supports the playback through USB only.
- "ULTRA HD Upgrade Kit" may require for certain LG ULTRA HD TV to access HEVC codec contents.

LICENSES

Supported licenses may differ by model. For more information about licenses, visit www.lg.com.



Manufactured under license from Dolby Laboratories. "Dolby" and the double-D symbol are trademarks of Dolby Laboratories.



The terms HDMI and HDMI High-Definition Multimedia interface, and the HDMI logo are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.



ABOUT DIVX VIDEO: DivX[®] is a digital video format created by DivX, LLC, a subsidiary of Rovi Corporation. This is an official DivX Certified[®] device that plays DivX video. Visit *divx.com* for more information and software tools to convert your files into DivX video.

ABOUT DIVX VIDEO-ON-DEMAND: This DivX Certified® device must be registered in order to play purchased DivX Video-on-Demand (VOD) movies. To obtain your registration code, locate the DivX VOD section in your device setup menu. Go to *vod.divx.com* for more information on how to complete your registration.

"DivX Certified® to play DivX® video up to HD 1080p, including premium content."

"DivX®, DivX Certified® and associated logos are trademarks of Rovi Corporation or its subsidiaries and are used under license."

"Covered by one or more of the following U.S. patents: 7,295,673; 7,460,668; 7,515,710; 7,519,274"



Manufactured under license under U.S. Patent Nos: 5,956,674; 5,974,380; 6,487,535 & other U.S. and worldwide patents issued & pending. DTS, the Symbol & DTS and the Symbol together are registered trademarks & DTS 2.0+Digital Out is a trademark of DTS, Inc. Product includes software. © DTS, Inc. All Rights Reserved.

OPEN SOURCE SOFTWARE NOTICE

To obtain the source code under GPL, LGPL, MPL and other open source licenses, that is contained in this product, please visit http://opensource.lge.com.

In addition to the source code, all referred license terms, warranty disclaimers and copyright notices are available for download.

LG Electronics will also provide open source code to you on CD-ROM for a charge covering the cost of performing such distribution (such as the cost of media, shipping and handling) upon email request to opensource@lge.com. This offer is valid for three (3) years from the date on which you purchased the product.

EXTERNAL CONTROL DEVICE SETUP

To obtain the external control device setup information, please visit www.lg.com.




Record the model number and serial number of the TV.
Refer to the label on the back cover and quote this information to your dealer when requiring any service.

MODEL		
CEDIAL		

(Only DTV)

Digital Video
Broadcasting

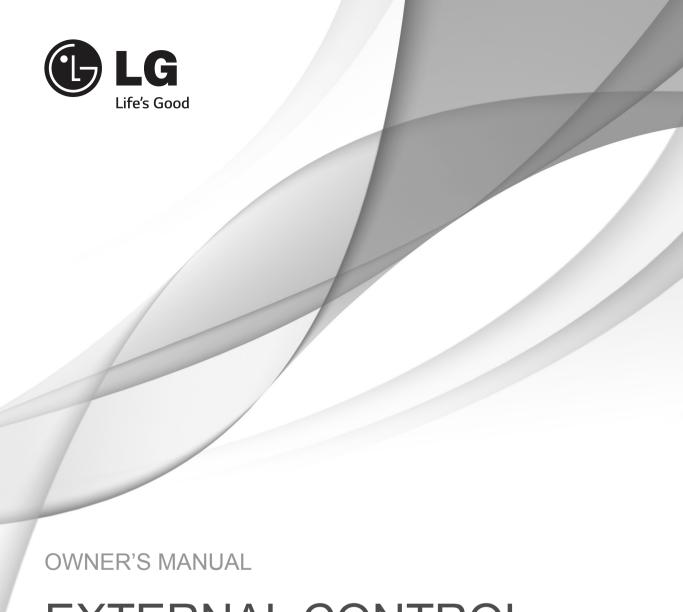

EXTERNAL CONTROL DEVICE SETUP

Please read this manual carefully before operating the set and retain it for future reference.

KEY CODES

• This feature is not available for all models.

Code (Hexa)	Function	Note	Code (Hexa)	Function	Note
00	CH +, PR +	R/C Button	45	Q.Menu	R/C Button
01	CH -, PR -	R/C Button	4C	List, - (ATSC Only)	R/C Button
02	Volume +	R/C Button	53	List	R/C Button
03	Volume -	R/C Button	5B	Exit	R/C Button
06	> (Arrow Key / Right Key)	R/C Button	61	Blue	R/C Button
07	< (Arrow Key / Left Key)	R/C Button	63	Yellow	R/C Button
08	Power	R/C Button	71	Green	R/C Button
09	Mute	R/C Button	72	Red	R/C Button
0B	Input	R/C Button	79	Ratio / Aspect Ratio	R/C Button
0E	SLEEP	R/C Button	91	AD (Audio Description)	R/C Button
0F	TV, TV/RAD	R/C Button	7A	User Guide	R/C Button
10 - 19	* Number Key 0 - 9	R/C Button	7C	Smart/ Home	R/C Button
1A	Q.View / Flashback	R/C Button	7E	Simplink	R/C Button
1E	FAV (Favorite Channel)	R/C Button	8E	▶► (Forward)	R/C Button
20	Text (Teletext)	R/C Button	8F	◀ (Rewind)	R/C Button
21	T. Opt (Teletext Option)	R/C Button	AA	Info	R/C Button
28	Return (BACK)	R/C Button	AB	Program Guide	R/C Button
30	AV (Audio/ Video) Mode	R/C Button	В0	► (Play)	R/C Button
39	Caption/Subtitle	R/C Button	B1	■ (Stop/ Live TV)	R/C Button
40	Λ (Arrow Key/ Cursor Up)	R/C Button	ВА	II (Freeze/Slow Play/Pause)	R/C Button
41	V (Arrow Key/ Cursor Down)	R/C Button	BD	• (REC)	R/C Button
42	My Apps	R/C Button	DC	3D	R/C Button
43	Menu / Settings	R/C Button	9F	App/ *	R/C Button
44	OK / Enter	R/C Button			

^{*} Key code 4C (0x4C) is available on ATSC/ISDB models which use major/minor channel. (For South Korea, Japan, North America, Latin America except Colombia models)

EXTERNAL CONTROL DEVICE SETUP

· Image shown may differ from your TV.

Connect the USB to Serial converter/RS-232C input jack to an external control device (such as a computer or an A/V control system) to control the product's functions externally.

Note: There are several ways to connect TV based on model's support port.

- * Please be advised that not all models support these connectivity.
- * Cable is not provided.

USB to Serial converter with USB Cable

USB Type



- LGTV supports PL2303 chip-based (Vendor ID : 0x0557, Product ID : 0x2008) USB to serial converter which is not made nor provided by LG.
- · It can be purchased from computer stores that carry accessories for IT support professionals.

RS-232C With RS232C Cable

DE9 (D-Sub 9pin) Type

 You need to purchase the RS-232C (DE9, D-Sub 9pin female-to-female type) to RS-232C cable required for the connection between the PC and the TV, which is specified in the manual.




• This connection can only be used for the following models: 55/65LA97**, 84LA98**

Phone jack Type

- You need to purchase the phone-jack to RS-232 cable required for the connection between the PC and the TV, which is specified in the manual.
- * For other models, connect to the USB port.




This connection can only be used for the following models: 55/47/39LN5450-UA, 55/50/47/42LN5400-UA, 42/39/32LN5300-UA, and 37/32LN530B-UA.



- This connection can only be used for the following models: 60PN6550-UA, 50/60PN6500-UA, 50/60PN5300-UF, and 42/50PN4500-UA.


Customer Computer



(Serial port)

RS-232C configurations

3-Wire Configurations(Not standard)

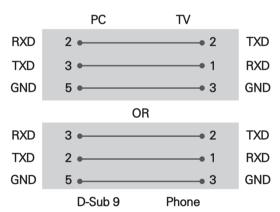

Set ID

For Set ID number, see "Real Data Mapping" on p. 6

- 1. Press **SETTINGS** to access the main menus.
- 2. Press the Navigation buttons to scroll to **OPTION** and press **OK**.
- 3. Press the Navigation buttons to scroll to **SET ID** and press **OK**.
- 4. Scroll left or right to select a set ID number and select CLOSE. The adjustment range is 1-99.
- 5. When you are finished, press EXIT.

Communication Parameters

• Baud rate: 9600 bps (UART)

Data length: 8 bitsParity: None

Stop bit : 1 bit

Communication code : ASCII code
Use a crossed (reverse) cable.

Command reference list

(Depending on model)

	COMMAND1	COMMAND2	DATA (Hexadecimal)		COMMAND1	COMMAND2	DATA (Hexadecimal)
01. Power*	k	а	00 to 01	13. Balance	k	t	00 to 64
02. Aspect Ratio	k	С	(See p.7)	14. Color (Colour) Temperature	x	u	00 to 64
03. Screen Mute	k	d	(See p.7)	15. ISM Method (Only Plasma TV)	j	p	(See p.8)
04. Volume Mute	k	е	00 to 01	16. Energy Saving	j	q	00 to 05
05. Volume Control	k	f	00 to 64	17. Tune Command	m	а	(See p.8)
06. Contrast	k	g	00 to 64	18. Channel (Programme) Add/Del(Skip)	m	b	00 to 01
07. Brightness	k	h	00 to 64	19. Key	m	С	Key Codes
08. Color/ Colour	k	i	00 to 64	20. Control Back Light, Control Panel Light	m	g	00 to 64
09. Tint	k	j	00 to 64	21. Input select (Main)	x	b	(See p.10)
10. Sharpness	k	k	00 to 32	22. 3D (Only 3D models)	х	t	(See p.11)
11. OSD Select	k	1	00 to 01	23. Extended 3D (Only 3D models)	х	V	(See p.11)
12. Remote Control Lock Mode	k	m	00 to 01				

^{*} Note: During USB operations such as DivX or EMF, all commands except Power(ka) and Key(mc) are not executed and treated as NG.

With RS232C cable, TV can communicate "ka command" in power-on or power-off status. but with USB-to-Serial converter cable, the command works only if TV is on.

Transmission / Receiving Protocol

Transmission

[Command1][Command2][][Set ID][][Data][Cr]

[Command 1]: First command to control the TV. (j, k, m or x)

[Command 2]: Second command to control the TV.

[Set ID] : You can adjust the [Set ID] to choose desired monitor ID number in option menu.

Adjustment range in TV is 1 to 99. If [Set ID] value is selected to '0', every connected set

can be controlled.

* [Set ID] is indicated as decimal (1 to 99) on menu and as Hexadecimal (0x00 to 0x63) on

transmission/receiving protocol.

[DATA] : To transmit command data (hexadecimal). Transmit 'FF' data to read status of command.

[Cr] : Carriage Return - ASCII code '0x0D'

[] : Space – ASCII code '0x20'

OK Acknowledgement

[Command2][][Set ID][][OK][Data][x]

* The set transmits ACK (acknowledgement) based on this format when receiving normal data. At this time, if the data is data read mode, it indicates present status data. If the data is data write mode, it returns the data of the PC computer.

Error Acknowledgement

[Command2][][Set ID][][NG][Data][x]

* The set transmits ACK (acknowledgement) based on this format when receiving abnormal data from nonviable functions or communication errors.

Data 00: Illegal Code

Real data mapping (Hexadecimal → Decimal)

- * When you enter the [data] in hexadecimal, refer to following conversion table.
- * Channel Tune (ma) Command uses two-byte hexadecimal value([data]) to select channel number.

```
      00 : Step 0
      32 : Step 50 (Set ID 50)
      FE : Step 254

      01 : Step 1 (Set ID 1)
      33 : Step 51 (Set ID 51)
      FF : Step 255

      ...
      ...
      ...

      0A : Step 10 (Set ID 10)
      63 : Step 99 (Set ID 99)
      01 00 : Step 256

      ...
      ...

      0F : Step 15 (Set ID 15)
      C7 : Step 199
      27 0E : Step 9998

      10 : Step 16 (Set ID 16)
      C8 : Step 200
      27 0F : Step 9999
```

* Commands may work differently depending on model and signal.

01. Power (Command: k a)

► To control Power *On or Off of the set.

Transmission[k][a][][Set ID][][Data][Cr]

Data 00 : Power Off 01 : *Power On

Ack [a][][Set ID][][OK/NG][Data][x]

► To Show TV is Power On or *Off

Transmission [k][a][][Set ID][][FF][Cr] Ack [a][][Set ID][][OK][Data][x]

- * Similarly, if other functions transmit 'FF' data based on this format, Acknowledgement feedback presents status about each function.
- * With RS232C cable, TV can communicate "ka command" in power-on or power-off status. but with USB-to-Serial converter cable, the command works only if TV is on.

02. Aspect Ratio (Command: k c) (Main Picture Size)

➤ To adjust the screen format. (Main picture format) You can also adjust the screen format using the Aspect Ratio in the Q.MENU. or PICTURE menu.

Transmission [k][c][][Set ID][][Data][Cr]

Data 01: Normal screen 07: 14:9

(Latin America (Europe, Colombia, Midexcept Colombia East, Asia except South Only) Korea and Japan)

06 : Set by Program/ 10 to 1F : Cinema Zoom 1 Original to 16

Ack [c][][Set ID][][OK/NG][Data][x]

- * Using the PC input, you select either 16:9 or 4:3 screen aspect ratio.
- * In DTV/HDMI/Component mode (high-definition), Just Scan is available.
- * Full wide mode may work differently based on model and is supported for DTV fully, and ATV, AV partially.

03. Screen Mute (Command: k d)

► To select screen mute on/off.

Transmission [k][d][][Set ID][][Data][Cr]

Data 00 : Screen mute off (Picture on), Video mute off

01: Screen mute on (Picture off)

10: Video mute on

Ack [d][][Set ID][][OK/NG][Data][x]

* In case of video mute on only, TV will display On Screen Display(OSD). But, in case of Screen mute on, TV will not display OSD.

04. Volume Mute (Command: k e)

To control volume mute on/off. You can also adjust mute using the MUTE button on remote control.

Transmission [k][e][][Set ID][][Data][Cr]

Data 00 : Volume mute on (Volume off)
01 : Volume mute off (Volume on)

Ack [e][][Set ID][][OK/NG][Data][x]

05. Volume Control (Command: k f)

► To adjust volume.

You can also adjust volume with the volume buttons on remote control.

Transmission [k][f][][Set ID][][Data][Cr]

Data Min: 00 to Max: 64

Ack [f][][Set ID][][OK/NG][Data][x]

06. Contrast (Command: kg)

► To adjust screen contrast.

You can also adjust contrast in the PICTURE menu.

Transmission [k][g][][Set ID][][Data][Cr]

Data Min: 00 to Max: 64

Ack [g][][Set ID][][OK/NG][Data][x]

07. Brightness (Command: k h)

► To adjust screen brightness.

You can also adjust brightness in the PICTURE menu.

Transmission [k][h][][Set ID][][Data][Cr]

Data Min: 00 to Max: 64

Ack [h][][Set ID][][OK/NG][Data][x]

08. Color/Colour (Command: ki)

➤ To adjust the screen Color(Colour). You can also adjust colour in the PICTURE menu.

Transmission [k][i][][Set ID][][Data][Cr]

Data Min: 00 to Max: 64

Ack [i][][Set ID][][OK/NG][Data][x]

09. Tint (Command: k j)

➤ To adjust the screen tint.
You can also adjust tint in the PICTURE menu.

Transmission [k][j][][Set ID][][Data][Cr]

Data Red: 00 to Green: 64

Ack [j][][Set ID][][OK/NG][Data][x]

10. Sharpness (Command: k k)

➤ To adjust the screen sharpness.
You can also adjust sharpness in the PICTURE menu.

Transmission [k][k][][Set ID][][Data][Cr]

Data Min: 00 to Max: 32

Ack [k][][Set ID][][OK/NG][Data][x]

11. OSD Select (Command: k I)

► To select OSD (On Screen Display) on/off when controlling remotely.

Transmission [k][l][][Set ID][][Data][Cr]

Data 00 : OSD off 01 : OSD on

Ack [I][][Set ID][][OK/NG][Data][x]

- 12. Remote control lock mode (Command: k m)
- ► To lock the front panel controls on the monitor and remote control.

Transmission [k][m][][Set ID][][Data][Cr]

Data 00 : Lock off 01 : Lock on

Ack [m][][Set ID][][OK/NG][Data][x]

 If you are not using the remote control, use this mode.

When main power is off & on (plug-off and plug-in, after 20 - 30 seconds), external control lock is released.

- * In the standby mode (DC off by off timer or 'ka', 'mc' command), and if key lock is on, TV will not turn on by power on key of IR & Local Key.
- 13. Balance (Command: kt)
- ► To adjust balance.

You can also adjust balance in the AUDIO menu.

Transmission [k][t][][Set ID][][Data][Cr]

Data Min: 00 to Max: 64

Ack [t][][Set ID][][OK/NG][Data][x]

- 14. Color(Colour) Temperature (Command: x u)
- ► To adjust colour temperature. You can also adjust Color(Colour) Temperature in the PICTURE menu.

Transmission [x][u][][Set ID][][Data][Cr]

Data Min: 00 to Max: 64

Ack [u][][Set ID][][OK/NG][Data][x]

15. ISM Method (Command: j p) (Only Plasma TV)

► To control the ISM method. You can also adjust ISM Method in OPTION menu.

Transmission [j][p][][Set ID][][Data][Cr]

Data Min: 02: Orbiter

08: Normal

20: Color(Colour) Wash

Ack [p][][Set ID][][OK/NG][Data][x]

- 16. Energy Saving (Command: j q)
- ► To reduce the power consumption of the TV. You can also adjust Energy Saving in PICTURE menu.

Transmission [j][q][][Set ID][][Data][Cr]

Data

00: Off

01: Minimum

02: Medium

03: Maximum

04: Auto

05: Screen off

* (Depending on model)

Ack [q][][Set ID][][OK/NG][Data][x]

17. Tune Command (Command: m a)

- This command may work differently depending on model and signal.
- For Europe, Mid-East, Colombia, Asia except South Korea and Japan Model
- ► Select channel to following physical number.

Transmission [m][a][][Set ID][][Data 00][][Data 01] [][Data 02][Cr]

* Analogue Terrestrial/Cable

[Data 00][Data 01] Channel Data Data 00: High byte channel data Data 01: Low byte channel data

- 00 00 ~ 00 C7 (Decimal : 0 ~ 199)

Data 02 : Input Source (Analogue)
- 00 : Terrestrial TV (ATV)
- 80 : Cable TV (CATV)

* Digital Terrestrial/Cable/Satellite

[Data 00][Data 01]: Channel Data Data 00: High Channel data Data 01: Low Channel data

- 00 00 ~ 27 0F (Decimal: 0 ~ 9999)

Data 02: Input Source (Digital)

- 10 : Terrestrial TV (DTV)

- 20 : Terrestrial Radio (Radio)

- 40 : Satellite TV (SDTV)

- 50 : Satellite Radio (S-Radio)

- 90 : Cable TV (CADTV)

- a0 : Cable Radio (CA-Radio)

- * Tune Command Examples:
- 1. Tune to the analogue terrestrial (PAL) Channel 10. Set ID = All = 00

Data 00 & 01 = Channel Data is 10 = 00 0a

Data 02 = Analogue Terrestrial TV = 00

Result = ma 00 00 0a 00

2. Tune to the digital terrestrial (DVB-T) Channel 01. Set ID = All = 00

Data 00 & 01 = Channel Data is 1 = 00 01 Data 02 = Digital Terrestrial TV = 10

Result = ma 00 00 01 10

3. Tune to the satellite (DVB-S) Channel 1000. Set ID = All = 00

Data 00 & 01 = Channel Data is 1000 = 03 E8

Data 02 = Digital Satellite TV = 40

Result = ma 00 03 E8 40

Ack [a][][Set ID][][OK][Data 00][Data 01][Data 02][x] [a][][Set ID][][NG][Data 00][x]

- For South Korea, North/Latin America except Colombia Model
- ► To tune channel to following physical/major/minor number

Transmission [m][a][][0][][Data00][][Data01] [][Data02][][Data03][][Data04][][Data05][Cr]

Digital channels have a Physical, Major, and Minor channel number. The Physical number is the actual digital channel number, the Major is the number that the channel should be mapped to, and the Minor is the sub-channel. Since the ATSC tuner automatically maps the channel from the Major / Minor number, the Physical number is not required when sending a command in Digital.

* Analogue Terrestrial/Cable

Data 00: Physical Channel Number

- Terrestrial (ATV): 02~45 (Decimal: 2 ~ 69)

- Cable (CATV): 01, 0E~7D (Decimal: 1, 14~125)

[Data 01 ~ 04]: Major/Minor Channel Number

Data 01 & 02: xx (Don't care) Data 03 & 04: xx (Don't care) Data 05: Input Source (Analogue)

- 00 : Terrestrial TV (ATV)

- 01 : Cable TV (CATV)

* Digital Terrestrial/Cable

Data 00: xx (Don't care)

[Data 01][Data 02]: Major Channel Number

Data 01 : High byte Channel Data Data 02 : Low byte Channel Data

- 00 01 ~ 27 0F (Decimal: 1 ~ 9999)

[Data 03][Data 04]: Minor Channel Number

Data 03 : High byte Channel Data Data 04 : Low byte Channel Data

Data 05: Input Source (Digital)

- 02 : Terrestrial TV (DTV) Use Physical Channel Number
- 06 : Cable TV (CADTV) Use Physical Channel Number
- 22 : Terrestrial TV (DTV) Don't Use Physical Channel Number
- 26 : Cable TV (CADTV) Don't Use Physical Channel Number
- 46 : Cable TV (CADTV) Use Major Channel Number Only (One Part Channel)

Two bytes are available for each major and minor channel data, but usually the low byte is used alone (high byte is 0).

- * Tune Command Examples:
- 1. Tune to the analogue cable (NTSC) channel 35. Set ID = All = 00

Data 00 = Channel Data is 35 = 23

Data 01 & 02 = No Major = 00 00

Data 03 & 04 = No Minor = 00 00

Data 05 = Analogue Cable TV = 01

Total = ma 00 23 00 00 00 00 01

2. Tune to the digital terrestrial (ATSC) channel 30-3.

Set ID = AII = 00

Data 00 = Don't know Physical = 00

Data 01 & 02 = Major is 30 = 00 1E

Data 03 & 04 = Minor is 3 = 00 03

Data 05 = Digital Terrestrial TV = 22

Total = ma 00 00 00 1E 00 03 22

Ack [a][][Set ID][][OK][Data 00][Data 01]

[Data 02][Data 03][Data 04][Data 05]

[x][a][][Set ID][][NG][Data 00][x]

- For Japan Model
- To tune channel to following physical/major/minor number.

Transmission [m][a][][0][][Data00][][Data01] [][Data02][][Data03][][Data04][][Data05][Cr]

* Digital Terrestrial/Satellite

Data 00: xx (Don't care)

[Data 01][Data 02]: Major Channel Number

Data 01: High byte Channel Data

Data 02: Low byte Channel Data

- 00 01 ~ 27 0F (Decimal: 1 ~ 9999)

[Data 03][Data 04]: Minor/Branch Channel Number (Don't care in Satellite)

Data 03: High byte Channel Data

Data 04: Low byte Channel Data

Data 05: Input Source (Digital/Satellite for Japan)

- 02 : Terrestrial TV (DTV)

- 07 : BS (Broadcasting Satellite)

- 08 : CS1 (Communication Satellite 1)

- 09 : CS2 (Communication Satellite 2)

- * Tune Command Examples:
- 1 Tune to the digital terrestrial (ISDB-T) channel 17-1. Set ID = AII = 00

Data 00 = Don't know Physical = 00

Data 01 & 02 = Major is 17 = 00 11

Data 03 & 04 = Minor/Branch is 1 = 00 01

Data 05 = Digital Terrestrial TV = 02

Total = ma 00 00 00 11 00 01 02

2. Tune to the BS (ISDB-BS) channel 30.

Set ID = AII = 00

Data 00 = Don't know Physical = 00

Data 01 & 02 = Major is 30 = 00 1E

Data 03 & 04 = Don't Care = 00 00

Data 05 = Digital BS TV = 07

Total = ma 00 00 00 1E 00 00 07

* This feature is varied based on the model.

Ack [a][][Set ID][][OK][Data 00][Data 01]

[Data 02][Data 03][Data 04][Data 05]

[x][a][][Set ID][][NG][Data 00][x]

18. Channel(Programme) Add/Del(Skip) (Command: m b)

► To skip current channel(programme) for next time.

Transmission [m][b][][Set ID][][Data][Cr]

Data 00 : Del(ATSC,ISDB)/Skip(DVB) 01 : Add

Ack [b][][Set ID][][OK/NG][Data][x]

* Set the saved channel status to del(ATSC, ISDB)/ skip(DVB) or add.

19. Key (Command: m c)

► To send IR remote key code.

Transmission [m][c][][Set ID][][Data][Cr]

Data Key code - See p.2.

Ack [c][][Set ID][][OK/NG][Data][x]

20. Control Back Light (Command: mg)

- For LCD TV / LED TV
- ▶ To control the back light.

Transmission [m][g][][Set ID][][Data][Cr]

Data Min: 00 to Max: 64

Ack [q][][Set ID][][OK/NG][Data][x]

Control Panel Light (Command: m g)

- For Plasma TV
- ▶ To control the panel light.

Transmission [m][g][][Set ID][][Data][Cr]

Data Min: 00 to Max: 64

Ack [g][][Set ID][][OK/NG][Data][x]

21. Input select (Command: x b)

(Main Picture Input)

► To select input source for main picture.

Transmission [x][b][][Set ID][][Data][Cr]

Data

00 : DTV 01: CADTV 02 : Satellite DTV 10: ATV

ISDB-BS (Japan)

03: ISDB-CS1 (Japan)

04: ISDB-CS2 (Japan)

11: CATV

20 : AV or AV1 21: AV2

40 : Component1 41: Component2

90: HDMI1 91: HDMI2 92: HDMI3 93: HDMI4

Ack [b][][Set ID][][OK/NG][Data][x]

* This function depends on model and signal.

22. 3D(Command: x t) (only 3D models)

(Depending on model)

► To change 3D mode for TV.

Transmission [x][t][][Set ID][][Data 00][][Data 01] [][Data 02][][Data 03][Cr]

Data Structure

[Data 00] 00:3D On

01:3D Off 02:3D to 2D

03 : 2D to 3D

[Data 01] 00: Top and Bottom

01 : Side by Side 02 : Checker Board

03 : Frame Sequential 04 : Column interleaving

05 : Row interleaving

[Data 02] 00 : Right to Left 01 : Left to Right

[Data 03] 3D Effect(3D Depth): Min: 00 - Max: 14 (*transmit by Hexadecimal code)

- * If [Data 00] is 01 (3D off) or 02 (3D to 2D), [Data 01], [Data 02] and [Data 03] have no meaning.
- * If [Data 00] is 03(2D to 3D), [Data 01] have no meaning.
- * If [Data 00] is 00 (3D On) or 03 (2D to 3D), [Data 03] works when 3D Mode (Genre) is manual only
- * All 3D pattern options ([Data 01]) may not be available according to broadcasting/video signal.

[Data 00]	[Data 01]	[Data 02]	[Data 03]
00	0	0	0
01	Х	Х	Х
02	Х	Х	Х
03	Х	0	0

X: don't care

Ack [t][][Set ID][][OK][Data00][Data01][Data02]

[Data03][x]

[t][][Set ID][][NG][Data00][x]

- Extended 3D(Command: x v) (only 3D models) (Depending on model)
- ► To change 3D option for TV.

Transmission [x][v][][Set ID][][Data 00][]

[Data 01][Cr]

[Data 00] 3D option

00: 3D Picture Correction

01: 3D Depth (3D Mode is Manual Only)

02:3D Viewpoint

06: 3D Color Correction

07: 3D Sound Zooming

08 : Normal Image View

09: 3D Mode (Genre)

[Data 01] It has own range for each 3D option determined by [Data 00].

1) When [Data 00] is 00

00 : Right to Left 01 : Left to Right

2) When [Data 00] is 01, 02

Data Min: 0 - Max: 14 (*transmit by Hexadecimal code)

Data value range(0 - 20) converts Viewpoint range (-10 - +10) automatically (Depending on model)

- * This option works when 3D Mode (Genre) is manual only.
- 3) When [Data 00] is 06, 07

00 : Off 01 : On

4) When [Data 00] is 08

00 : Revert to 3D video from 3D-to-2D converted 2D video

01: Change 3D video to 2D video, except

2D-to-3D video

* If conversion condition doesn't meet, command is treated as NG.

5) When [Data 00] is 09

00 : Standard 01 : Sport 02 : Cinema 03 : Extreme

04 : Manual

Ack [v][][Set ID][][OK][Data00][Data01][x] [v][][Set ID][][NG][Data00][x]

