


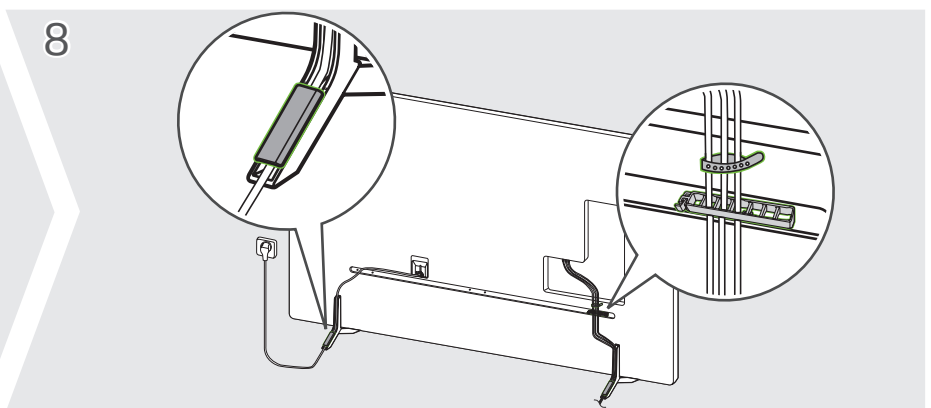
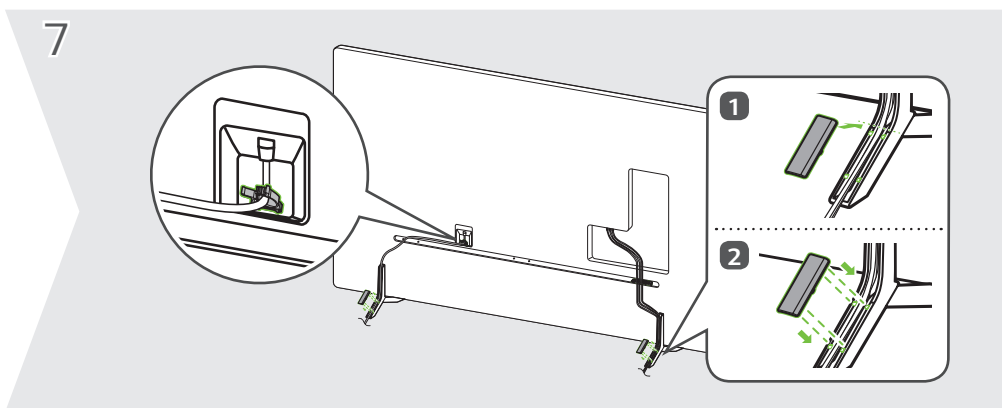
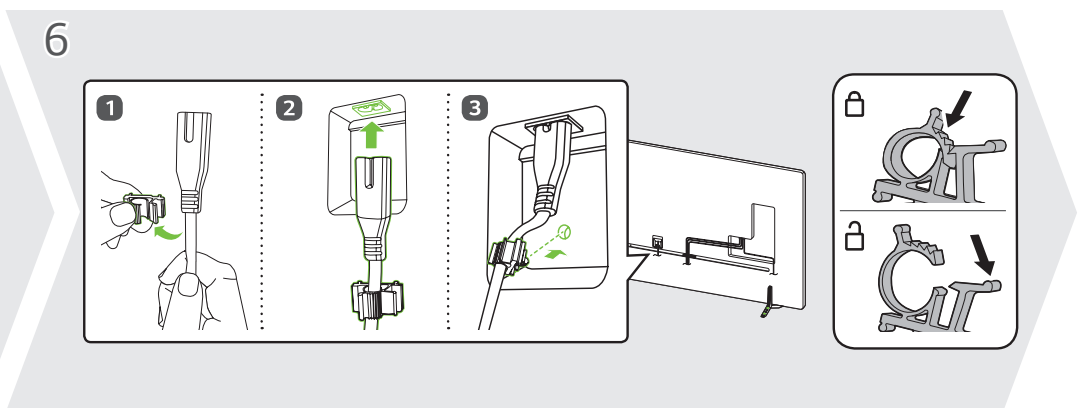
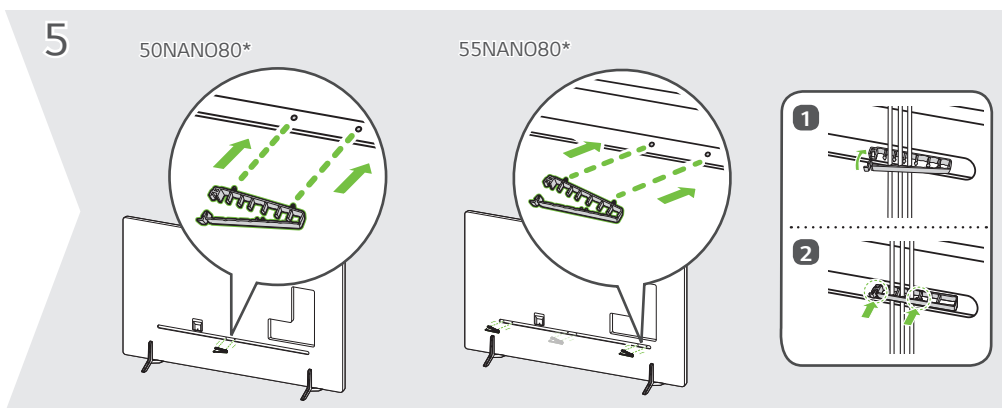
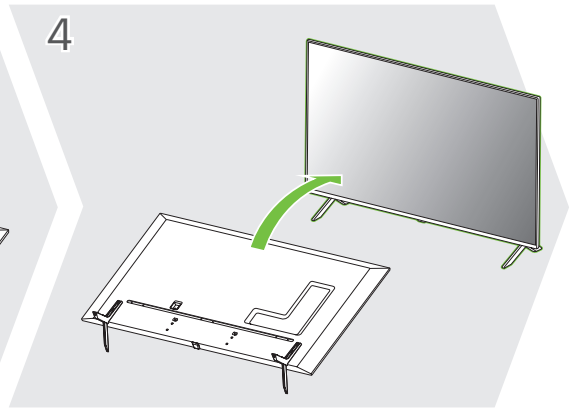
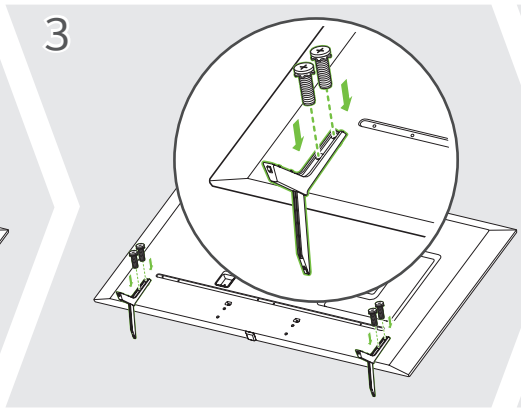
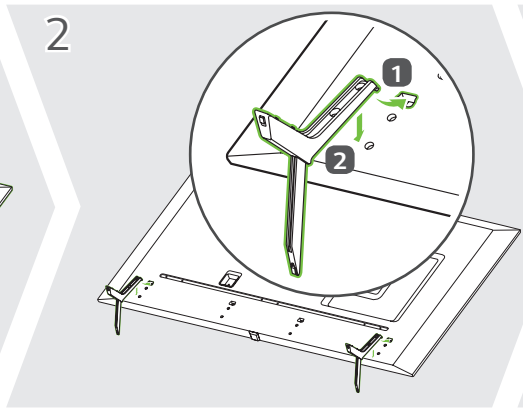
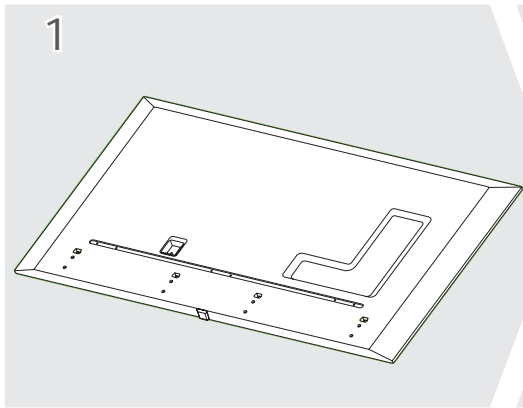
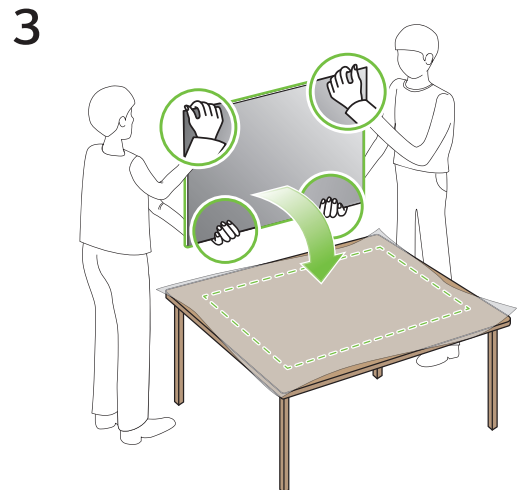
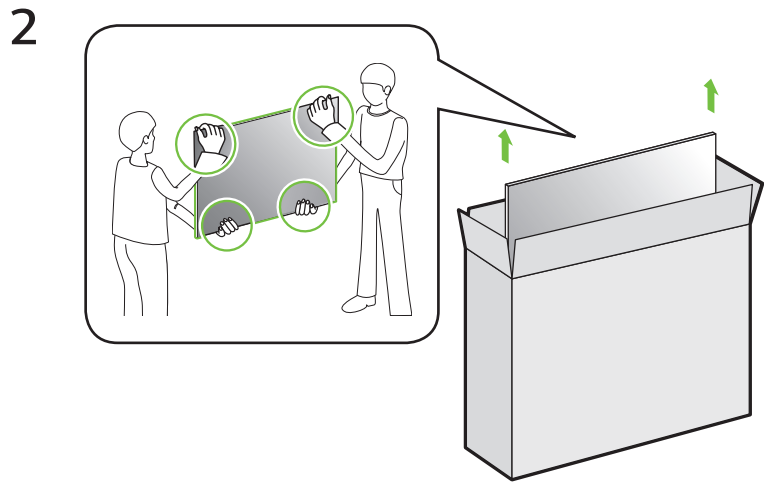
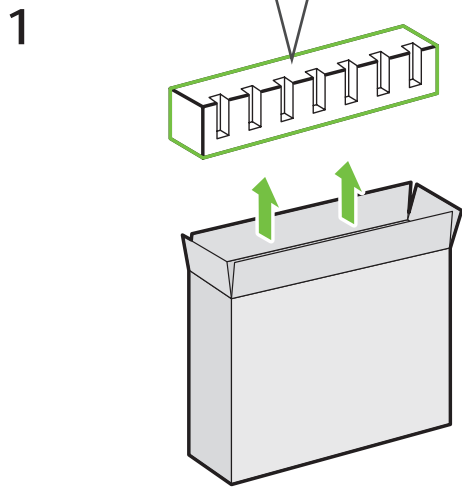
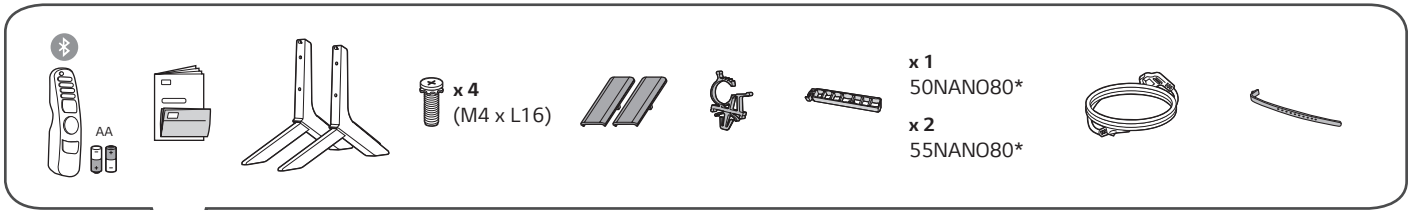
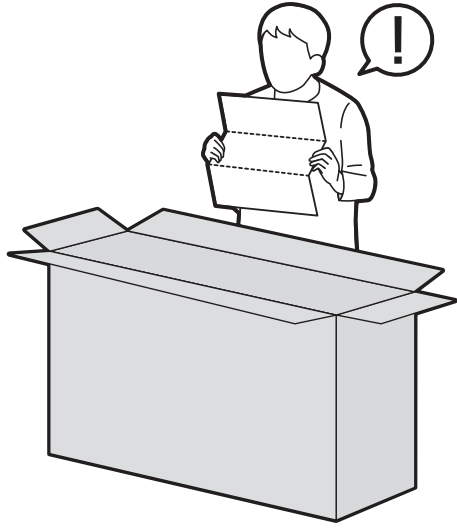
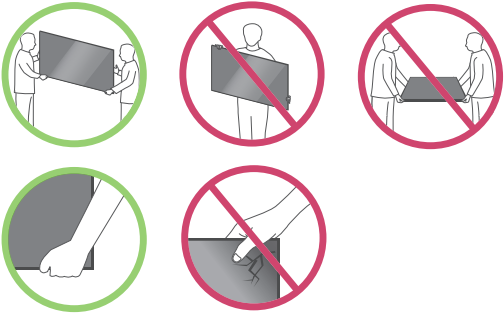


NANO80*

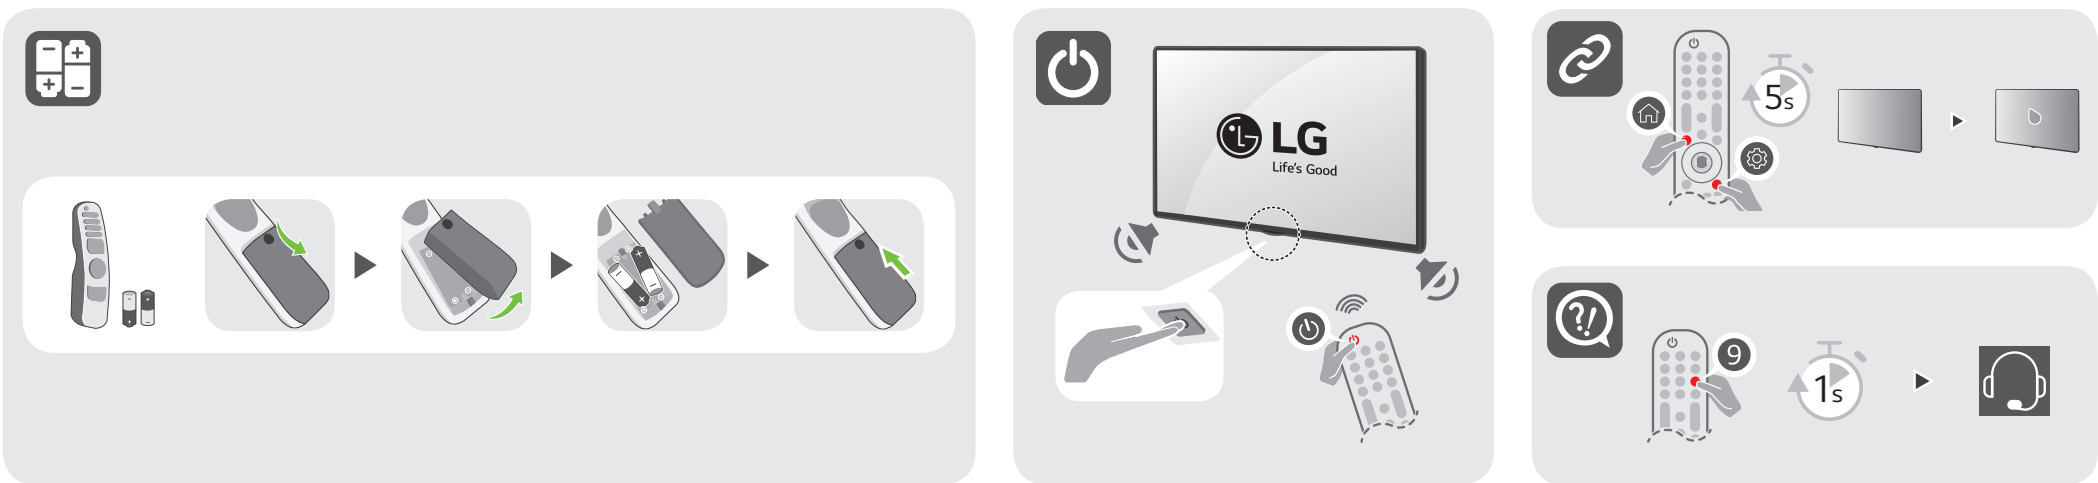

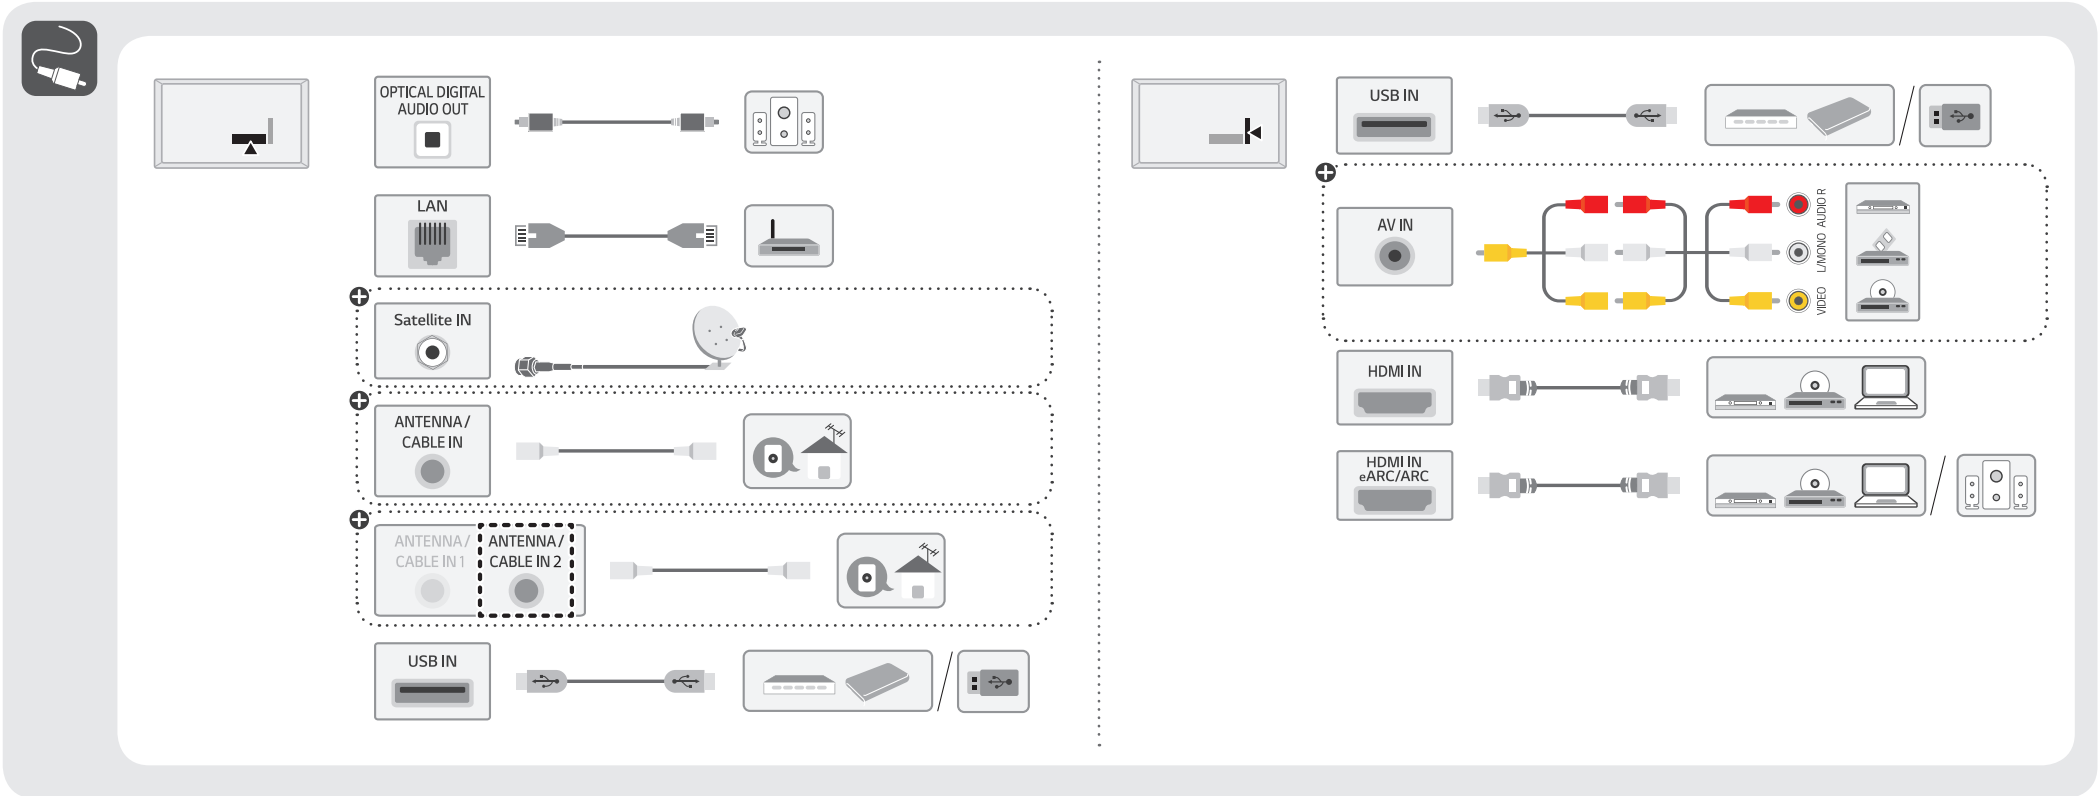

	A	B	C	D	E	F	F - G
	(mm)					(kg)	
50NANO80SQA	1120	718	257	653	49.2	14.4	14.0
55NANO80SQA	1233	781	257	716	44.2	16.7	16.3

Power requirement / Kebutuhan daya

AC 100-240 V ~ 50 / 60 Hz

A	B	C × D (mm)	E
LSW240B MSW240	50NANO80*	200 x 200	M6
OLW480B MSW240	55NANO80*	300 x 300	M6

A	B	C (mm)	D
WB21LMB	50NANO80*	200	M6
WB21LMB	55NANO80*	300	M6

English

Indonesia

• Read **Safety and Reference**.

• Baca **Keamanan dan Petunjuk**

⊕

Depending on model / Tergantung pada model

English

Indonesia

• The Analog Gender adapter can be purchased separately at Customer Service.

• Adaptor Analog Gender dapat dibeli terpisah di Layanan Pelanggan.