



\*LG LED Monitors are LCD Monitors with LED Backlighting.

Please read this manual carefully before operating your set and retain it for future reference.

### IPS LED(LED LCD) MONITOR MODEL

19M38A	20M38A	22M38A	24M38A	27MP38VQ
19M38D	20M38D	22M38D	24M38D	27MP38HQ
19M38H	20M38H	22M38H	24M38H	

# **CONTENTS**

### 3 LICENSE

### 4 ASSEMBLING AND PREPAR-ING

- 4 Unpacking
- 6 Parts and buttons
- 7 Moving and Lifting the Monitor
- 8 Setting up the Monitor set
- 8 Attaching the Stand Base
- 9 Detaching the Stand Base
- 10 Mounting on a table
- 10 Using the cable holder
- 12 Mounting on a wall

# 13 USING THE MONITOR SET

- 13 Connecting to a PC
- 13 D-SUB connection
- 13 DVI-D connection
- 14 HDMI connection
- 14 Connecting to AV Devices
- 14 HDMI connection
- 15 Connecting to External Devices
- 15 Peripheral device connection

### 16 CUSTOMIZING SETTINGS

- 17 Customizing Settings
- 17 Menu Settings
- 19 -Picture
- 20 -Color
- 21 -Display
- 21 -Audio
- 22 -Others
- 23 READER Setting
- 24 FUNC. Setting
- 24 -SMART ENERGY SAVING
- 25 -Picture Mode
- 26 -Color Weakness

## 27 TROUBLESHOOTING

### 29 SPECIFICATIONS

- 39 Preset Modes (Resolution)
- 40 Indicator

### **41 PROPER POSTURE**

41 Proper posture for using the Monitor set.

19M38H 20M38H 22M38H 24M38H 27MP38VQ 27MP38HQ

# **LICENSE**

Each model has different licenses. Visit www.lg.com for more information on the license.



The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries.

The following content is only applied to the monitor which is sold in Europe market and which needs to meet the ErP Directive:


<sup>\*</sup>This monitor is set to be turned off automatically in 4 hours after you turned on display if there is no adjustment to display.

<sup>\*</sup>To make this setting be disabled, change the option to 'Off' in OSD menu of "Automatic Standby".

# **ASSEMBLING AND PREPARING**

# **Unpacking**

Check your product box for the following items. If there are any missing accessories, contact the local dealer where you purchased your product. The illustrations in this manual may differ from the actual product and accessories.

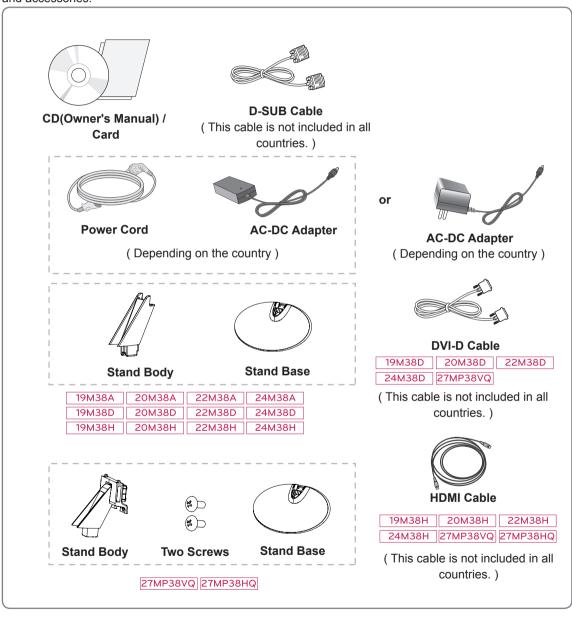



#### **CAUTION** -


- Do not use any unapproved accessories to ensure the safety and product life span.
- · Any damages or injuries by using unapproved accessories are not covered by the warranty.



#### NOTE -

- The accessories supplied with your product may vary depending on the model.
- Product specifications or contents in this manual may be changed without prior notice due to upgrade
  of product functions.


### **Parts and buttons**

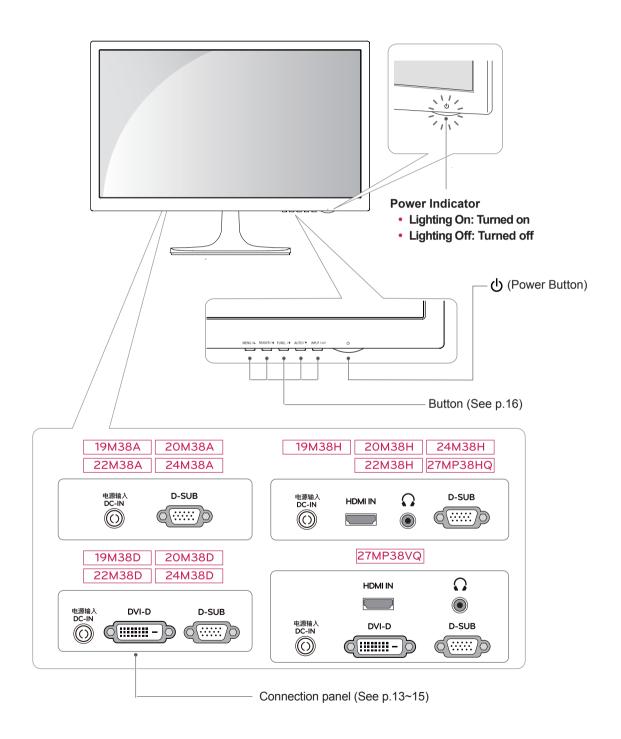

# **Moving and Lifting the Monitor**

When moving or lifting the monitor, follow these instructions to prevent the monitor from being scratched or damaged and to ensure safe transportation regardless of its shape or size.

- It is advisable to place the monitor in the original box or packing material before attempting to move it.
- Before moving or lifting the monitor, disconnect the power cord and all cables.
- Hold the top and bottom of the monitor frame firmly. Do not hold the panel itself.



 When holding the monitor, the screen should face away from you to prevent it being scratched.



- When moving the monitor, avoid any strong shock or vibrations to the product.
- When moving the monitor, keep it upright, never turn the monitor on its side or tilt it sideways.



#### **CAUTION**

 As far as possible, avoid touching the monitor screen. This may result in damage to the screen or some of the pixels used to create images.



# **Setting up the Monitor set**

### **Attaching the Stand Base**

1 Place the Monitor set with the screen side down on a flat and cushioned surface.




#### **CAUTION**

Lay a foam mat or soft protective cloth on the surface to protect the screen from damage.


2	19M38A	20M38A	22M38A	24M38A
	19M38D	20M38D	22M38D	24M38D
	19M38H	20M38H	22M38H	24M38H

- 1 Attach the Stand Body to the monitor set.
- 2 Attach the Stand Base.
- 3 Tighten the screw to the right with a coin.




#### 27MP38VQ 27MP38HQ


- 1 Attach the **Stand Body** to the monitor set.
- Use two screws to fix the Stand Body and monitor set.
- 3 Attach the Stand Base.
- 4 Tighten the screw to the right with a coin.

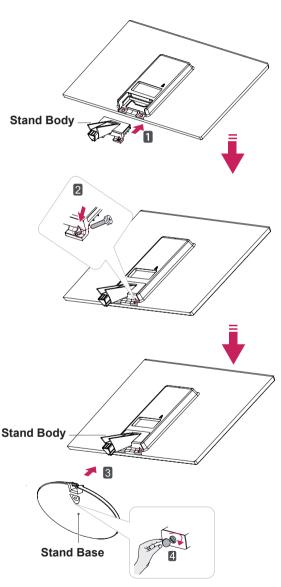

## **Detaching the Stand Base**


- 1 Place the Monitor set with the screen side down on a flat and cushioned surface.
- 2 19M38A 20M38A 22M38A 24M38A 19M38D 20M38D 22M38D 24M38D 19M38H 20M38H 22M38H 24M38H
  - Pull out the Stand Body and Stand Base from the monitor set.
  - 2 Turn the screw to the left with a coin.
  - 3 Pull out the Stand Base.





#### 27MP38VQ 27MP38HQ

- 1 Turn the screw to the left with a coin.
- 2 Pull out the Stand Base from the Stand Body.
- 3 Remove two screws and pull out the **Stand Body** from the monitor set.

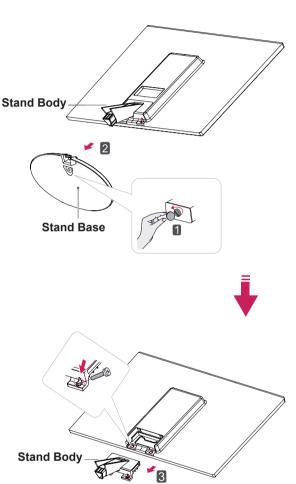

# ·/!\


#### CAUTION

- This illustration depicts the general model of connection. Your monitor may differ from the items shown in the picture.
- Do not carry the product upside down holding only the stand base. The product may fall and get damaged or injure your foot.


### Mounting on a table

1 Lift and tilt the Monitor set into its upright position on a table.

Leave a 100 mm (minimum) space from the wall for proper ventilation.



2 Connect the AC-DC Adapter and Power Cord to a wall outlet.

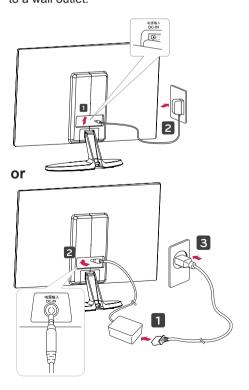


3 Press  $\circ$  (Power) button on the bottom switch panel to turn the power on.




#### CAUTION

Unplug the power cord before moving the Monitor to another location. Otherwise electric shock may occur.

## Using the cable holder



Cable holder




### WARNING -

When you adjust the angle, do not hold the bottom of the Monitor set frame as shown on the following illustration, as may injure your fingers.






Do not touch or press the screen when adjusting the angle of the monitor.




Do not hold this set like below picture. Monitor screen can detach from stand base and injure your body.



#### Using the Kensington security system

The Kensington security system connector is located at the back of the Monitor set. For more information of installation and using, refer to the manual supplied with the Kensington security system or visit http://www.kensington.com.

Connect the Kensington security system cable between the Monitor set and a table.






The Kensington security system is optional. You can obtain it from most electronics stores.




#### **NOTE**

Tilt from +20 to -5 degrees up or down to adjust the angle of the Monitor set to suit your view.



### Mounting on a wall

For proper ventilation, allow a clearance of 100 mm on each side and from the wall. Detailed instructions are available from your dealer, see the optional Tilt Wall Mounting Bracket Installation and Setup Guide.



If you intend to mount the Monitor set to a wall, attach Wall mounting interface (optional parts) to the back of the set.


When you install the Monitor set using a wall mounting interface (optional parts), attach it carefully so it will not drop.

- 1 If you use screw longer than standard, the monitor might be damaged internally.
- 2 If you use improper screw, the product might be damaged and drop from mounted position. In this case, LG Electronics is not responsible for it.

Model	19M38A	20M38A	22M38A
	19M38D	20M38D	22M38D
	19M38H	20M38H	22M38H
Wall Mount (A x B)	75 x 75		
Standard screw	M4		
Number of screws	4		

Model	24M38A 27MP38VQ 24M38H
	24M38D 27MP38HQ
Wall Mount (A x B)	100 x 100
Standard screw	M4
Number of screws	4


Wall Mount (A x B)





#### **CAUTION**

- Disconnect the power cord first, and then move or install the Monitor set. Otherwise electric shock may occur.
- If you install the Monitor set on a ceiling or slanted wall, it may fall and result in severe injury.
- Use only an authorized LG wall mount and contact the local dealer or qualified personnel.
- Do not over tighten the screws as this may cause damage to the Monitor set and void your warranty.
- Use only screws and wall mounts that meet the VESA standard. Any damages or injuries by misuse or using an improper accessory are not covered by the warranty.
- Screw length from outer surface of back cover should be under 8mm.





#### NOTE

- Use the screws that are listed on the VESA standard screw specifications.
- The wall mount kit will include an installation manual and necessary parts.
- The wall mount bracket is optional. You can obtain additional accessories from your local dealer
- The length of screws may differ depending on the wall mount. Be sure to use the proper length.
- For more information, refer to the instructions supplied with the wall mount.


# **USING THE MONITOR SET**

# Connecting to a PC

 Your Monitor set supports Plug & Play\*.
 \*Plug & Play: A PC recognizes a connected device that users connect to a PC and turn on, without device configuration or user intervention.

#### **D-SUB** connection


Transmits analog video from your PC to the Monitor set. Connect the PC and the Monitor set with the supplied D-sub 15 pin signal cable as shown in the following illustrations.



# 0

#### NOTE

When using a D-Sub signal input cable connector for Macintosh





Mac adapter

For Apple Macintosh use, a separate plug adapter is needed to change the 15 pin high density (3 row) D-SUB VGA connector on the supplied cable to a 15 pin 2 row connector.

#### **DVI-D** connection

Transmits a digital video signal from your PC to the Monitor set. Connect the PC and the Monitor set with a DVI cable as shown in the following illustrations.





### **CAUTION** -


 Connect the signal input cable and tighten it by turning the screws clockwise.




- Do not press the screen with your finger for a long time as this may result in temporary distortion on the screen.
- Avoid displaying a fixed image on the screen for a long period of time to prevent image burn. Use a screensaver if possible.

#### **HDMI** connection

Transmits the digital video and audio signals from your PC to the Monitor set. Connect the PC and the Monitor set with the HDMI cable as shown in the following illustrations.







#### NOTE

- If you use HDMI PC, it can cause compatibility problem.
- Use a certified cable with the HDMI logo attached. If you do not use a certified HDMI cable, the screen may not display or a connection error may occur.
- · Recommended HDMI cable types
- High-Speed  $\mathsf{HDMI}^{\mathsf{B}}/^{\mathsf{TM}}$  Cable
- High-Speed HDMI<sup>®</sup>/<sup>™</sup> Cable with Ethernet



#### NOTE -


- When you want to use two PC in our Monitor, please connect the signal cable(D-SUB/ DVI-D/HDMI) respectively in Monitor set.
- If you turn the Monitor set on while it is cold, the screen may flicker. This is normal.
- Some red, green, or blue spots may appear on the screen. This is normal.

# **Connecting to AV Devices**

#### **HDMI** connection

Transmits the digital video and audio signals from your AV devices to the monitor. Connect your AV device to the monitor with the HDMI cable as illustrated below.








#### **NOTE**

- If you use HDMI PC, it can cause compatibility problem.
- Use a certified cable with the HDMI logo attached. If you do not use a certified HDMI cable, the screen may not display or a connection error may occur.
- Recommended HDMI cable types
- High-Speed HDMI®/™ Cable
- High-Speed HDMI®/™ Cable with Ethernet

### **Connecting to External Devices**

### Peripheral device connection

Connect peripheral devices to the monitor using headphone ports.





#### **NOTE**

- · Peripheral devices are sold separately.
- Cables with angled plugs may have clearance issues, use straight plugs when possible.





Angle Type

Straight Type




#### NOTE

 Headphones or speakers may not work normally, depending on the server PC settings.

#### Self Image Setting Function

Press the power button on the bottom panel to turn the power on. When monitor power is turned on, the "**Self Image Setting**" Function is executed automatically. (Only supported in Analog Mode)





"Self Image Setting" Function.


This function provides the user with optimal display settings. When the user connects the monitor for the first time, this function automatically adjusts the display to optimal settings for individual input signals. (Only supported in Analog Mode)

• 'AUTO' Function.

When you encounter problems such as blurry screen, blurred letters, screen flicker or tilted screen while using the device or after changing screen resolution, press the AUTO function button to improve resolution. (Only supported in Analog Mode)

# **CUSTOMIZING SETTINGS**

- 1 Press the desired button on the bottom of the Monitor set.
- 2 Change the value of the menu item by pressing the buttons on the bottom of the Monitor set. To return to the upper menu or set other menu items, use the up arrow (1) button.
- 3 Select **EXIT** to leave the OSD menu.

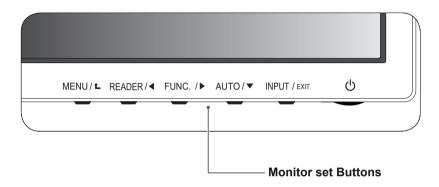

Button		Description			
MENU / <b>L</b>	Accesses the main	Accesses the main menus.(See p.17)			
	OSD Locked/OSD Unlocked	This function allow you to lock the current control settings, so that they cannot be inadvertently changed.  Press and hold the MENU button for several seconds. Then OSD of "OSD Lock" will appear. After that, user can select lock or unlock by pressing left/right button.  If user selects the "Lock" icon by pressing the "OK" button, the message "OSD Locked" will appear. Otherwise, "OSD Unlocked" will appear. After selecting the "Lock", If you want to change to Unlock, you can push the "MENU" button for several seconds. The message "OSD Unlocked" will appear.			
READER/◀		Use this button to enter Reader Mode menu. Its function works to display screen as paper-like picture for Eye comfort.If you want to more information(See p.23).			
FUNC./▶		Use this button to enter SMART ENERGY SAVING , Picture Mode, Color Weakness menus. (See p.24~26)			
AUTO / ▼		When adjusting your display settings, always press the AUTO button on the MONITOR SETUP OSD. (Only supported in Analog Mode)			
	The best display mode	19M38A/19M38D/19M38H: 1366 x 768 20M38A/20M38D/20M38H: 1600 x 900 22M38A/22M38D/22M38H/24M38A/24M38D/24M38H/27MP38HQ/ 27MP38VQ: 1920 x 1080			
INPUT / EXIT	HDMI) you want.	input signal. signals are connected, you can select the input signal (D-SUB/DVI-D/ ignal is connected, it is automatically detected. The default setting is			
	EXIT				
	EXIT the OSD(On S	creen Display).			
<b>ம்</b> (Power Button)	Turns the power on	or off.			
	Power Indicator	The power indicator stays white if the display is running properly (On Mode). If the display is in Sleep Mode, the power indicator blinks white.			

# **Customizing Settings**

### **Menu Settings**

- 1 Press MENU button on the bottom of the Monitor set to display the Menu OSD.
- 2 Set the options by pressing the ◀ or ▶ or ▼ buttons.
- 3 Select the "**Next Menu**" button to enter the more option settings.
- 4 Select **EXIT** to leave the OSD menu.

  To return to the upper menu or set other menu items, use the up arrow (♠) button.



Manual Ma	1	1	LIDMI	Description
Menu	Analog	Digital	HDMI	Description
Brightness	•	•	•	To adjust the brightness, contrast of the screen.
Contrast	•	•	•	To adjust the brightness, contrast of the screen.
Response Time [27MP38VQ] [27MP38HQ]	•	•	•	You can set a response time for displayed pictures based on the speed of the screen. For a normal environment, it is recommended that you use 'Off'. For a fast-moving picture, it is recommended that you use 'High'.
Wide/Original				Wide
				Switch to full screen mode according to input image signal.
	•	•	•	Original
				Change the input image signal ratio to original.  * This function works only if input resolution is lower than Monitor set ratio (16:9).
Reset	•	•	•	Restore all factory default settings. Press the ◀ , ▶ buttons to reset immediately.

Menu > Next Menu		Analog	Digital	HDMI	Description
Picture	Sharpness	•	•	•	To adjust the clearness of the screen
	19M38H   22M38H   24M38H   27MP38VQ   27MP38HQ			•	To set offset level
	Overscan  19M38H 20M38H 24M38H 24M38H 27MP38VQ 27MP38HQ			•	To improve the clarity and stability of the screen
Color	Gamma Color Temp Six Color [27MP38VQ] [27MP38HQ]  Color Reset [27MP38VQ] [27MP38HQ]	•	•	•	To customize the color of the screen
Display	Horizontal Vertical	•			To adjust the position of the screen
	Clock Phase	•			To improve the clarity and stability of the screen
Audio  19M38H 20M38H 24M38H 24M38H 27MP38VQ 27MP38HQ	Volume			•	To adjust the volume
Others	Language Power Indicator	•	•	•	
	Automatic Standby  19M38H 20M38H 24M38H 24M38H 27MP38VQ 27MP38HQ	•	•	•	To customize the screen status for a user's operating environment
	Resolution	•			


Analog: D-SUB(Analog signal) input.
 Digital: DVI-D(Digital signal) input.

• HDMI: HDMI(Digital signal) input.

#### **Picture**

- 1 Press **MENU** button on the bottom of the Monitor set to display the **Menu** OSD.
- 2 Select the "Next Menu" button to enter the more option settings.
- 3 Enter to **Picture** by pressing the ▼ button.
- 4 Set the options by pressing the ◀ or ▶ or ▼ buttons.
- 5 Select **EXIT** to leave the OSD menu.


  To return to the upper menu or set other menu items, use the up arrow (1) button.



Menu > Next Menu > Picture	Description		
Sharpness	To adjust the clearness of the screen.		
Black Level	Sets the offset level (for HDMI only).  • Offset: as a reference for a video signal, this is the darkest color the monitor can display.		
24M38H 27MP38VQ 27MP38HQ	Low	Keeps the current contrast ratio of the screen.  Lowers the black levels and raises the white levels from the current contrast ratio of the screen.	
Overscan  19M38H 20M38H 22M38H 24M38H 27MP38VQ 27MP38HQ	To select the range of output image for DTV timing in HDMI input.(only for input)Recommend Overscan function to turn on when connect AV equipm		

#### Color

- 1 Press **MENU** button on the bottom of the Monitor set to display the Menu OSD.
- 2 Select the "Next Menu" button to enter the more option settings.
- 3 Select **Color** by pressing the ▶ button.
- 4 Enter to **Color** by pressing the **▼** button.
- 5 Set the options by pressing the ◀ or ▶ or ▼ buttons.
- 6 Select EXIT to leave the OSD menu. To return to the upper menu or set other menu items, use the up arrow (1) button.



Menu > Next Menu > Color		Description	
Gamma	Set your own gamma value. : Gamma 0, Gamma 1, Gamma 2, Off on the monitor, high gamma values display blackish images and low gamma values display whitish images.  If user don't want adjusted gamma, user can select Gamma off.		
Color Temp	Custom		
	• Green: Set ye	own red color levels. our own green color levels. r own blue color levels.	
	Select the screen color.  Warm: Set the screen to warm color temperature (more red).  Medium: Set the screen to medium color temperature.  Cool: Set the screen to cool color temperature (more blue).		
Six Color		s the hue and saturation for six colors(Red/Green/Blue/Cyan/v) to satisfy the color requirements of a user.	
[27MP38VQ] [27MP38HQ]	Hue	Adjusts the screen hue.	
	Saturation  Adjusts the color sharpness on the screen. Lower values mathe color sharpness weaker and colors lighter while higher values make the color sharpness stronger and colors dark.		
Color Reset [27MP38VQ] [27MP38HQ]	Resets the color settings to the factory default settings for the current input device.		

### **Display**

- 1 Press MENU button on the bottom of the Monitor set to display the Menu OSD.
- 2 Select the "Next Menu" button to enter the more option settings.
- 3 Select **Display** by pressing the ▶ button.
- 4 Enter to **Display** by pressing the **▼** button.
- 5 Set the options by pressing the ◀ or ▶ or ▼ buttons.
- 6 Select EXIT to leave the OSD menu. To return to the upper menu or set other menu items, use the up arrow (♠) button.



Each option is explained below.

Menu > Next Menu > Display	Description
Horizontal	To move image left and right.
Vertical	To move image up and down.
Clock	To minimize any vertical bars or stripes visible on the screen background. The horizontal screen size will also change.
Phase	To adjust the focus of the display. This item allows you to remove any horizontal noise and clear or sharpen the image of characters.

### Audio

19M38H 22M38H 24M38H 27MP38VQ 27MP38HQ

- 1 Press MENU button on the bottom of the Monitor set to display the Menu OSD.
- 2 Select the "Next Menu" button to enter the more option settings.
- 3 Select **Audio** by pressing the ▶ button.
- 4 Enter to **Volume** by pressing the **▼** button.
- 5 Set the options by pressing the ◀ or ▶ buttons.
- 6 Select **EXIT** to leave the OSD menu.

  To return to the upper menu or set other menu items, use the up arrow (♠) button.



Menu > Next Menu > Audio	Description	
Volume	To adjust the volume of headphone/earphone.(Only for HDMI input)	

#### **Others**

- 1 Press **MENU** button on the bottom of the Monitor set to display the Menu OSD.
- 2 Select the "Next Menu" button to enter the more option settings.
- 3 Select **Others** by pressing the ▶ button.
- 4 Enter to **Others** by pressing the **▼** button.
- 5 Set the options by pressing the ◀ or ▶ or ▼ buttons.
- 6 Select EXIT to leave the OSD menu. To return to the upper menu or set other menu items, use the up arrow (1) button.



Menu > Next Menu > Others	Description			
Language	To choose the language in which the control names are displayed.			
Power Indicator	Use this function to set the power indicator on the bottom side of the monitor to On or Off.If you set Off, it will go off.  If you set On at any time, the power indicator will automatically be turned on.			
Automatic Standby  19M38H 20M38H 24M38H 27MP38VQ 27MP38HQ	The monitor will automatically switch to standby mode after a certain period.			
Resolution	User can set the desired resolution. The function is enabled only when the screen resolution on your computer is set to the following, except that the PC output wrong resolution.			
	19M38A 19M38D 19M38H	Off, 1024x768, 1280x768, 1360x768, 1366x768		
	20M38A 22M38A 24M38A 27MP38VQ	Off, 1024x768, 1280x768, 1360x768, 1366x768		
	20M38D	Off, 1280x960, 1600x900		
	201/3011 221/3011 241/3011	Off, 1440x900, 1600x900		

# **READER Setting**

- 1 Press READER button on the bottom of the Monitor set to display the Reader Mode OSD.
- 2 Set the options by pressing the ◀ or ▶ buttons.
- 3 Select **EXIT** to leave the OSD menu.



Each option is explained below.

Reader Mode	Description
Reader 1	It is a mode that the screen is adjusted to the best for the newspaper. If you want screen more bright, you can control brightness in Menu OSD.
Reader 2	It is a mode that the screen is adjusted to the best for the cartoon. If you want screen more bright, you can control brightness in Menu OSD.
Reader Off	It is a mode that reader mode is off.



If option of Reader Mode is Reader 1 or Reader 2, Picture Mode will automatically be Custom and SMART ENERGY SAVING and Color Weakness will automatically be Off.

# **FUNC. Setting**

#### SMART ENERGY SAVING

- Press **FUNC**, button on the bottom of the Monitor set to display the FUNC. OSD.
- 2 Enter to SMART ENERGY SAVING by pressing the ▼ button.
- 3 Set the options by pressing the ◀ or ▶ buttons.
- 4 Select EXIT to leave the OSD menu. To return to the upper menu or set other menu items, use the up arrow (1) button.



Each option is explained below.

SMART ENERGY SAVING	Description	
High	Enables SMART ENERGY SAVING you can save energy with this energy- high efficient function.	
Low	Enables SMART ENERGY SAVING you can save energy with this energy- low efficient function.	
Off	Disables SMART ENERGY SAVING .	

<sup>\*</sup> SMART ENERGY SAVING: Conserve energy by using luminance compensation algorithm.



#### NOTE

- Saving Data depends on the Panel. So, those values should be different from each panel and panel vendor.If option of SMART ENERGY SAVING is High or Low, monitor luminance become higher or lower depend on source.
- · If option of SMART ENERGY SAVING is High or Low, Picture Mode will automatically be Custom and Reader Mode and Color Weakness will automatically be Off.


#### **Picture Mode**

- 1 Press **FUNC**. button on the bottom of the Monitor set to display the FUNC. OSD.
- 2 Select **Picture Mode** by pressing the ▶ button.
- 3 Enter to **Picture Mode** by pressing the ▼ button.
- 4 Set the options by pressing the ◀ or ▶ buttons.
- 5 Select **EXIT** to leave the OSD menu. To return to the upper menu or set other menu items, use the up arrow(♠)button.

#### **PC Mode**



#### **AV Mode**





Each option is explained below.

Picture Mode	Description
Custom	It is a mode that the user can adjust each element. It can adjust the color mode of the Main Menu.
Text	It is a mode that the screen is adjusted to the best for the textworks.
Photo	It is a mode that the screen is adjusted to the best to view pictures.
Cinema	It is a mode that the screen is adjusted to the best to view the videos.
Game	It is a mode that the screen is adjusted to the best to play a game.

19M38H 20M38H 22M38H 24M38H 27MP38VQ 27MP38HQ

Picture Mode	Description	
Custom	It is a mode that the user can adjust each element. It can adjust the color mode of the Main Menu.	
Vivid 1	Adjusts the video image for the retail environment by enhancing the contrast, brightness, Colour, and sharpness.	
Vivid 2		
Standard	Adjusts the image for the normal environment.	
Cinema	It is a mode that the screen is adjusted to the best to view the videos.	



### NOTE

If option of Picture Mode is non-Custom, Reader Mode, SMART ENERGY SAVING and Color Weakness will automatically be Off.

#### Color Weakness

- 1 Press FUNC. button on the bottom of the Monitor set to display the **FUNC.** OSD.
- 2 Select Color Weakness by pressing the ▶ button.
- 3 Enter to Color Weakness by pressing the ▼ button.
- 4 Set the options by pressing the ◀ or ▶ buttons.
- 5 Select **EXIT** to leave the OSD menu. To return to the upper menu or set other menu items, use the up arrow (1) button.



Color Weakness	Description
On	This mode is for users who cannot distinguish between red and green. It enables users with color weakness to easily distinguish between the two colors.
Off	It is a mode that Color Weakness mode is off.



- · This is subsidiary for color weakness user. Therefore if you feel uncomfortable with the screen, please turn off this function.
- This function can't distinguish some colors in some images.
- If option of Color Weakness is not Off, Reader Mode and SMART ENERGY SAVING will be Off and Picture Mode will automatically be Custom.

# **TROUBLESHOOTING**

### Check the following before calling for service.

No image appears		
Is the power cord of the display connected?	Check and see if the power cord is connected properly to the power outlet.	
Is the power indicator light on?	Press the Power button.	
Is the power indicator flickering?	<ul> <li>If the display is in power saving mode, try moving the mouse or pressing any key on the keyboard to bring up the screen.</li> <li>Try to turn on the PC.</li> </ul>	
Do you see an "OUT OF RANGE" message on the screen?	This message appears when the signal from the PC (video card) is out of horizontal or vertical frequency range of the display. See the 'Specifications' section of this manual and configure your display again.	
Do you see a "NO SIGNAL" message on the screen?	This is displayed when the signal cable between the PC and the monitor is missing or disconnected. Check the cable and reconnect it.	

Do you see a "OSD LOCKED" message on the screen?		
Do you see "OSD LOCKED" when you push MENU button?	You can secure the current control settings, so that they cannot be inadvertently changed. You can unlock the OSD controls at any time by pushing the MENU button for several seconds: the message "OSD UNLOCKED" will appear.	

Display image is incorrect		
Display Position is incorrect.	Press the <b>AUTO</b> button to automatically adjust your display image to the ideal setting.	
On the screen background, vertical bars or stripes are visible.	<ul> <li>Press the AUTO button to automatically adjust your display image to the ideal setting.</li> </ul>	
Any horizontal noise appearing in any image or characters are not clearly portrayed.	<ul> <li>Press the AUTO button to automatically adjust your display image to the ideal setting.</li> <li>Check Control Panel ➤ Display ➤ Settings and adjust the display to the recommended resolution or adjust the display image to the ideal setting. Set the color setting higher than 24 bits (true color).</li> </ul>	



#### **CAUTION**

- Check Control Panel ▶ Display ▶ Settings and see if the frequency or the resolution were changed. If yes, readjust the video card to the recommend resolution.
- If the recommended resolution (optimal resolution) is not selected, letters may be blurred and the screen may be dimmed, truncated or biased. Make sure to select the recommend resolution.
- The setting method can differ by computer and O/S (Operation System), and resolution mentioned above may not be supported by the video card performance. In this case, please ask to the computer or the video card manufacturer.

Display image is incorrect	
The screen color is mono or abnormal.	<ul> <li>Check if the signal cable is properly connected and use a screwdriver to fasten if necessary.</li> <li>Make sure the video card is properly inserted in the slot.</li> <li>Set the color setting higher than 24 bits (true color) at Control Panel Settings.</li> </ul>
The screen blinks.	Check if the screen is set to interlace mode and if yes, change it to the recommend resolution.

Do you see an "Unrecognized monitor, Plug&Play (VESA DDC) monitor found" message?		
Have you installed the display driver?	<ul> <li>Be sure to install the display driver from our web site: http://www.lg.com.</li> <li>Make sure to check if the video card supports Plug&amp;Play function.</li> </ul>	

19M38A	19M38D	19M38H

		_
Display	Screen Type	Flat Panel Active matrix-TFT LCD Anti-Glare coating
	Pixel Pitch	0.3 mm x 0.3 mm (Pixel Pitch)
Resolution	Max	1366 x 768 @ 60 Hz
	Recommend	VESA 1366 x 768 @ 60 Hz
Power consumption (Typ.)	On Mode : 19.8 W Typ.(Outgoing condition)* Sleep Mode ≤ 0.3 W Off Mode ≤ 0.3 W	
Power Input	19 V 0.8 A	
AC-DC Adapter	Type ADS-18SG-19-3 19016G, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-18FSG-19 19016GPG, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-18FSG-19 19016GPI, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-18FSG-19 19016GPCU, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-18FSG-19 19016GPB, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-18FSG-19 19016EPCU-L, manufactured by SHENZHEN HONOR ELECTRONIC or Type LCAP42, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP36-A, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP36-E, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP36-I, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP36-U, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP60-A, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE OT Type LCAP60-A, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE	
Dimensions	With Stand	441.3 mm x 350.2 mm x 167.8 mm
(Width x Height x Depth)	Without Stand	441.3 mm x 278.1 mm x 57.3 mm
Weight	1.9 kg	
Tilt Range	-5° to 20°	
Environmental conditions	Operating Temperature Operating Humidity	0°C to 40 °C ≤ 80%
	Storage Temperature Storage Humidity	-20°C to 60 °C ≤ 85%

Product specifications shown above may be changed without prior notice due to upgrade of product

<sup>\*</sup> The power consumption level can be different by operating condition and monitor setting.
\* The On mode power consumption is measured with LGE test standard(Full White pattern,Maximum resolution).

			19M38A	19M38D	19M38H
Video Signal	Horizontal	30 kHz to 83 kHz (Automatic)			
	Frequency	30 kHz to 61 kHz (Automatic)	•	•	•
	Vertical	56 Hz to 75 Hz (D-SUB)	•	•	•
	Frequency	56 Hz to 75 Hz (DVI-D)		•	
		56 Hz to 75 Hz (HDMI)			•
	Synchronization	Separate Sync.	•	•	•
		Digital		•	•
Input Connector		15 pin D-SUB Connector	•	•	•
		DVI-D Connector (Digital)		•	
		HDMI Connector			•

20M38A	20M38D	20M38H
ZUMSOA	20M30D	20M30H

Display	Screen Type	Flat Panel Active matrix-TFT LCD Anti-Glare coating			
	Pixel Pitch	0.271 mm x 0.262 mm (Pixel Pitch)			
Resolution	Max	1600 x 900 @ 60 Hz			
	Recommend	VESA 1600 x 900 @ 60 Hz			
Power consumption (Typ.)	On Mode : 22 W Typ.(Out Sleep Mode ≤ 0.3 W Off Mode ≤ 0.3 W	tgoing condition)*			
Power Input	19 V 0.8 A				
AC-DC Adapter	or Type ADS-18FSG-19 19016 or Type LCAP42, manufacture or Type LCAP36-A, manufacture or Type LCAP36-E, manufacture or Type LCAP36-I, manufacture or Type LCAP36-II, manufacture or Type LCAP36-III, manufacture or Type LCAP36-III				
Dimensions	With Stand	463.0 mm x 358.8 mm x 167.8 mm			
(Width x Height x Depth)	Without Stand	463.0 mm x 286.5 mm x 57.4 mm			
Weight	2.0 kg				
Tilt Range	-5° to 20°				
Environmental conditions	tal Operating Temperature O°C to 40 °C ≤ 80%				
	Storage Temperature Storage Humidity	-20°C to 60 °C ≤ 85%			

Product specifications shown above may be changed without prior notice due to upgrade of product functions.

<sup>\*</sup> The power consumption level can be different by operating condition and monitor setting.

<sup>\*</sup> The On mode power consumption is measured with LGE test standard(Full White pattern,Maximum resolution).

			20M38A	20M38D	20M38H
Video	Horizontal	30 kHz to 83 kHz (Automatic)	•	•	•
Signal	Frequency	30 kHz to 61 kHz (Automatic)			
	Vertical Frequency	56 Hz to 75 Hz (D-SUB)	•	•	•
		56 Hz to 75 Hz (DVI-D)		•	
		56 Hz to 75 Hz (HDMI)			•
	Synchronization	Separate Sync.	•	•	•
		Digital		•	•
Input Conn	ector	15 pin D-SUB Connector	•	•	•
		DVI-D Connector (Digital)		•	
		HDMI Connector			•

22N120V	22M38D	22M38H
ZZIVIJOA	22M30D	ZZIVIJON

Display	Screen Type	Flat Panel Active matrix-TFT LCD Anti-Glare coating			
	Pixel Pitch	0.248 mm x 0.248 mm (Pixel Pitch)			
Resolution	Max	1920 x 1080 @ 60 Hz			
	Recommend	VESA 1920 x 1080 @ 60 Hz			
Power consumption (Typ.)	On Mode : 25.3 W Typ.(C Sleep Mode ≤ 0.3 W Off Mode ≤ 0.3 W	Outgoing condition)*			
Power Input	19 V 1.2 A				
AC-DC Adapter	or Type ADS-40FSG-19 19025 or Type ADS-25FSG-19 19025 or Type LCAP26-A, manufacture or Type LCAP26-E, manufactur	G, manufactured by SHENZHEN HONOR ELECTRONIC GPG-1, manufactured by SHENZHEN HONOR ELECTRONIC GPBR-1, manufactured by SHENZHEN HONOR ELECTRONIC GPBR-1, manufactured by SHENZHEN HONOR ELECTRONIC GPI-1, manufactured by SHENZHEN HONOR ELECTRONIC GPB-2, manufactured by SHENZHEN HONOR ELECTRONIC EPCU-1L, manufactured by SHENZHEN HONOR ELECTRONIC EPCU-1L, manufactured by SHENZHEN HONOR ELECTRONIC EDCU-1L, manufactured by SHENZHEN HONOR EDCU-1L, manufactured by SHENZHEN EDCU-1L, manuf			
Dimensions	With Stand	508.5 mm x 386.5 mm x 186.7 mm			
(Width x Height x Depth)	Without Stand	508.5 mm x 315.7 mm x 56.8 mm			
Weight	2.4 kg				
Tilt Range	-5° to 20°				
Environmental conditions	Operating Temperature O°C to 40 °C Operating Humidity ≤ 80%				
	Storage Temperature Storage Humidity	-20°C to 60 °C ≤ 85%			

Product specifications shown above may be changed without prior notice due to upgrade of product

<sup>\*</sup> The power consumption level can be different by operating condition and monitor setting.

<sup>\*</sup> The On mode power consumption is measured with LGE test standard(Full White pattern, Maximum resolution).

			22M38A	22M38D	22M38H
Video	Horizontal	30 kHz to 83 kHz (Automatic)	•	•	•
Signal	Frequency	30 kHz to 61 kHz (Automatic)			
	Vertical Frequency	56 Hz to 75 Hz (D-SUB)	•	•	•
		56 Hz to 75 Hz (DVI-D)		•	
		56 Hz to 75 Hz (HDMI)			•
	Synchronization	Separate Sync.	•	•	•
		Digital		•	•
Input Con	nector	15 pin D-SUB Connector	•	•	•
		DVI-D Connector (Digital)		•	
		HDMI Connector			•

24M38A	24M38D	24M38H

Display	Screen Type	Flat Panel Active matrix-TFT LCD Anti-Glare coating			
	Pixel Pitch	0.272 mm x 0.272 mm (Pixel Pitch)			
Resolution	Max	1920 x 1080 @ 60 Hz			
	Recommend	VESA 1920 x 1080 @ 60 Hz			
Power consumption (Typ.)	On Mode : 27.5 W Typ.(C Sleep Mode ≤ 0.3 W Off Mode ≤ 0.3 W	outgoing condition)*			
Power Input	19 V 1.2 A				
AC-DC Adapter	Type ADS-40SG-19-3 19025G, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19025GPG-1, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19025GPBR-1, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19025GPI-1, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19025GPCU-1, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19025GPB-2, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-25FSG-19 19025GPB-2, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-25FSG-19 19025EPCU-1L, manufactured by SHENZHEN HONOR ELECTRONIC or Type LCAP21, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26-A, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26-E, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26-B, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26-B, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP51, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP51, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP51, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP51, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP51, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type PA-1021-23, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE				
Dimensions	With Stand	556.2 mm x 415.1 mm x 186.7 mm			
(Width x Height x Depth)	Without Stand	556.2 mm x 344.0 mm x 56.8 mm			
Weight	2.8 kg				
Tilt Range	-5° to 20°				
Environmental conditions	Operating Temperature O°C to 40°C   Operating Humidity ≤ 80%				
	Storage Temperature Storage Humidity	-20°C to 60 °C ≤ 85%			

Product specifications shown above may be changed without prior notice due to upgrade of product

<sup>\*</sup> The power consumption level can be different by operating condition and monitor setting.
\* The On mode power consumption is measured with LGE test standard(Full White pattern,Maximum resolution).

			24M38A	24M38D	24M38H
Video	Horizontal	30 kHz to 83 kHz (Automatic)	•	•	•
Signal	Frequency	30 kHz to 61 kHz (Automatic)			
	Vertical Frequency	56 Hz to 75 Hz (D-SUB)	•	•	•
		56 Hz to 75 Hz (DVI-D)		•	
		56 Hz to 75 Hz (HDMI)			•
	Synchronization	Separate Sync.	•	•	•
		Digital		•	•
Input Conn	ector	15 pin D-SUB Connector	•	•	•
		DVI-D Connector (Digital)		•	
		HDMI Connector			•

### 27MP38HQ | 27MP38VQ |

Display	Screen Type	Flat Panel Active matrix-TFT LCD Anti-Glare coating			
	Pixel Pitch	0.311 mm x 0.311 mm (Pixel Pitch)			
Resolution	Max	1920 x 1080 @ 60 Hz			
	Recommend	VESA 1920 x 1080 @ 60 Hz			
Power consumption (Typ.)	On Mode : 28.93 W Typ.( Sleep Mode ≤ 0.3 W Off Mode ≤ 0.3 W	Outgoing condition)*			
Power Input	19 V 1.6 A or 19 V	1.3 A			
AC-DC Adapter	Type ADS-40SG-19-3 19032G, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19032GPG-1, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19032GPBR-1, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19032GPCU-1, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19032GPCU-1, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-32FSG-19 19032EPCU-1L, manufactured by SHENZHEN HONOR ELECTRONIC or Type LCAP21A, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26A-A, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26A-E, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26A-I, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26A-B, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26A-B, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26A-B, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP21A, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP21A, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP21A, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP21A, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type PA-1031-23, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE				
	Type ADS-40SG-19-3 19025G, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19025GPG-1, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19025GPBR-1, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19025GPI-1, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19025GPCU-1, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-40FSG-19 19025GPB-2, manufactured by SHENZHEN HONOR ELECTRONIC or Type ADS-25FSG-19 19025EPCU-1L, manufactured by SHENZHEN HONOR ELECTRONIC or Type LCAP21, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26-B, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26-I, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26-I, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26-B, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26-B, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE or Type LCAP26-I, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE Or Type LCAP26-I, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE Or Type LCAP26-I, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE Or Type LCAP26-I, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE OR Type LCAP26-I, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE OR Type LCAP26-I, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE OR TYPE LCAP26-I, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE OR TYPE LCAP26-I, manufactured by LIEN CHANG ELECTRONIC ENTERPRISE				
Dimensions	With Stand	641.4 mm x 459.7 mm x 203.0 mm			
(Width x Height x Depth)	Without Stand	641.4 mm x 393.0 mm x 48.2 mm			
Weight	4.4 kg				
Tilt Range	-5° to 20°				
Environmental conditions	Operating Temperature O°C to 40 °C ≤ 80%				
	Storage Temperature Storage Humidity	-20°C to 60 °C ≤ 85%			

Product specifications shown above may be changed without prior notice due to upgrade of product functions.

<sup>\*</sup> The power consumption level can be different by operating condition and monitor setting.

<sup>\*</sup> The On mode power consumption is measured with LGE test standard(Full White pattern,Maximum resolution).

			27MP38HQ	27MP38VQ
Video Signal	Horizontal	30 kHz to 83 kHz (Automatic)	•	•
	Frequency	30 kHz to 61 kHz (Automatic)		
	Vertical	56 Hz to 75 Hz (D-SUB)	•	•
	Frequency	56 Hz to 75 Hz (DVI-D)		•
		56 Hz to 75 Hz (HDMI)	•	•
	Synchronization	Separate Sync.	•	•
		Digital	•	•
Input Connector		15 pin D-SUB Connector	•	•
		DVI-D Connector (Digital)		•
		HDMI Connector	•	•

# **Preset Modes (Resolution)**

# **D-SUB/DVI-D Timing**

19M38A 19M38D 19M38H

Display Modes (Resolution)	Horizontal Frequency(kHz)	Vertical Frequency(Hz)	Polarity(H/V)	
720 x 400	31.468	70	-/+	
640 x 480	31.469	60	-/-	
640 x 480	37.500	75	-/-	
800 x 600	37.879	60	+/+	
800 x 600	46.875	75	+/+	
832 x 624	49.725	75	-/-	
1024 x 768	48.363	60	-/-	
1366 x 768	47.712	60	+/+	Recommend Mode

#### 20M38A 20M38D 20M38H

Display Modes (Resolution)	Horizontal Frequency(kHz)	Vertical Frequency(Hz)	Polarity(H/V)	
720 x 400	31.468	70	-/+	
640 x 480	31.469	60	-/-	
640 x 480	37.500	75	-/-	
800 x 600	37.879	60	+/+	
800 x 600	46.875	75	+/+	
1024 x 768	48.363	60	-/-	
1024 x 768	60.023	75	+/+	
1152 x 864	67.500	75	+/+	
1600 x 900	60.000	60	+/+	Recommend Mode

#### 22M38A | 22M38D | 22M38H | 24M38A | 24M38D | 24M38H | 27MP38HQ | 27MP38VQ

Display Modes (Resolution)	Horizontal Frequency(kHz)	Vertical Frequency(Hz)	Polarity(H/V)	
720 x 400	31.468	70	-/+	
640 x 480	31.469	60	-/-	
640 x 480	37.500	75	-/-	
800 x 600	37.879	60	+/+	
800 x 600	46.875	75	+/+	
1024 x 768	48.363	60	-/-	
1024 x 768	60.023	75	+/+	
1152 x 864	67.500	75	+/+	
1280 x 1024	63.981	60	+/+	
1280 x 1024	79.976	75	+/+	
1680 x 1050	65.290	60	-/+	
1920 x 1080	67.500	60	+/+	Recommend Mode

# **HDMI Timing**

19M38H 20M38H

Factory support mode (Preset Mode)	Horizontal Frequency(kHz)	Vertical Frequency(Hz)	НДМІ
480P	31.50	60	0
576P	31.25	50	0
720P	37.50	50	0
720P	45.00	60	0

22M38H | 24M38H | 27MP38VQ | 27MP38HQ


Factory support mode (Preset Mode)	Horizontal Frequency(kHz)	Vertical Frequency(Hz)	НДМІ
480P	31.50	60	0
576P	31.25	50	0
720P	37.50	50	0
720P	45.00	60	0
1080P	56.25	50	0
1080P	67.50	60	O Recommend Mode

# **Indicator**

Mode	LED Color
On Mode	White
Sleep Mode	Blinking White
Off Mode	Off

# PROPER POSTURE

# Proper posture for using the Monitor set.

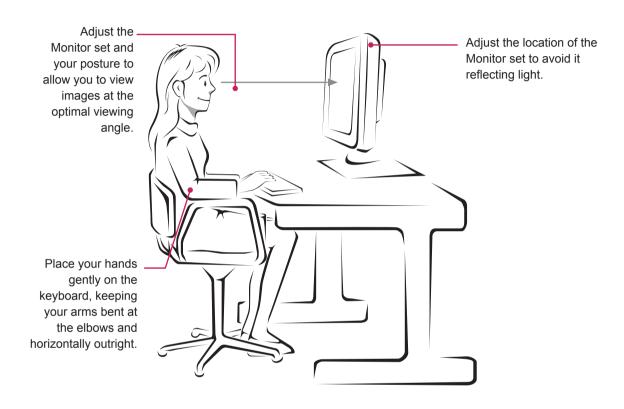



Make sure to read the Safety Precautions before using the product.

The model and serial number of the product are located on the back and on one side of the product.

Record them below in case you ever need service.

MODEL	
SERIAL	

ENERGY STAR® is a set of power-saving guidelines issued by the U.S.Environmental Protection Agency(EPA).



As an ENERGY STAR® Partner LGE U. S. A.,Inc. has determined that this product meets the ENERGY STAR® ENERGY STAR guidelines for energy efficiency.

Refer to ENERGY STAR.gov for more information on the ENERGY STAR® program.