
Printing Specification

1. Specification


Models	1. Model Name:	B4*
	2. Suffix:	TR
	3. Part No:	MFL72097705
	4. REV	REV00
	5. Number of pages	16
	6. Folded/Unfolded	3 Folded
SIZE	7. Trim size (W x H)_Unfolded (mm)	296 x 420(+/-5)
	8. Trim size (W x H)_folded (mm)	148 x 105
	9. Bindery	-
COVER	10. Color (Cover)	-
	11. Paper (Cover)	-
	12. Weight (cover) (g/㎡)	-
INNER	13. Color (inner)	4(CMYK)
	14. Paper (inner)	Wood free
	15. Weight (inner) (g/㎡)	70(+/-10)
	16. Coating	No
	17. Thomson	No
	18. Sub-material	No
	19. Languages	ENG

1.1 Folding / Cover

Folded Step

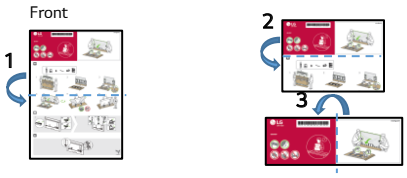

Folded

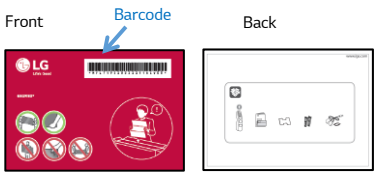

2. Origin Notification



Changes the Country name.

Printed in [Country Name in English]

Imprimé en(au) [Country Name in French]

[blank]

[PRODUZIDO NO POLO INDUSTRIAL DE MANAUS CONHEÇA A AMAZÔNIA LG Electronics do Brasil Ltda. CNPJ: 01.166.372/0008-21 Rua Javari, nº 1004, Distrito Industrial, CEP 69075-110, Manaus/AM, Indústria Brasileira]

[Country Name] (ENG/FRE)	
LGERS / LGEMX :	Printed in Mexico Imprimé au Mexique
LGEKR :	Printed in Korea Imprimé en Corée
LGEMA :	Printed in Poland Imprimé en Pologne
LGEND :	Printed in China Imprimé en Chine
LGEIN :	Printed in Indonesia Imprimé en Indonésie
Brazil :	Printed in [Each Country name] [Image] (LGEAZ production only)
Others :	Each Country name.

NOTE

[Restriction of Hazardous Substances]

Hazardous substances on this product should be satisfied by substance regulation of Level A-I, A-II, SVHC according to LG(52)B—5011 standard.

Especially, Part should be followed and controlled the following specification.

(1) Hazardous substances test report should be submitted when part certification test and first mass production.

(2) Especially, Don't use or contain lead (Pb) and cadmium (Cd) in ink.

INK REQUIREMENT FOR EU

(1) The amount of MOAH/MOSH must be less than 0.1% of the weight of the INK used.

* MOAH(Mineral Oil Aromatic Hydrocarbons) : Consisting of 1 to 7 aromatic cycles

* MOSH(Mineral Oil Saturated Hydrocarbons) : Consisting of 16 to 35 carbon atoms

(2) From 01 January 2025 : Ban on the use of MOAH in INK up to a limit of one part per million(1ppm) for compounds of 3 to 7 aromatic cycles

3. History

Rev. Number	Date	Description	ECO Number	Owner	Aditya K.
REV07					
REV06					
REV05					
REV04					
REV03					
REV02					
REV01					
REV00	15-02-24			Checked	Nitin H.
				Approved	Santosh C.

MFL72097705240 2REV00

Quick Start Guide

OLED48B4*
OLED55B4*
OLED65B4* **OLED77B4***





www.lg.com
Printed in India

55/65”
(Model without stand)













48/55/65”



x 4
(M4 x L30)

77”



x 6
(M4 x L30)


Images and Accessory parts shown in manual may vary depending on model.

Unpacking

Check your product box for the following items. If there are any missing accessories, contact the local dealer where you purchased your product.
The illustrations in this manual may differ from the actual product and item.


48”

1




55/65/77”

1

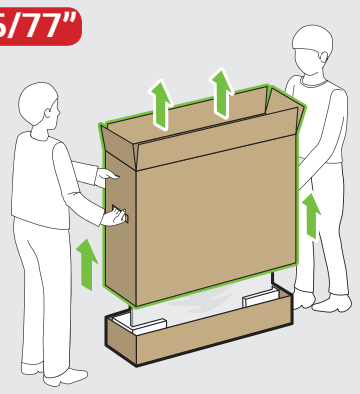

2

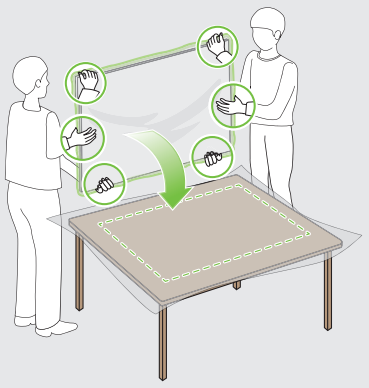


3




55/65” (Model without stand)

1

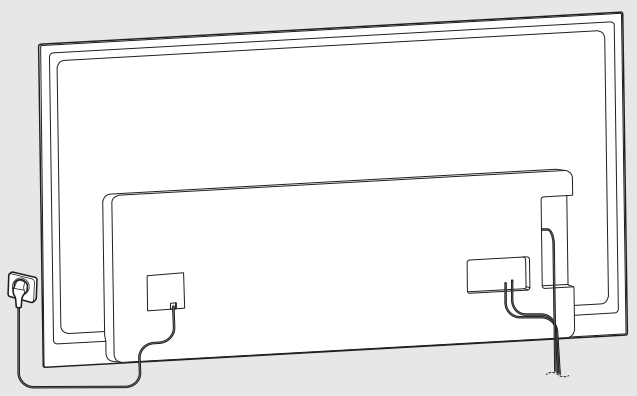


48/55/65”

1

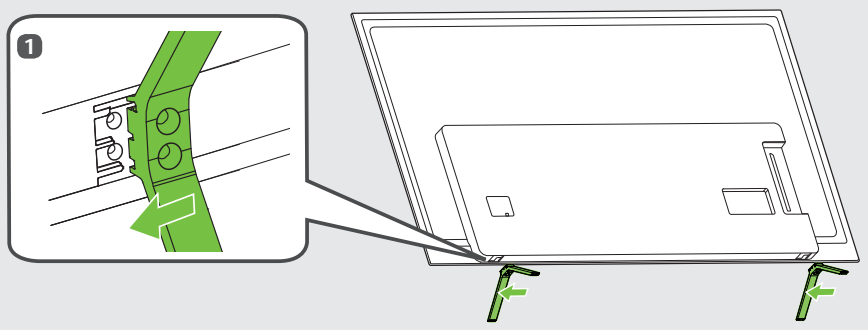




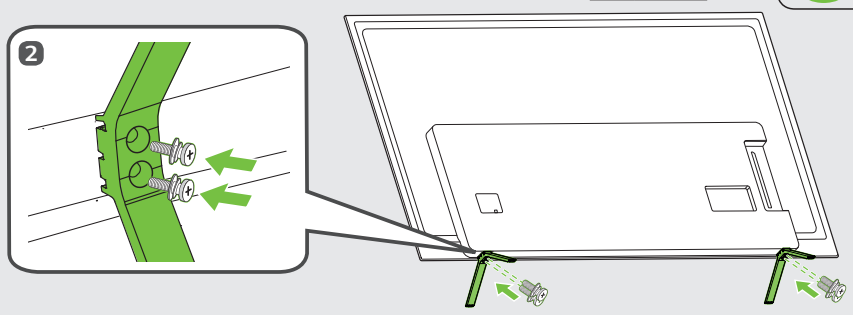


77”

1

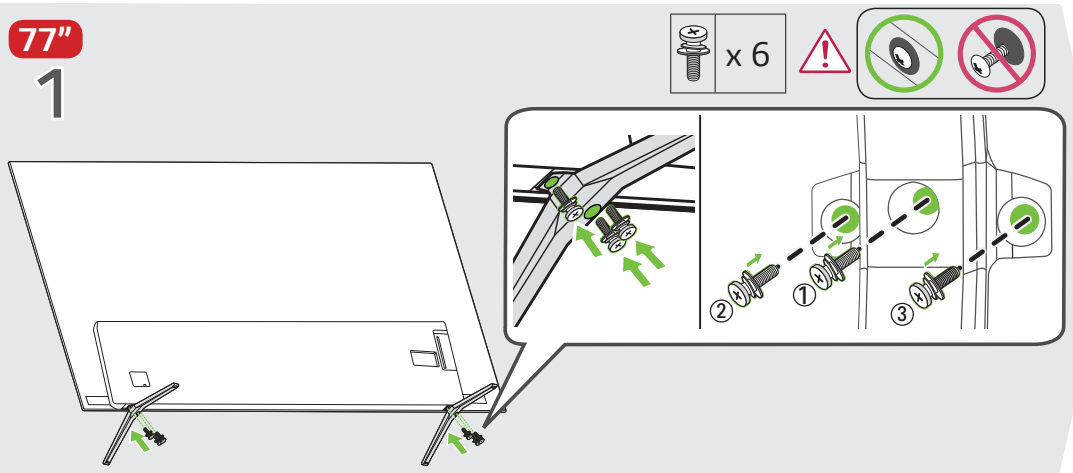


48/55/65”

2

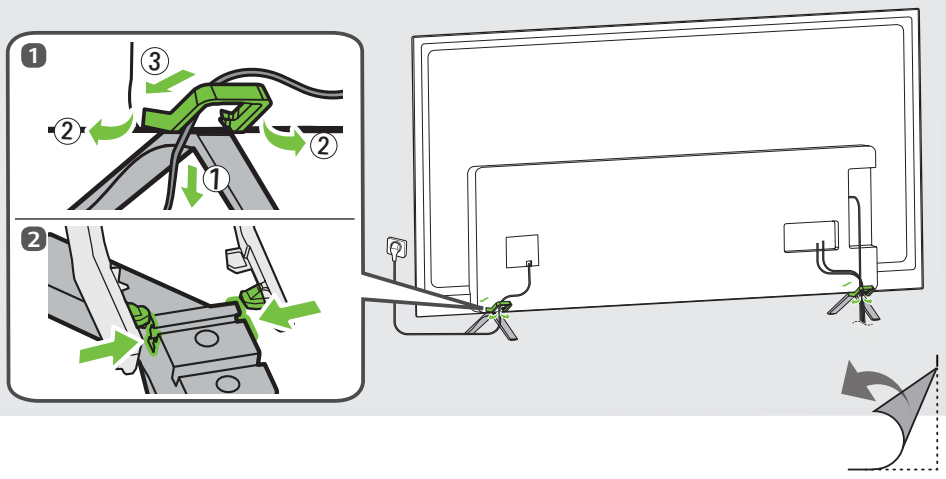


77"


2

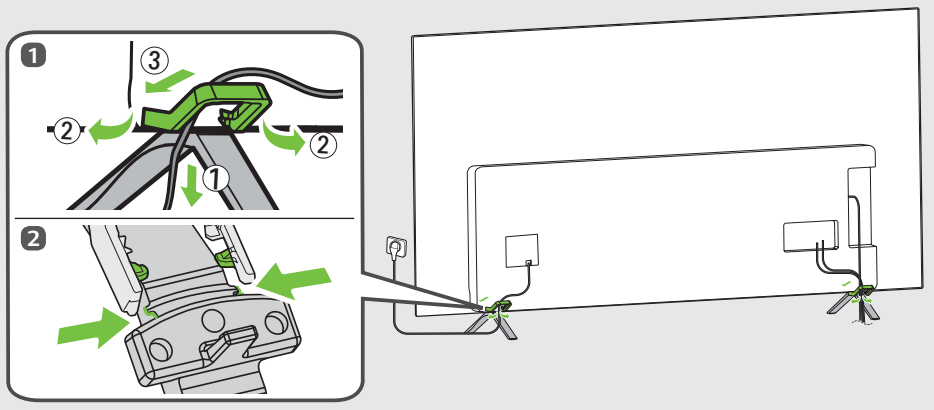

48/55/65/77"

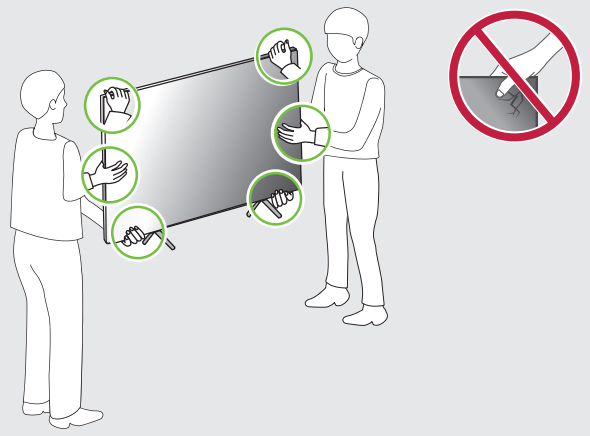

OPTICAL DIGITAL AUDIO OUT

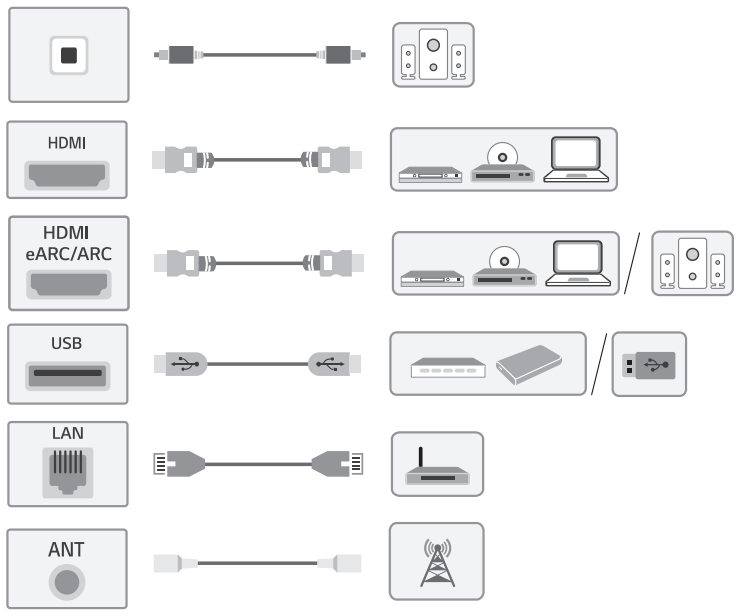

NOTE

- Do not look into the optical output ports, looking at the laser beam may damage your vision
- Audio with ACP (Audio Copy Protection)function may block digital audio output.

NOTE


- Some USB Hubs may not work, if a USB device connected using a USB Hub is not detected, connect it to the USB port on the TV directly
- Connect the external power source if your USB is needed.

ARC (Audio Return Channel)

An external audio device that supports SIMPLINK and ARC must be connected using HDMI IN eARC/ARC port

When connected with a high-speed HDMI cable, the external audio device that supports ARC outputs SPDIF audio without additional audio cable and supports the SIMPLINK function




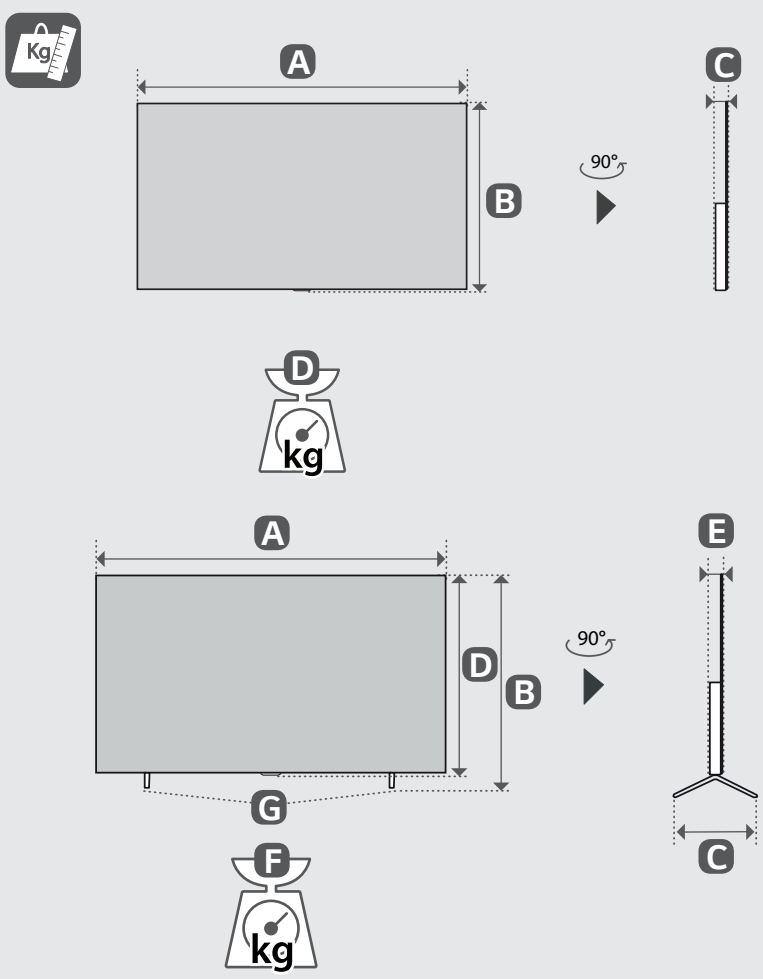


mm (inches)
kg (lbs)

MODELS	A	B	C	D	Power consumption
OLED55B4*	1228 mm (48.3) inches	708 mm (27.8) inches	45.9 mm (1.8) inches	14.3 kg (31.5) lbs	266 W
OLED65B4*	1449 mm (57.0) inches	832 mm (32.7) inches	45.9 mm (1.8) inches	17.1 kg (37.6) lbs	347 W

MODELS	A	B	C	D	E	F	F - G	Power consumption
OLED48B4*	1070 mm (42.1) inches	684 mm (26.9) inches	235 mm (9.2) inches	620 mm (24.4) inches	45.9 mm (1.8) inches	11.7 kg (25.7) lbs	11.5 kg (25.3) lbs	213 W
OLED55B4*	1228 mm (48.3) inches	772 mm (30.3) inches	235 mm (9.2) inches	708 mm (27.8) inches	45.9 mm (1.8) inches	14.5 kg (31.9) lbs	14.3 kg (31.5) lbs	266 W
OLED65B4*	1449 mm (57.0) inches	896 mm (35.2) inches	235 mm (9.2) inches	832 mm (32.7) inches	45.9 mm (1.8) inches	17.3 kg (38.1) lbs	17.1 kg (37.6) lbs	347 W
OLED77B4*	1719 mm (67.6) inches	1057 mm (41.6) inches	319 mm (12.5) inches	989 mm (38.9) inches	50.9 mm (2.0) inches	23.5 kg (51.8) lbs	22.9 kg (50.4) lbs	495 W

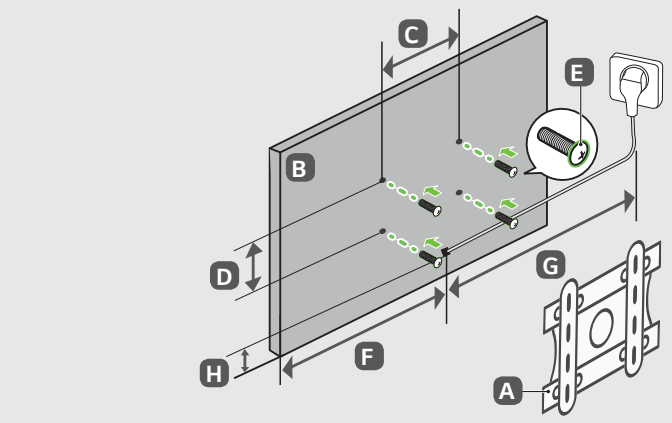

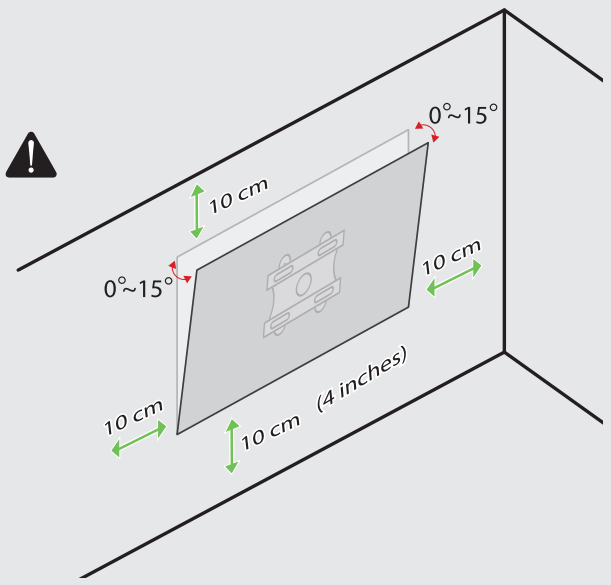

mm (inches)

A	B	C x D	E	F	G	H
Wallmount Bracket	OLED48B4*	300 x 200 mm (11.8 x 7.8) inches	M6	119 mm (4.6) inches	≧1.5 m (59.0) inches	120 mm (4.7) inches
	OLED55B4*			159 mm (6.2) inches		123 mm (4.8) inches
	OLED65B4*			269 mm (10.5) inches		123 mm (4.8) inches
	OLED77B4*			277 mm (10.9) inches		75 mm (2.9) inches