



UQ80*

Quick Start Guide



Images shown in manual may vary depending on model

Unpacking

Check your product box for the following items. If there are any missing accessories, contact the local dealer where you purchased your product. The illustrations in this manual may differ from the actual product and item.




50/55UQ80*


1-A



2-A

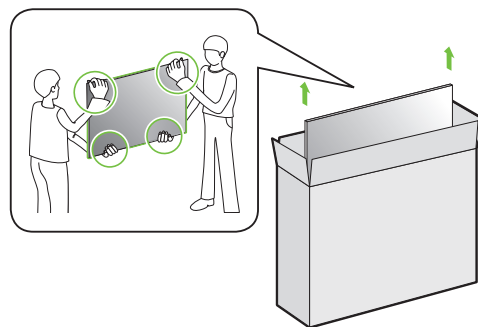


3




60/65UQ80*


1-B



2-B





3



CAUTION

Image shown may differ from your TV

When attaching the stand to the TV set, place the screen facing down on a cushioned table or flat surface to protect the screen from scratches.

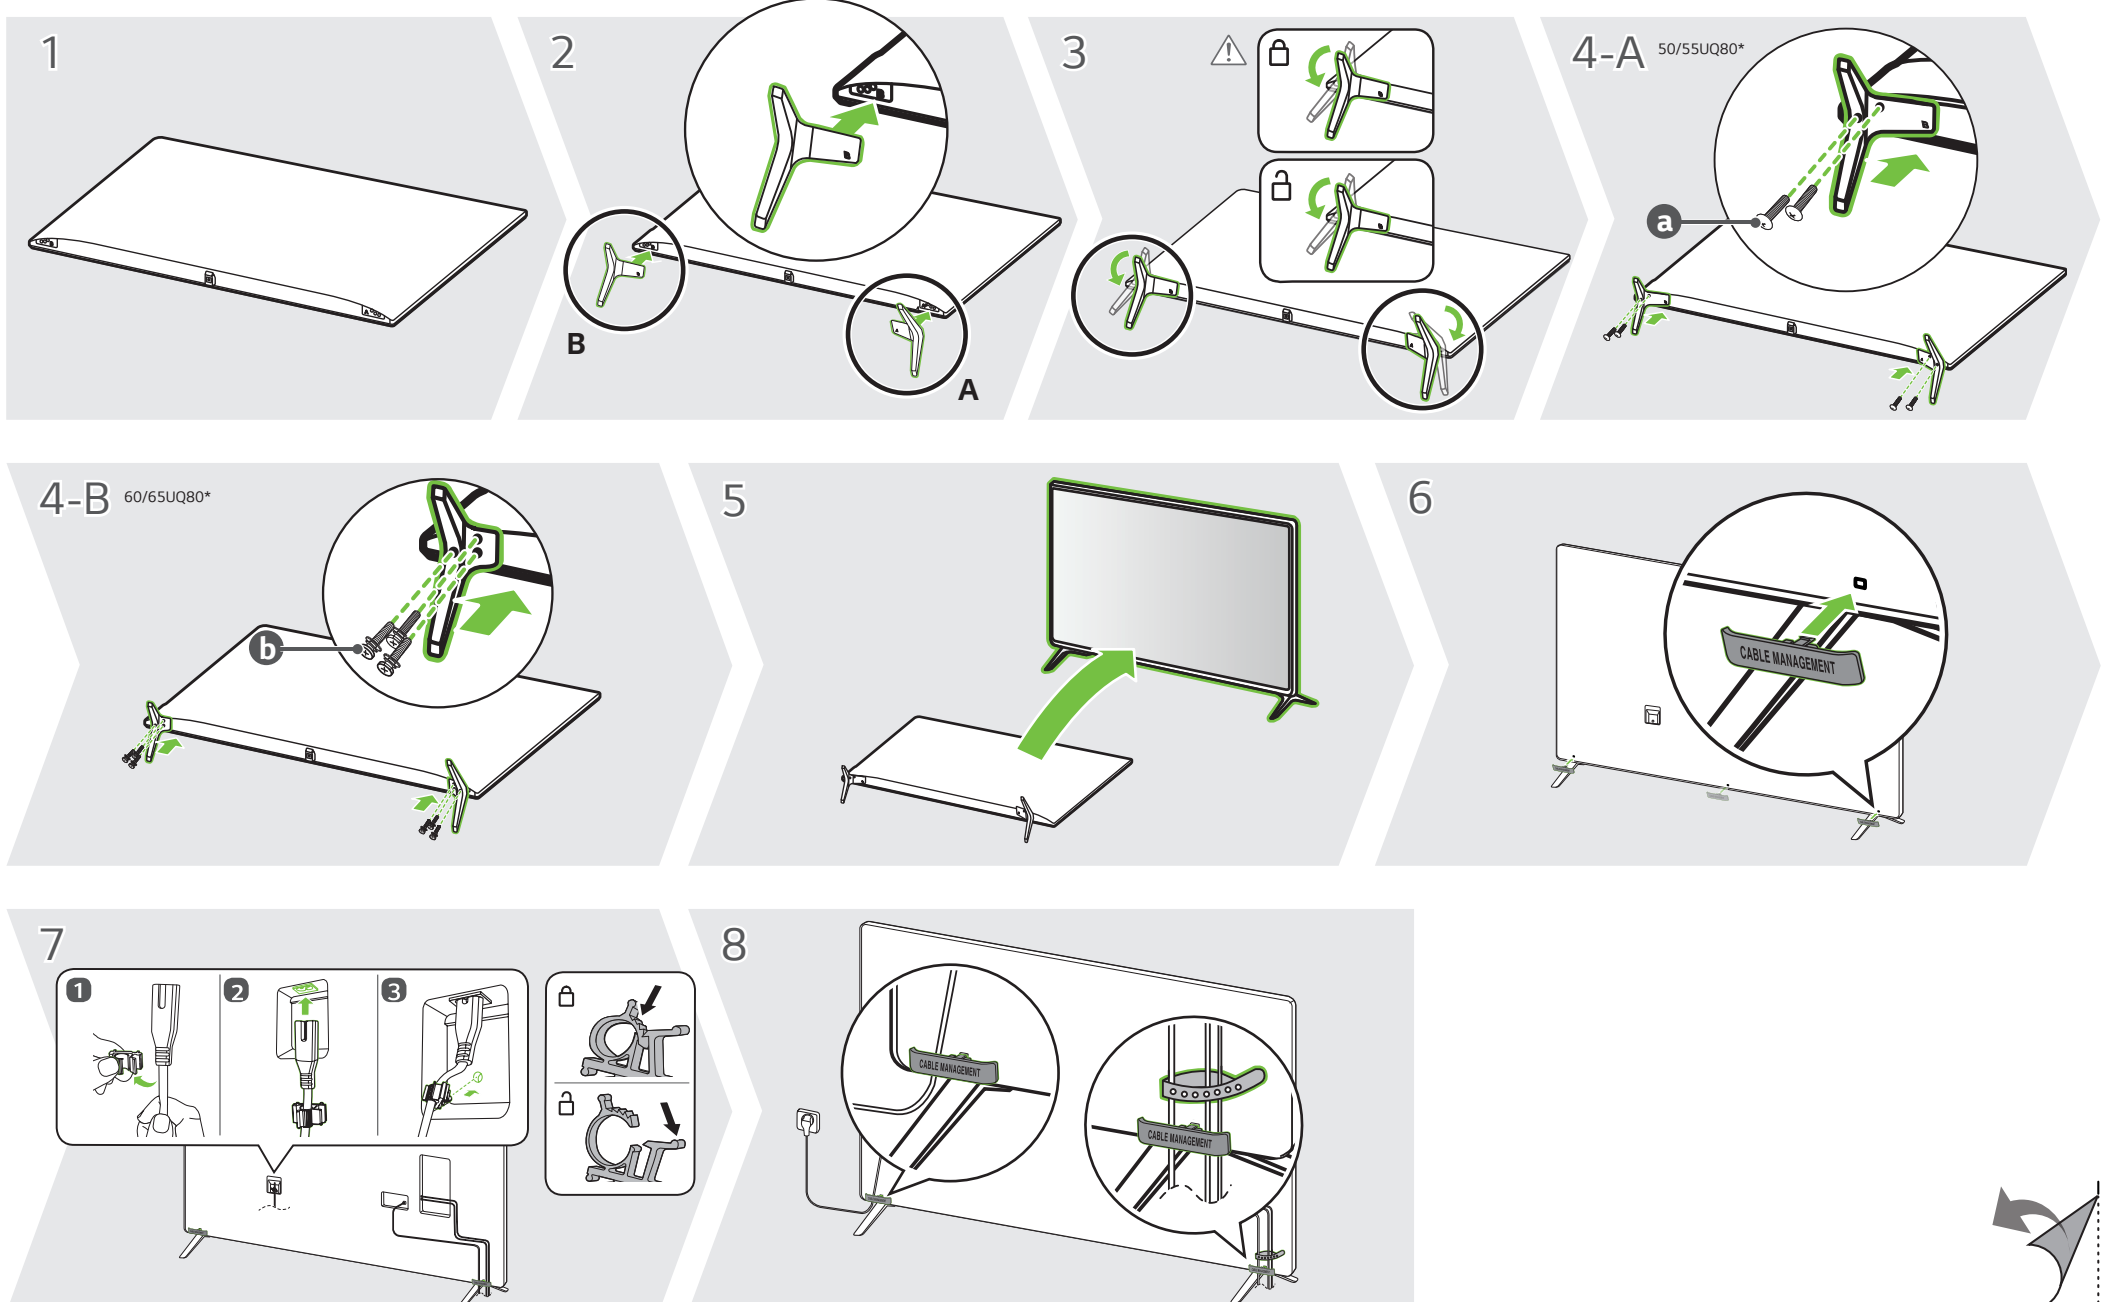



OPTICAL DIGITAL AUDIO OUT



HDMI IN



USB IN



LAN



NOTE


- Do not look into the optical output ports, looking at the laser beam may damage your vision.
- Audio with ACP (Audio Copy Protection) function may block digital audio output.

NOTE

- Some USB Hubs may not work, if a USB device connected using a USB Hub is not detected, connect it to the USB port on the TV directly.
- Connect the external power source if your USB is needed.



AV IN

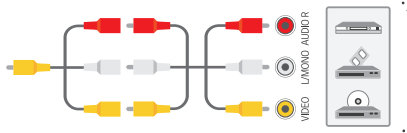

USB IN



HDMI IN



HDMI IN eARC/ARC




NOTE

- Some USB Hubs may not work, if a USB device connected using a USB Hub is not detected, connect it to the USB port on the TV directly.
- Connect the external power source if your USB is needed.

ARC (Audio Return Channel)
An external audio device that supports SIMPLINK and ARC must be connected using HDMI IN eARC/ARC port.
When connected with a high-speed HDMI cable, the external audio device that supports ARC outputs SPDIF audio without additional audio cable and supports the SIMPLINK function.

+

ANTENNA / CABLE IN 1



+

ANTENNA / CABLE IN 2





+

ANTENNA / CABLE IN




+


Satellite IN

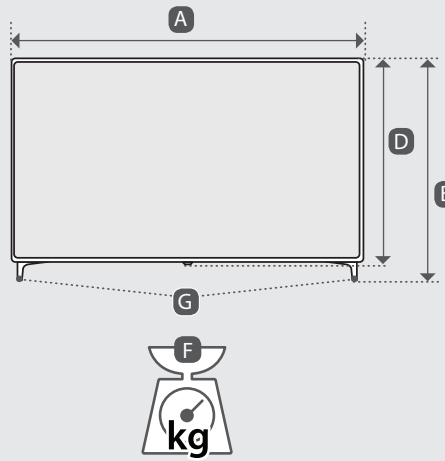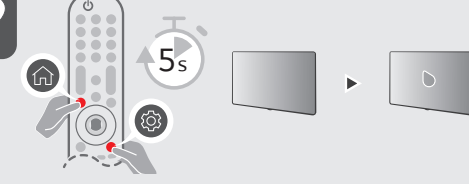

90°



		A	B	C	D	E	F	F - G
		(mm)					(kg)	
50UQ80006LB 50UQ80006LD 50UQ80006LM 50UQ8000PSC	50UQ8000PSL 50UQ8050PSB 50UQ8050PSK	1121	713	231	651	57.1	11.9	11.7
55UQ80006LB 55UQ80006LD 55UQ80006LM 55UQ8000PSC 55UQ8000PSL 55UQ8020PSB	55UQ8020PSK 55UQ8040PSB 55UQ8040PSK 55UQ8050PSB 55UQ8050PSK	1235	776	231	715	57.5	14.2	14.0
60UQ8000PSC 60UQ8000PSL	60UQ8050PSB 60UQ8050PSK	1356	852	269	783	57.5	17.4	17.1
65UQ80006LB 65UQ80006LD 65UQ80006LM 65UQ8000PSC 65UQ8000PSL 65UQ8020PSB	65UQ8020PSK 65UQ8040PSB 65UQ8040PSK 65UQ8050PSB 65UQ8050PSK	1454	906	269	838	57.7	21.8	21.5
Power requirement					AC 100-240 V ~ 50 / 60 Hz			

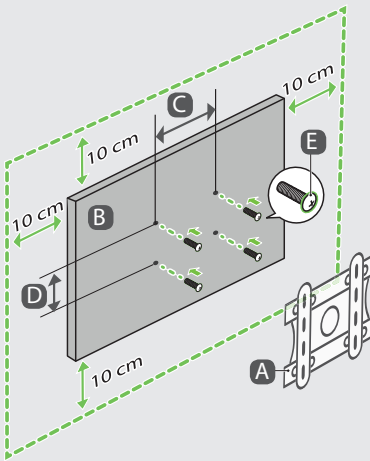

A	B	C × D (mm)	E
Wallmount	50UQ80*	200 x 200	M6
Wallmount	55UQ80*	300 x 300	M6
Wallmount	60/65UQ80*	300 x 300	M6



- Read **Safety and Reference**.

The Analog Gender adapter can be purchased separately at Customer Service.

⊕ : Depending on model