

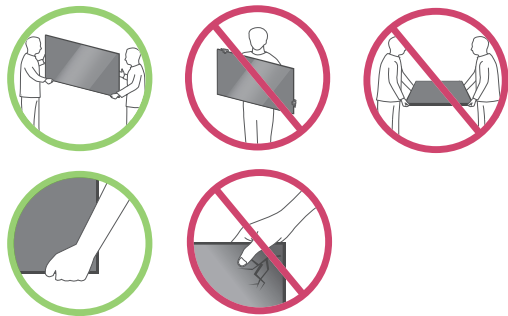
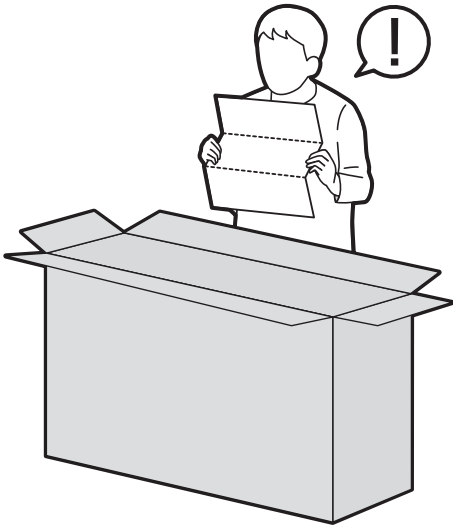



NANO75*

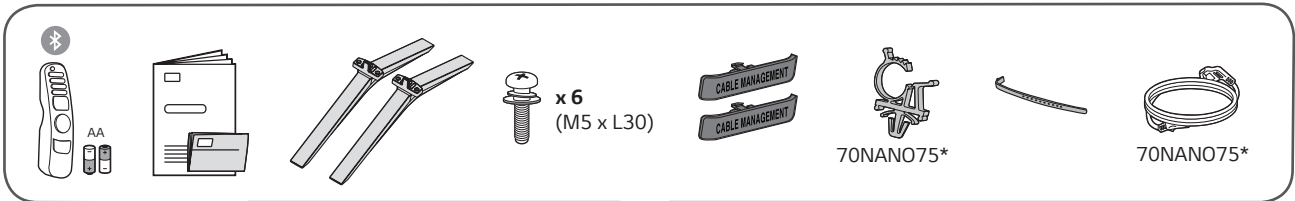


1

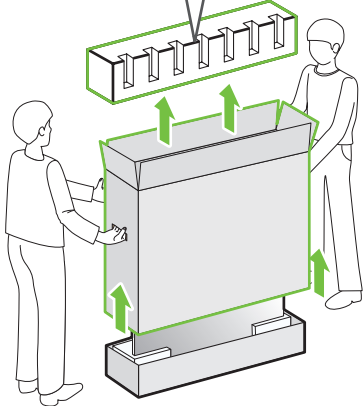


2

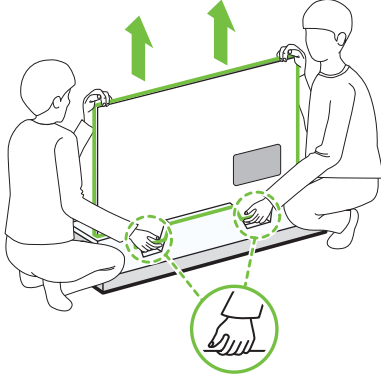


3

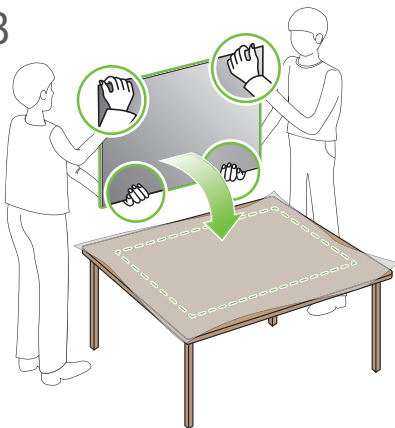


1

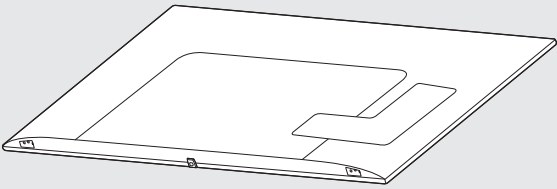


2

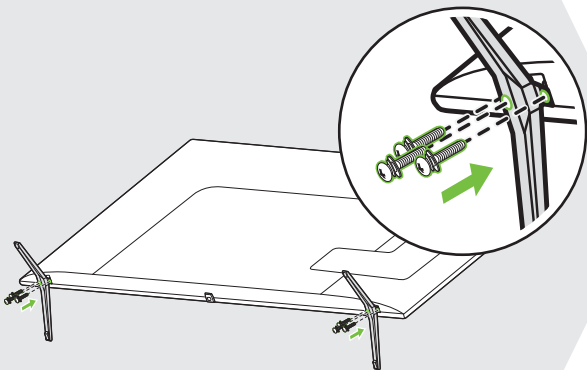


3

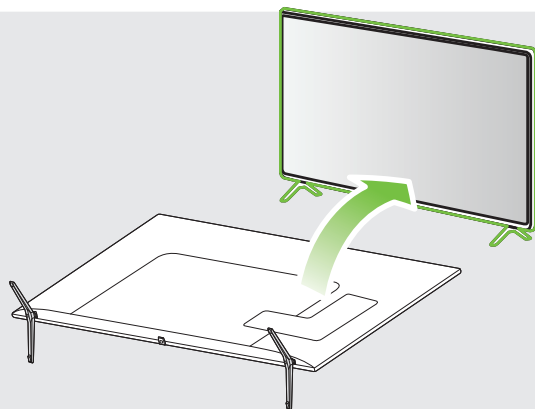


4-A 70NANO75*

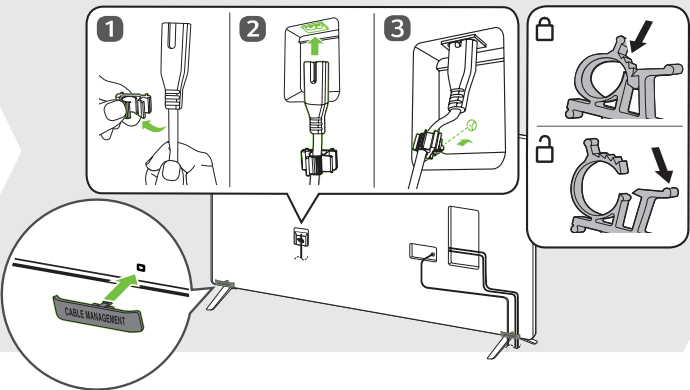


4-B 75NANO75*


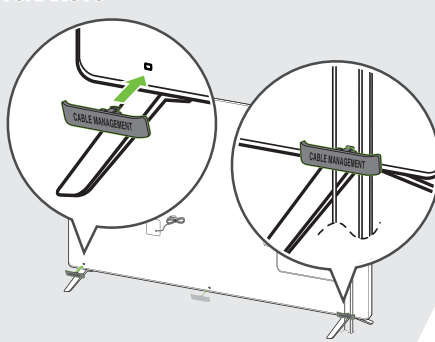


5-A 70NANO75*

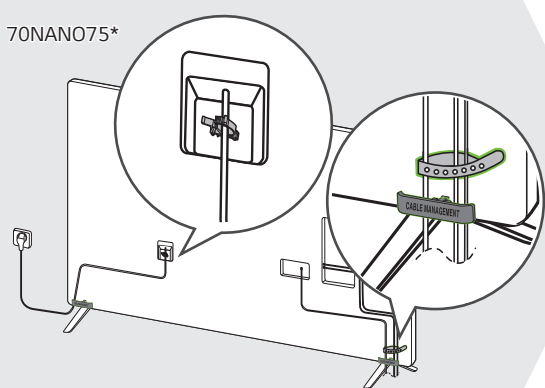

5-B 75NANO75*

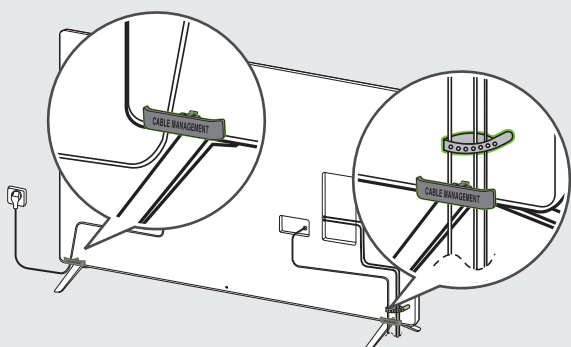

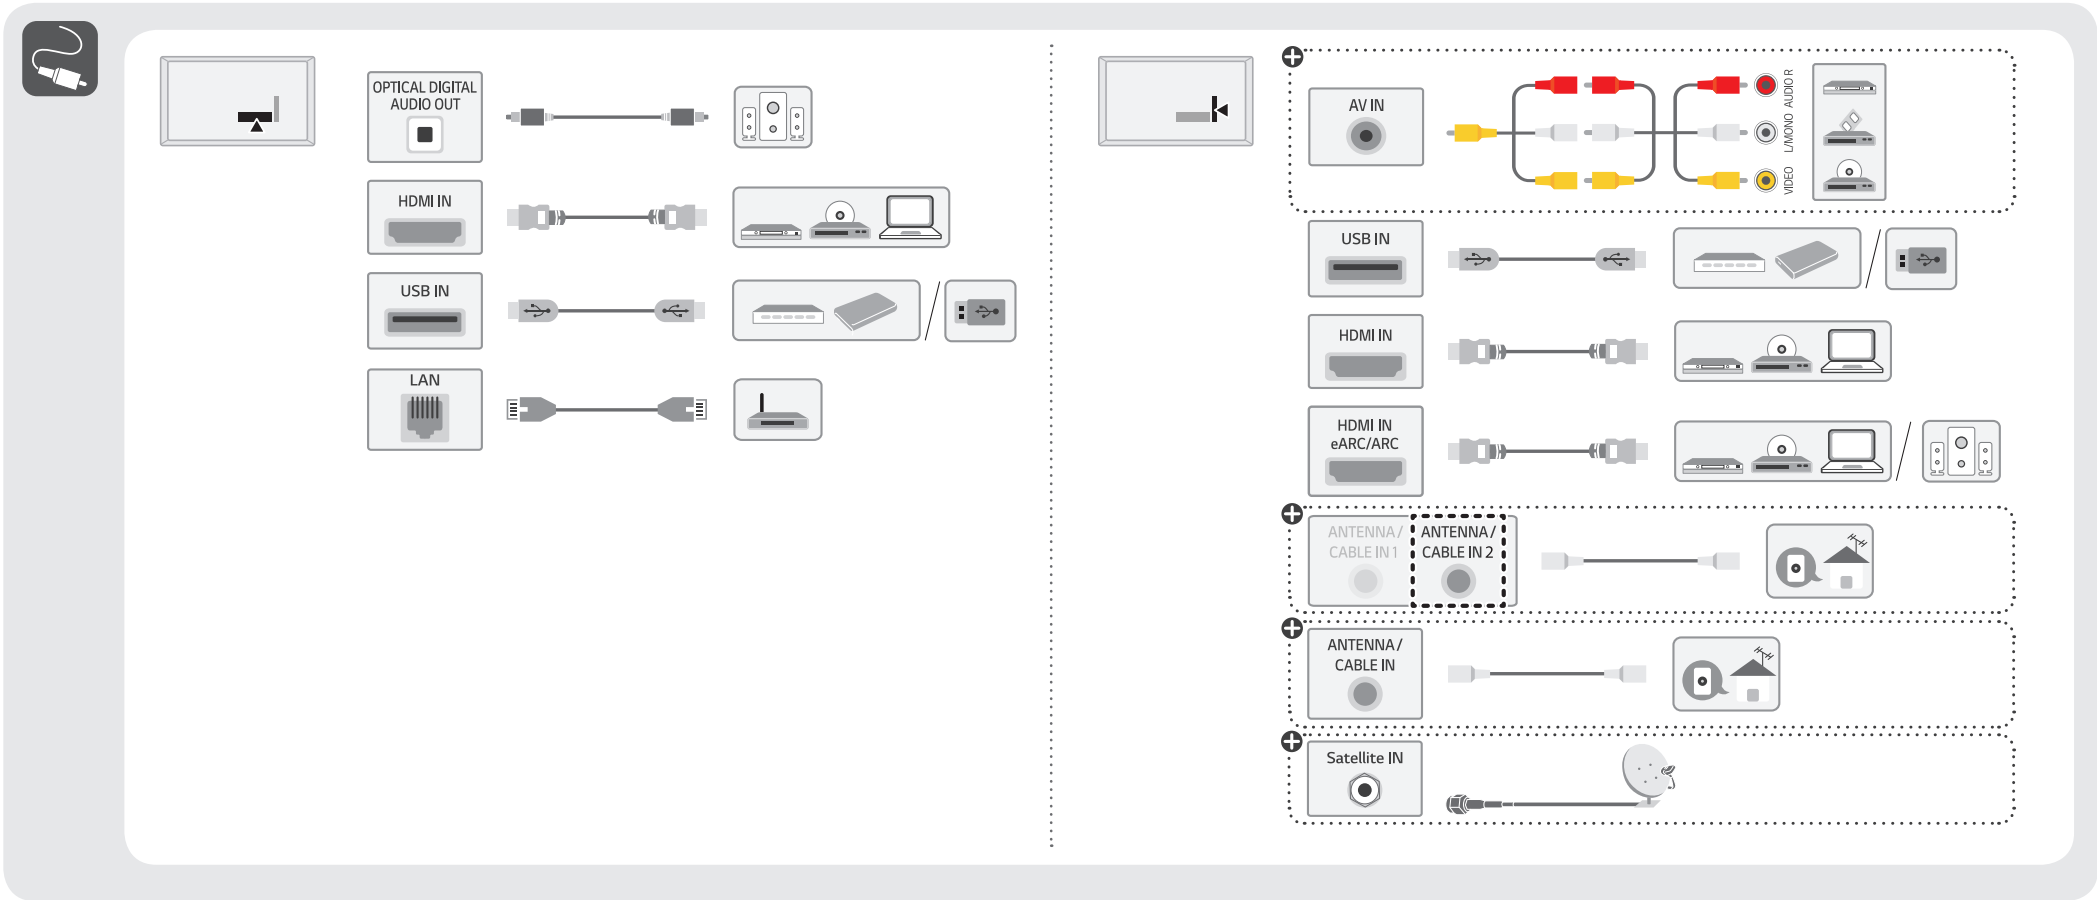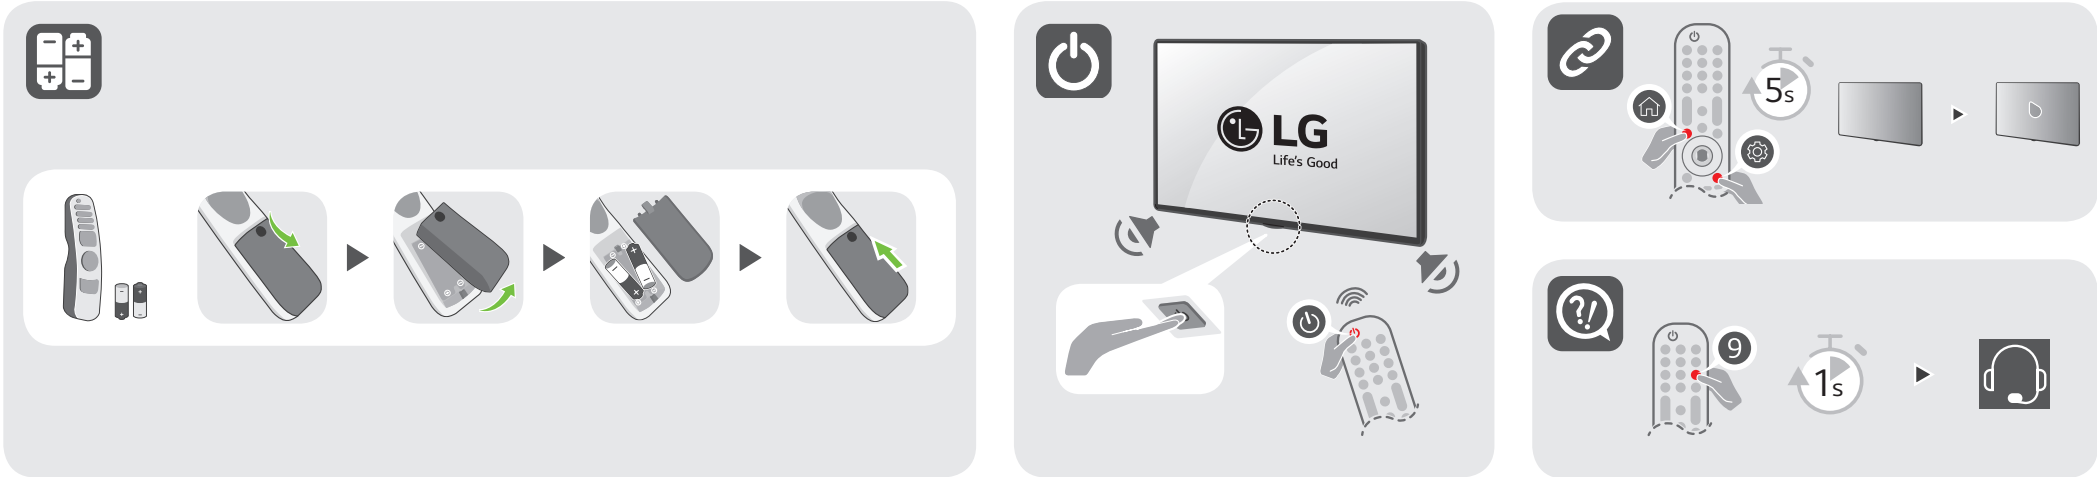

	A	B	C	D	E	F	F-G
	(mm)					(kg)	
70NANO75SQA	1562	972	361	907	59.9	28.8	28.4
75NANO75SQA	1678	1027	361	964	59.9	31.8	31.4
Power requirement / Kebutuhan daya				AC 100-240 V - 50 / 60 Hz			

A	B	C x D (mm)	E
LSW440B	70/75NANO75*	400 x 400	M6

English

Indonesia

• Read **Safety and Reference.**

• Baca **Keamanan dan Petunjuk**

+

: Depending on model / Tergantung pada model

English

Indonesia

• The Analog Gender adapter can be purchased separately at Customer Service.

• Adaptor Analog Gender dapat dibeli terpisah di Layanan Pelanggan.