

# SIMPLE MANUAL

## Wireless Sound Bar

Please read this manual carefully before operating your set and retain it for future reference.

To view the instructions of advanced features, visit <http://www.lg.com> and then download Owner's Manual.

Some of the content in this manual may differ from your unit.


MODEL  
SK5



[www.lg.com](http://www.lg.com)


Copyright © 2018 LG Electronics Inc. All Rights Reserved.

ENGLISH

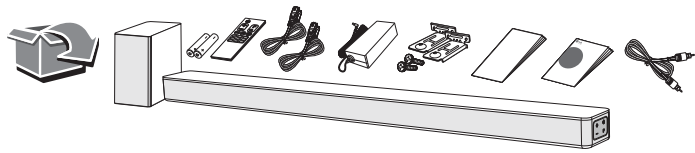


### Front Panel

The buttons are located on the side.



- ⏻ (Standby) ..... Switches the unit ON or OFF
- F (Function) ..... Selects Function
- +/- (Volume) ..... Adjusts Volume

### Rear Panel

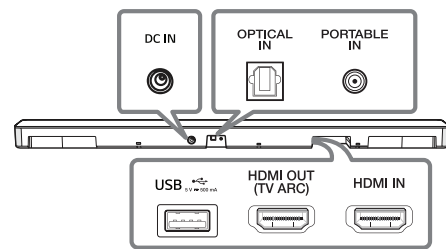

- DC IN ..... Connect to the AC adapter
- OPTICAL IN ..... Connect to an Optical device
- PORTABLE IN ..... Connect to a Portable device
- USB ..... Connect to a USB device
- HDMI OUT (TV ARC) ..... Connect to a TV
- HDMI IN ..... Connect to HDMI out on a device

### 1 Subwoofer Connection

Place the wireless subwoofer near the speaker and follow steps below.

- 1 Connect the power cord of wireless subwoofer and sound bar to the outlet.
- 2 Turn on the main unit :  
The sound bar and wireless subwoofer will be **automatically** connected. The subwoofer's green LED turns on.


#### Subwoofer Connection Manually

If the subwoofer does not make sound, try to connect manually.

- 1 Press **Pairing** button on the rear of the wireless subwoofer.
  - The green LED on the rear of wireless subwoofer blinks quickly. (If the green LED does not blink, press and hold the Pairing button.)
- 2 Turn on the main unit.
- 3 Pairing is completed.
  - The green LED on the rear of wireless subwoofer turns on.



Keep the sound bar and the subwoofer away from the device (ex. wireless router, microwave oven, etc.) over 1 m to prevent wireless interference.




### 2 TV Connection

Connect with the Sound Bar and TV using Optical (A) or HDMI ARC (B).


#### A Optical Connection

- 1 Connect the sound bar to the TV using Optical cable.
- 2 Set up [External Speaker (Optical)] on your TV setting menu.



#### B HDMI(ARC) Connection


- 1 Connect the sound bar to the TV using HDMI cable.
- 2 Set up [External Speaker (HDMI ARC)] on your TV setting menu.



- HDMI connection is unavailable if your TV does not support HDMI ARC.
- If this unit is connected by OPTICAL and ARC at the same time, the ARC signal is a high priority.


#### Additional Device Connection

- 1 Connect to the external device as follows.

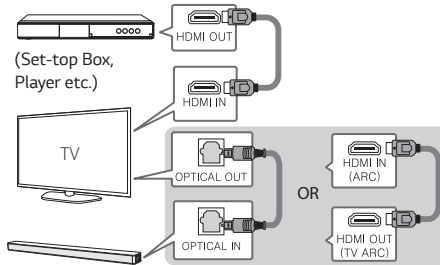

- 2 Set the input source by pressing **F** on the remote control or unit repeatedly.

### Remote control




**ASC/DTS V:X/BASS BLAST +:** Selects the sound effect.

**NIGHT ON/OFF:** Turns down the volume at night.

**WOOFER +/-:** Adjusts the volume level of subwoofer.

**AUTO POWER ON/OFF:** Automatically turns on by an input source.

#### Replacement of battery



### Additional Information

#### Specification

Power consumption	Refer to the main label.
AC adapter	<ul style="list-style-type: none"><li>• Model : DA-50F25</li><li>• Manufacturer : Asian Power Devices Inc.</li><li>• Input : 100 - 240 V ~ 50 - 60 Hz</li><li>• Output : 25 V <math>\overline{\sim}</math> 2 A</li></ul>
Dimensions (W x H x D)	Approx. 891.0 mm X 57.5 mm X 87.8 mm With foot
Bus Power Supply (USB)	5 V $\overline{\sim}$ 500 mA
Amplifier (Total RMS Output power)	360 W RMS

Design and specifications are subject to change without notice.

#### OPEN SOURCE SOFTWARE NOTICE INFORMATION

To obtain the source code under GPL, LGPL, MPL, and other open source licenses, that is contained in this product, please visit <http://opensource.lge.com>.

In addition to the source code, all referred license terms, warranty disclaimers and copyright notices are available for download.

LG Electronics will also provide open source code to you on CD-ROM for a charge covering the cost of performing such distribution (such as the cost of media, shipping and handling) upon email request to [opensource@lge.com](mailto:opensource@lge.com). This offer is valid for a period of three years after our last shipment of this product. This offer is valid to anyone in receipt of this information.

#### Declaration of Conformity



Hereby, LG Electronics declares that the radio equipment type Wireless Sound Bar is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:

<http://www.lg.com/global/support/cedoc/cedoc#>

For consideration of the user, this device should be installed and operated with a minimum distance of 20 cm between the device and the body.

#### IMPORTANT SAFETY NOTICE

The cord grip for the plug fitted to this product is built into the existing power cord as supplied. If, for any reason you need to shorten the cord.

#### DO NOT RE-USE THE PLUG.

A new plug must be used to ensure your continued safety by securing the plug to the power cord in accordance with Plug & Socket Regulations 1994.



簡易手冊

# 無線 Sound Bar

操作播放器前，請細心閱讀本說明書並予以保留作日後參考之用。  
要查看進階功能，請瀏覽 <http://www.lg.com> 並下載使用者手冊。  
本手冊中的某些內容可能不適用於此裝置上。


型號  
SK5




MFL70420377

www.lg.com  
版權所有 © 2018 LG Electronics Inc. 保留一切權利。

中文

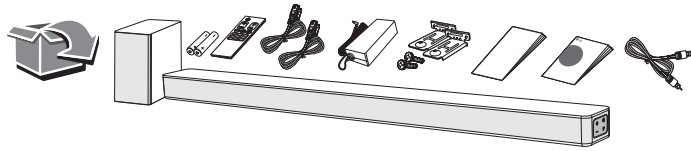


## 前面板



⏻ (待機) ..... 待機/啟動  
F (功能) ..... 選擇功能  
+/- (音量) ..... 調節音量

## 後面板

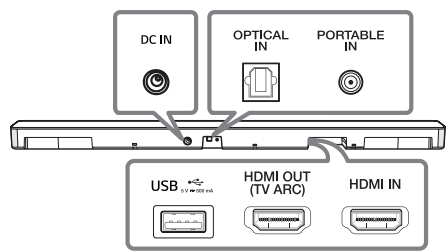

DC IN ..... 連接 AC 電源轉接器  
OPTICAL IN ..... 連接至光纖裝置  
PORTABLE IN ..... 連接至可攜式裝置  
USB ..... 連接至 USB 裝置  
HDMI OUT (TV ARC) ..... 連接至電視  
HDMI IN ..... 從其他裝置經 HDMI 輸入

## 1 無線超低音揚聲器連接

將無線超低音揚聲器放置在 Sound Bar 附近並按照以下步驟操作。


- 1 將 Sound Bar 及無線超低音揚聲器的電源線連接到電源插座。
- 2 開啟 Sound Bar :  
Sound bar 與無線超低音揚聲器會自動連接。無線超低音揚聲器的綠色 LED 燈會亮起。

### 手動連接無線超低音揚聲器

若無線超低音揚聲器未能發出聲響，嘗試手動連接。

- 1 按下超低音揚聲器後的Pairing按鈕。
  - 無線超低音揚聲器背部的綠色LED燈會閃爍。(如綠色LED沒有閃動，按著Pairing[配對]按鈕不放。)
- 2 開啟 Sound Bar。
- 3 配對完成。
  - 無線超低音揚聲器背部的綠色 LED 燈會亮起。

! 請將 Sound Bar 和無線超低音揚聲器放置在離其他裝置（例如無線路由器、微波爐等等）1米以上的地方，避免無線干擾。




## 2 電視連接

透過光纖 (A) 或 HDMI ARC (B) 連接 Sound Bar 和電視。


### A 光纖連接

- 1 透過光纖將 Sound Bar 連接至電視。
- 2 在您的電視設定功能表上設定 [外置揚聲器 (光纖)]。



### B HDMI (ARC) 音訊連接


- 1 透過 HDMI 纜線連接 Sound Bar 至電視。
- 2 在您的電視設定功能表上設定 [外置揚聲器 (HDMI ARC)]。



- ! 假如您的電視不支援HDMI ARC，HDMI 連接並不適用。
- 若裝置同時連接 OPTICAL 和 ARC，ARC訊號將更為優先。


### 額外裝置連接

- 1 依照下圖連接外接裝置。

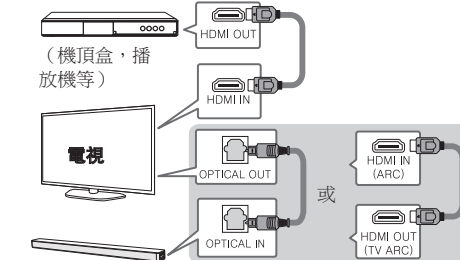

- 2 重複按遙控器或本裝置上的F以設定輸入源。

## 遙控器




ASC/DTS V:X/BASS BLAST +/-: 選擇音效。

NIGHT ON/OFF: 晚上將音量收細。

WOOFER +/-: 調整低音揚聲器音量。

AUTO POWER ON/OFF: 自動透過輸入來源開啟。

### 更換電池



## 其他資訊

### 規格

耗電	請參閱主要標籤。
AC 轉接器	<ul style="list-style-type: none"><li>• 型號: DA-50F25</li><li>• 製造商: Asian Power Devices Inc.</li><li>• 電源輸入: 100 - 240 V ~ 50 - 60 Hz</li><li>• 電源輸出: 25 V <math>\overline{\sim}</math> 2 A</li></ul>
尺寸 (寬 x 高 x 深)	大約 891,0 mm x 57,5 mm x 87,8 mm 連底部
匯流排電源供應 (USB)	5 V $\overline{\sim}$ 500 mA
擴音器 (總RMS輸出功率)	360 W RMS

設計和規格如有任何變更，恕不另行通知。

### 注意：開放來源程式碼軟件

若要獲取此產品所包含的 GPL、LGPL、MPL 來源程式碼和其他開放來源程式碼認證，請瀏覽 <http://opensource.lge.com>。

除了來源程式碼，所有涉及到的授權條款、免責聲明和版權聲明可供下載。

LG Electronics 亦可以透過收費 CD-ROM 提供開放來源程式碼，費用包括 CD-ROM 成本（例如媒體成本、運費以及處理費），您可透過 [opensource@lge.com](mailto:opensource@lge.com) 索取。此服務由購買產品日期起計算三年內有效。

### 符合性聲明



在此，LG電子聲明 無線條形音箱 類型的無線電設備符合 2014/53/EU指令。你可以從以下互聯網地址獲得歐盟符合性聲明的全文：

<http://www.lg.com/global/support/cedoc/cedoc#>

為了使用者的考慮，安裝和使用設備時，設備需和身體之間保持最少20厘米距離。

### 安全注意事項

本機的插頭握柄是專為本產品所設計，且與附設的電源線為一體，若您因為任何理由而需截短此電源線時

### 請勿再使用該插頭

應使用全新的插頭以確保連續使用之安全性。請依據1994年之插頭及插座規範的規定，將插頭確實地與電源線結合。

