Software Upgrade Guide

Notice


- 1. Check correctly the Full model name of TV Set.
- Ex) 47LX9500-UA : The Full model name must include "-UA".
- Check the application Full model name and purpose of software upgrade after click the software name on the website.
- 3. Do not unplug the TV power cord during software upgrading.

1. Method to verify the Full model name of TV Set .

Method 1. Check label of TV Set (Side or Rear).



or



- 1) Press [MENU] key of remote control.
- 2) Press (Red) key of remote control.
 (Red) key is "Customer Support".



Method³. Check the SETUP.

- 1) Press [Home] key of remote control.
- Select the "SETUP".



Close
3) Move to the "SUPPORT"
4) Select the "Product/
Service Info."

47LX9500-UA.

3) Select the "Product/


Software Update

Product/Service Info

Picture Test
 Sound Test

Network Test

Service Info."





5) Check the "Model/Type"



- 2. Method to verify the Full model name of TV Set and purpose of software upgrade on the website.
 - 1 Click the "Drivers & Software".
 - 2 Click the Software name.



③ Check the Full model name (Ex. 47LX9500-UA) and purpose of Software upgrade.



1

Searching the software.


Select your country after connecting to www.lg.com.
 itp://www.lg.com/commai/rdoc/go#




② Move to the "Support".



③ Fill in the your Model name. (Ex. 47LX9500(Fill Model name except "-UA".)
④ Click the "Continue".

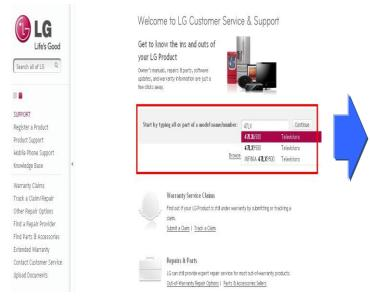

6 Click the "Drivers & Software".7 Click the Software name.



(5) Click the Model name.

Search all of LG Q	
SUPPORT	
Register a Product	
Product Support	
Mobile Phone Support	
(nowledge Base	ł
Warranty Claims	
Frack a Claim/Repair	
Other Repair Options	
Find a Repair Provider	
Find Parts & Accessories	
Extended Warranty	
Contact Customer Service	
Jpload Documents	

Rodel Name/Number	47LX6500	Continue
	Type all or any part of the name or number.	
tches for 471 X6	500	
teries for 47LX6	000	
TV/Audio/Vide	5	
I V/Audio/Vide	0	
20.00	47LX6500	
Televisions	Contraction of the second seco	

TV/Audio/Video

iome Theater System

Televisions

Audio

⑧ Check the Full model name (Ex. 47LX9500-UA) and purpose of software upgrade.

MOBILE PHONES


Hobile Phone

Life's Good		Product Support for 47LX6500	Knowledge Base Search the DORnowledge Ease Q
Search all of 10 Q		TV/Audio/Video: Televisions: 47LX6500	or start at the Knowledge Base
		Please role this product has been discontinued. It is no larger possibilities to taken.	hose
LEPORT sighter a Product reduct Support lobile Phone Support nowledge Base		Co you own this product? Angeteerit New >	We're Here to Help
Sarratity Claims		Warranty & Documents Delears & Software Warranty Info	representative (Weekdays), Ban-Bpn CST
ratk a Clains Repair Ither Repair Options Ind a Repair Provider		Software Upgrades include Decker Systems and Firmware Updates for specific Model, only, NAP all Model's support dow-includes software upgrades, so check the Owner's Manual for Portractions:	
ind Parts & Accessories atended Warranty		Reck to Litt	By Event Send emersispe to LG Customer Service and Support.
Iontact Customer Service Island Documents		Details for: The latest fearware life v64.12.49	
			6
		(I.G)_USB_Download_Manual_V1_3_[2].p.df . Quarked the File	Call on US support representative(800) 240-
			0000
		Operating hydronia): Windows 40	Phone software update
		The_latest_firmware_file_x04.12.00.2.0	1
		Download that The	_
	*	Silan: 140,7507 Opporting Epithology Without D	HORE COMMUNITY
		The latest finaware file for upgrade	100
		(Replication Rodel Int)	LG Holder Forum Log your questions and ant appears from other U
		42/47/18136900	ifer.
		L	


Constant - Senset I Brance I B

2 Downloading the software file to the USB Memory device. Running the software Upgrade.

① Click the "Download this File" on the website to save it to the PC.

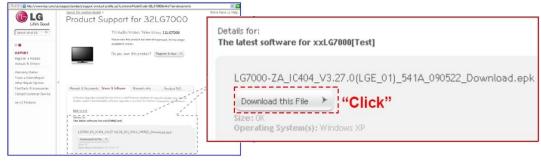


- 2 Unzip the software file.
- ③ If there are two files exist in the compressed file, update lower version first and update higher version later.




- 1) Insert the USB memory device into USB Port of the PC.
- 2) Make a folder in USB Memory device. Folder name must be "LG_DTV".
- 3) Firstly, copy lower version file only to "LG_DTV" folder in USB memory device .

File Edit View Favorites	Tools	Help		
G Back • 🕥 · 🏂	P	Search	Polders	-
Address E:\LG_DTV	dia si			
Folders	×		CD TV-xxLH	13000-xxLH4000
Desktop My Documents My Computer				
Gripticer G				
🗑 🥝 DVD Drive (E:)				
USB MEMORY (F:)				

- 4) Insert the USB memory device into USB Port of the TV.
 - E Position of USB port : Side or Rear



You may see one of picture below.

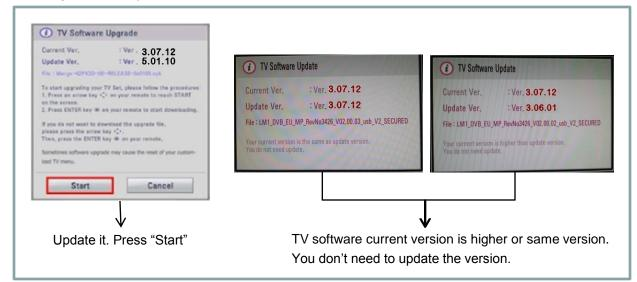

* A few USB memory device may not be compatible with the TV, in that case you use another USB device. If software upgrade execute, below message will appear on TV.



Copying the new version software file from USB Memory device to the TV system memory.

※ Don't remove the USB Memory device while this message is displayed. Do not unplug the TV power cord while this message is displayed.

Running the software upgrade.

***** Do not unplug the TV power cord while this message is displayed.

If the upgrade is completed, this message is displayed. And the TV will restart automatically in 5 seconds.

- 5) Secondly, copy higher version file to "LG_DTV" folder in USB memory device.
- 6) Repeat 4)
- 7) Update has completed.

* Just remember. Update lower version first and update higher version later.