


Uputstvo za nadogradnju softvera

◆ Napomena

- Provjerite točnost pune oznake modela TV uređaja
Npr) 47LX9500-UA: Puna oznaka modela mora imati "-UA".
- Provjerite aplikaciju pune oznake modela i svrhu nadogradnje softvera i kliknite na ime softvera na web stranici
- Ne isključujte TV kabel tokom nadogradnje softvera

1. Metoda verifikacije pune oznake modela TV uređaja

Metoda ①. Provjerite naljepnicu TV uređaja(sa strane ili iza)

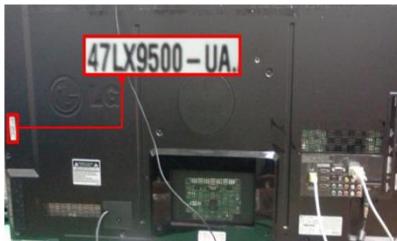

ili



Metoda ②. Provjerite Menu

- Pritisnite tipku [MENU] na daljinskom upravljaču
- Pritisnite (Crveno) na daljinskom upravljaču.
(Crveno) je "Podrška za korisnike".




Metoda③. Provjerite Podešavanje.


- Pritisnite [Home] tipku na daljinskom upravljaču.
- Odaberite "Podešavanje".



3) Izaberite "Proizvod/
"Servisne informacije"




4) Provjerite "Model/Tip"




3) Prijedite na "Podrška"

4) Odaberite "Proizvod/
"Servisne informacije"



5) Provjerite "Model/Tip"



2. Metoda verifikacije pune oznake modela TV uređaja i svrha nadogradnje softvera na web stranici

- Kliknite na "Upravljački programi i softver".
- Kliknite na ime softvera



Podrška za proizvod 47LX

Televizori/Audio/Video/Telefoni

47LX9500

Specifikacije, galerija fotografija, recenzije

Informacije o pristupu, potrošnji i energetičkoj

efikasnosti

Makroprogrami, informacije o usluzama i aplikacijama i programi za integraciju

sredstava mreže. Ovaj se modul ne podstavlja nadogradnje softvera za ovim

kontrolnim programima.

Operativni sustav: Sve dostupne

The latest Firmware file v03.20.25

Operativni sustav: Nisu dostupne

Windows 2000

Windows XP

Windows VISTA

Windows 7



- Provjerite punu oznaku modela (Npr. 47LX9500-UA) i svrhu nadogradnje softvera



Podrška za proizvod 47LX9500

Upravljački programi i softver

47LX9500

Specifikacije, galerija fotografija, recenzije

Informacije o pristupu, potrošnji i energetičkoj

efikasnosti

Makroprogrami, informacije o usluzama i aplikacijama i programi za integraciju

sredstava mreže. Ovaj se modul ne podstavlja nadogradnje softvera za ovim

kontrolnim programima.

Operativni sustav: Sve dostupne

The latest Firmware file v03.20.25

Operativni sustav: Nisu dostupne

Windows 2000

Windows XP

Windows VISTA

Windows 7

Redownload

Cancel

Close

OK

Cancel

Close

Traženje softvera.

① Odaberite Vašu zemlju nakon konekcije na www.lg.com. ② Idite na "Podrška".

The left side shows a world map with regions labeled: Global, Europe, Asia & Pacific, North America, Middle East & Africa, and Latin America. A red box highlights the 'Europe' region. To the right is a list of countries with their corresponding languages: Austria, Deutsch, Bulgaria, Evropski; Belgium, Français, Dutch, Čeština, Hrvatska; Czech Republic, Čeština, Croatian; Estonia, Eesti, Danish; France, Français, German, Deutsch; Ireland, English, Italy, Italian; Latvia, Latvīķi, Lithuania, Lietuva; Netherlands, Dutch, Norwegian, Magyar; Poland, Polski, Portuguese, Português; Romania, Româñă, Serbia, Srbija; Slovakia, Slovák, Spanish, Español; Switzerland, Deutsch, French, Svensk. A blue arrow points from this list to the 'Podrška' section on the right. The 'Podrška' section includes links for: Televizori/Audio/Video, Mobilni telefoni, Kućanski aparati, IT proizvodi, Klima-uređaj/Grijanje, Poslovna rješenja, O LG-u, Podrška (highlighted with a red box), and Spora Internet veza. At the bottom right is a Facebook icon for 'LG Hrvatska'.

- ③ Popunite oznaku modela
(Npr. 47LX9500(Popunite ime modela osim "-UA").)
④ Kliknite "Nastavi".

The page title is 'Dobro došli u LG korisničku za podršku'. It features a grid of icons representing various support services like warranty, repair, and software updates. A red box highlights the input field where '47LX9500' is typed. A blue arrow points to the next step.

- ⑤ Kliknite ime modela

The page title is 'Podrška za proizvod'. It shows a search bar with '47LX9500' and a result list for 'Televizori/Audio/Video' with 'Televizori' selected. A red box highlights the 'Televizori' link. A blue arrow points to the next step.

- ⑥ Kliknite "Upravljački programi i softver".
⑦ Kliknite ime softvera.

The page title is 'Podrška za proizvod 47LX'. It shows a large image of a Full LED 3D television. A red box highlights the 'Upravljački programi i softver' link in the menu. A blue arrow points to the next step.

- ⑧ Kliknite puno ime modela (Npr. 47LX9500-UA) i svrhu nadogradnje softvera.

The page title is 'Podrška za proizvod 47LX9500'. It shows a download section for 'The latest firmware file v03.20.25'. A red box highlights this link. A blue arrow points to the bottom of the page where a list of supported operating systems is shown.

Kuhajte zdravije,
LG MJ3280 - Konvek
valovima I roštiljem !
Ugljen

Tajna potpuno nove LG konvek
roštiljem je u snazi prirode. Uz
grijaća na Ugljen kuhanje je d
grijaća na Ugljen poboljšava aps
standardnim, zbog toga će Vaš
izvana, sočna iznutra.

Mikrovlnne pećnicne ➤



Podrška za proizvod

Pronadite svoj proizvod unosom naziva ili broja modela, odnosno §

Unesite naziv ili broj modela Unesite cijelo ili djelomično ime ili broj.

Rezultati 47LX9500

Televizori/Audio/Video

Televizori

Ili pritisnite vrstu proizvoda

Televizori/Audio/Video
Televizori
Video
HIFI sustavi

2 Preuzimanje softvera na USB memoriju. Pokretanje nadogradnje softvera.

- ① Kliknite na "Preuzmi datoteku" na stranici da bi ga spremili na USB memoriju.


The latest firmware file v03.20.25

The_latest_firmware_file_v03.20.25.zip


Preuzmi datoteku

Veličina: 93,977K


- ② Odzipajte fajl sa softverom.
③ Ako postoje dva fajla u zip datoteci prvo nadogradite stariju pa zatim noviju verziju.



- 1) Uključite USB memoriju u USB port na PC-u.
2) Kreirajte folder na USB memoriji u početnom (root) direktoriju. **Ime foldera mora biti "LG_DTV".**
3) Prvo kopirajte stariju verziju jedino u folder "LG_DTV" na USB memoriji.

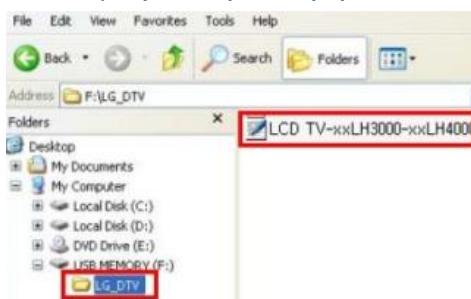

- 4) Uključite USB memoriju u USB port na TV-u.
▪ Pozicija USB porta na TV-u je sa strane ili na poleđini TV-a.

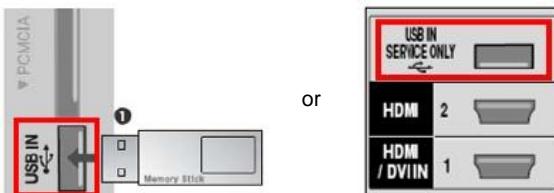

Prikazati će se jedan od prozorčića.



Pokrenite nadogradnju "Start" tipkom. TV softver je više ili iste verzije koju pokušavate instalirati pa nema potrebe za nadogradnjom..

* Neke USB memorije neće biti kompatibilne s TV-om pa molimo da pokušate s drugom USB memorijom..

Ako započne nadogradnja možete vidjeti neke od ovih poruka.



Kopiranje novije verzije softvera sa USB memorije u TV sistemsku memoriju.

※ **Ne isključujte USB memoriju dok traje ova poruka.**

Ne isključujte TV dok traje ova poruka.

Nadogradnja softvera u toku.

※ **Ne isključujte TV dok traje ova poruka.**

Ako je nadogradnja obavljena ova poruka će biti prikazana.

TV će se automatski restartati nakon 5 sekundi..

- 5) Nakon toga kopirajte noviju verziju u "LG_DTV" folder in USB memory device a stariju uklonite iz foldera.
(Ovo važi samo ako su u zip-u bile dvije datoteke!)
- 6) Ponovite korake od koraka 4)
- 7) Nadogradnja je završena.
※ Napomena! Poštujte redoslijed nadogradnje i prvo nadogradite stariju verziju pa tek onda noviju!