



简体中文  
繁體中文  
English



## HBS-600 用户手册 立体声蓝牙耳机



**Rev 2.0 CN**

LG Electronics Inc., 2014  
保留所有权利。

请在使用HBS-600之前仔细阅读本手册内容，以防使用不便或误操作，让产品达到最佳使用效果。

## 部件说明



## 包装盒内的物品



收纳袋



AUX 数据线



USB 充电数据线



用户手册

## 规格

项目	说明
蓝牙® 规格	3.0 (耳机/免提/A2DP 模式)
电池	电池 3.7 伏/370 毫安锂聚合物电池
待机时间/通话时间	长达 900 小时/长达 18 小时
音乐播放时间	长达 18 小时
充电时间	< 3.0 小时
充电额定输入	DC 4.75 V ~ 5.6 V, 400mA
操作温度	-10° C ~ 60° C
尺寸/重量	167 毫米 (宽) x 175 毫米 (长) x 64.6 毫米 (厚) /145 克

**开机/关机**

- 将电源开关滑至“ON”或“OFF”位置。

**充电**

- 无论关机与否，耳机连接充电器进行充电时都会自动关机。
- 充电过程中，LED指示灯将显示为稳定的红色。
- 充电完成后，LED 指示灯将熄灭。
- \* 注：充电电压高于额定输入电压时，可能导致产品受损或充电故障。

**电池电量低**

- 每两分钟提示一次。
- 如果不及时充电电池电量耗尽，耳机会自动关机。

**电池状态提醒**

按住“音量调低键”1秒钟。

- 有三个电池状态级别

电池状态	高	中	低
语音提示	电池电量高	电池电量中等	电池电量低

- \* 注：HBS-600 在 iPhone 会显示电池电量信息。

**配对**

- 在首次使用耳机之前，您必须将其与支持蓝牙的手机配对。
- 要将耳机与其他手机配对，耳机必须处于“配对”模式。
- HBS-600 有两种配对模式方法。

**简单配对（首次配对）**

1. 将HBS-600从关机状态进行开机（电源开关滑倒” ON “一侧），耳机开机后过几秒后进入配对模式，此时LED指示灯为蓝灯常亮。
2. 在您的设备中进入蓝牙菜单中进行搜索。
  - 从列表中选择“LG HBS600”并将其配对。

3. 如果要求输入通行码/PIN 码，请输入“0000”（4 个 0）。
  - \* 备注：如果您的手机支持安全简单配对（SSP），则无需输入通行码/PIN 码。
  - 一旦配对成功完成，您将听到“已匹配”的语音提示。
4. 对于有些手机，在访问其中的联系人列表时，可能需要权限。如果收到手机返回的消息，请选择“确定”或“允许访问”
5. 如果在 3 分钟内未配对，HBS-600 将自动关闭。

### 手动配对（与其他手机配对或重新配对）

- HBS-600在关机状态下按住”播放/暂停/停止键“同时开机（电源开关划至”ON“），等LED指示灯蓝灯常亮，耳机进入匹配模式后松开”播放/暂停/停止键“。
- 重复简单配对步骤 2 到 4。

## 多连接

HBS-600采用最先进的多点连接技术允许同时连接两部手机，并且让您可以灵活切换两部手机间的通话。

### 多点连接方法

- 将耳机与其中一部启用了蓝牙的手机配对（请参阅第 2 页中的配对说明）。
- 关闭耳机。
- 通过手动配对方法与另一部启用蓝牙的手机进行配对。（此时此手机成为主手机）。
- 之后再第一次配对的手机的蓝牙菜单中寻找配对过得HBS-600进行连接。（此时此手机为辅手机）。

注1：：当 HBS-600 同时连接两部手机时，耳机通话功能将使用主手机。

注2：：如果通过“简单配对”连接至主手机失败，HBS-600 将进入配对模式。

### 通话功能

- “语音拨号”和“重拨上次呼叫的号码”功能使用主手机（或上次拨打电话使用的手机）。

### 呼叫等待

- 在通话过程中，按住“通话键”1秒钟以切换至来电。
- 要在两个现有通话之间进行切换，请按住“通话键”1秒钟。
- 要终止当前通话或同时终止两个通话，请短按“通话键”。
- 如果两部手机同时接到来电，耳机将默认使用主设备。

### 自动重新连接

- 正常使用时因意外或有意HBS-600关机后，跟手机的连接将断开。在蓝牙有效范围内重新打开HBS-600后，主手机和耳机将自动重新连接。
- 此时辅手机需要从手机的蓝牙菜单中选择“LG HBS-600”来进行手动连接。

### 超出范围

- 如果已配对设备相距 10 米（33 英尺）或更远，耳机和手机将断开连接，HBS-600 将会提醒您。
- 如果在回到有效范围内时，耳机和手机会自动重新连接。部分手机未能自动连接时，可短按耳机的“通话键”进行手动连接。
  - \* 仅当手机支持时，才可以使用这些功能。有关如何使用这些功能的详细信息，请参阅手机的用户手册。
- 多点连接时，如果一部手机欣赏媒体时，另一部手机因超出范围断开连接时，HBS-600 会提示一次，但不会重新连接。

### 通话

#### 接听来电/结束通话

- 有来电时，耳机将会响起铃声。
- 短按“通话键”。

#### 转移呼叫

- 在使用手机通话期间，按住音量调高按钮 3 秒，将音频从耳机转接到手机或从手机转接到耳机。

#### 语音拨号

- 短按“通话键”以激活“语音命令”。
- 注：如果手机不支持语音拨号，此操作可能会激活“重拨上次呼叫的号码”。

#### 重新拨号

- 按住“通话键”1秒钟可以激活“重拨上次呼叫的号码”。
- 耳机将发出蜂鸣音，并随后呼叫上次拨出的号码。

#### 呼叫等待

- 按住“通话键”1秒钟可应答另一个呼叫而不挂断第一个呼叫（将听到蜂鸣声）。按“通话”“通话键”1秒钟可切换到原始呼叫。
- 短按“通话键”可以一次性结束当前呼叫或两个呼叫。（取决于手机是否支持）

#### 拒接电话

- 在手机振铃时按“通话键”1秒钟。

#### 麦克风静音

- 同时按住“音量调高键”和“音量调低键”1秒可在通话过程中静音/取消静音麦克风。

#### 有线耳机模式

- 您可以将 HBS-600 作为有线耳机使用。无需为电池充电，便可体验有线耳机的音频质量。
- 只需将附带的 AUX 数据线的直筒型（3 极）插头插入耳罩底部，将弯脚型（4 极）插头插入 AV 设备（即手机、MP3 播放器或飞机座位上的耳机插孔等）。
- 插入音频数据线后蓝牙功能将自动关闭。（即 HBS-600关机）



### 音量控制

- 短按音量按钮。

### 音频流媒体控制

- 播放：短按“播放/暂停/停止键”。
- 暂停：短按“播放/暂停/停止键”。
- 停止：按住“播放/暂停/停止键”。
- 下一首：短按“快进键”。
- 上一首：短按“快退键”。
- 快进：按住“快进键”。
- 快退：按住“快退键”。

### 均衡器

- 播放音乐时，同时按住“音量调高键”和“音量调低键”1秒，可在 EQ 之间切换（低音增强（默认）→ 正常 → 高音增强）。
- 来自扬声器的低音可能会因使用的耳塞大小而异。

### aptX®（无损音频压缩技术）

- HBS-600采用 aptX® 技术，该技术让您欣赏更高清的媒体。
- 只要源设备支持，aptX® 将自动启用。

### 短信阅读器

HBS-600 蓝牙耳机支持在 Android™ 设备上读取短信。

在 Google Play™ Store 中搜索 LG ‘BT Reader’ 应用程序，然后将其安装到设备上以使用此功能。

\* 下列二维码可以帮助您从 Google Play™ Store 下载 LG ‘BT Reader’ 应用程序。Google Play 是 Google, Inc. 的商标



## LED 指示

功能	HBS-600 状态	操作
操作	开机	蓝色 LED 指示灯闪烁 4 次。
	关机	蓝色 LED 指示灯闪烁 4 次，然后关闭。
	配对模式	蓝色 LED 指示灯持续发亮。
	耳机/免提情景模式已连接	蓝色 LED 指示灯每 5 秒钟闪烁 2 次。
	呼叫接通	蓝色 LED 指示灯每 5 秒钟闪烁 2 次。
充电	充电	红色 LED 指示灯持续亮起。
	充电完成	LED 指示灯熄灭。

## 故障排除

问题	可能的原因	解决方法
无法开机	检查 HBS-600 的电池是否充满电。	为电池充电。
无法与 LG 蓝牙® 耳机 HBS-600 通信	检查手机是否支持耳机或免提蓝牙情景模式。	确定手机是否支持耳机或免提蓝牙情景模式。
	检查 HBS-600 的电池是否电量低。	为电池充电。
无法将 HBS-600 与蓝牙® 设备配对	检查并确保耳机已开机。	将电源开关滑至“ON”一侧，打开耳机。
	检查并确保耳机处于配对模式。	电源关闭时，按下“播放/暂停/停止键”并在同一秒将电源开关移动到“ON”一侧以进入配对模式。
低音（扬声器）	检查扬声器音量。	提高音量。

请勿将设备从高处摔下。

请勿改装、修理或拆解设备。

不要直接使用水、酒精、苯等进行清洁。

不要使其接触易燃物。

不要将设备放置或存放在易燃物附近。

请使设备远离潮湿和充满灰尘的环境。

不要将重物放在设备上。

请只使用原装 LG 充电器为耳机充电，否则会将其损坏。

- 任何未经符合性的责任方明确同意的更改或改装均可能导致用户丧失对设备的操作权限。
- 替换电池类型不当时可能会有爆炸危险。
- 请按说明处置用过的电池。

**FCC告知用户：**

本产品符合FCC part-15的相关规定：

产品工作时满足以下两个要求

- (1) 设备不会产生干扰信号。
- (2) 设备能承受接受不良干扰和一些意外的操作。

**重要说明**

为了满足FCC的射频要求，请不要更改设备和相关电路，更改设备任何电路或射频装置会导致射频超标。

**CE告知用户：**

LG电子声明HBS-600符合1999/5/EC相关规定和要求。



CE 1177

FCC ID: BEJHBS600



### 1. 蓝牙射频

立体声蓝牙耳机HBS-600是无线收发器，工作频段为2.402~2.480 GHz，即微波频段。与兼容设备进行通信时，符合国家相应规定及国际健康机构规定的射频范围。

### 2. 易燃易爆环境

在易燃易爆环境中请关闭本产品。在特殊情况下极个别电器产品可能会产生火花（极少见），这种火花可能造成火灾或爆炸。为了您和他人的安全，请在非易燃易爆环境中使用本产品。

### 3. 电池的使用

可充电电池使用方法正确，能使电池保持最佳状态和长时间的使用寿命。长期不使用或者放置于极端环境（高于60°C或者低于-10°C）下，容易造成电池容量减少或缩短电池使用寿命。常温下使用会提供最佳电量，但在低温下会使电量稍微减低。

充电只有在10°C ~ 45°C环境下进行。

### 4. 电池的循环再利用

本产品中的电池需要报废时，应按照当地电池处理规定进行处理。不能按照一般生活垃圾进行处理。LG电子合作方取出电池后，应按照当地规定进行处理。

### 5. 保修条件

- 产品保修时需提供产品的同时，也要提供购买时销售方提供的发票原件（包含产品购买日期、序列号等信息）。如果提供的发票上的信息被删除或更改，LG电子有权拒绝维修。
- 本保修条件不包含以下情形下的故障：
  - 1) 因不按照产品正常使用方式使用引起的故障。
  - 2) 正常磨损或误操作引起的故障。
  - 3) 因有毒或有腐蚀性物质的损伤。
  - 4) 突发事故、自行拆解更改、自然灾害等引起的故障。
- 本保修条件不包括，未经得到LG电子授权的人员拆卸、修理、改装过的产品。

对消费者购买本产品之日起的1年内，LG电子保证本产品的设计和原材料及技术方面不存在缺陷。如阁下的产品需要保障服务，请直接联系产品销售店或者本产品指定售后服务点。

## 重要安全提示

### 听力受损的预防

耳机的声音过大可能造成听觉永久受损，请将声音设置在安全级别使用。长时间听音量过高的声音，耳朵会慢慢习惯这种声音，久而久之听力会受到伤害。如果耳朵出现回音、耳鸣或者听到的声音低且模糊，请停止使用耳机，并去做听力检查。

耳机的声音设置的越大，听觉受损可能会更严重。

为保护您的听力，专家建议如下：

- 限制耳机在高音量状态下的使用时间
- 避免用高音量阻挡周边环境杂音
- 听不到周边人的讲话声时，调小耳机声音大小  
(设置手机的声音的方法，请参考手机相关说明书。)



### 安全使用耳机

驾驶车辆时为了安全，建议您不要使用耳机听音乐。任何需要高度集中的活动时，建议您不要使用耳机。

**无线电发射设备**  
Radio Transmission Equipment  
**型号核准证**  
Type Approval Certificate

韩国 LG Electronics, Inc.:

根据《中华人民共和国无线电管理  
In accordance with the provisions on the Radio  
条例》，经审查，下列无线电发射设备  
Regulations of the People's Republic of China, the following  
符合中华人民共和国无线电管理规定和  
radio transmission equipment, after examination, conforms  
技术标准，其核准代码为：CMIIT ID: 2014DJ0996  
to the provisions with its CMIIT ID:

有效期：五年  
Validity



Sealed by issuing authority

2014年3月14日  
Year Month Date

### 有毒有害物质成分及含量表

为了对应中国电子信息产品污染限制管理方法，提供如下包括电子产品部品名称及有毒有害物质的样式。

#### 1. 产品中有毒有害物质或元素的名称及含量：

部品每次	有毒有害物质成分及含量					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr+6)	多溴联苯 (PBB)	多溴二苯 (PBDE)
耳机	X	O	O	O	O	O
USB 充电线	X	O	O	O	O	O
AUX 数据线	X	O	O	O	O	O
用户手册	O	O	O	O	O	O
收纳袋	O	O	O	O	O	O

#### 注意：

1. “O”表示该有害物质在该部件所有均质材料中的含量均在SJ/T11363-2006标准规定的限量要求以下。
2. “X”表示该有害物质至少在该部件的某一均质材料中的含量超出 SJ/T11363-2006标准规定的限量要求以下
3. 上述“X”标示的部品符合EU RoHS 法规。- 欧洲联盟议会制定了电子/电器产品中限制使用有害物质的2002/95/EC法令。

## 关于安全有效使用耳机的准则

### 2. 构成部品别环境安全使用期限

构成部品	环境安全使用期限
耳机, USB 充电线, AUX 数据线, 用户手册, 收纳袋	
电池	

\* 上方标志中的使用期限以正常使用条件(温/湿度)为基准。

繁體中文



**HBS-600 使用手冊**  
**BLUETOOTH® 立體聲耳機**



保留所有權利。

LG Electronics Inc., 2014

注意：為發揮最佳效能及避免損壞產品或發生不當使用的  
情況，使用 HBS-600 之前，請詳細閱讀所有資訊。

唯有 LG Electronics Inc. 有權修改或變更本手冊的  
印刷錯誤或非正確陳述的資訊。

## 配件說明



## 包裝盒內容



收納袋



AUX 連接線



USB 充電連接線



使用手冊

## 規格

項目	說明
Bluetooth® 規格	3.0 (耳機/免提/ A2DP 操作模式)
電池	電池 3.7V / 370mAh 鋰聚合物電池
待機時間/通話時間	最長 900 小時/最長 18 小時
音樂播放時間	高達 18 小時
充電時間	< 3.0 小時
額定充電輸入	DC 4.75 V ~ 5.6 V · 400mA
操作溫度	-10°C ~ 60°C
尺寸/重量	167 毫米 (寬) x 175 毫米 (長) x 64.6 毫米 (高) / 145 克

**開機/關機**

- 將電源開關滑動至 [ON] 或 [OFF] 位置。

**充電**

- 連接充電器時，不論為開機或關機狀態，耳機都會關閉。
- 充電時，LED 指示燈會顯示恆亮的紅燈。
- 充電完成後，LED 指示燈會關閉。
- \* 注意：如果以額定電壓以外的電壓充電，可能會造成本產品損壞和充電失敗。

**電量不足**

- 每 2 分鐘會出現一次通知。
- 若電池未充電，耳機則會關閉。

**電池狀態提示**

- 按住 [音量調低] 按鈕 1 秒鐘。
- 電池狀態分為 3 個等級

電池狀態	高	中	低
語音提示	電池電量高	電池電量中等	電池電量低

- HBS-600 電池狀態指示燈將會出現在 iPhone 畫面上。

**配對**

- 第一次使用耳機之前，您必須先將耳機與已啟用藍牙功能的手機進行配對。
- 若要將耳機與其他手機進行配對，耳機必須處於 [配對] 模式。
- HBS-600 有 2 種配對模式方法。

**簡易配對 (首次配對)**

1. 將電源開關移動至 [ON] 那一端以開啟 HBS-600。當耳機進入 [配對] 模式，LED 指示燈會顯示恆亮的藍燈。
2. 使用手機找到 [藍牙] 功能表，然後 [搜尋] 或 [新增] 新裝置。
  - 從裝置清單選擇 “LG HBS600”，然後將其與手機配對。

3. 如果系統要求 Pass/PIN 碼，請輸入“0000”（4 個零）。
  - \* 注意：如果您的手機支援安全簡易配對 (SSP)，您將不需要輸入 Pass/PIN 碼。
  - 配對成功後，您會聽到「已配對」。
4. 部分手機可能會要求存取手機連絡人清單的權限。如果您收到來自手機的訊息，請選擇 [確定] 或 [允許存取]
  - 若在 3 分鐘內未進行配對，HBS-600 將自動關閉。

### 手動配對 (與另一支手機配對或重新配對)

- 在電源關閉時，按下 [播放/暫停/停止] 按鈕並同時將電源開關移動至 [ON] 那一端 1 秒鐘。
- 當耳機進入 [配對] 模式，LED 指示燈會顯示恆亮的藍燈。該程序完成後，重複 [簡易配對] 的步驟 2 到 4。

## 多重連線

### 進階多點連接功能

HBS-600 能同時將兩部裝置連線到耳機。這能讓您在連線的手機上，自由地在通話之間使用來電等候。

### 連線

- 將耳機與其中一支已啟用藍牙功能的手機配對（按照第 2 頁的配對指示操作）。
- 關閉耳機電源。
- 在電源關閉時，按下 [播放/暫停/停止] 按鈕並同時將電源開關移動至 [ON] 那一端 1 秒鐘，以進入 [手動配對] 模式。
- 現在，將耳機與另一支已啟用藍牙功能的手機進行配對並連線（這將會是您的主要手機）。
- 在此手機完成配對與連線後，請回頭將原先配對的手機連線到耳機。現在這將會是您的次要手機。
- \* 注意：HBS-600 同時連線到兩支手機（多點連接）時，耳機通話功能是與主要手機搭配運作。
- \* 注意：若無法透過 [簡易配對] 與主要手機連線，HBS-600 會進入配對模式。

### 通話功能

- [語音撥號] 與 [最後撥出號碼重撥] 功能是與主要手機（或最後撥出號碼的手機）搭配運作。

### 來電等候

- 通話進行中時，按下 [通話] 按鈕 1 秒鐘即可切換至來電。
- 若要在 2 個進行中通話之間切換，請按下 [通話] 按鈕 1 秒鐘。
- 若要結束目前通話或一次結束兩個通話，請短按 [通話] 按鈕。
- 如果兩支手機同時接到來電，根據預設，耳機將選擇主要手機。

### 自動重新連線

- 如果 HBS-600 在連線到手機時意外或故意關閉，耳機和手機將中斷連線。在範圍內重新開啟 HBS-600 時，耳機和手機將會自動重新連線。
- 若要連線次要手機，必須透過在 [藍牙] 功能表的裝置清單中選擇 “LG HBS600”。

### 不在涵蓋範圍內

- 配對的裝置之間若距離 10 公尺 (33 英呎) 以上，耳機和手機將會中斷連接，並且 HBS-600 會提示您。
- 若耳機與手機在回到要求範圍內時，並未自動重新連接，請短按 HBS-600 上的 [通話] 按鈕來手動重新連線。
- \* 這些功能僅在手機支援時可供使用。如需使用這些功能的詳細資訊，請參閱手機的使用手冊。
- 在多重連線與串流模式中，位於涵蓋範圍之外的非使用中配對裝置將會中斷連線。HBS-600 將提示您一次，但不會嘗試重新連線。

### 通話

#### 接聽來電/結束通話

- 有來電時，耳機會響鈴。
- 短按 [音量調低] 按鈕即可停止震動。
- 短按 [通話] 按鈕。

#### 轉接電話

- 在手機上進行通話時，按住 [音量調高] 按鈕 3 秒鐘，即可將聲音從耳機傳輸至手機，或從手機傳輸至耳機。

#### 語音撥號

- 短按 [通話] 按鈕以啟動 [語音命令]。  
注意：若手機不支援語音撥號功能，則可能在執行此動作後啟動 [最後撥出號碼重撥]。

#### 最後撥出號碼重撥

- 按住 [通話] 按鈕 1 秒即可啟動 [最後撥出號碼重撥]。  
耳機會發出嗶聲，然後撥打最後撥出的號碼。

#### 來電等候

- 按下 [通話] 按鈕 1 秒鐘，可按聽第二通來電但不掛斷第一通電話（您會聽到嗶聲）。  
。 按下 [通話] 按鈕 1 秒鐘即可回到原來的通話。
- 短按 [通話] 按鈕可結束目前通話或一次結束兩個通話（依手機支援而定）

#### 拒接來電

- 手機鈴響時，按下 [通話] 按鈕 1 秒鐘。

#### 麥克風靜音

- 同時按住 [音量調高] 和 [音量調低] 按鈕 1 秒鐘，即可在交談期間將麥克風靜音/解除靜音。

#### 有線耳機模式

- 您可以將 HBS-600 作為有線耳機使用。 不需要充電電池就可以享受有線耳機的音質。
- 將隨附的 AUX 連接線的直線型（3 孔）插頭連接到耳罩的底部，並將直角型（4 孔）插頭連接到 AV 設備（即手機、MP3 播放器或飛機座椅的耳機插孔等）。
- 插入音訊線將會停用無線功能（HBS-600 將會關機）。



### 音量控制

- 短按 [音量] 按鈕。

### 音訊串流控制

- 播放：短按 [播放/暫停] 按鈕。
- 暫停：短按 [播放/暫停] 按鈕。
- 停止：按住 [播放/暫停] 按鈕。
- 下一首歌曲：短按 [快進] 按鈕。
- 上一首歌曲：短按 [快退] 按鈕。
- 快進：按住 [快進] 按鈕。
- 快退：按住 [快退] 按鈕。

### 等化器

- 播放音樂時，同時按住 [音量調高] 和 [音量調低] 按鈕 1 秒鐘，即可在等化器（低音強化（預設）→ 標準 → 高音提升）之間進行切換。
- 喇叭播放的低音可能會因所使用的耳塞大小而有所不同。

### aptX®

- HBS-600 配備 aptX® 技術，可確保透過藍牙傳輸的音訊內容不僅具即時性且音質清晰。
- 只要來源裝置支援，aptX® 即會自動啟用。

### 文字訊息讀取器

HBS-600 藍牙耳機支援在 Android™ 裝置上讀取文字訊息。

在 Google Play™ Store 搜尋 LG 'BT Reader' 應用程式，並將其安裝在您的裝置上以使用此功能。

\* 下方顯示的 2D 條碼可協助您從 Google Play™ Store 下載 LG 'BT Reader' 應用程式。Google Play 是 Google, Inc. 的商標。



## LED 指示

功能	HBS-600 狀態	動作
運作中	開機	藍色 LED 燈會閃爍 4 次。
	關機	藍色 LED 燈會閃爍 4 次，然後關閉。
	配對模式	藍色 LED 燈會持續亮起。
	耳機/免提裝置操作模式已連線	藍色 LED 燈每 5 秒會閃爍 2 次。
	電話接通	藍色 LED 燈每 5 秒會閃爍 2 次。
充電	充電	紅色 LED 燈會持續亮起。
	充電完成	LED 關閉。

## 疑難排解

問題	可能問題	解決方法
無法開機	檢查 HBS-600 的電池是否已充滿。	為電池充電。
無法與 LG Bluetooth® 耳機 HBS-600 通訊	檢查手機是否支援耳機或免提藍牙裝置操作模式。	判斷您的手機是否支援耳機或免提藍牙裝置操作模式。
	檢查 HBS-600 的電池電量是否不足。	為電池充電。
無法將 HBS-600 與 Bluetooth® 裝置配對	檢查並確認耳機是否已開啟。	將電源開關滑動至 [ON] 那一端以開啟耳機。
	檢查並確認耳機處於配對模式。	在電源關閉時，按下 [播放/暫停/停止] 按鈕並同時將電源開關移動至 [ON] 那一端 1 秒鐘，即可手動將耳機設定為配對模式。
音量太小 (喇叭)	檢查喇叭音量。	調高音量。

請避免裝置從高處掉落。

請勿改裝、維修，或拆卸裝置。

請勿直接使用水、酒精或苯等溶劑清潔裝置。

請勿直接接觸火源。

請保持裝置遠離火源。

裝置應保持防潮與防塵。

請勿在裝置上放置重物。

請僅搭配原廠 LG 充電器使用耳機，否則可能導致耳機損壞。

- 若負責遵循法規者未獲明文同意即變更或修改裝置，則可能喪失設備的使用權益。
- 如果更換的電池類型不正確，可能會有爆炸的危險。
- 請根據指示丟棄使用過的電池。

## 確認宣告

**使用者 FCC 聲明：**

本裝置符合 FCC 規則第 15 節。

必須遵守下列兩個操作條件：

- (1) 本裝置不得引起有害干擾，且
- (2) 本裝置必須可承受接收到的干擾，包括可能導致預期外操作之干擾。

**重要注意事項：**

為了符合 FCC RF 放射物需求，不得對天線或裝置進行變更。若對天線或裝置進行任何變更，可能導致裝置超出 RF 放射物要求，並中止使用者操作裝置之授權。

**使用者 CE 聲明：**

LG Electronics Inc. 在此宣告此 HBS-600 符合基本要求及法令 1999/5/EC 的其他相關條款。



CE 1177

FCC ID: BEJHBS600



### 1. 無線電頻率放射

HBS-600 這款 Bluetooth® 耳機是一種無線電傳輸器及接收器。操作中的耳機會接收與傳輸頻率範圍在 2.4 至 2.4835 GHz 的無線電頻率 (RF) 電磁場 (微波)，藉此與配備 Bluetooth® 的行動裝置通訊。

當您的 Bluetooth® 耳機與任何相容的 LG Electronics 行動電話搭配使用時，必須遵守國家機構和國際健康機構所制定的 RF 放射線指導方針與限制。

### 2. 具有潛在爆炸危險的環境

當您身在具有潛在爆炸性風險的任何區域時，請關閉您的電子裝置。您的電子裝置可能會產生火花，雖然這種現象非常罕見。在這類區域產生火花可能造成爆炸或火災，從而導致身體受傷，甚至死亡。具有潛在爆炸性的區域經常，但並非總是會有明確的標示。

### 3. 電池資訊

適當使用的充電電池保有較長的使用期限。全新的電池或長時間未使用的電池，前幾次的使用容量可能會降低。請勿將電池曝露在超過 +60° C (+140° F) 或低於 -20° C (-4° F) 的極端溫度下。為了使用最大的電池容量，請在室溫下使用電池。如在低溫下使用電池，電池容量會降低。電池只能在 +10° C (+50° F) 至 +45° C (+113° F) 之間的溫度充電。為了您的安全，請勿取出產品配備的電池。

如果您需要更換電池，請將裝置帶到附近的 LG Electronics 授權服務中心或經銷商處以尋求協助。

### 4. 回收 Bluetooth® 耳機的電池

Bluetooth® 耳機的電池必須適當處置，絕對不能隨一般廢棄物一起處理。取出電池的 LG Electronics 服務夥伴將依據當地法規處置電池。

### 5. 條件

- 唯有當業者提供給原始購買者的原始收據有指定購買日期和序號，且在維修或更換產品出示該收據時，保固才會生效。若向業者初次購買產品後，此資訊已移除或變更，LG Electronics 將保留拒絕保固服務之權利。
- 如果 LG Electronics 維修或更換產品，則維修或更換之產品的保固期限為原始產品的剩餘保固期，或是自維修日起九十 (90) 天 (視何者較長)。維修或更換可能涉及使用功能相同的二手品。替換的零件或元件將成為 LG Electronics 之資產。
- 因以下情況而導致的任何產品故障均不在此保固涵蓋範圍內：正常損壞或撕裂，或者不當使用，包括但不限於異常及不依慣例使用、不依照指示來使用和維護產品。此保固亦不涵蓋下列原因所導致的任何產品故障：意外、修改或調整、天災，或者液體潑灑所導致的損壞。
- 此保固不涵蓋非 LG Electronics 授權人員所執行之不當維修安裝、修改或服務所造成的產品故障。損毀產品的任何封條將中止保固。

在此有限保固條款中，LG Electronics 保證消費者在原始購買本產品時，產品之設計、材料與製作上並無瑕疵，並在該日起一（1）年內亦享有同等保固。如果您的產品需要保固服務，請將產品退回出售之業者，或連絡您當地的 LG Electronics 連絡中心以取得進一步資訊。

## 重要安全資訊

### 避免聽力受損

如果您在高音量下使用免提車用套件，可能會對聽力造成永久性的損害。請設定安全等級的音量。過了一段時間，您可能會習慣較大的音量並將其視為正常音量，但此音量可能會使您的聽力受損。

如果您聽到嗡嗡聲或聽不清楚話語，請停止聆聽並檢查聽力。音量越大，越可能加速聽力受損的時間。聽力專家提出了下列保護聽力的建議：

- 限制在高音量下使用耳機的時間。
- 避免調大音量來阻絕周圍噪音。
- 如果您聽不到周遭他人的談話聲，請調低音量。

請參閱手機使用者指南，瞭解更多關於如何在手機上調整音量的資訊。

### 安全地使用耳機

不建議您在開車時使用耳機聽音樂，且這種行為在某些地區是違法的。開車時請小心並集中注意力。駕駛任何類型的車輛或執行需要全神貫注的其他任何活動時，若發現使用此裝置可能會分神或產生混亂，請停止使用。





English



**HBS-600** User Manual

**BLUETOOTH® Stereo Headset**




All rights reserved.  
LG Electronics Inc., 2014

Note: For the best performance and to prevent any damage to, or misuse of the HBS-600, please read all of the information carefully prior to using the HBS-600.

Any modifications or changes to this manual due to typographical errors or inaccuracies of stated information shall only be made by LG Electronics Inc.

## Description of parts

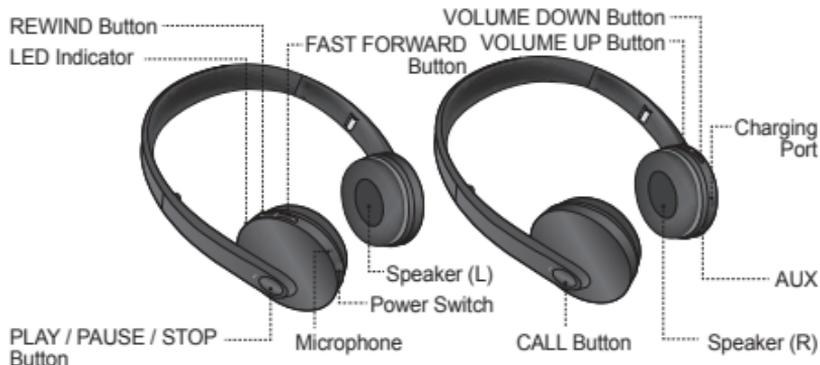

## Package Contents



POUCH



AUX Cable



USB Charging Cable



User Manual

## Specification

Item	Description
Bluetooth® specification	3.0 (Headset / Hands-Free / A2DP Profiles)
Battery	Battery 3.7V / 370mAh Li-Polymer
Standby time / Talk Time	Up to 900Hrs / Up to 18Hrs
Music play time	Up to 18Hrs
Charging time	< 3.0Hrs
Charging rated input	DC 4.75 V ~ 5.6 V, 400mA
Operation temperature	-10°C ~ 60°C
Dimension / weight	167mm(W) x 175(L) x 64.6(T)/145g

### Power On / Power Off

- Slide the Power switch to the 'ON' or 'OFF' position.

### Charging

- When the charger is connected, with the power on or off, the headset will turn off.
- While charging, the LED indicator will show a solid red light.
- When charging is complete, the LED indicator will turn off.
- \* Note: When Charging other than the rated voltage, this product can cause damage and charging failure.

### Low Battery

- An announcement will be made once every 2 minutes.
- If the battery is not charged, the headset will turn off.

### Battery Status Alert

- Press and hold the VOLUME DOWN button for 1 second.
- There are 3 levels of battery status

Battery status	High	Medium	Low
Voice Prompt	电池电量高	电池电量中等	电池电量低

- HBS-600 battery status indicator will appear on the iPhone screen.

### Pairing

- Before using the headset for the first time, you must pair it with a Bluetooth-enabled handset.
- To pair your headset with an additional handset, the headset must be placed in Pairing Mode.
- There are 2 Pairing Mode Methods with the HBS-600.

#### **Easy Pairing (First Time Pairing)**

1. Move the Power switch to the 'ON' side to turn on the HBS-600. When the headset enters Pairing Mode, the LED indicator will show a solid blue light.
2. Using your handset, find the Bluetooth Menu and "search for" or "add" new devices.

- Select "LG HBS600" from the list of devices and pair it with your handset.
3. If asked for the Pass/PIN code please enter "0000" (4 Zeros).
- \* Note : If your handset supports Secure Simple Pairing (SSP), you will not need to enter Pass/PIN code.
  - Once pairing has completed successfully, you will hear "已匹配".
4. Some handsets might ask for permission to access the phone's contact list. If you receive a message from your handset, please select "OK" or "Allow access"
- The HBS-600 will automatically turn off if not paired within 3 minutes.

### **Manual Pairing (Pairing with another phone or re-pairing)**

- With the power off, press the PLAY/PAUSE/STOP button and move the Power switch to the 'ON' side at the same time for 1 second.
- When the headset enters Pairing Mode, the LED indicator will show a solid blue light. After the procedure repeat Easy Pairing steps 2 through 4.

## Multi-connection

### **Advanced Multipoint**

The HBS-600 is capable of having two devices connected to the headset at the same time. This will give you the freedom of using call waiting between calls on both of your connected phones.

### **Connection**

- Pair the headset with one of your Bluetooth-enabled handsets. (per the pairing instructions on page 2).
- Turn off the headset.
- With the power off, press the PLAY/PAUSE/STOP button and move the Power switch to the 'ON' side at the same time for 1 second to enter Manual Pairing mode.
- Now, pair and connect the headset with your other Bluetooth-enabled handset. (this will be your primary handset).
- Once this handset is paired and connected, go back and connect the originally paired handset to the headset. This will now be your secondary handset.
- \* NOTE: When the HBS-600 is connected to two handsets at the same time(Multipoint), the headset calling functions will work with the primary handset.
- \* NOTE: In case of failure to connect to the primary phone through Easy Pairing, HBS-600 will enter pairing mode.

### Calling Function

- Voice Dialing and Last Number Redial features work with the primary handset (or handset which made the last outgoing call).

### Call Waiting

- While speaking on an active call, press the CALL button for 1 second to switch to an incoming call.
- To switch between 2 active calls, press the CALL button for 1 second.
- To terminate the active call or both calls at once, briefly press the CALL button.
- If both handsets are receiving an incoming call, the headset will default to the primary device.

### Auto Reconnect

- If the HBS-600 is turned off (either accidentally or intentionally) while connected to a handset, the headset and handset will disconnect. The headset and handset will automatically reconnect when the HBS-600 is turned back on while in range.
- Secondary handset need to be connected via selecting "LG HBS600" from the list of devices at Bluetooth menu.

### Out of range

- If the paired devices are separated by a range of 10 meters(33 feet) or more, the headset and handset will disconnect and HBS-600 will alert the user.
- If the headset and handset do not automatically reconnect when they are back within the required range, briefly press the CALL button on the HBS-600 to reconnect manually.
- \* It is possible to use these functions only when your handset supports them. For further information about using these features, please consult your handset's user manual.
- While in multi-connection and streaming, the inactive paired device, which is out of range, will be disconnected. The HBS-600 will alert once with no attempt to reconnect.

### Calling

#### Answering a call / Ending a call

- When there is an incoming call, the headset will ring.
- Briefly press the CALL button.

#### Transferring a call

- While on a call on your handset, press and hold VOLUME UP button for 3 seconds to transfer the audio either from headset to handset or from handset to headset.

#### Voice dialing

- Briefly press the CALL button to activate "Voice Command".  
Note: If the handset does not support Voice Dialing, it is possible that performing this action will activate Last Number Redial.

#### Last number redial

- Press and hold the CALL button for 1second to activate "Last Number Redial". The headset will beep, and call the last number dialed.

#### Call waiting

- Answer a second call without hanging up the first call by pressing the CALL button for 1 second (you will hear a beep). Press the CALL button for 1second to turn to the original call.
- Briefly press the CALL button to terminate the active call or both calls at once. (subject to handset's support)

#### Rejecting a Call

- Press the CALL button for 1second when the handset rings.

#### Mic Mute

- Press and hold the VOLUME UP and VOLUME DOWN buttons simultaneously for 1 second to mute/unmute the Mic during conversation.

#### Wired headphone mode

- You can use HBS-600 as a wired headphone. No charged battery is required and you can enjoy the audio quality of wired headphone.
- Simply connect straight type(3-pole) plug of the included AUX cable to the bottom of the earcup and angle type (4-pole) plug to AV equipment (i.e., handset, MP3 player or headphone jack on air plane seats, etc.).
- Inserting an audio cable disables wireless functionality. (HBS-600 will be powered off)



### Volume control

- Briefly press the VOLUME button.

### Audio streaming controls

- PLAY : Briefly press the PLAY/PAUSE button.
- PAUSE : Briefly press the PLAY/PAUSE button.
- STOP : Press and hold the PLAY/PAUSE button.
- NEXT SONG : Briefly press the FF button.
- PREVIOUS SONG : Briefly press the REW button.
- FAST FORWARD : Press and hold the FF button.
- REWIND : Press and hold the REW button.

### Equalizer

- While playing music, press and hold VOLUME UP and VOLUME DOWN buttons simultaneously for 1 second to switch between EQ's (Bass Boost(Default) → Normal → Treble Boost).
- The bass coming from the speakers can vary as a result of the size of the Earbud that is being used.

### aptX®

- HBS-600 features aptX® technology that ensures audio content transmitted over Bluetooth is instant and crystal-clear.
- aptX® is automatically enabled as long as the source device supports it.

### SMS Reader

The HBS-600 Bluetooth headset supports SMS reading on Android™ based devices.

In Google Play™ Store search for the LG 'BT Reader' application and install on your device to use this function.

\* The 2D barcode shown below helps you download the LG 'BT Reader' application from Google Play™ Store. Google Play is a trademark of Google, Inc.



## LED indication

Function	HBS-600 Status	Action
Operating	Power on	The blue LED light flickers 4 times.
	Power off	The blue LED light flickers 4 times and then turns off.
	Pairing mode	The blue LED light stays on.
	Headset / hands-free profile connected	The blue LED light flickers 2 times every 5 seconds.
	Call connected	The blue LED light flickers 2 times every 5 seconds.
Charging	Charging	The red LED stays on.
	Charging complete	LED turns off.

## Troubleshooting

Issue	Possible problem	Resolution
Does not turn on	Check whether the battery of the HBS-600 is fully charged.	Charge the battery.
Unable to communicate with the LG Bluetooth® Headset HBS-600	Check whether the headset supports the headset or hands-free Bluetooth profiles.	Determine whether your headset supports the headset or hands-free Bluetooth profiles.
	Check whether the battery of the HBS-600 is low.	Charge the battery.
Unable to pair the HBS-600 with the Bluetooth® device	Check and make sure the headset is on.	Slide the Power switch to the 'ON' side to turn on the headset.
	Check and make sure the headset is placed in pairing mode.	With the power off, press the PLAY/PAUSE/STOP button and move the Power switch to the 'ON' side at the same time for 1 second to manually place the headset in pairing mode.
Low sound (speaker)	Check the speaker volume.	Increase the volume level.

Do not drop the unit from high places.

Do not modify, repair, or take apart.

Do not expose directly to water, alcohol, benzene, etc. for cleaning.

Do not expose directly to flammables.

Do not place or keep the unit near flammables.

Keep unit away from humidity & dust.

Do not place heavy objects on the unit.

Only use the headset with an original LG charger, otherwise it may be damaged.

- Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- There is a risk of explosion if the battery is replaced by an incorrect type.
- Dispose of used batteries according to the instructions.

## Declaration of Confirmation

### FCC NOTICE TO USERS :

This device complies with part 15 of the FCC rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

### IMPORTANT NOTE :

To comply with the FCC RF exposure compliance requirements, no change to the antenna or the device is permitted. Any change to the antenna or the device could result in the device exceeding the RF exposure requirements and void user's authority to operate the device.

### CE NOTICE TO USERS :

Hereby, LG Electronics Inc. declares that this HBS-600 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.



**Bluetooth**<sup>®</sup>

**CE 1177**



**FCC ID: BEJHBS600**

### 1. Radio frequency exposure

This Bluetooth® Headset, HBS-600, is a radio transmitter and receiver. When in operation, it communicates with a Bluetooth® equipped mobile device by receiving and transmitting radio frequency (RF) electromagnetic fields (microwaves) in the frequency range 2.4 to 2.4835 GHz.

Your Bluetooth® Headset is designed to operate in compliance with the RF exposure guidelines and limits set by national authorities and international health agencies when used on any compatible LG Electronics mobile phone.

### 2. Potentially explosive atmosphere

Turn off your electronic device when in any area with a potentially explosive atmosphere. It is rare, but your electronic device could generate sparks. Sparks in such areas could cause an explosion or fire resulting in bodily injury or even death. Areas with a potentially explosive atmosphere are often, but not always, clearly marked.

### 3. Battery information

A rechargeable battery has a long service life if treated properly. A new battery or one that has not been used for a long period of time could have reduced capacity the first few times it is used. Do not expose the battery to extreme temperatures, never above +60°(+140°F) or under -20°(-4°F). For maximum battery capacity, use the battery in room temperature. If the battery is used in low temperatures, the battery capacity will be reduced. The battery can only be charged in temperatures between +10°(+50°F) and +45°(+113°F). For your safety, do not remove the battery incorporated in the product.

If you need to replace the battery, take it to the nearest authorised LG Electronics service point or dealer for assistance.

### 4. Recycling the battery in your Bluetooth® Headset

The battery in your Bluetooth® Headset must be disposed of properly and should never be placed in municipal waste. The LG Electronics service partner removing battery will dispose of it according to local regulations.

### 5. Conditions

- The warranty is valid only if the original receipt issued to the original purchaser by the dealer, specifying the date of purchase and serial number, is presented with the product to be repaired or replaced. LG Electronics reserves the right to refuse warranty service if this information has been removed or changed after the original purchase of the product from the dealer.

- If LG Electronics repairs or replaces the product, the repaired or replaced product shall be warranted for the remaining time of the original warranty period or for ninety (90) days from the date of repair, whichever is longer. Repair or replacement may involve the use of functionally equivalent reconditioned units. Replaced parts or components will become the property of LG Electronics.
- This Warranty does not cover any failure of the product due to normal wear and tear, or due to misuse, including but not limited to use in other than the normal and customary manner, in accordance with instructions for use and maintenance of the product. Nor does this warranty cover any failure of the product due to accident, modification or adjustment, acts of God or damage resulting from liquid.
- This warranty does not cover product failures due to improper repair installations, modifications or service performed by a non-LG Electronics authorized person. Tampering with any of the seals on the product will void the warranty.

## Limited Warranty

SUBJECT TO THE CONDITIONS OF THIS LIMITED WARRANTY, LG ELECTRONICS WARRANTS THIS PRODUCT TO BE FREE FROM DEFECTS IN DESIGN, MATERIAL AND WORKMANSHIP AT THE TIME OF ITS ORIGINAL PURCHASE BY A CONSUMER, AND FOR A SUBSEQUENT PERIOD OF ONE (1) YEAR. SHOULD YOUR PRODUCT NEED WARRANTY SERVICE, PLEASE RETURN IT TO THE DEALER FROM WHOM IT WAS PURCHASED OR CONTACT YOUR LOCAL LG ELECTRONICS CONTACT CENTER TO GET FURTHER INFORMATION.

### Avoiding hearing damage

Permanent hearing loss may occur if you use your Handsfree car kit at a high volume. Set the volume to a safe level. You can adapt over time to a higher volume of sound that may sound normal but can be damaging to your hearing.

If you experience ringing in your ears or muffled speech, stop listening and have your hearing checked. The louder the volume, the less time is required before your hearing could be affected. Hearing experts suggest that to protect your hearing:

- Limit the amount of time you use Headset at high volume.
- Avoid turning up the volume to block out noisy surroundings.
- Turn the volume down if you can't hear people speaking near you.

Please refer to your handset user guide for more information on how to adjust listening levels on your handset.



### Using Headset safely

Use of Headset to listen to music while operating a vehicle is not recommended and is illegal in some areas. Be careful and attentive while driving. Stop using this device if you find it disruptive or distracting while operating any type of vehicle or performing any other activity that requires your full attention.





[www.lg.com](http://www.lg.com)