Life's Good

ENGLISH

TÜRKÇE

OWNER'S MANUAL

LG TONE Free

***Bluetooth*®** LG Stereo Headset

Rev 2.0 TR

NOTE: For the best performance and to prevent any damage to, or misuse of the headset, please read all of the information carefully prior to using the headset.

Any modifications or changes to this manual due to typographical errors or inaccuracies of stated information shall only be made by LG Electronics Inc.

Google Play

App Store

TONE-FP9 / TONE-FP9W
TONE-FP9E

www.lg.com

Copyright © 2021 - 2022 LG Electronics Inc. All Rights Reserved

ENGLISH

Contents

Safety Precautions 1
HD Speaker 3
Product Components 4
Overview 5
Pairing and Connecting 6
Wearing Earbuds 8
Playing Music 9
Mobile Calling Functions 10
Listen to the Ambient Sound (LAS) / Active Noise Cancellation (ANC) 11
UVnano 12
Charging 13
Plug and Wireless Mode (External Device Connection Mode) 14
Checking the Battery Status 16
Battery Status Indicator 17
Out of Range 18
LG TONE Free App 18
Troubleshooting 19
Specifications and Features 20
Declaration of Confirmation 21
Additional Information 22
Important Safety Information 24
Open Source Software Notice Information 25
Symbols 26

LG Electronics Inc. Single point of contact (EU/UK) :
Krijgsman 1, 1186 DM Amstelveen, The Netherlands

The LG TONE Free (TONE-FP9) is a lightweight wireless headset that uses *Bluetooth* technology.

This product can be used as an audio accessory for devices supporting either the A2DP or Hands-Free *Bluetooth* Profile.

Safety Precautions

The following safety precautions are provided to prevent any unexpected accident or damage. Please familiarise yourself with the safety precautions. The safety precautions are classified into "WARNING" and "CAUTION".

⚠ **WARNING:** Failing to comply with the instructions may result in serious injury or death.

⚠ **CAUTION:** Failing to comply with the instructions may result in minor injury or product damage.

⚠ WARNING

Do not drop the product from a high place.

Make sure there is no water, alcohol, or benzene in contact with the product.

Do not store the product in a wet or dusty place.

Do not place heavy objects on the product.

This product is waterproof to the IPX4 level (daily life waterproof). (The IPX4 waterproof rating applies to the earbud product only.)

Do not put the product under the water or use it in a humid location such as a bathroom.

⚠ CAUTION

Do not disassemble, adjust, or repair the product arbitrarily.

Do not place the product near excessive heat or flammable material.

The product may be damaged if an incompatible charger is used.

Make sure that an infant or child does not swallow a magnet or a small component of the product.

Make sure that foreign objects do not enter the charger's connectors (charging port and power plug). Failure to do so may result in fire or electric shock.

If you have a medical device implanted, contact your doctor before using this device.

This product has a built-in battery, and the battery cannot be removed or replaced arbitrarily.

For your safety, do not remove the battery incorporated in the product.

If you arbitrarily replace the battery or don't replace it correctly, it may explode.

The lithium-ion battery is a hazardous component that can cause injury.

Battery replacement by an unqualified professional can cause damage to your device.

Do not replace the battery by yourself. The battery can be damaged, which can cause overheat and injury. The battery must be replaced by authorized service provider. The battery should be recycled or disposed separately from household wastes.

Do not discard the battery arbitrarily. Follow the local procedure for discarding batteries.

Risk of fire or explosion if the battery is replaced by an incorrect type.

Do not store or transport at pressures lower than 11.6 kPa and at above 15000 m altitude.

Replacement of a battery with an incorrect type that can defeat a safeguard (for example, in the case of some lithium battery types).

Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.

Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas.

A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.

Do not carelessly throw away old batteries. It can cause an explosion or fire. The disposal method may vary by country and region. Dispose of it in an appropriate manner.

NOTE

If the product is exposed to excessive sweat, clean the product.


Keep the earbuds clean.

Wearing earbuds for a long time may cause pain, and if humidity inside ears continues for a long time, it may cause skin trouble.


HD Speaker

If the communication network of the device you are connecting to supports HD Voice Calling, you can enjoy making voice calls and listening to music in high definition.


Product Components




LG TONE Free™
Earbuds (medium eargels installed)
UV Charging Case



Extra Ear Gels
(small & large)



USB Type-C™
Charging Cable



USB-C™ to AUX
cable



Owner's Manual



Warranty Card



WEEE Card

NOTE: Actual product design may differ from images shown in manual.

⚠ CAUTION

Make sure authentic LG Electronics components are used. Using a non-authentic component may damage the product and thus void the warranty.

Use the USB Type-C™ cable/USB-C™ to AUX cable provided with the product.


NOTE

The complete manual is available for download from the LG Electronics website.


www.lg.com > support or service > Manuals & Downloads > Manuals

Overview

Charging Case

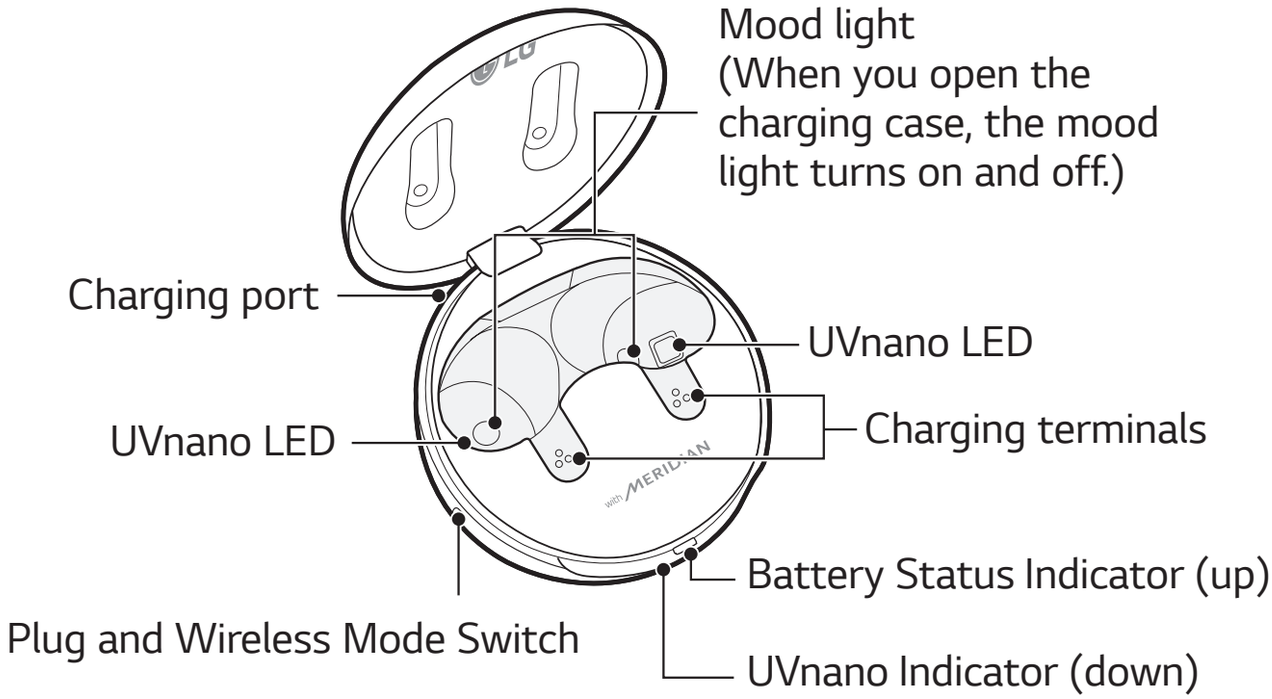

Earbuds

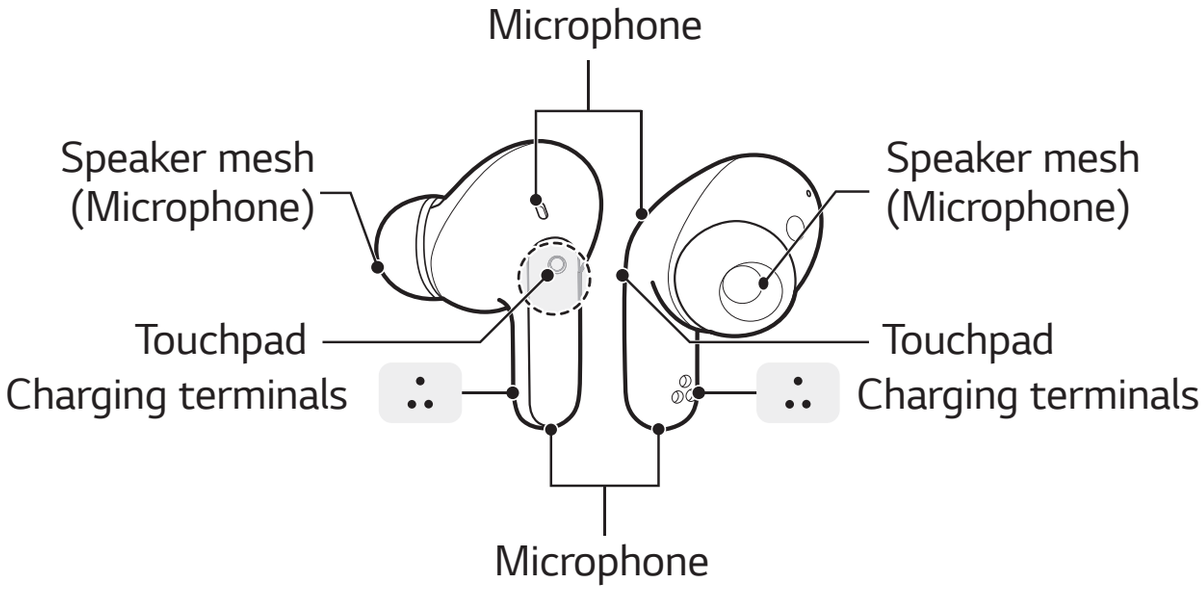


*Make sure that the charging terminal is not soiled with foreign substance.

*The appearance and specifications of the actual product may differ depending on the model.


Pairing and Connecting

Fast Pair

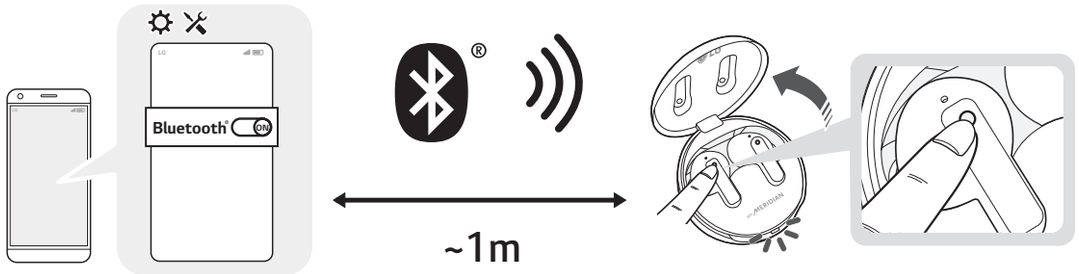

1 Turn on the *Bluetooth* function on the mobile phone or the device to be connected.

2 Open the cover of the charging case with the earbuds mounted on the case. Press and hold the touchpad of the left or right earbud for 3 to 5 seconds until the battery status indicator blinks in blue.

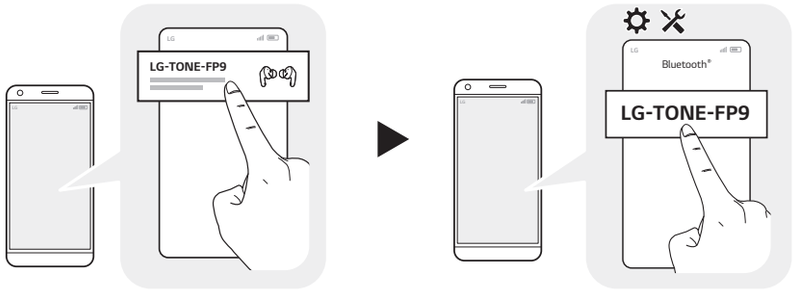

3 When the Fast Pair connection pop-up appears on the top area of the mobile phone screen, tap it to connect. (It only supports Android™ 6.0 or higher, and requires configuring *Bluetooth* and location information settings of the mobile device.)

4 If the pop-up does not appear, select **[LG-TONE-FP9]** from the *Bluetooth* menu on the mobile phone and connect it (for users of iOS or Android 5.0 or lower versions).

⚠ **CAUTION:** In the list of *Bluetooth* connected devices, LG-TONE-FP9_LE is not the correct model name for connection. Check the model name in use and connect with the model name without “LE”.
If the earbud model name is abnormally displayed on the Android device, change the model name in the *Bluetooth* menu of Connected Device Settings.

NOTE: To connect with another device, perform the above procedure again.


Automatic Reconnection

The earbuds are connected automatically when you open the cover of the charging case. If you close the cover of the charging case with both earbuds mounted in the charging case, the earbuds are disconnected.


Wearing Earbuds

1 Separate the earbuds from the charging case and adjust them so that they fit comfortably in your ears.


NOTE: **You can use ear gels that fit your ears to improve Active Noise Canceling (ANC) performance and enjoy rich music sound.**

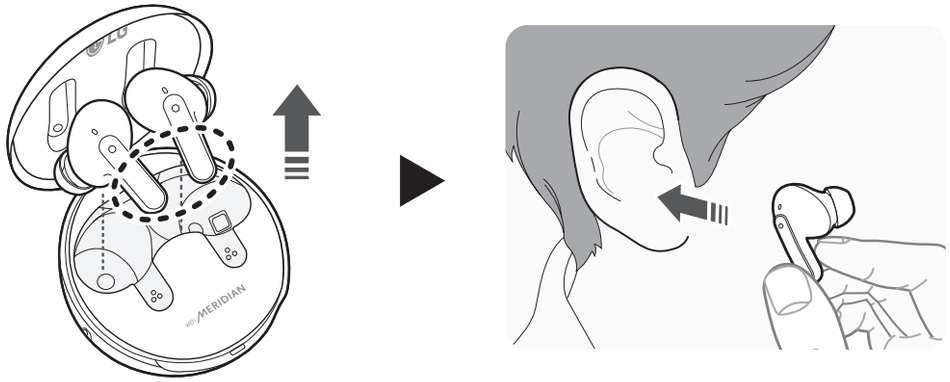

2 When you wear the earbuds, you will hear a wearing detection alarm.

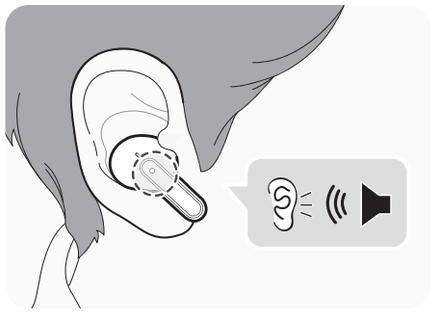

Playing Music

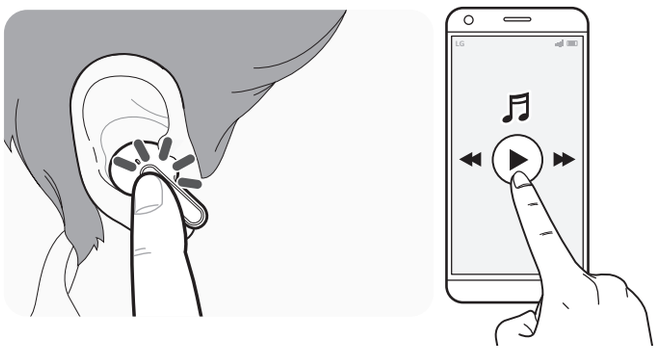


Function	Description
Play / Pause	: **Touch the left or right earbud** once.
Adjusting the Volume	: **Touch the left(Decrease volume) or right(Increase volume) earbud** twice.
Play Next	: **Touch the left or right earbud** three times.

NOTE: You can change the operation method of the function in the touchpad settings of the LG TONE Free app.

Once you turn on the Plug and Wireless mode, the earbuds reacts to your touch as follows:

- Touch it once to mute or unmute the sound.
- Touch it twice to adjust the volume.
- Touching it three times triggers no response.


Mobile Calling Functions

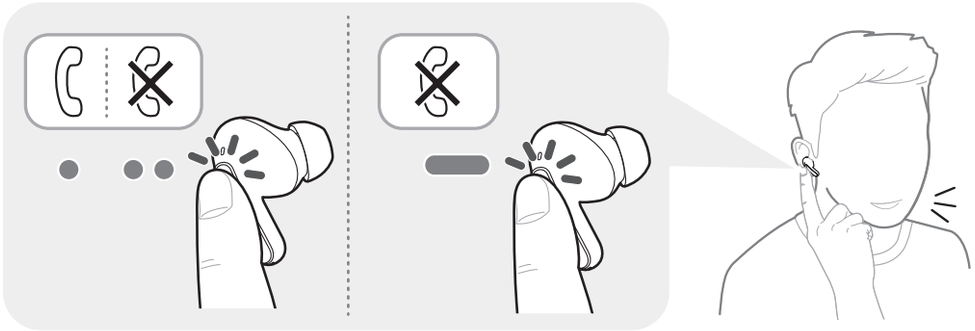

Function	Status	Description
Answering Calls	Ringing	**Touch the left or right earbud** once.
Ending Calls	Talking	**Touch the left or right earbud** twice.
Making Calls	Idle	If you make a call using a mobile phone, the call is automatically connected to the headset.
Receiving Calls while on the Phone	Talking	If you **touch the left or right earbud** once, the current call will go on hold, and you will be able to answer an incoming call. If the previous call is on hold, you can finish the current call on the mobile phone. (It works differently depending on the mobile phone settings.)
Rejecting Calls	Ringing	**Touch and hold the left or right earbud.**


Listen to the Ambient Sound (LAS) / Active Noise Cancellation (ANC)

Listen to the Ambient Sound (LAS)

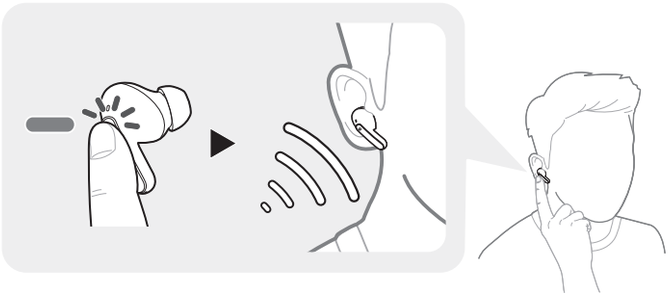

The Listen to the Ambient Sound (LAS) function allows you to listen to the ambient sound so that you can recognize the surrounding situation and any potential risks.

Active Noise Cancellation (ANC)

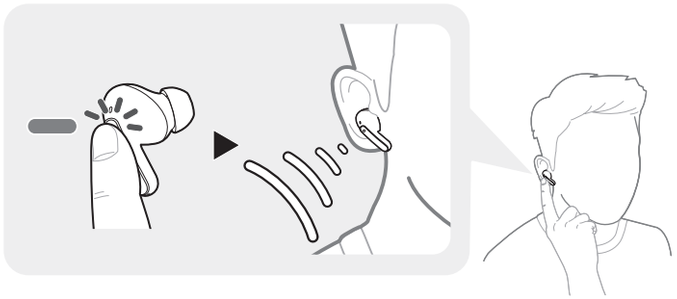

The Active Noise Cancellation (ANC) function blocks any ambient sound. So, you can use the function to listen to the music or watch a video without interference.

Touch and hold the left or right earbud to switch between the ANC mode and the LAS mode.

You can set the LAS and ANC functions in the LG TONE Free app.

You can configure the Listen to the Ambient Sound mode and Conversation mode using the LG TONE Free app.


If you use the LAS or ANC function, the battery consumes faster, reducing the time you can use the product.

You can use the LAS and ANC functions while being idle, listening to music, or being on the phone.

*ANC is an acronym for Active Noise Cancellation.

⚠ **CAUTION:** When the LAS mode is enabled, you may hear the ambient sound become loud suddenly. When using the ANC function outdoors, pay attention to the surrounding environment for safety.

UVnano

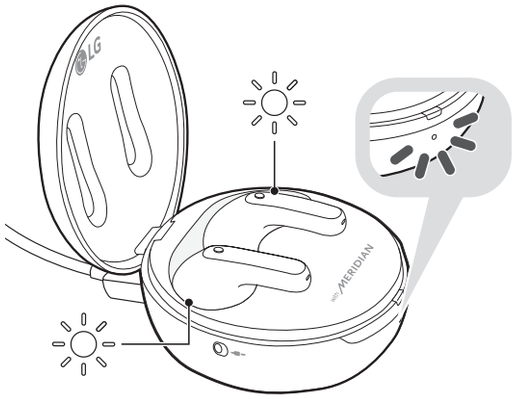

The charging case has a built-in UVnano LED, which allows you to use your earbuds cleanly.

If you charge the earbuds wired after mounting them on the charging case and closing the cover, the UVnano LED operates for 5 minutes.


*UVnano is a compound word derived from the words UV and its unit, nanometer.

NOTE: The UVnano indicator turns on blue while the UVnano LED is on.
The UVnano charging case eliminates up to 99.9% of harmful bacteria inside the earbud hole.
In the case of a white product, discolouring may occur in the contact area of the UVnano LED, but it does not affect the product function.

CAUTION: Be aware that the temperature of the earbuds may rise while the UVnano LED is on.

Charging

Wired Charging

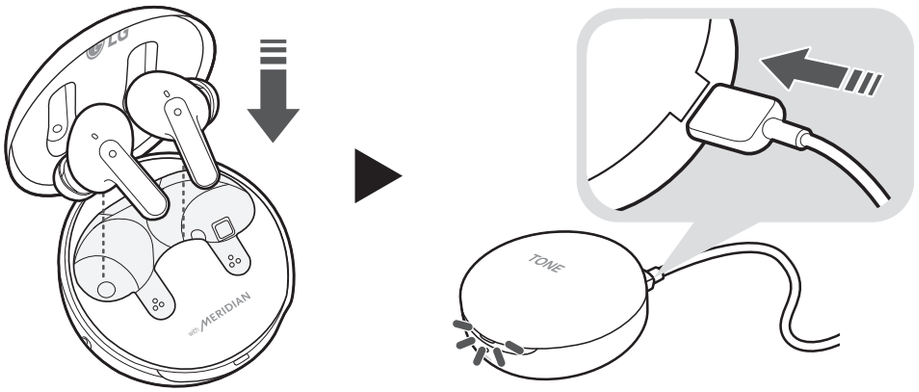

When the charging cable is connected, the charging status is displayed in the charging case.

NOTE: The earbuds and the charging case are charged at the same time. The charging port on the charging case cannot be used to supply power to mobile phones, etc.


Plug and Wireless Mode (External Device Connection Mode)

You can connect the charging case to a device such as an airplane stereo system, treadmill, cassette player, radio, and TV to listen with the earbuds.

How to Connect

1 Connect the USB-C™ side of the USB-C™ to AUX cable to the charging case.

2 Connect the AUX side to a device you want to use.

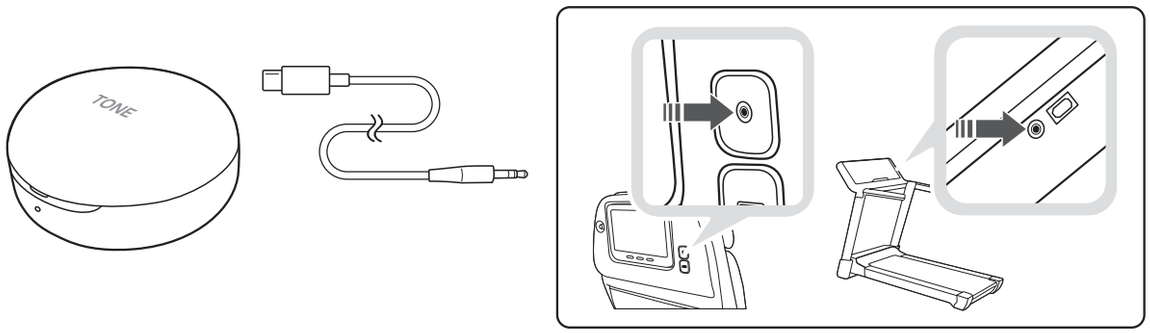


3 Wear the earbuds.

4 Push the Plug and Wireless Mode switch to the right to turn on the mode.

5 The indicator on the charging case flashes in green.

6 Once the charging case is connected to the earbuds, the indicator turns off.

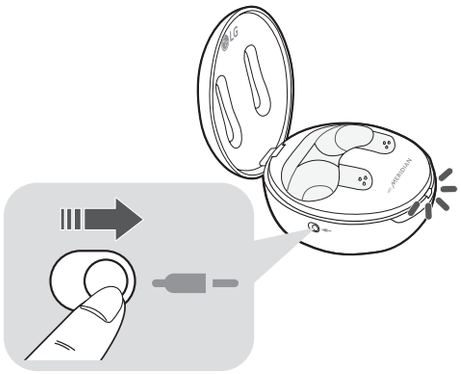


How to Disconnect

1 Push the Plug and Wireless Mode switch to the left.

2 The indicator on the charging case flashes in blue.

3 Once disconnected from the charging case, the earbuds reconnect to the device that was previously connected.

- If the device is not found, the earbuds enter the Connection Ready mode.

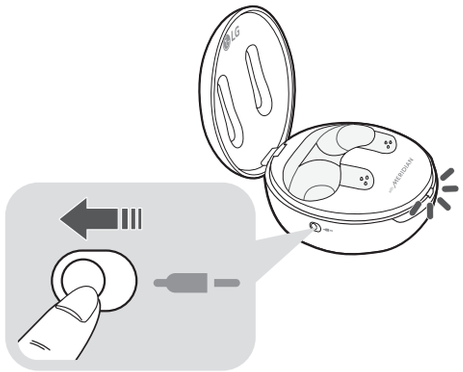

NOTE: You cannot use the LG TONE Free app, but the EQ and touchpad settings are maintained as is. (Touch operation: Refer to the Playing Music section.)

The earbuds do not support the call function.

The USB-C™ to AUX cable does not support the charging function.


The earbuds may not be compatible with some devices, and a separate adapter (sold separately) may be necessary to use a port on some airplane seats.

If you use the earbuds for a long duration, the battery of the earbuds (including the charging case) may drain faster than when physically connected to a smartphone.

Checking the Battery Status

If earbuds are mounted in the charging case, the earbuds' battery status is displayed. Otherwise, the charging case's battery status is displayed.

If the earbuds are mounted in the charging case while plugged in, the UVnano process will commence for 5 minutes. Once this process is complete, the charging case's battery status will be displayed.

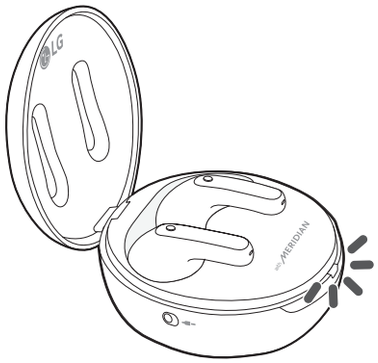

Battery Status Indicator	Remaining Battery (charger not connected)	Charging State (charger connected)
Red	20% or lower	Charging
Yellow	20% - 80%	-
Green	80% or higher	Fully charged

NOTE: When the charging case lid is closed, charging case battery status is displayed. If the charging case has no remaining charge, there will be no display and it cannot function. We recommend you keep the charging case charged at all times as the earbuds are not able to be turned on and turned off independently.

Battery Status Indicator

Status	Description
Bluetooth Search Mode	The **battery status indicator** flashes in blue.
Battery below 20%	The **battery status indicator** turns on and off in red.
Battery 20% - 80%	The **battery status indicator** turns on and off in yellow.
Battery 80% or more	The **battery status indicator** turns on and off in green.
When there is a problem while charging	The **battery status indicator** flashes in red.
Charging (charger connected)	The **battery status indicator** turns on in red.
Charging complete (charger connected)	The **battery status indicator** turns on in green.

Out of Range

If the device connected to the product is out of effective communication range, the communication signal becomes weak and the communication is lost. The effective communication range may vary depending on surrounding and other conditions.

If the device comes back within effective communication range, the product automatically reconnects to the device. If the device is not automatically reconnected, **touch the left or right earbud** once to connect them.

LG TONE Free App

If you install the “LG TONE Free” app, you can use Check Earbud Battery, Voice Alert, Change Equalizer Mode, Check Last Connected Location Information, and Find My Earbuds functions. Check out the app for more details.

To install the “LG TONE Free” app, search LG TONE Free in the Google Play Store or App Store or scan the QR code below.

It supports Android 7.0 or higher and iOS 11 or higher.

Google Play

App Store

Troubleshooting

If you see any of the following symptoms while using the product, make sure to recheck it. It may not be a malfunction.

Symptom	Cause and Solution
The power does not turn on	Check the battery level and charge it.
If unable to make a call with earbuds	If the mobile phone does not support headset and hands-free functions, you cannot use the calling features. Check the battery level and charge it.
If unable to register earbuds to mobile phone	Check whether earbuds are turned on. Check if the earbuds have entered the search mode. - While the earbuds are inserted in the charging case, press and hold the touch pad on the left or right earbud for 3 to 5 seconds to switch to the search mode.
If you replaced the earbuds or there is a problem with the operation (Factory reset)	While the earbuds are inserted in the charging case, press and hold the touch pad on the left or right earbud for 10 seconds or more. - The battery status indicator of the charging case flashes red and the initialization to the factory status is carried out. After initialization to the factory status, reconnect the earbuds.

*Factory reset and Search mode cannot be used in Plug and Wireless mode.

Specifications and Features

Item	Comments
Bluetooth Specifications	V 5.2 (Headset/Hands-Free/A2DP/AVRCP)
Battery	Earbud : 3.7 V / 68 mAh, Lithium-ion Charging case : 3.7 V / 390 mAh, Lithium-ion
Music Play Time Earbuds & With Charging case	ANC Off : Up to 10 & Up to 24 hours* ANC On : Up to 6 & Up to 15 hours*
Charging Time	Earbud : within an hour / Charging case : within 2 hours Fast Charging : 5 min charge for up to 60 min playtime* ※ When charging wired at room temperature
Rated Input Voltage	Earbud : 5 V ⎓, 136 mA Charging case : 5 V ⎓, 500 mA
Operating Temperature	0 °C ~ +40 °C
Operating Humidity	5 % ~ 60 %
Dimensions (mm) / Weight (g)	Earbud : 21.2 mm (W) X 28.3 mm (L) X 23.2 mm (H) / 5.2 g (One earbud) Charging case : 54.5 mm (W) X 54.5 mm (L) X 30 mm (H) / 36.7 g

Frequency range	Output Power (Max)
2402 MHz to 2480 MHz	Earbud :11.5 dBm Charging case : 10 dBm

*Duration of use may vary depending on the connected mobile device, features being used, settings, signal strength, operating temperature, frequency band, and other methods of use.

Declaration of Confirmation

DECLARATION OF CONFORMITY:

Hereby, LG Electronics declares that the radio equipment type this headset is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: http://www.lg.com/global/support/cedoc/cedoc#

Bluetooth® is a registered trademark of Bluetooth SIG, Inc. worldwide.

Android, Google Play, the Google Play logo, and other related marks and logos are trademarks of Google LLC.

Additional Information

1. Radio frequency exposure

This *Bluetooth* LG Stereo Headset is a radio transmitter and receiver. When in operation it communicates with a *Bluetooth* equipped mobile device by receiving and transmitting radio frequency (RF) electromagnetic fields (microwaves) in the frequency range 2402 to 2480 MHz. Your *Bluetooth* headset is designed to operate in compliance with the RF exposure guidelines and limits set by national authorities and international health agencies when used with any compatible LG Electronics mobile phone.

2. *Bluetooth* Connection Precautions

The following environments affect the range and reception of *Bluetooth* signals:

- When walls, metal, human bodies, or other obstacles exist between the *Bluetooth* device and the connected device
- When equipment that uses 2.4 GHz frequency signals (Wireless LANs, wireless phones, microwave ovens, etc.) is placed near the devices being used
- When using a *Bluetooth* device (TV, laptop, etc.) other than the mobile phone, the sound quality may be affected by the specifications and performance of the device

3. Potentially explosive atmosphere

Turn off your electronic device when in any area with a potentially explosive atmosphere. It is rare, but your electronic device could

generate sparks. Sparks in such areas could cause an explosion or fire resulting in bodily injury or even death. Areas with a potentially explosive atmosphere are often, but not always, clearly marked.

4. Battery information

A rechargeable battery has a long service life if treated properly. A new battery or one that has not been used for a long period of time could have reduced capacity the first few times it is used. Do not expose the battery to extreme temperatures, never above +50° or below -10°. For maximum battery capacity, use the battery in room temperature. If the battery is used in low temperatures, the battery capacity will be reduced. The battery can only be charged in temperatures between 0° and +45°.

Removal of waste batteries and accumulators(Product with embedded battery ONLY)

- In case this product contains a battery incorporated within the product which cannot be readily removed by end-users, LG recommends that only qualified professionals remove the battery, either for replacement or for recycling at the end of this product's working life. To prevent damage to the product, and for their own safety, users should not attempt to remove the battery and should contact LG Service Helpline, or other independent service providers for advice.
- Removal of the battery will involve dismantling of the product case, disconnection of the electrical cables/contacts, and careful extraction of the battery cell using specialized tools. If you need the instructions for qualified professionals on how to remove the battery safely, please visit http://www.lge.com/global/sustainability/environment/take-back-recycling.

5. Recycling the battery in your *Bluetooth* Headset

The battery in your *Bluetooth* Headset must be disposed of properly and should never be placed in municipal waste.



Disposal of waste batteries/accumulators

1 This symbol may be combined with chemical symbols for mercury(Hg), cadmium(Cd) or lead(Pb) if the battery Contains more that 0.0005% of mercury, 0.002% of cadmium or 0.004% of lead.



2 All batteries/accumulators should be disposed separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities.

3 The correct disposal of Your old batteries/accumulators will help to prevent potential negative consequences for the environment, animal and human health.

4 For more detailed information about disposal of Your old batteries/accumulators, please contact Your city office, waste disposal service or the shop where You purchased the product. (http://www.lg.com/global/sustainability/environment/take-back-recycling/global-network-europe)

Important Safety Information

Avoiding hearing damage

Permanent hearing loss may occur if you use your Headset at a high volume. Set the volume to a safe level. You can adapt over time to a higher volume of sound that may sound normal but can be damaging to your hearing.

If you experience ringing in your ears or muffled speech, stop listening and have your hearing checked. The louder the volume, the less time is required before your hearing could be affected. Hearing experts suggest that to protect your hearing:

- Limit the amount of time you use Headset at high volume.
- Avoid turning up the volume to block out noisy surroundings.
- Turn the volume down if you can't hear people speaking near you.



Please refer to your handset user guide for more information on how to adjust listening levels on your handset.

Using headsets safely

Use of Headset to listen to music while operating a vehicle is not recommended and is illegal in some areas. Be careful and attentive while driving. Stop using this device if you find it disruptive or distracting while operating any type of vehicle or performing any other activity that requires your full attention.

Open Source Software Notice Information

To obtain the source code under GPL, LGPL, MPL, and other open source licenses that have the obligations to disclose source code, that is contained in this product, and to access all referred license terms, copyright notices and other relevant documents please visit https://opensource.lge.com.

LG Electronics will also provide open source code to you on CD-ROM for a charge covering the cost of performing such distribution (such as the cost of media, shipping, and handling) upon email request to opensource@lge.com.

This offer is valid to anyone in receipt of this information for a period of three years after our last shipment of this product.

RISK GROUP 2	
	**CAUTION :** UV EMITTED FROM THIS PRODUCT. EYE OR SKIN IRRITATION MAY RESULT FROM EXPOSURE. USE APPROPRIATE SHIELDING.
	WARNING : IF YOU DON'T DO CHARGING OR IF YOU OPEN THE CHARGING CASE, THE UVNANO FUNCTION IS NOT ACTIVATED.

The output level shall automatically return to an output level not exceeding RS1 when the power is switched off.

Symbols

~	Refers to alternating current (AC).
⎓	Refers to direct current (DC).
⧈	Refers to class II equipment.
⏻	Refers to stand-by.
I	Refers to "ON" (power).
⚡	Refers to dangerous voltage.

Life's Good

KULLANICI KILAVUZU

LG TONE Free

***Bluetooth*®** LG Stereo Kulaklık

TÜRKÇE

Rev 2.0 TR

NOT: En iyi performansı elde etmek ve kulaklığın hasar görmesini veya yanlış kullanımını önlemek için lütfen kulaklığı kullanmadan önce tüm bilgileri dikkatlice okuyun.

Bu kılavuz üzerinde yazım hataları ya da verilen bilgilerdeki yanlışlıklar nedeniyle gerekebilecek düzeltme veya eğişiklikler yalnızca LG Electronics Inc. tarafından yapılacaktır.

TONE-FP9 / TONE-FP9W
TONE-FP9E

www.lg.com

Telif Hakkı © 2021 - 2022 LG Electronics Inc. Tüm hakları saklıdır

İçindekiler

Güvenlik Önlemleri 1
HD Hoparlör 3
Ürün Bileşenleri 4
Genel Bakış 5
Eşleştirme ve Bağlama 6
Kulaklıkların Takılması 8
Müzik Oynatma 9
Mobil Arama İşlevleri 10
Ortam Sesini Dinleme (LAS) / Aktif Gürültü Önleme (ANC) 11
UVnano 13
Şarj Etme 14
Tak ve Kablosuz Modu (Harici Cihaz Bağlantı Modu) 15
Pil Durumunun Kontrolü 17
Pil Durumu Göstergesi 18
Kapsam Alanı Dışı 19
LG TONE Free Uygulaması 19
Sorun Giderme 20
Teknik ve Fiziksel Özellikler 21
Uygunluk Bildirimi 22
Ek Bilgiler 23
Önemli Emniyet Bİlgileri 26
Açık Kaynaklı Yazılım Bildirimi Bilgileri 27
Semboller 28

LG TONE Free (TONE-FP9) *Bluetooth* teknolojisini kullanan hafif bir kablosuz kulaklıktır.

Bu ürün, A2DP veya Eller Serbest *Bluetooth* Profilini destekleyen cihazlarda bir ses aksesuarı olarak kullanılabilir.

Güvenlik Önlemleri

Aşağıdaki güvenlik önlemleri beklenmeyen kazaları veya hasarları önlemek üzere sağlanmıştır. Lütfen güvenlik önlemlerini öğrenin. Güvenlik önlemleri "UYARI" ve "DİKKAT" kısımlarına ayrılmıştır.

⚠ **UYARI:** Talimatlara uyulmaması ciddi yaralanmaya veya ölüme yol açabilir.

⚠ **DİKKAT:** Talimatlara uyulmaması küçük yaralanmalara veya ürün hasarına yol açabilir.

⚠ UYARI

Ürünü yüksek bir yerden düşürmeyin.

Ürünün su, alkol veya benzinle temas etmediğinden emin olun.

Ürünü ıslak veya tozlu yerlerde saklamayın.

Ürünün üzerine ağır nesneler koymayın.

Bu ürün IPX4 seviyesinde su geçirmezdir (günlük yaşam seviyesinde su geçirmezlik). (IPX4 seviyesinde su geçirmezlik derecesi yalnızca kulak içi kulaklık ürünü için geçerlidir.)

Ürünü su içerisine koymayın veya banyo gibi nemli ortamlarda kullanmayın.

⚠ DİKKAT

Ürünü gelişigüzel bir şekilde parçalarına ayırmayın, ayarlamayın veya onarmayın.

Ürünü aşırı ısı yayan veya yanıcı materyalin yakınına koymayın.

Uyumlu olmayan bir şarj cihazı kullanılırsa ürün hasar görebilir.

Bebeklerin veya çocukların ürünün manyetik aksamını veya küçük bir bileşenini yutmamasına dikkat edin.

Şarj cihazının konektörlerine (şarj bağlantı noktası ve güç fişi) yabancı cisim girmediğinden emin olun. Aksi takdirde yangın çıkabilir veya elektrik çarpabilir.

Vücudunuza yerleştirilmiş bir tıbbi cihaz varsa bu cihazı kullanmadan önce doktorunuzla iletişime geçin.

Bu üründe yerleşik pil bulunmaktadır ve pil gelişigüzel bir şekilde çıkarılamaz veya değiştirilemez.

Güvenliğiniz için ürün içerisindeki yerleşik pili çıkarmayın.

Pili gelişigüzel bir şekilde çıkarırsanız veya doğru şekilde değiştirmezseniz patlayabilir.

Lityum iyon pil, yaralanmaya neden olabilecek tehlikeli bir bileşendir.

Pil değişiminin yetkili bir profesyonel tarafından yapılmaması cihazınızda hasara neden olabilir.

Pili kendiniz değiştirmeyin. Pil zarar görerek aşırı ısınmaya ve yaralanmalara neden olabilir.

Pil, yetkili servis sağlayıcısı tarafından değiştirilmelidir. Pil, ev atıklarından ayrı tutularak geri dönüştürülmeli veya atılmalıdır.

Pili gelişigüzel bir şekilde atmayın. Pillerin atılmasına ilişkin yerel prosedürü izleyin.

Pil yanlış türde bir pille değiştirildiğinde yangın veya patlama riski vardır.

11,6 kPa değerinden düşük basınçta ve 15.000 m rakımın üstünde saklamayın veya taşımayın.

Pilin yanlış türde bir pil ile değiştirilmesi korumayı ortadan kaldırabilir (ör. bazı lityum pil türleri için).

Pilin ateşe veya sıcak bir fırına atılması ya da mekanik olarak ezilmesi veya kesilmesi patlamayla sonuçlanabilir.

Pilin aşırı derecede yüksek sıcaklıktaki ortama bırakılması, patlamaya veya yanıcı sıvı ya da gaz sızıntısına sebep olabilir.

Pil aşırı derecede düşük hava basıncına maruz kalırsa patlayabilir veya yanıcı sıvı veya gaz sızıntısı oluşabilir.

Eski pilleri dikkatsizce atmayın. Patlama veya yangına sebep olabilir. Atma yöntemi ülkeye veya bölgeye göre farklılık gösterebilir. Pili uygun bir yöntemle atın.

NOT

Aşırı tere maruz kalması durumunda ürünü temizleyin.


Kulak içi kulaklıkları temiz tutun.

Kulak içi kulaklıkların uzun süre takılması acıya neden olabilir ve kulak içi kulaklıkların içerisindeki nem uzun süre devam ederse cilt sorununa sebep olabilir.

HD Hoparlör


Bağlandığınız cihazın iletişim ağı HD Sesli Aramayı destekliyorsa, yüksek çözünürlüklü sesli aramaların ve müzik dinlemenin keyfini çıkarabilirsiniz.

Ürün Bileşenleri




LG TONE Free™
Kulak içi kulaklıklar (orta boy kulak jelleri takılı)


UV Şarj Kutusu




Ekstra Kulak Jelleri (küçük ve büyük)




USB Type-C™ Şarj Kablosu



USB-C™ - AUX kablosu



Kullanıcı Kılavuzu



Garanti Belgesi



WEEE Kartı

NOT: Gerçek ürün tasarımı kılavuzda gösterilen resimlerden farklı labilir.

⚠ DİKKAT

Orijinal LG Electronics bileşenlerinin kullanıldığından emin olun. Orijinal olmayan bileşen kullanımı, ürüne hasar vererek garantiyi geçersiz kılabilir.

Ürünle verilen USB Type-C™ kablosu/USB-C™ - AUX kablosunu kullanın.


NOT

Kılavuzun tamamı LG Electronics web sitesinden indirilebilir.


www.lg.com > support or service > Manuals & Downloads > Manuals

Genel Bakış

Şarj Kutusue

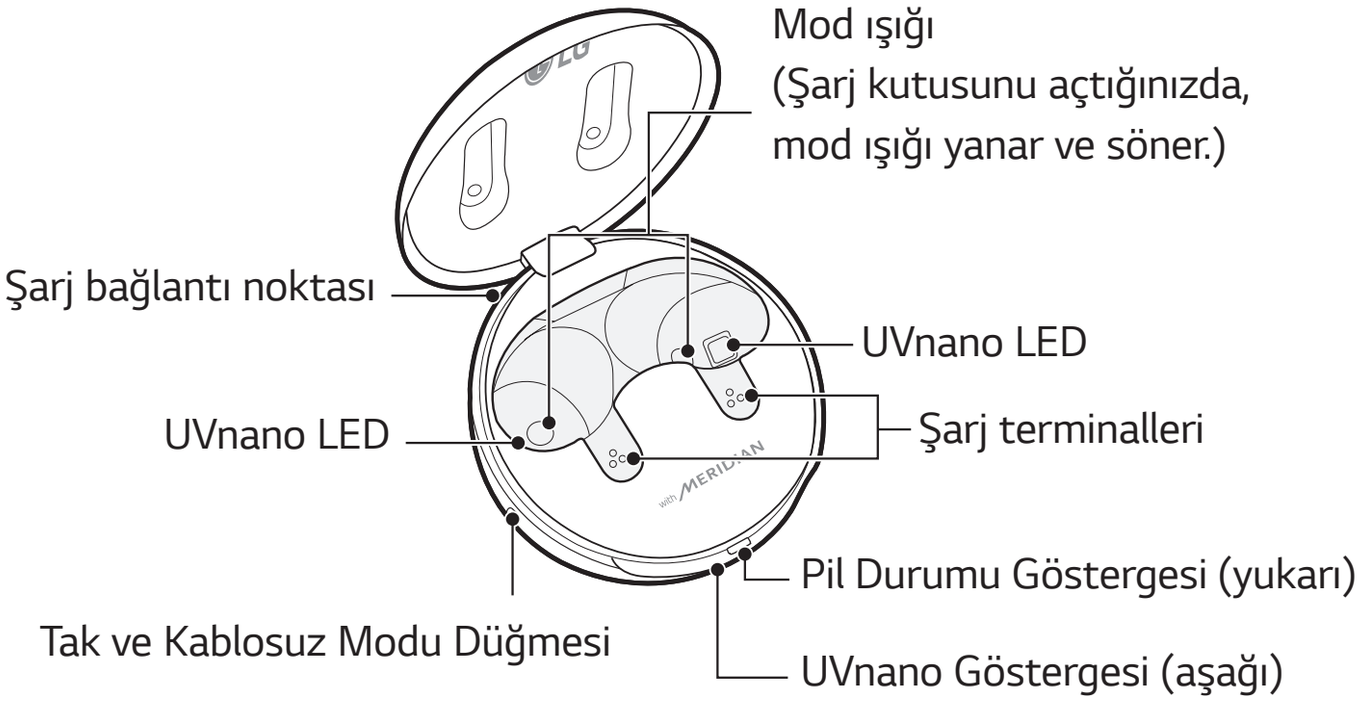

Kulak içi kulaklıklar

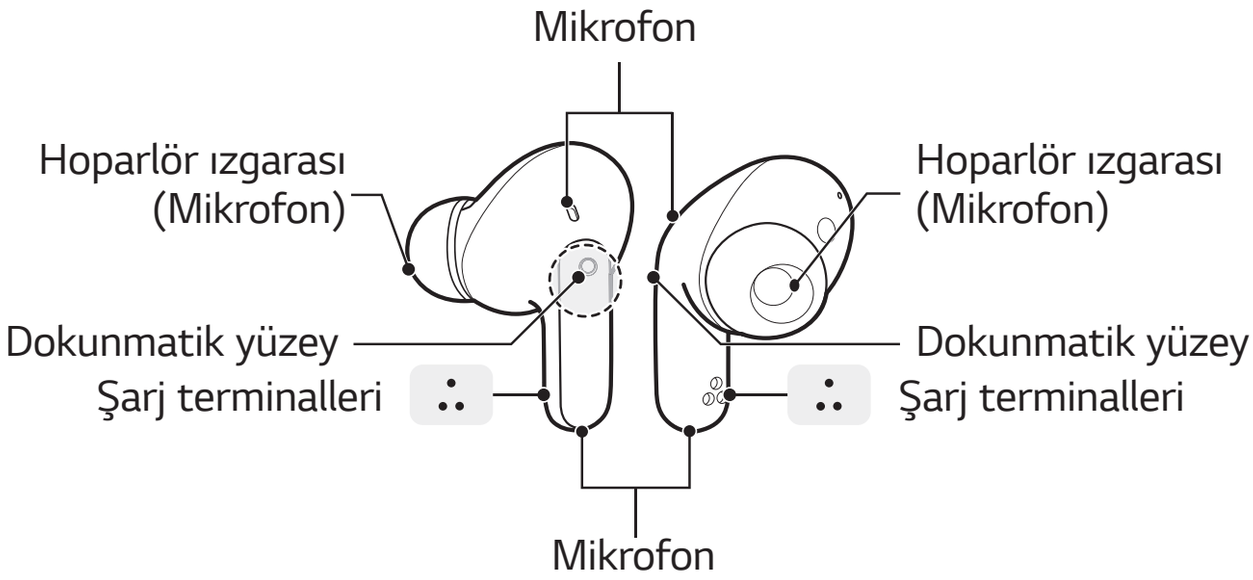


*Şarj terminalinin yabancı madde ile kirlenmediğinden emin olun.

*Gerçek ürünün görünümü ve teknik özellikleri modele bağlı olarak farklılık gösterebilir.


Eşleştirme ve Bağlama

Hızlı Eşleştirme

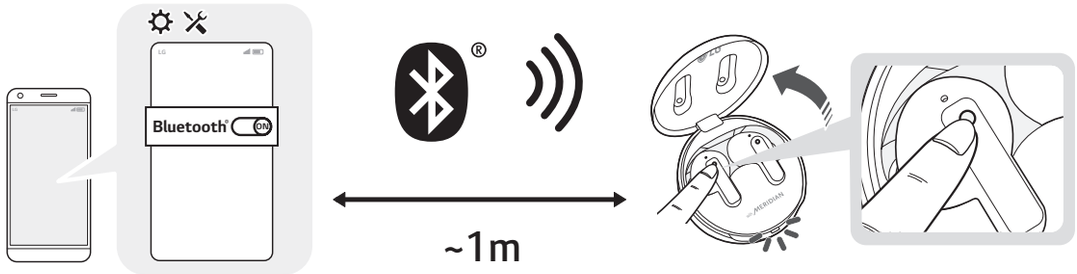

1 Bağlanılacak mobil telefonda veya cihazda *Bluetooth* fonksiyonunu açın.

2 Kulak içi kulaklıklar kutuda takılıyken şarj kutusunun kapağını açın. Pil durumu göstergesi mavi renkte yanıp sönene kadar **sol veya sağ kulak içi kulaklığın dokunmatik yüzeyini** basılı tutun.

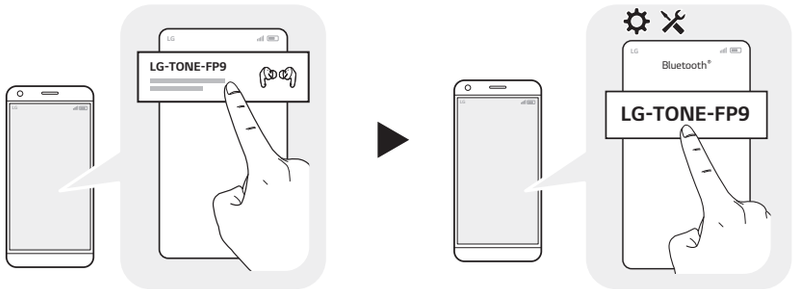

3 Mobil telefon ekranının üst kısmında Hızlı Eşleştirme Bağlantısı açılır penceresi göründüğünde, bağlamak için dokunun. (Yalnızca Android™ 6.0 veya üzeri sürümleri destekler ve mobil cihazın *Bluetooth* ve konum bilgisi ayarlarının yapılandırılmasını gerektirir.)

4 Açılır pencere görünmezse, mobil telefonda **[LG-TONE-FP9]** öğesini *Bluetooth* menüsünden seçin ve bağlayın (iOS veya Android 5.0 ve daha düşük sürüm kullanıcıları için).

⚠ **DİKKAT:** *Bluetooth* bağlı aygıtlar listesinde, LG-TONE-FP9_LE bağlantı için doğru model adı değildir. Kullanımda olan model adını kontrol edin ve “LE” ifadesi olmayan model adı ile bağlantı sağlayın.
Kulak içi kulaklığın model adı Android cihazda anormal şekilde gösteriliyorsa, Bağlı Cihaz Ayarları'nın *Bluetooth* menüsünde model adını değiştirin.

✓ **NOT:** Başka bir cihaza bağlamak için yukarıdaki prosedürü tekrarlayın.


Otomatik Yeniden Bağlantı

Şarj kutusunun kapağını açtığınızda kulaklıklar otomatik olarak bağlanır. Her iki kulaklık şarj kutusuna takılıyken şarj kutusunun kapağını kapatırsanız, kulaklıkların bağlantısı kesilir.


Kulaklıkların Takılması

1 Kulaklıkları şarj kutusundan çıkarın ve kulaklarınıza rahat bir şekilde oturacak şekilde ayarlayın.


NOT: **Aktif Gürültü Önleme (ANC) performansını artırmak ve zengin müziğin keyfini çıkarmak için kulaklarınıza uygun kulak jelleri kullanabilirsiniz.**

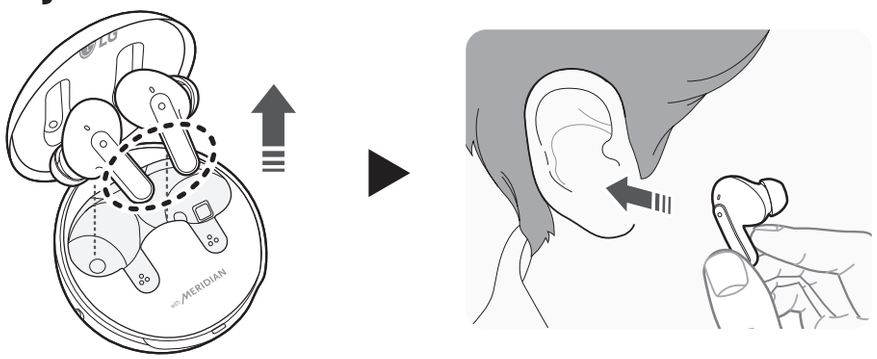

2 Kulaklıkları taktığınızda, takılma işlemini algılayan bir uyarı sesi duyarsınız.

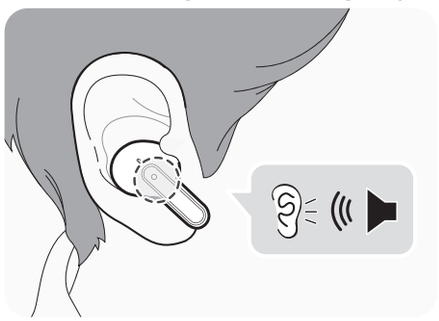

Müzik Oynatma

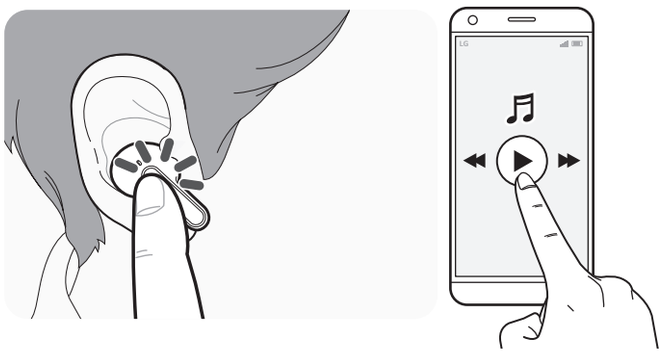


İşlev	Açıklama
Oynat / Durdur	: **Sol veya sağ kulaklığa** bir kez dokunun.
Ses Düzeyinin Ayarlanması	: **Sol (Ses düzeyini artırır) veya sağ (Ses düzeyini azaltır)** kulaklığa iki kez dokunun.
Sonrakini Oynat	: **Sol veya sağ kulaklığa üç kez** dokunun.

NOT: LG TONE Free uygulamasının dokunmatik yüzey ayarlarından işlevin işlem modunu değiştirebilirsiniz.

Tak ve Kablosuz Modu modunu açtıktan sonra, kulak içi kulaklıklar dokunma işleminize aşağıdaki gibi tepki verir.

- Sessize almak ve sesini açmak için bir kez dokunun
- Ses düzeyini ayarlamak için iki kez dokunun.
- Üç kez dokunmak yanıt vermemeyi tetikler.

Mobil Arama İşlevleri

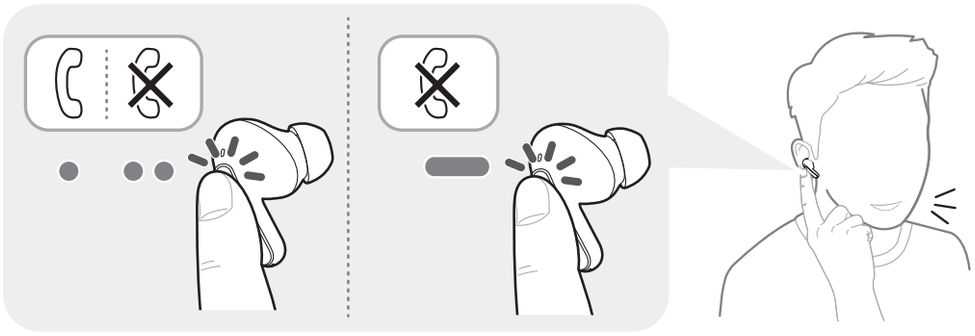


TÜRKÇE

İşlev	Durum	Açıklama
Aramaları Yanıtlama	Çalma	**Sol veya sağ kulaklığa** bir kez dokunun.
Çağrıların Sonlandırılması	Konuşma	**Sol veya sağ kulaklığa** iki kez dokunun.
Arama Yapma	Boşta	Cep telefonunu kullanarak arama yaparsanız, arama otomatik olarak kulaklığa bağlanır.
Telefondayken Aramaları Kabul Etme	Konuşma	**Sol veya sağ kulaklığa** bir kez dokunursanız, mevcut arama beklemeye alınır ve gelen aramayı yanıtlayabilirsiniz. Önceki arama beklemedeyse, cep telefonundaki mevcut aramayı bitirebilirsiniz. (Cep telefonu ayarlarına bağlı olarak farklı çalışır.)

Aramaları Reddetme	Çalma	**Sol veya sağ kulaklığa dokunun ve basılı tutun.**


Ortam Sesini Dinleme (LAS) / Aktif Gürültü Önleme (ANC)

Ortam Sesini Dinleme (LAS)

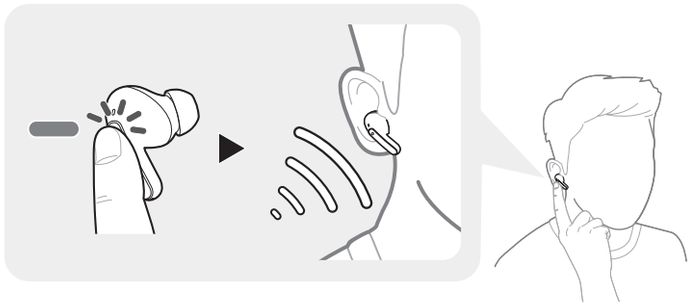

Ortam Sesini Dinleme (LAS) işlevi, ortam sesini dinlemenizi sağlayarak çevredeki durumu ve olası riskleri anlamanıza olanak tanır.

Aktif Gürültü Önleme (ANC)

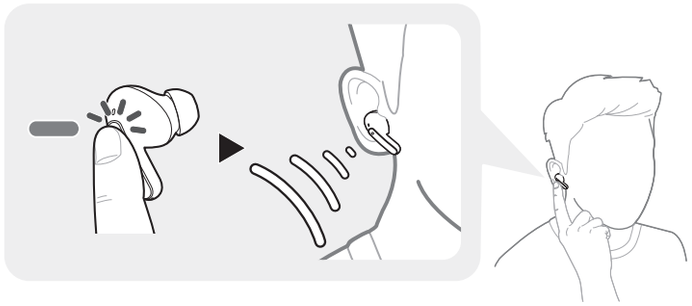

Aktif Gürültü Önleme (ANC) işlevi ortam sesini bloke eder. Böylece işlevi müdahale olmaksızın müzik dinlemek veya video seyretmek üzere kullanabilirsiniz.

ANC modu ve LAS modu arasında geçiş yapmak için **sol veya sağ kulaklığa dokunun ve basılı tutun**.

LAS ve ANC işlevlerini LG TONE Free uygulamasından ayarlayabilirsiniz.

LG TONE Free uygulamasını kullanarak Ortam Sesini Dinle modunu ve Konuşma modunu yapılandırabilirsiniz.


LAS ve ANC işlevini kullanırsanız, pil daha hızlı tükenerek ürünü kullanma sürenizi azaltır.

LAS ve ANC işlevlerini boştayken, müzik dinlerken veya telefondayken kullanabilirsiniz.

*ANC, Aktif Gürültü Önleme anlamına gelir.

⚠ **DİKKAT:** Ortam Sesini Dinleme modu etkinken, ortam sesinin birden yükseldiğini duyabilirsiniz.
ANC işlevini dışarıda kullanırken, güvenlik için çevredeki ortama dikkat gösterin.

UVnano

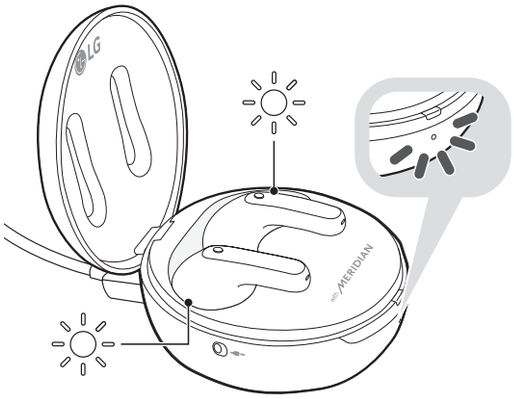

Şarj kutusunda, kulaklıklarınızı temiz şekilde kullanmanıza olanak tanıyan dahili UVnano LED bulunur.

Kulaklıkları şarj kutusuna takıp kapağı kapattıktan sonra kablo bağlıyken şarj ederseniz, UVnano LED 5 dakika çalışır.


*UVnano, UV ve kendisine ait birimi nanometreden oluşan birleşik bir sözcüktür.

NOT: UVnano LED açıkken UVnano göstergesi mavi renkte yanar.
UVnano şarj kutusu, kulak içi kulaklık deliği içerisindeki bakterileri % 99,9'a kadar önler.
Ürünün beyaz olması durumunda, UVnano LED'in temas bölgesinde renk bozulması meydana gelebilir ancak bu durum ürün işlevini etkilemez.

DİKKAT: UVnano LED açıkken, kulaklık sıcaklıklarının yükselebileceğini unutmayın.

Şarj Etme

Kablolu Şarj

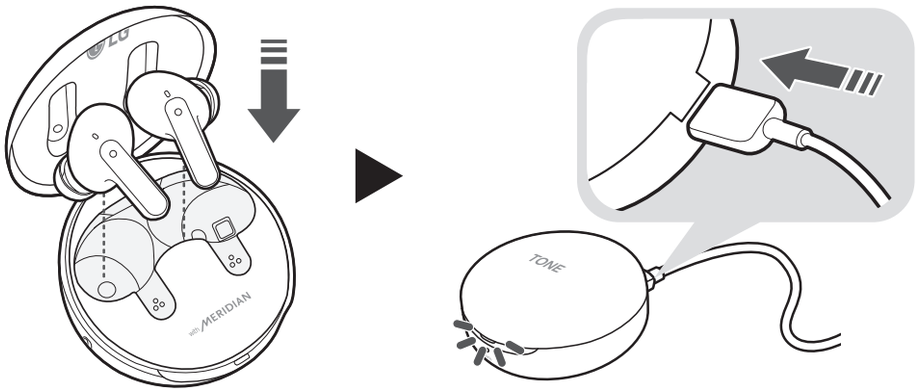

Şarj kablosu takıldığında, şarj durumu şarj kutusunda görüntülenir.

NOT: Kulaklıklar ve şarj kutusu aynı aynda şarj olur.
Şarj kutusundaki şarj bağlantı noktası, cep telefonları vb. cihazlara güç sağlamak için kullanılamaz.


Tak ve Kablosuz Modu (Harici Cihaz Bağlantı Modu)

Kulak içi kulaklıklarla dinlemek için şarj kutusunu uçak ses sistemi, koşu bandı, kaset oynatıcı, radyo ve TV gibi bir cihaza bağlayabilirsiniz.

Bağlantı

1 USB-C™ - AUX kablosunun USB-C™ kısmını şarj kutusuna bağlayın.

2 AUX kısmını kullanmak istediğiniz cihaza bağlayın.

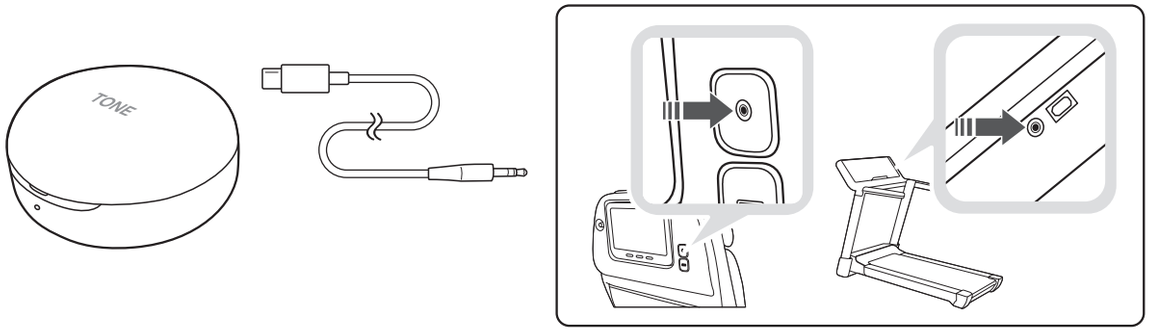


3 Kulak içi kulaklıkları takın.

4 Tak ve Kablosuz Modu düğmesini sağa kaydırarak modu açın.

5 Şarj kutusundaki gösterge yeşil renkte yanıp söner.

6 Şarj kutusu kulak içi kulaklıklara bağlandıktan sonra gösterge söner.

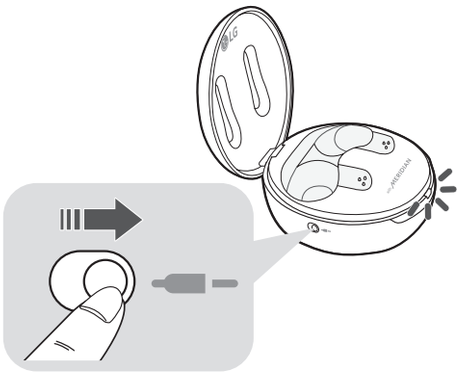


Bağlantının Kesilmesi

1 Tak ve Kablosuz Modu düğmesini sola kaydırın.

2 Şarj kutusundaki gösterge mavi renkte yanıp söner.

3 Şarj kutusu ile bağlantı kesildikten sonra, kulak içi kulaklıklar daha önce bağlandığı cihaza yeniden bağlanır.

- Cihaz bulunamazsa, kulak içi kulaklıklar Bağlantı Hazır moduna geçer.

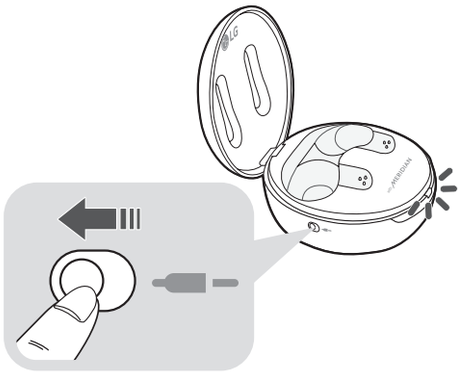

NOT: LG TONE Free uygulamasını kullanamazsınız ancak EQ ve dokunmatik yüzey ayarları olduğu gibi kalır. (Dokunma işlemi: Müzik Oynatma kısmına bakın.)
Kulak içi kulaklıklar arama işlevini desteklemez.
USB-C™ - AUX kablosu şarj işlevini desteklemez.
Kulak içi kulaklıklar bazı cihazlarla uyumlu olmayabilir ve bazı uçak koltuklarında bağlantısı noktasını kullanmak için ayrı bir adaptör (ayrı satılır) gerekli olabilir.
Kulak içi kulaklıkları uzun süre kullanırsanız, kulaklıkların pili (şarj kutusu dahil) bir akıllı telefona fiziksel olarak bağlı olduğundan daha hızlı tükenebilir.


Pil Durumunun Kontrolü

Kulaklıklar şarj kutusuna takılıysa, kulaklıkların pil durumu görüntülenir.

Aksi takdirde, şarj kutusunun pil durumu görüntülenir.

Kulaklıklar, fiş takılıyken şarj kutusuna yerleştirildiyse, UVnano işlemi 5 dakika çalışır.

Bu işlem tamamlandıktan sonra şarj kutusunun pil durumu görüntülenir.

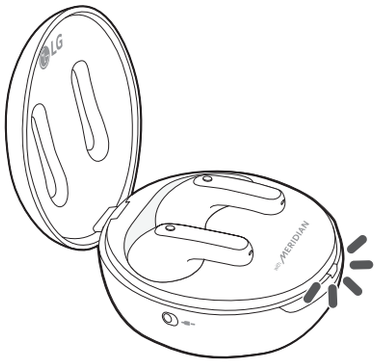

Pil Durumu Göstergesi	Kalan Pil (şarj cihazı bağlı değil)	Şarj Durumu (şarj cihazı bağlı)
Kırmızı	% 20 veya daha az	Şarj oluyor
Sarı	% 20 - % 80	-
Yeşil	% 80 veya daha fazla	Tam şarjlı

NOT: Şarj kutusu kapağı kapalıyken, şarj kutusu pil durumu görüntülenir. Şarj kutusunun şarjı kalmadıysa, gösterim olmaz ve çalışmaz. Kulaklıklar bağımsız olarak açılıp kapanmayacağı için şarj kutusunu sürekli şarj olmuş şekilde tutmanız önerilir.

Pil Durumu Göstergesi

Durum	Açıklama
Bluetooth Arama Modu	**Pil durumu göstergesi** mavi renkte yanıp söner.
Pil % 20'nin altında	**Pil durumu göstergesi** kırmızı renkte yanar ve söner.
Pil % 20 - % 80	**Pil durumu göstergesi** sarı renkte yanar ve söner.
Pil % 80 ve üzeri	**Pil durumu göstergesi** yeşil renkte yanar ve söner.
Şarj sorunu olduğunda	**Pil durumu göstergesi** kırmızı renkte yanıp söner.
Şarj oluyor (şarj cihazı bağlı)	**Pil durumu göstergesi** kırmızı renkte yanar.
Şarj tamamlandı (şarj cihazı bağlı)	**Pil durumu göstergesi** yeşil renkte yanar.

Kapsam Alanı Dışı

Ürüne bağlı olan cihaz etkin kapsama alanının dışındaysa, iletişim sinyali zayıflar ve iletişim kesilir. Etkin kapsama alanı çevreye ve diğer koşullara bağlı olarak farklılık gösterebilir.

Cihaz yeniden etkin kapsama alanına girerse ürün, cihaza otomatik olarak yeniden bağlanır. Cihaz otomatik olarak yeniden bağlanmazsa, bunları bağlamak için **sol veya sağ kulaklığa** bir kez dokunun.

LG TONE Free Uygulaması

"LG TONE Free" uygulamasını yüklerseniz, Kulaklık Pilini Denetle, Sesli Uyarı, Ekolayzer Modunu Değiştir, Son Bağlanılan Konum Bilgisini Denetle, ve Kulaklıklarımı Bul işlevlerini kullanabilirsiniz. Daha fazla ayrıntı için uygulamaya bakın.

"LG TONE Free" uygulamasını yüklemek için, Google Play Store veya App Store içinde LG TONE Free uygulamasını arayın veya aşağıdaki QR kodunu taratın.

Uygulama, Android 7.0 veya üzeri ve iOS 11 veya üzeri sürümleri destekler.

Google Play

App Store

Sorun Giderme

Ürünü kullanırken aşağıdaki belirtileri görürseniz yeniden kontrol etmeyi unutmayın. Bu bir arıza olmayabilir.

Belirti	Neden ve Çözüm
Cihaz açılmıyor	Pil seviyesini kontrol edin ve şarj edin.
Kulaklık ile arama yapılamıyorsa	Cep telefonu, kulaklık ve eller serbest işlevlerini desteklemiyorsa, arama özelliklerini kullanamazsınız. Pil seviyesini kontrol edin ve şarj edin.
Kulaklık mobil telefona kaydedilemiyorsa	Kulaklığın açık olup olmadığını kontrol edin. Kulak içi kulaklıkların arama moduna girip girmediğini kontrol edin. - Kulak içi kulaklıklar şarj kutusunun içerisindeyken, arama moduna geçmek için sol veya sağ kulak içi kulaklığın dokunmatik yüzeyine 3 ila 5 saniye basılı tutun.
Kulaklıkları değiştirdiyseniz veya kullanımla ilgili bir sorun varsa (Fabrika ayarlarına sıfırlama)	Kulak içi kulaklıklar şarj kutusunun içerisindeyken, sol veya sağ kulak içi kulaklığın dokunmatik yüzeyine 10 saniye veya daha fazla basılı tutun. - Şarj kutusunun pil durumu göstergesi kırmızı renkte yanıp söner ve fabrika başlangıç durumuna getirme gerçekleştirilir. Fabrika başlangıç durumuna getirme işleminden sonra kulak içi kulaklıkları tekrar bağlayın.

* Fabrika ayarlarına sıfırlama ve Arama modu, Tak ve Kablosuz Modunda kullanılamaz.

Teknik ve Fiziksel Özellikler

Öğe	Yorumlar
Bluetooth Teknik Özellikleri	V 5.2 (Kulaklık/Eller Serbest/A2DP/AVRCP)
Pil	Kulak içi kulaklık: 3,7 V / 68 mAh, Lityum iyon Şarj kutusu: 3,7 V / 390 mAh, Lityum iyon
Müzik Oynatma Süresi Kulaklıklar ve Şarj kutusu ile	ANC Kapalı: 10 ve 24 saate kadar* ANC Açık: 6 ve 15 saate kadar*
Şarj Süresi	Kulaklık: bir saat içinde / Şarj Kutusu: 2 saat içinde Hızlı Şarj: Azami 60 dakika oynatma süresi için 5 dakikalık şarj* ※ Oda sıcaklığında kablolu şarj edilirken
Nominal Giriş Gerilimi	Kulak içi kulaklık: 5 V ⎓, 136 mA Şarj kutusu: 5 V ⎓, 500 mA
Çalışma Sıcaklığı	0 °C ~ +40 °C
Çalışma Nem Oranı	% 5 ~ % 60
Boyutlar (mm) / Ağırlık (g)	Kulak içi kulaklık: 21,2 mm (G) X 28,3 mm (U) X 23,2 mm (Y) / 5,2 g (Bir kulaklık) Şarj kutusu: 54,5 mm (G) X 54,5 mm (U) X 30 mm (Y) / 36,7 g

Frekans aralığı	Çıkış gücü (Maks.)
2402 MHz ila 2480 MHz	Kulak içi kulaklık: 11,5 dBm Şarj kutusu: 10 dBm

*Kullanım süresi; bağlı olan mobil cihaza, kullanılan özelliklere, ayarlara, sinyal gücüne, çalışma sıcaklığına, frekans bandına ve diğer kullanım yöntemlerine bağlı olarak değişiklik gösterebilir.

Uygunluk Bildirimi

UYGUNLUK BİLDİRİMİ:

LG Electronics burada radyo cihazı türündeki bu kulaklığın 2014/53/EU Yönetmeliği ile uyumlu olduğunu beyan eder. AB uygunluk beyanı tam metnine aşağıdaki internet adresinden ulaşılabilir.
http://www.lg.com/global/support/cedoc/cedoc#

Bluetooth®, Bluetooth SIG, Inc.in dünyanın her yerinde geçerli tescilli ticari markasıdır.

Android, Google Play, Google Play logosu ve diğer ilgili markalar ve logolar, Google LLC şirketinin ticari markalarıdır.

Ek Bilgiler

1. Radyo frekansına maruz kalma

Bu *Bluetooth* LG Stereo Kulaklık bir radyo vericisi ve alıcısıdır. Çalışması sırasında, *Bluetooth* donanımlı bir mobil cihazla, 2402 ila 2480 MHz frekans aralığında radyo frekanslarını (RF) elektromanyetik alanları (mikrodalgalar) alarak ve ileterek iletişim kurar.

Bluetooth kulaklığınız, herhangi bir LG Electronics uyumlu mobil telefon ile kullanıldığında ulusal kurumlar ve uluslararası sağlık organizasyonları tarafından belirlenen RF'na maruz kalma talimatları ve sınırlamalarıyla uyumlu çalışmak üzere tasarlanmıştır.

2. *Bluetooth* Bağlantısı Önlemleri

Aşağıdaki ortamlar *Bluetooth* sinyallerinin menzilini ve alınmasını etkileyebilir.

- *Bluetooth* cihazıyla bağlı cihaz arasında duvarlar, metal, insan veya diğer engeller olduğunda
- Kullanılan cihazların yakınına 2,4 GHz frekans sinyali kullanan ekipman (Kablosuz LAN, kablosuz telefon, mikrodalga fırın vb.) koyulduğunda
- Cep telefonu haricinde bir *Bluetooth* aygıtı (TV, dizüstü bilgisayar vb.) kullanılırken, ses kalitesi aygıtın özellikleri ve performansına göre etkilenebilir

3. Patlama potansiyeli olan ortam

Patlama potansiyeli olan bir ortamda elektronik cihazınızı kapatın. Nadir olmakla birlikte bu elektrik cihazı kıvılcım oluşturabilir. Bu tip ortamlarda

oluşan kıvılcımlar patlamalara ya da yangınlara yol açarak, fiziksel yaralanmalara ve hatta ölüme neden olabilir. Patlama potansiyeli olan ortamlar sıklıkla, ancak her zaman olmamak kaydıyla açıkça işaretlenir.

4. Pil hakkında bilgiler

Şarj edilebilir bir pil, uygun şekilde kullanıldığında uzun bir hizmet ömrüne sahiptir. Yeni veya uzun bir süre kullanılmayan bir pil, kullanıldığı ilk birkaç sefer düşük kapasiteye sahip olabilir. Pili +50° üzerindeki veya -10° altındaki aşırı sıcaklıklara asla maruz bırakmayın. Maksimum pil kapasitesi için pili oda sıcaklığında kullanın. Pilin düşük sıcaklıklarda kullanılması durumunda, pil kapasitesi azalacaktır. Pil yalnızca 0° ve +45° arasındaki sıcaklıklarda şarj edilebilir.

Atık batarya ve akülerin çıkarılması (SADECE gömülü bataryalı üründe)

- Bu üründe, nihai kullanıcılar tarafından kolaylıkla çıkarılamayan bataryanın ürünle birleşik konumda olması halinde LG, ister batarya değişiminde ister bu ürünün kullanım süresinin sonunda gerçekleşecek olan bataryanın geri dönüşümünde bataryanın sadece nitelikli ve uzman kişiler tarafından çıkarılmasını tavsiye eder. Kullanıcılar, ürünün zarar görmesini engellemek ve kendi güvenliklerini sağlamak için bataryayı çıkarmaya kalkışmamalı ve öneri konusunda LG Servis Yardım Hattı ya da diğer bağımsız servis sağlayıcıları ile iletişime geçmelidir.
- Bataryayı çıkarma işlemi,ürün kasasının sökülmesini, elektrik kablo/bağlantılarının kesilmesini ve özel aletler kullanılarak bataryanın dikkatli bir şekilde çıkarılmasını kapsar. Nitelikli ve uzman kişilerin bataryayı güvenli bir şekilde çıkarmalarına yönelik talimatlara ihtiyaç duymanız

halinde lütfen http://www.lge.com/global/sustainability/environment/take-back-recycling bağlantısına gidiniz.

5. *Bluetooth* kulaklığınızdaki pilin geri dönüştürülmesi

Bluetooth kulaklığınızın pili uygun bir şekilde atılmalı, asla evsel atıklarla karıştırılmamalıdır.

Kullanılmış pil ve akümülatörlerin elden çıkarılması



1 Bu sembol pillerin % 0,0005 oranında civa, % 0,002 oranında kadmiyum veya % 0,004 oranında kurşun içermesi durumunda cıva (Hg), kadmiyum (Cd) veya kurşun (Pb) kimyasal sembolleri ile bir arada bulunabilir.



2 Tüm piller ve akümülatörler, normal atılan çöplerden ayrı olarak, hükümet veya yerel idareler tarafından belirlenmiş olan toplama merkezlerinde atılmalıdır.

3 Bu tip kullanılmış pillerin/akümülatörlerin doğru olarak atılması hem çevreye hem de hayvan ve insan sağlığına verilebilecek potansiyel olumsuz sonuçları önleyecektir.

4 Kullanılmış pillerinizin/akümülatörlerinizin atılması ile ilgili olarak, bulunduğunuz yerdeki belediye, çöp atım hizmeti veren kuruluşlara veya ürünü satın aldığınız yerlere başvurabilirsiniz.(http://www.lg.com/global/sustainability/environment/take-back-recycling/global-network-europe)

Önemli Emniyet Bİlgileri

İşitme hasarlarını engelleme

Kulaklığınızın yüksek sesle kullanılması durumunda kalıcı işitme kaybı meydana gelebilir. Ses şiddetini güvenli bir seviyeye ayarlayın. Zaman içerisinde yüksek ses size normal gelebilir ancak işitme sisteminize zarar verebilir.

Kulaklarınızda çınlama varsa veya konuşmaları boğuk şekilde duyuyorsanız, kulaklığı kullanmayı bırakın ve işitme duyunuzu kontrol ettirin. Ses ne kadar yüksekse, işitme sisteminizin etkilenmesi o kadar kısa sürer. Uzmanlar işitme duyunuzu aşağıdaki şekilde korumanızı önerirler.

- Kulaklığı yüksek sesle kullanma sürenizi sınırlayın.
- Gürültülü ortamlardaki sesi bastırmak için sesi açmaktan kaçının.
- Yakınınızdaki kişilerin konuşmalarını duyamıyorsanız, sesi kısın.



Telefonunuzda dinleme seviyelerini ayarlamakla ilgili daha fazla bilgi için lütfen telefonunuzun kullanma kılavuzuna bakın.

Kulaklığı güvenli bir şekilde kullanma

Kulaklığı araç sürerken müzik dinlemek amacıyla kullanmak tavsiye edilmez ve bazı yerlerde yasa dışıdır. Araç sürerken dikkatli olun. Tipi ne olursa olsun bir araç sürerken veya tüm dikkatinizi gerektiren başka bir faaliyet sırasında sizi engellediğini veya dikkatinizi dağıttığını hissediyorsanız cihazı kullanmayın.

Açık Kaynaklı Yazılım Bildirimi Bilgileri

GPL, LGPL, MPL ve kaynak kodu açıklama yükümlülüğü bulunan ve bu üründe yer alan diğer açık kaynak lisansları altındaki kaynak kodunu edinmek ve belirtilen tüm lisans koşullarına, telif hakkı bildirimlerine ve ilgili diğer belgelere erişmek için lütfen https://opensource.lge.com adresini ziyaret edin.

Ayrıca LG Electronics, opensource@lge.com adresine gönderilen e-posta taleplerinin üzerine bu tür bir hizmetin maliyetini (ortam, gönderi ve taşıma masrafı gibi) kapsayan bir ücret karşılığında açık kaynak kodunu CD-ROM ile de sağlar.

Bu teklif, bu ürünü son gönderimimizden itibaren üç yıllık bir süre boyunca bu bilgiyi alan herkes için geçerlidir.

<table>
<tr><th colspan="2">RİSK GRUBU 2</th></tr>
<tr><td rowspan="2">
</td><td>DİKKAT : BU ÜRÜNDEN UV YAYILIR.
MARUZ KALINIRSA GÖZ VEYA CİLT TAHRİŞİ LUŞABİLİR.
UYGUN KORUMAYI KULLANIN.</td></tr>
<tr><td>UYARI : ŞARJ ETMEZSINIZ VEYA ŞARJ KUTUSUNU AÇARSINIZ, UVNANO IŞLEVI ETKINLEŞTIRILMEZ.</td></tr>
</table>

Güç kapatıldığında, çıkış seviyesi otomatik olarak RS1'i aşmayan bir çıkış seviyesine dönecektir.

Semboller

~	Alternatif akım (AC) anlamına gelir.
⎓	Doğru akım (DC) anlamına gelir.
⧈	Sınıf II ekipmanı anlamına gelir.
⏻	Bekleme modu anlamına gelir.
I	"AÇIK" (güç) anlamına gelir.
⚡	Tehlikeli gerilim anlamına gelir.



UG-FP9-TR-02