





# LG-A100 User Guide - English

This guide will help you to understand your new mobile phone. It will provide you with useful explanations of the features on your phone. Some of the contents of this manual may differ from your phone depending on the phone software or your service provider.


# CE0168



P/N: MFL67206619 (1.0)

www.lg.com

## Getting to know your phone

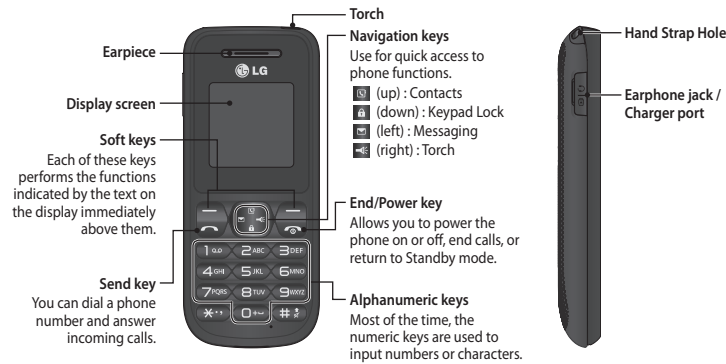

## Making a Call

- 1 Key in the number on the keypad.
- 2 Press **[Call]** to initiate the call.
- 3 To end the call, press **[End]**.

**TIP!** To enter + when making an international call, press and hold 0.

## Making a call from your contacts

- 1 Press **[Up]** (up) to open the address book.
- 2 On the keypad, enter the first letter of the contact you want to call.
- 3 To scroll through your contacts, use the up and down navigation keys. And to scroll through their different numbers, use the left and right navigation keys.
- 4 Press **[Call]** to initiate the call.

## Answering and rejecting a call

When your phone rings, press **[Accept]** or press **[Reject]** to answer the call. While your phone is ringing, select **[Silent]** to mute the ringing. This is great if you have forgotten to change your profile to **[Silent]** for a meeting.

Press **[Accept]** or **[Reject]** to reject the incoming call. **TIP!** You can change the settings on your phone to answer your calls in different ways. Press **[Menu]**, select **[Settings]** and choose **[Call]**. Select **[Answer mode]** and choose **[Any key]** or **[Send key only]**.

- **Any key** – You can answer a call by pressing any key.
- **Send key only** – You can answer a call only by pressing the Send key.

## Changing your call settings

You can set the menu depending on the call. Press **[Menu]**, select **[Settings]** and choose **[Call]**.

- **Call divert** – Select methods for diverting calls.
- **Call waiting** – Select Active or cancel call waiting.

## Checking your call history

You can check the record of all, missed, dialled, received calls and call durations. The number and name (if available) are displayed together with the date and time at which the call was made. You can also view the number of times you have called. Press **[Menu]**, select **[Call history]**.

## Quick feature reference

### Messaging

#### Sending a message

- 1 Press **[Menu]**, select **[Messaging]** and choose **[New message]**.
- 2 A new message editor will open. The default setting of the message editor is SMS mode.
- 3 Enter your message using either the T9 predictive mode or Abc manual mode or 123 mode. You can switch text input modes by pressing **[Mode]**.
- 4 Press **[Options]** and choose **[Insert]** to add an **[Symbol]**, **[Template]**, **[Contact]**, **[Business card]**.
- 5 Press **[Send]**.
- 6 Enter the phone number or press **[Options]** and select **[Contacts]** or **[Recent list]** to open your contacts list.
- 7 Press **[Options]** and choose **[Send]**.

### Contacts

You can search for a contact in your Contacts.

- 1 Press **[Contacts]** and choose **[Search]**, select **[Contacts]** from the **[Menu]** screen or press **[Right soft key]** from the standby screen.
- 2 On the keypad enter the first letter of the contact you want to call.
- 3 To scroll through the contacts, use the up and down navigation keys. To scroll through their different numbers use the left and right navigation keys.

### Tools

- **Torch** – Turn on/off the torch directly by holding the right navigation key.

### Settings

- **Date & Time** – You can set functions relating to the date and time.

## Installing the SIM Card and Charging the Battery

### Installing the SIM Card

When you subscribe to a mobile phone network, you are provided with a plug-in SIM card which is loaded with your subscription details, such as your PIN, any optional services available and many others.

- Important!**
- › The plug-in SIM card and its contacts can easily be damaged by scratches or bending, so be careful when handling, inserting or removing the card. Keep all SIM cards out of the reach of small children.
  - › only 2G SIM supported

### Illustrations

- 1 Open battery cover
- 2 Remove the battery
- 3 Insert your SIM
- 4 Insert the battery
- 5 Close the battery cover
- 6 Charge your battery

**WARNING:** Do not remove the battery while the phone is switched on, as this may damage the phone.



- **Language** – You can change the language for the display texts in your phone. This change will also affect the Language Input modes.
- **Display** – You can adjust settings for the phone display.
- **Call** – You can set the menu depending on the call.
- **Auto key lock** – Lock the keypad automatically in standby screen.
- **Security** – This menu allows you to set the phone securely.
  - › **PIN code request** – Choose a PIN code to be requested when you turn your phone on.
  - › **Phone lock** – Choose a security code to lock your phone, When power on, When SIM changed or Immediately.
  - › **Call barring** – Choose a barring password for all outgoing calls, outgoing international, outgoing international when roaming, all incoming calls, or incoming when roaming.

- › **Fixed dial number** – Choosing a PIN2 code to enable fixed dial number lets you restrict calls to only those in Contacts.
- › **Change codes** – Change your Security code, PIN code or PIN2 code.
- **Power save** – If you set Always on, you can save the battery power when you are not using the phone. Choose to switch between power save settings **Always on**, **Night only** or **Off**.
- **Network selection** – You can select a network that will be registered either automatically or manually.
- **Reset settings** – Use **[Reset]** to restore the factory settings. You need the security code to activate this function. The default number is "0000".
- **Memory status** – You can check the free space and memory usage of each repository.

## Guidelines for safe and efficient use

Please read these simple guidelines. Failure to follow these guidelines may be dangerous or illegal. More detailed information is given in this manual.

### WARNING

- Mobile phones must be switched off at all times in an aircraft.
- Do not hold the phone in your hand while driving.
- Do not use your phone near petrol stations, fuel depots, chemical plants or blasting operations.
- For your safety, use ONLY specified ORIGINAL batteries and chargers.
- Do not handle the phone with wet hands while it is being charged. It may cause an electric shock or seriously damage your phone.
- Keep the phone in a safe place out of reach of small children. It includes small parts which if detached may present a choking hazard.
- Do not charge the phone when it is on soft furnishings.
- The phone should be charged in a well ventilated area.

### CAUTION

- Switch the phone off in any area where required by special regulations. For example, do not use your phone in hospitals or it may affect sensitive medical equipment.
- Emergency calls may not be available on all mobile networks. Therefore, you should never depend solely on the phone for emergency calls.
- Only use ORIGINAL accessories to avoid damage to your phone.
- All radio transmitters carry risks of interference with electronics in close proximity. Minor interference may affect TVs, radios, PCs, etc.
- Batteries should be disposed of in accordance with pertinent legislation.
- Do not dismantle the phone or battery.

### Exposure to radio frequency energy Radio wave exposure and Specific Absorption Rate (SAR) information

This mobile phone model LG-A100 has been designed to comply with applicable safety requirements regarding exposure to radio waves. This requirement is based on scientific guidelines that include safety margins designed to assure this safety of all persons, regardless of age and health.

- The radio wave exposure guidelines employ a unit of measurement known as the Specific Absorption Rate, or SAR. Tests for SAR are conducted using standardised method with the phone transmitting at its highest certified power level in all used frequency bands.
- While there may be differences between the SAR levels of various LG phone models, they are all designed to meet the pertinent guidelines for exposure to radio waves.
- The SAR limit recommended by the International Commission on Non-Ionizing Radiation Protection (ICNIRP) is 2 W/Kg averaged over ten (10) gram of tissue.
- The highest SAR value for this model phone tested by DAS14 for use at the ear is 0.974 W/Kg (10g) and when worn on the body is 0.653 W/Kg (10g).
- SAR data information for residents of countries/regions that have adopted the SAR limit recommended by the Institute of Electrical and Electronics Engineers (IEEE), which is 1.6 W/Kg averaged over one (1) gram of tissue.

### Product care and maintenance

#### WARNING

Only use batteries, chargers and accessories that have been approved for use with this phone model. The use of any other types may invalidate any approval or warranty



### Disposal of your old appliance

1. When this crossed-out wheeled bin symbol is attached to a product it means the product is covered by the European Directive 2002/96/EC.
2. All electrical and electronic products should be disposed of separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities.
3. The correct disposal of your old appliance will help prevent potential negative consequences for the environment and human health.
4. For more detailed information about disposal of your old appliance, please contact your city office, waste disposal service or the shop where you purchased the product.



### Disposal of waste batteries/accumulators

1. When this crossed-out wheeled bin symbol is attached to batteries/accumulators of Your product it means they are covered by the European Directive 2006/66/EC.
2. This symbol may be combined with chemical symbols for mercury(Hg), cadmium(Cd) or lead(Pb) if the battery Contains more than 0.0005% of mercury, 0.002% of cadmium or 0.004% of lead.
3. All batteries/accumulators should be disposed separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities.
4. The correct disposal of Your old batteries/accumulators will help to prevent potential negative consequences for the environment, animal and human health.
5. For more detailed information about disposal of Your old batteries/accumulators, please contact Your city office, waste disposal service or the shop where You purchased the product.

## Efficient phone operation

### Electronics devices

All mobile phones are susceptible to interference, which may affect performance.

- Do not use your mobile phone near medical equipment without requesting permission. Avoid placing the phone over pacemakers, i.e. in your breast pocket.
- Some hearing aids might be disturbed by mobile phones.
- Minor interference may affect TVs, radios, PCs, etc.

### Road safety

Check the laws and regulations on the use of mobile phones in the areas where you drive.

- Do not use a hand-held phone while driving.
- Give your full attention to driving.
- Use a hands-free kit, if available.
- Pull off the road and park before making or answering a call if driving conditions so require.
- RF energy may affect some electronic systems in your vehicle such as car stereos and safety equipment.

If your vehicle is equipped with an air bag, do not obstruct with installed or portable wireless equipment. It can fail or cause serious injury due to improper performance. If you are listening to music whilst out and about, please ensure that the volume is at a reasonable level so that you are aware of your surroundings. This is particularly imperative when near roads.

### Avoid damage to your hearing

Your hearing may be damaged if you are exposed to loud sounds for long periods of time. We therefore recommend that you do not turn the handset on or off close to your ear. We also recommend that music and call volumes are set to a reasonable level. **Note:** Excessive sound pressure from earphones can cause hearing loss.

### Blasting area

Do not use the phone where blasting is in progress. Observe restrictions, and follow any regulations or rules.

### Potentially explosive atmospheres

Do not use the phone at a refuelling point. Do not use near fuel or chemicals.

## Accessories

There are various accessories for your mobile phone. You can select these options according to your personal communication requirements.

### Standard Battery



### Travel Adapter




### Note

- › Always use genuine LG accessories. Failure to do this may invalidate your warranty.
- › Accessories may be different in different regions; please check with our regional service company or agent for further enquires.

## Technical Data

### Ambient Temperatures

- › Max : +55°C (discharging)
- › +45°C (charging)
- › Min : -10°C



- Do not transport or store flammable gas, liquid, or explosives in the compartment of your vehicle which contains your mobile phone and accessories.

### In aircraft

Wireless devices can cause interference with aircraft.

- Turn off your mobile phone before boarding any aircraft.
- Do not use it on the aircraft without permission from the cabin crew.

### Children

Keep the phone in a safe place out of reach of small children. It includes small parts which if detached may present a choking hazard.

### Emergency calls

Emergency calls may not be available on all mobile networks. Therefore, you should never depend solely on the phone for emergency calls. Check with your local service provider.

### Battery information and care

- You do not need to discharge the battery completely before recharging. Unlike other battery systems, there is no memory effect that could compromise the battery's performance.