



OWNER'S MANUAL

# LG TONE Free

**Bluetooth®** LG Stereo Headset

ENGLISH

עברית

✓ **NOTE:** For the best performance and to prevent any damage to, or misuse of the headset, please read all of the information carefully prior to using the headset.

Any modifications or changes to this manual due to typographical errors or inaccuracies of stated information shall only be made by LG Electronics Inc.

Rev 2.0 IL



Google Play



App Store

**TONE-FP8 / TONE-FP8W  
TONE-FP8E**



UG-FP8-IL-02

[www.lg.com](http://www.lg.com)

## Contents

|                                                                           |    |
|---------------------------------------------------------------------------|----|
| Safety Precautions .....                                                  | 1  |
| HD Speaker .....                                                          | 3  |
| Product Components .....                                                  | 4  |
| Overview .....                                                            | 5  |
| Pairing and Connecting .....                                              | 6  |
| Wearing Earbuds .....                                                     | 7  |
| Playing Music .....                                                       | 8  |
| Mobile Calling Functions .....                                            | 9  |
| Listen to the Ambient Sound (LAS) / Active Noise Cancellation (ANC) ..... | 10 |
| UVnano .....                                                              | 11 |
| Charging .....                                                            | 12 |
| Checking the Battery Status .....                                         | 13 |
| Battery Status Indicator .....                                            | 14 |
| Out of Range .....                                                        | 15 |
| LG TONE Free App .....                                                    | 15 |
| Troubleshooting .....                                                     | 16 |
| Specifications and Features .....                                         | 17 |
| Additional Information .....                                              | 19 |
| Important Safety Information .....                                        | 22 |
| Open Source Software Notice Information .....                             | 23 |
| Symbols .....                                                             | 24 |

**LG Electronics Inc. Single point of contact (EU/UK) :**  
**Krijgsman 1, 1186 DM Amstelveen, The Netherlands**

Copyright © 2021 - 2023 LG Electronics Inc. All rights reserved.

The LG TONE Free (TONE-FP8) is a lightweight wireless headset that uses *Bluetooth* technology.

This product can be used as an audio accessory for devices supporting either the A2DP or Hands-Free *Bluetooth* Profile.

## Safety Precautions

The following safety precautions are provided to prevent any unexpected accident or damage. Please familiarise yourself with the safety precautions. The safety precautions are classified into "WARNING" and "CAUTION".

 **WARNING:** Failing to comply with the instructions may result in serious injury or death.

 **CAUTION:** Failing to comply with the instructions may result in minor injury or product damage.

### WARNING

Do not drop the product from a high place.

Make sure there is no water, alcohol, or benzene in contact with the product.

Do not store the product in a wet or dusty place.

Do not place heavy objects on the product.

This product is waterproof to the IPx4 level (daily life waterproof).

(The IPx4 waterproof rating applies to the earbud product only.)

Do not put the product under the water or use it in a humid location such as a bathroom.

 **CAUTION**

Do not disassemble, adjust, or repair the product arbitrarily.

Do not place the product near excessive heat or flammable material.

The product may be damaged if an incompatible charger is used.

Make sure that an infant or child does not swallow a magnet or a small component of the product.

Make sure that foreign objects do not enter the charger's connectors (charging port and power plug). Failure to do so may result in fire or electric shock.

If you have a medical device implanted, contact your doctor before using this device.

This product has a built-in battery, and the battery cannot be removed or replaced arbitrarily.

For your safety, do not remove the battery incorporated in the product.

If you arbitrarily replace the battery or don't replace it correctly, it may explode.

The lithium-ion battery is a hazardous component that can cause injury.

Battery replacement by an unqualified professional can cause damage to your device.

Do not replace the battery by yourself. The battery can be damaged, which can cause overheat and injury. The battery must be replaced by authorized service provider. The battery should be recycled or disposed separately from household wastes.

Do not discard the battery arbitrarily. Follow the local procedure for discarding batteries.

Risk of fire or explosion if the battery is replaced by an incorrect type.

Do not store or transport at pressures lower than 11.6 kPa and at above 15,000 m altitude.

Replacement of a battery with an incorrect type that can defeat a safeguard (for example, in the case of some lithium battery types).

Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.

Leaving a battery in an extremely high temperature surrounding environment that can result in an explosion or the leakage of flammable liquid or gas.

A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.

Do not carelessly throw away old batteries. It can cause an explosion or fire. The disposal method may vary by country and region. Dispose of it in an appropriate manner.

#### NOTE

If the product is exposed to excessive sweat, clean the product.

Keep the earbuds clean.

Wearing earbuds for a long time may cause pain, and if humidity inside ears continues for a long time, it may cause skin trouble.

## HD Speaker

If the communication network of the device you are connecting to supports HD Voice Calling, you can enjoy making voice calls and listening to music in high definition.

## Product Components



LG TONE Free™  
Earbuds (medium eargels  
installed)  
UV Charging Case



Extra Ear Gels  
(small & large)



USB Type C™ Charging  
Cable



Owner's Manual



Warranty Card

✓ **NOTE:** Actual product design may differ from images shown in manual.



### CAUTION

Make sure authentic LG Electronics components are used. Using a non-authentic component may damage the product and thus void the warranty. Use the USB Type C™ cable provided with the product.



### NOTE


The complete manual is available for download from the LG Electronics website.




[www.lg.com](http://www.lg.com) > support or service > Manuals & Downloads > Manuals

## Overview

### Charging Case

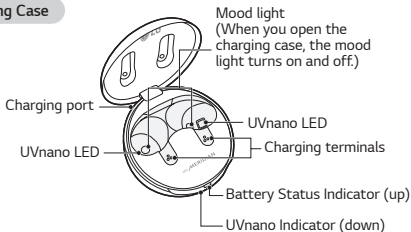

### Earbuds

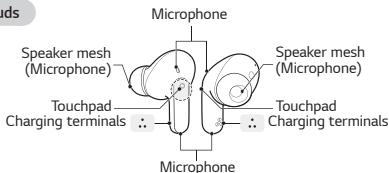

\*Make sure that the charging terminal is not soiled with foreign substance.

\*The appearance and specifications of the actual product may differ depending on the model.

## Pairing and Connecting

### Fast Pair



- 1 Turn on the *Bluetooth* function on the mobile phone or the device to be connected.
- 2 Open the cover of the charging case with the earbuds mounted on the case. Press and hold the touchpad of the left or right earbud for 3 to 5 seconds until the battery status indicator blinks in blue.



- 3 When the Fast Pair connection pop-up appears on the top area of the mobile phone screen, tap it to connect. (It only supports Android™ 6.0 or higher, and requires configuring *Bluetooth* and location information settings of the mobile device.)
- 4 If the pop-up does not appear, select **[LG-TONE-FPB]** from the *Bluetooth* menu on the mobile phone and connect it (for users of iOS or Android 5.0 or lower versions).



**⚠ CAUTION:** In the list of *Bluetooth* connected devices, LG-TONE-FP8\_LE is not the correct model name for connection. Check the model name in use and connect with the model name without "LE".  
If the earbud model name is abnormally displayed on the Android device, change the model name in the *Bluetooth* menu of Connected Device Settings.

**✓ NOTE:** To connect with another device, perform the above procedure again.

### Automatic Reconnection

The earbuds are connected automatically when you open the cover of the charging case. If you close the cover of the charging case with both earbuds mounted in the charging case, the earbuds are disconnected.

### Wearing Earbuds

- 1 Separate the earbuds from the charging case and adjust them so that they fit comfortably in your ears.


**✓ NOTE:** You can use ear gels that fit your ears to improve **Active Noise Canceling (ANC)** performance and enjoy rich music sound.



2 When you wear the earbuds, you will hear a wearing detection alarm.




## Playing Music



| Function             | Description                                                                                                                                                        |
|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Play / Pause         |  : <b>Touch the left or right earbud</b> once.                                    |
| Adjusting the Volume |  : <b>Touch the left(Decrease volume) or right(Increase volume) earbud</b> twice. |
| Play Next            |  : <b>Touch the left or right earbud</b> three times.                             |

✓ **NOTE:** You can change the operation method of the function in the touchpad settings of the LG TONE Free app.

## Mobile Calling Functions



| Function                           | Status  | Description                                                                                                                                                                                                                                                                                              |
|------------------------------------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Answering Calls                    | Ringing | <b>Touch the left or right earbud once.</b>                                                                                                                                                                                                                                                              |
| Ending Calls                       | Talking | <b>Touch the left or right earbud twice.</b>                                                                                                                                                                                                                                                             |
| Making Calls                       | Idle    | If you make a call using a mobile phone, the call is automatically connected to the headset.                                                                                                                                                                                                             |
| Receiving Calls while on the Phone | Talking | <p>If you <b>touch the left or right earbud</b> once, the current call will go on hold, and you will be able to answer an incoming call.</p> <p>If the previous call is on hold, you can finish the current call on the mobile phone. (It works differently depending on the mobile phone settings.)</p> |
| Rejecting Calls                    | Ringing | <b>Touch and hold the left or right earbud.</b>                                                                                                                                                                                                                                                          |

## Listen to the Ambient Sound (LAS) / Active Noise Cancellation (ANC)

### Listen to the Ambient Sound (LAS)



The Listen to the Ambient Sound (LAS) function allows you to listen to the ambient sound so that you can recognize the surrounding situation and any potential risks.

### Active Noise Cancellation (ANC)



The Active Noise Cancellation (ANC) function blocks any ambient sound. So, you can use the function to listen to the music or watch a video without interference.

**Touch and hold the left or right earbud** to switch between the ANC mode and the LAS mode. You can set the LAS and ANC functions in the LG TONE Free app. You can configure the Listen to the Ambient Sound mode and Conversation mode using the LG TONE Free app.

If you use the LAS or ANC function, the battery consumes faster, reducing the time you can use the product.

You can use the LAS and ANC functions while being idle, listening to music, or being on the phone.

\*ANC is an acronym for Active Noise Cancellation.



**CAUTION:** When the LAS mode is enabled, you may hear the ambient sound become loud suddenly. When using the ANC function outdoors, pay attention to the surrounding environment for safety.

## UVnano



The charging case has a built-in UVnano LED, which allows you to use your earbuds cleanly.

If you charge the earbuds wired after mounting them on the charging case and closing the cover, the UVnano LED operates for 5 minutes.


\*UVnano is a compound word derived from the words UV and its unit, nanometer.

- ✓ **NOTE:** The UVnano indicator turns on blue while the UVnano LED is on. The UVnano charging case eliminates up to 99.9% of harmful bacteria inside the earbud hole. In the case of a white product, discolouring may occur in the contact area of the UVnano LED, but it does not affect the product function.

- ⚠ **CAUTION:** Be aware that the temperature of the earbuds may rise while the UVnano LED is on.

## Charging

### Wired Charging



When the charging cable is connected, the charging status is displayed in the charging case.

- ✓ **NOTE:** The earbuds and the charging case are charged at the same time. The charging port on the charging case cannot be used to supply power to mobile phones, etc.

### Wireless Charging



Align the bottom center of the charging case with the center of the wireless charger.

- ✓ **NOTE:** The wireless charger is not provided. The wireless charging function may not work in some wireless chargers. Wireless charging feature charges at a slower rate due to less power being transmitted to the charging case.
- If you do wireless charging, the UVnano LED sterilizes the earbuds for 5 minutes before charging.


## Checking the Battery Status

If earbuds are mounted in the charging case, the earbuds' battery status is displayed.

Otherwise, the charging case's battery status is displayed.

If the earbuds are mounted in the charging case while plugged in, the UVnano process will commence for 5 minutes.

Once this process is complete, the charging case's battery status will be displayed.



| Battery Status Indicator | Remaining Battery (charger not connected) | Charging State (charger connected) |
|--------------------------|-------------------------------------------|------------------------------------|
| Red                      | 20% or lower                              | Charging                           |
| Yellow                   | 20% - 80%                                 | -                                  |
| Green                    | 80% or higher                             | Fully charged                      |

- ✓ **NOTE:** When the charging case lid is closed, charging case battery status is displayed. If the charging case has no remaining charge, there will be no display and it cannot function. We recommend you keep the charging case charged at all times as the earbuds are not able to be turned on and turned off independently.

## Battery Status Indicator

ENGLISH

| Status                                 | Description                                                     |
|----------------------------------------|-----------------------------------------------------------------|
| <i>Bluetooth</i> Search Mode           | The <b>battery status indicator</b> flashes in blue.            |
| Battery below 20%                      | The <b>battery status indicator</b> turns on and off in red.    |
| Battery 20% - 80%                      | The <b>battery status indicator</b> turns on and off in yellow. |
| Battery 80% or more                    | The <b>battery status indicator</b> turns on and off in green.  |
| When there is a problem while charging | The <b>battery status indicator</b> flashes in red.             |
| Charging (charger connected)           | The <b>battery status indicator</b> turns on in red.            |
| Charging complete (charger connected)  | The <b>battery status indicator</b> turns on in green.          |



## Out of Range

If the device connected to the product is out of effective communication range, the communication signal becomes weak and the communication is lost. The effective communication range may vary depending on surrounding and other conditions.

If the device comes back within effective communication range, the product automatically reconnects to the device. If the device is not automatically reconnected, **touch the left or right earbud** once to connect them.

## LG TONE Free App

If you install the "LG TONE Free" app, you can use Check Earbud Battery, Voice Alert, Change Equalizer Mode, Check Last Connected Location Information, and Find My Earbuds functions. Check out the app for more details.

To install the "LG TONE Free" app, search LG TONE Free in the Google Play Store or App Store or scan the QR code below.

It supports Android 7.0 or higher and iOS 11 or higher.



Google Play



App Store

## Troubleshooting

If you see any of the following symptoms while using the product, make sure to recheck it. It may not be a malfunction.

| Symptom                                                                              | Cause and Solution                                                                                                                                                                                                                                                                                                                       |
|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| The power does not turn on                                                           | Check the battery level and charge it.                                                                                                                                                                                                                                                                                                   |
| If unable to make a call with earbuds                                                | If the mobile phone does not support headset and hands-free functions, you cannot use the calling features.<br>Check the battery level and charge it.                                                                                                                                                                                    |
| If unable to register earbuds to mobile phone                                        | Check whether earbuds are turned on.<br>Check if the earbuds have entered the search mode.<br>- While the earbuds are inserted in the charging case, press and hold the touch pad on the left or right earbud for 3 to 5 seconds to switch to the search mode.                                                                           |
| If you replaced the earbuds or there is a problem with the operation (Factory reset) | While the earbuds are inserted in the charging case, press and hold the touch pad on the left or right earbud for 10 seconds or more.<br>- The battery status indicator of the charging case flashes red and the initialization to the factory status is carried out. After initialization to the factory status, reconnect the earbuds. |

## Specifications and Features

| Item                                         | Comments                                                                                                                                                                                                              |
|----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Bluetooth Specifications                     | V 5.2 (Headset/Hands-Free/A2DP/AVRCP)                                                                                                                                                                                 |
| Battery                                      | Earbud : 3.7 V / 68 mAh, Lithium-ion<br>Charging case : 3.7 V / 390 mAh, Lithium-ion                                                                                                                                  |
| Music Play Time Earbuds & With Charging case | ANC Off : Up to 10 & Up to 24 hours*<br>ANC On : Up to 6 & Up to 15 hours*                                                                                                                                            |
| Charging Time                                | Earbud : within an hour / Charging case : within 2 hours<br>Fast Charging : 5 min charge for up to 60 min playtime*<br>※ When charging wired at room temperature                                                      |
| Rated Input Voltage                          | Earbud : 5 V  136 mA<br>Charging case : 5 V  500 mA |
| Operating Temperature                        | 0 °C ~ +40 °C                                                                                                                                                                                                         |
| Operating Humidity                           | 5 % ~ 60 %                                                                                                                                                                                                            |
| Dimensions (mm) / Weight (g)                 | Earbud : 21.2 mm (W) X 28.3 mm (L) X 23.2 mm (H) / 5.2 g (One earbud)<br>Charging case : 54.5 mm (W) X 54.5 mm (L) X 30 mm (H) / 39 g                                                                                 |

|                 |                      |
|-----------------|----------------------|
| Frequency range | 2402 MHz to 2480 MHz |
|-----------------|----------------------|

\*Duration of use may vary depending on the connected mobile device, features being used, settings, signal strength, operating temperature, frequency band, and other methods of use.

Fast charging feature does not apply when charging case is placed on wireless charging device such as a pad.

Wireless charging feature charges at a slower rate due to less power being transmitted to the charging case.

*Bluetooth®* is a registered trademark of Bluetooth SIG, Inc. worldwide.

Android, Google Play, the Google Play logo, and other related marks and logos are trademarks of Google LLC.



## Additional Information

### 1. Radio frequency exposure

This *Bluetooth* LG Stereo Headset is a radio transmitter and receiver. When in operation it communicates with a *Bluetooth* equipped mobile device by receiving and transmitting radio frequency (RF) electromagnetic fields (microwaves) in the frequency range 2402 to 2480 MHz. Your *Bluetooth* headset is designed to operate in compliance with the RF exposure guidelines and limits set by national authorities and international health agencies when used with any compatible LG Electronics mobile phone.

### 2. *Bluetooth* Connection Precautions

The following environments affect the range and reception of *Bluetooth* signals:

- When walls, metal, human bodies, or other obstacles exist between the *Bluetooth* device and the connected device
- When equipment that uses 2.4 GHz frequency signals (Wireless LANs, wireless phones, microwave ovens, etc.) is placed near the devices being used
- When using a *Bluetooth* device (TV, laptop, etc.) other than the mobile phone, the sound quality may be affected by the specifications and performance of the device

### 3. Potentially explosive atmosphere

Turn off your electronic device when in any area with a potentially explosive atmosphere. It is rare, but your electronic device could generate sparks. Sparks in such areas could cause an explosion or fire resulting in bodily injury or even death. Areas with a potentially explosive atmosphere are often, but not always, clearly marked.

### 4. Battery information

A rechargeable battery has a long service life if treated properly. A new battery or one that has not been used for a long period of time could have reduced capacity the first few times it is used. Do not expose the battery to extreme temperatures, never above +50° or below -10°. For maximum battery capacity, use the battery in room temperature. If the battery is used in low temperatures, the battery capacity will be reduced. The battery can only be charged in temperatures between 0° and +45°.

#### **Removal of waste batteries and accumulators (Product with embedded battery ONLY)**

- In case this product contains a battery incorporated within the product which cannot be readily removed by end-users, LG recommends that only qualified professionals remove the battery, either for replacement or for recycling at the end of this product's working life. To prevent damage to the product, and for their own safety, users should not attempt to remove the battery and should contact LG Service Helpline, or other independent service providers for advice.
- Removal of the battery will involve dismantling of the product case, disconnection of the electrical cables/contacts, and careful extraction of the battery cell using specialized tools. If you need the instructions for qualified professionals on how to remove the battery safely, please visit <http://www.lge.com/global/sustainability/environment/take-back-recycling>.

## 5. Recycling the battery in your *Bluetooth* Headset

The battery in your *Bluetooth* Headset must be disposed of properly and should never be placed in municipal waste.



### Disposal of waste batteries/accumulators

- 1 This symbol may be combined with chemical symbols for mercury(Hg), cadmium(Cd) or lead(Pb) if the battery Contains more than 0.0005% of mercury, 0.002% of cadmium or 0.004% of lead.
- 2 All batteries/accumulators should be disposed separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities.
- 3 The correct disposal of Your old batteries/accumulators will help to prevent potential negative consequences for the environment, animal and human health.
- 4 For more detailed information about disposal of Your old batteries/accumulators, please contact Your city office, waste disposal service or the shop where You purchased the product. (<http://www.lg.com/global/sustainability/environment/take-back-recycling/global-network-europe>)

## Important Safety Information

### Avoiding hearing damage

Permanent hearing loss may occur if you use your Headset at a high volume. Set the volume to a safe level. You can adapt over time to a higher volume of sound that may sound normal but can be damaging to your hearing.

If you experience ringing in your ears or muffled speech, stop listening and have your hearing checked. The louder the volume, the less time is required before your hearing could be affected. Hearing experts suggest that to protect your hearing:

- Limit the amount of time you use Headset at high volume.
- Avoid turning up the volume to block out noisy surroundings.
- Turn the volume down if you can't hear people speaking near you.



Please refer to your handset user guide for more information on how to adjust listening levels on your handset.

### Using headsets safely

Use of Headset to listen to music while operating a vehicle is not recommended and is illegal in some areas. Be careful and attentive while driving. Stop using this device if you find it disruptive or distracting while operating any type of vehicle or performing any other activity that requires your full attention.



## Open Source Software Notice Information

To obtain the source code under GPL, LGPL, MPL, and other open source licenses, that is contained in this product, please visit <https://opensource.lge.com>.

In addition to the source code, all referred license terms, warranty disclaimers and copyright notices are available for download.

LG Electronics will also provide open source code to you on CD-ROM for a charge covering the cost of performing such distribution (such as the cost of media, shipping, and handling) upon email request to [opensource@lge.com](mailto:opensource@lge.com).

This offer is valid for a period of three years after our last shipment of this product. This offer is valid to anyone in receipt of this information.

| RISK GROUP 2                                                                      |                                                                                                                                     |
|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
|  | <b>CAUTION</b> : UV EMITTED FROM THIS PRODUCT.<br>EYE OR SKIN IRRITATION MAY RESULT FROM<br>EXPOSURE.<br>USE APPROPRIATE SHIELDING. |
|                                                                                   | <b>WARNING</b> : IF YOU DON'T DO CHARGING OR IF<br>YOU OPEN THE CHARGING CASE, THE UVNANO<br>FUNCTION IS NOT ACTIVATED.             |

## Symbols

ENGLISH

|                                                                                   |                                     |
|-----------------------------------------------------------------------------------|-------------------------------------|
| ~                                                                                 | Refers to alternating current (AC). |
| ==                                                                                | Refers to direct current (DC).      |
|  | Refers to class II equipment.       |
|  | Refers to stand-by.                 |
| I                                                                                 | Refers to "ON" (power).             |
|  | Refers to dangerous voltage.        |

The output level shall automatically return to an output level not exceeding RS1 when the power is switched off.

## סמלים

|                              |    |
|------------------------------|----|
| מתייחס לזרם חילופין (AC).    | ~  |
| מתייחס לזרם ישיר (DC).       | == |
| מתייחס לציווד מחלקה II.      | □  |
| מתייחס למצב המתנה.           | ⏻  |
| מתייחס ל- "ON" (צריכת חשמל). | I  |
| מתייחס למתח מסוכן.           | ⚡  |

עברית

רמת הפלט תחזור באופן אוטומטי לרמת פלט שאינה חורגת מ-RS1 כאשר המתח מופסק.

## פרטי הודעה על תוכנת קוד פתוח

אנא בקרו באתר <https://opensource.lge.com> על מנת להשיג את קוד המקור תחת MPL, LGPL, GPL, קוד פתוח ורשיונות אחרים. בנוסף לקוד המקור, זמינים להורדה תנאי הרשיון, אחריות, כתבי ויתור וזכויות יוצרים.

LG Electronics גם תספק לכם קוד מקור פתוח על גבי תקליטור בתמורה לתשלום המכסה את עלות ההפצה (כגון עלות המדיה, המשלוח והטיפול), בתגובה לבקשה בדואר האלקטרוני אל הכתובת [opensource@lge.com](mailto:opensource@lge.com). הצעה זו תהיה תקפה למשך שלוש שנים מתאריך המשלוח האחרון של מוצר זה על-ידנו. הצעה זו תקפה לכל מי שיקבל מידע זה.

זיכרון

### קבוצת סיכון 2

**התראה:** UV הנפלט ממוצר זה. גירוי בעין או בעור עלול לנבוע מחשיפה. השתמש במיגון המתאים.

**אזהרה:** אם לא תעשה טעינה או אם תפתח את מארז הטעינה, הפונקציה UVNANO לא תופעל.



## מידע בטיחות חשוב

### מניעת נזק לשמיעה

נזק קבוע לשמיעה עלול להיגרם על-ידי שימוש באוזניות בעצמת קול גבוהה. יש להגדיר את עוצמת הקול לרמה בטוחה. במשך הזמן ניתן להתרגל לעוצמת קול גבוהה יותר שתישמע כעוצמה רגילה אך עוצמה זו עלולה לגרום לנזק לשמיעה. אם נשמעים צלצולים באוזניים או דיבור עמום, יש להפסיק את השימוש ולפנות לבדיקת שמיעה. ככל שעוצמת הקול גבוהה יותר, כך מושפעת השמיעה תוך זמן קצר יותר. מומחים לשמיעה מציעים להגן על שמיעתך:



- יש להגביל את משך זמן השימוש באוזניה בעוצמת קול גבוהה.
- יש להימנע מהגברת עוצמת הקול כדי לחסום רעש סביבתי.
- יש להחליש את העוצמה אם לא ניתן לשמוע אנשים המדברים לידך.

יש לעיין במדריך למשתמש של הטלפון לקבלת מידע נוסף על התאמת רמות עוצמת הקול להקשבה בטלפון.

### שימוש בטוח באוזניות

השימוש באוזניות לצורך האזנה למוסיקה בעת הנהיגה ברכב אינו מומלץ ואף אינו חוקי באזורים מסוימים. היה זהיר וקשוב בעת הנהיגה. הפסק את השימוש במכשיר אם הוא גורם להפרעה או להסחת דעתך כאשר אתה נוהג ברכב מכל סוג שהוא, או כאשר אתה מבצע פעילות אחרת כלשהי שדורשת תשומת לב מלאה.

## 5. מחזור הסוללה שבאוזניית Bluetooth

חובה לסלק את הסוללה באוזניית Bluetooth כראוי ולעולם אין להשליכה עם הפסולת הביתית או העירונית.

### סילוק סוללות/סוללות נטענות משומשות



- 1 סמל זה עשוי להופיע לצד סימונים כימיים עבור כספית (Hg), קדמיום (Cd) או עופרת (Pb) אם הסוללה מכילה יותר מ-0.0005% כספית, 0.002% קדמיום או 0.004% עופרת.
  - 2 יש לסלק את כל הסוללות/הסוללות הנטענות בנפרד מהפסולת העירונית הרגילה באמצעות מתקני האיסוף המיועדים לכך, שהוקצו על-ידי הממשלה או הרשויות המקומיות.
  - 3 סילוק נכון של סוללות/סוללות נטענות משומשות יעזור במניעת השפעה שלילית על בריאות הסביבה, בעלי-החיים ובני האדם.
  - 4 למידע מפורט יותר אודות סילוק סוללות/סוללות נטענות משומשות, פנה למשרד העירוני, לשירות סילוק הפסולת המקומי או לחנות שבה רכשת את המוצר.
- [http://www.lg.com/global/sustainability/environment/take-\(back-recycling/global-network-europe](http://www.lg.com/global/sustainability/environment/take-(back-recycling/global-network-europe)

#### 4. מידע אודות הסוללה

לסוללה נטענת יש משך חיים ארוך אם מטפלים בה כראוי. סוללה חדשה או כזו שלא השתמשו בה במשך זמן רב עשויה להיות חלשה יותר בפעמים הראשונות שבהן נעשה בה שימוש. אין לחשוף את הסוללה לטמפרטורות קיצוניות, לעולם לא מעל  $+50^{\circ}\text{C}$  או מתחת ל  $-10^{\circ}\text{C}$ . להשגת קיבולת מרבית של הסוללה, יש להשתמש בה בטמפרטורת החדר. שימוש בסוללה בטמפרטורות נמוכות עלול להקטין את הקיבולת. ניתן לטעון את הסוללה אך ורק בטמפרטורות בין  $0^{\circ}\text{C}$  ל-  $+45^{\circ}\text{C}$ .

#### הסרת סוללות וסוללות נטענות (מוצר עם סוללה מוטמעת בלבד)

-במקרה שמוצר זה מכיל סוללה המשולבת במוצר שלא נועדה להסרה בקלות בידי משתמשי קצה, חברת LG ממליצה כי רק אנשי מקצוע מוסמכים יסירו את הסוללה, אם לצורך החלפה ואם לצורך מחזור בסוף חיי השירות של המוצר. כדי להימנע מגרימת נזק למוצר ולבטיחותכם האישית, אין למשתמשים לנסות להוציא את הסוללה, ועליהם לפנות לקו הסיוע של שירות LG או לספקי שירות עצמאיים לקבלת ייעוץ.

-הוצאת הסוללה תהיה כרוכה בפירוק של כיסוי המוצר, ניתוק של הכבלים/החיבורים החשמליים וחילוץ זהיר של תא הסוללה באמצעות כלים מיוחדים. אם יש לך צורך בהוראות שנועדו לאנשי מקצוע מוסמכים בנוגע להוצאת הסוללה בבטחה, בקר באתר <http://www.lge.com/global/sustainability/environment/take-back-recycling>

## מידע נוסף

### 1. חשיפה לתדר רדיו

אוזניות סטריאו Bluetooth אלו של LG הן משדר ומקלט רדיו. כאשר ההתקן פועל, הוא מתקשר עם התקן נייד המצויד ב-Bluetooth על-ידי קליטה ושידור של שדות אלקטרומגנטיים (גלי מיקרו) של תדרי רדיו (RF) בטווח תדרים שבין 2402 ל-2480 MHz. אוזניות ה-Bluetooth מתוכננת לפעול בהתאם להנחיות והמגבלות בנוגע לחשיפה לתדרי רדיו שקבעו הרשויות הארציות וסוכנויות הבריאות הבינלאומיות כאשר נעשה בה שימוש עם כל טלפון נייד תואם LG Electronics.

### 2. אמצעי זהירות לחיבור Bluetooth

- הסביבות הבאות משפיעות על טווח הקליטה של אותות Bluetooth:
  - כאשר קיימים קירות, מתכת, גופי אנוש או מכשולים אחרים בין מכשיר ה-Bluetooth למכשיר המחובר
  - כאשר ציוד העושה שימוש באותות תדר של 2.4 ג'יגה הרץ (רשתות LAN אלחוטיות, טלפונים אלחוטיים, תנורי מיקרוגל וכד') ממוקם ליד המכשירים הנמצאים בשימוש.
  - בעת שימוש במכשיר Bluetooth (טלוויזיה, מחשב נייד וכו') שאינו טלפון נייד, איכות הצליל עשויה להיות מושפעת מהמפרט ומהביצועים של המכשיר.

### 3. סביבה בעלת פוטנציאל נפיצות

באזור בעל סביבה נפיצה פוטנציאלית, יש לכבות את המכשיר האלקטרוני. במקרים נדירים, המכשיר האלקטרוני עלול לייצר ניצוצות. ניצוצות הנפלטים באזורים אלה עלולים לגרום לפיצוץ או לבעירה, שעלולים להסתיים בפגיעה גופנית או אפילו במוות. אזורים בעלי סביבה נפיצה פוטנציאלית בדרך כלל מסומנים בבירור ככאלה, אך לא תמיד.



|                      |            |
|----------------------|------------|
| 2402 MHz עד 2480 MHz | תחום תדרים |
|----------------------|------------|

\*משך השימוש עשוי להשתנות בהתאם למכשיר הנייד המחובר, לתכונות הנמצאות בשימוש, להגדרות, לעוצמת האות, לטמפרטורת ההפעלה, לרצועת התדרים ולשיטות שימוש אחרות.  
תכונת טעינה מהירה אינה חלה כאשר מארז הטעינה ממוקם בהתקן טעינה אלחוטי כגון כרית.  
תכונת הטעינה האלחוטית נטענת בקצב איטי יותר עקב פחות חשמל המועבר למארז הטעינה.

עברית

**Bluetooth®** הוא סימן מסחרי רשום של Bluetooth SIG, Inc.  
Google Play, Android, הלוגו של Google Play וסימני מסחר קשורים אחרים הם סימנים מסחריים של Google LLC.



## מפרטים ותכונות

| זרימה | הערות                                                                                                                                                        | פריט                                             |
|-------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------|
|       | 5.2 V (אוזניות/דיבורית/AVRCP/A2DP)                                                                                                                           | מפריט Bluetooth                                  |
|       | אוזניות: 3.7 V / 68 mAh, ליתיום-יון<br>מארז טעינה: 3.7 V / 390 mAh, ליתיום-יון                                                                               | סוללה                                            |
|       | ANC כבוי: עד 10 & עד 24 שעות*<br>ANC פעיל: עד 6 & עד 15 שעות*                                                                                                | זמן סוללה<br>להשמעת מוסיקה<br>& עם מארז<br>טעינה |
|       | אוזניות: בתוך שעה / מארז טעינה מהירה - שעתיים<br>טעינה מהירה: טעינה של 5 דקות עבור השמעה של עד<br>60 דקות*<br>※ בעת טעינה קוית בטמפרטורת החדר                | זמן טעינה                                        |
|       | אוזניות: 5 V --- 136 mA<br>מארז טעינה: 5 V --- 500 mA                                                                                                        | מתח כניסה מדורג                                  |
|       | +40 °C ~ 0 °C                                                                                                                                                | טמפרטורת<br>הפעלה                                |
|       | 5 % ~ 60 %                                                                                                                                                   | לחות הפעלה                                       |
|       | אוזניות: 21.2 מ"מ (רוחב) X 28.3 מ"מ (עומק) X 23.2 מ"מ (גובה) / 5.2 ג' (אוזניה אחת)<br>מארז: טעינה: 54.5 מ"מ (רוחב) X 54.5 מ"מ (עומק) X 30 מ"מ (גובה) / 39 ג' | מידות (מ"מ) /<br>משקל (ג')                       |

## איתור תקלות

אם אתה רואה אחת מהתופעות הבאות בעת השימוש במוצר, הקפד לבדוק אותו שוב. ייתכן שזו לא תקלה.

| סימפטום                                                               | סיבה ופתרון                                                                                                                                                                                                                                  |
|-----------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| החשמל אינו נדלק                                                       | בדוק את רמת הסוללה וטען אותה.                                                                                                                                                                                                                |
| אם אין אפשרות לבצע שיחה עם אוזניות                                    | אם הטלפון הנייד אינו תומך באוזניות ובפונקציות ללא שימוש בידיים, אין באפשרותך להשתמש בתכונות השיחה.<br>בדוק את רמת הסוללה וטען אותה.                                                                                                          |
| אם אין אפשרות לרשום אוזניות לטלפון הנייד                              | בדוק אם האוזניות מופעלות.<br>בדוק אם האוזניות נכנסו למצב החיפוש.<br>- בעוד האוזניות מוכנסות למארז הטעינה, לחץ והחזק את משטח המגע באוזניה השמאלית או הימנית למשך 3 עד 5 שניות כדי לעבור למצב החיפוש.                                          |
| במידה והחלפת את האוזניות או שקיימת בעיה בתפעול האוזניות (איפוס היצרן) | בזמן שהאוזניות מוכנסות למארז הטעינה, לחצו לחיצה ארוכה על משטח המגע באוזניה השמאלית או הימנית למשך 10 שניות או יותר.<br>- מחוון מצב הסוללה של מארז הטעינה מהבהב באדום והאתחול למצב המפעל מתבצע. לאחר האתחול למצב היצרן, חבר מחדש את האוזניות. |

עברית

## מחוץ לטווח

אם ההתקן המחובר למוצר נמצא מחוץ לטווח תקשורת יעיל, אות התקשורת נחלש והתקשורת אובדת. טווח התקשורת היעיל עשוי להשתנות בהתאם לתנאים הסובבים ואחרים.

אם ההתקן חוזר לטווח תקשורת יעיל, המוצר מתחבר מחדש להתקן באופן אוטומטי. אם ההתקן אינו מחובר מחדש באופן אוטומטי, **גע פעם אחת באוזניה השמאלית או הימנית** כדי לחבר אותו.

## LG TONE Free יישום

אם תתקין את האפליקציה "LG TONE Free", תוכל להשתמש בפונקציות בדיקת סוללת האוזניות, התראה קולית, שינוי מצב אקולייזר, בדוק את פרטי המיקום המחוברים האחרונים ו מצא את פונקציות האוזניות שלי. עיין באפליקציה לקבלת פרטים נוספים.

כדי להתקין את אפליקציית "LG TONE Free", חפשו ב-LG TONE Free בחנות Google Play או ב-App Store או סרקו את קוד ה-QR למטה. תומך במערכות Android 7.0 ומעלה ו-iOS 11 ומעלה.



App Store



Google Play

## מחונן מצב סוללה

| סטטוס                       | תיאור                               |
|-----------------------------|-------------------------------------|
| מצב חיפוש Bluetooth         | מחונן מצב הסוללה מהבהב בכחול.       |
| סוללה מתחת ל-20%            | מחונן מצב הסוללה מופעל ונכבה באדום. |
| סוללה 20% - 80%             | מחונן מצב הסוללה מופעל ונכבה בצהוב. |
| סוללה 80% או יותר           | מחונן מצב הסוללה מופעל ונכבה בירוק. |
| כאשר קיימת בעיה בעת הטעינה  | מחונן מצב הסוללה מהבהב באדום.       |
| טעינה (מטען מחובר)          | מחונן מצב הסוללה מופעל באדום.       |
| הטעינה הושלמה (המטען מחובר) | מחונן מצב הסוללה מופעל בירוק.       |


עברית

✓ **הערה:** המטען האלחוטי אינו מסופק. ייתכן שפונקציית הטעינה האלחוטית לא תפעל במטענים אלחוטיים מסוימים. תכונת הטעינה האלחוטית נטענת בקצב איטי יותר עקב פחות חשמל המועבר למארז הטעינה. אם אתם משתמשים בטעינה אלחוטית, ה-UVnano LED מחטא את האוזניות במשך 5 דקות לפני הטעינה.

## בדיקת מצב הסוללה

לבמארז הטעינה, מצב הסוללה של האוזניות מוצג. אם אוזניות מותקנות. אחרת, יוצג מצב הסוללה של מארז הטעינה. אם האוזניות מותקנות במארז הטעינה בזמן שהן מחוברות לחשמל, תהליך UVnano יתחיל למשך 5 דקות. לאחר השלמת תהליך זה, יוצג מצב הסוללה של מארז הטעינה.


| מחווון מצב סוללה | זמן סוללה (מטען לא מחובר) | מצב טעינה (מטען מחובר) |
|------------------|---------------------------|------------------------|
| אדום             | 20% ומטה                  | טעינה                  |
| צהוב             | 20% - 80%                 | -                      |
| ירוק             | 80% ומעלה                 | טעון במלואו            |



✓ **הערה:** כאשר מכסה מארז הטעינה סגור, מוצג מצב הסוללה של מארז הטעינה. אם למארז הטעינה לא נותרה טעינה, לא תהיה תצוגה והוא לא יוכל לפעול. אנו ממליצים לשמור על מארז הטעינה טעון בכל עת מכיוון שלא ניתן יהיה להדליק ולכבות את האוזניות באופן עצמאי.

## טעינה

### טעינה קווית



עברית

כאשר כבל הטעינה מחובר, מצב הטעינה מוצג במארז הטעינה.  
✓ **הערה:** האוזניות ומארז הטעינה נטענים בו זמנית. לא ניתן להשתמש ביציאת הטעינה במארז הטעינה כדי לספק חשמל לטלפונים ניידים וכו'.

### טעינה אלחוטית



יישר את המרכז התחתון של מארז הטעינה עם מרכז המטען האלחוטי.

## UVnano

מארז הטעינה כולל נורית לד UVnano מובנית. המאפשרת לך להשתמש באוזניות שלך בצורה נקייה.

אם תטעינו את האוזניות אם תטעינו את האוזניות כשהן נמצאות בתוך מארז הטעינה ומכסה המארז סגור, תפעל נורית הLED UVnano במשך 5 דקות.

UVnano\* היא מילה מורכבת הנגזרת מהמילים UV והיחידה שלה, ננומטר.



זיכרון

**הערה:** ✓ כאשר נורית ה-UVnano פועלת צבע נורית הLED הינו כחול. מארז הטעינה UVnano מבטל עד 99.9% מהחיידקים המזיקים בתוך חור האוזניים.

במקרה שצבע המוצר הינו לבן, עשויה להיות דהיייה קלה של הצבע כשהוא בא במגע עם נורית UVnano אבל אין בכך שום השפעה על תפקוד המוצר.

**התראה:** ⚠ שים לב כי הטמפרטורה של האוזניות עשויה לעלות בזמן ש UVnano LED הוא פעיל.



## האזינו לצליל הסביבה (LAS) / ביטול רעשים אקטיבי (ANC)

גע והחזק את האוזנייה השמאלית או הימנית כדי לעבור בין מצב ANC למצב LAS.

ניתן להגדיר את הפונקציות LAS ו-ANC באפליקציית LG TONE ללא תשלום.

באפשרותך לקבוע את התצורה של מצב האזנה למצב צליל סביבה ומצב שיחה באמצעות האפליקציה LG TONE ללא תשלום.

אם אתה משתמש בפונקציה LAS או ANC, הסוללה צורכת יותר, ובכך מקצרת את הזמן שבו באפשרותך להשתמש במוצר.

באפשרותך להשתמש בפונקציות LAS ו-ANC בעת חוסר פעילות, האזנה למוסיקה או להיות בטלפון.

\*ANC הוא ראשי תיבות של ביטול רעשים אקטיבי.

**⚠ התראה:** כאשר מצב LAS מופעל, ייתכן שתשמע את צליל הסביבה מתחזק לפתע.  
בעת שימוש בפונקציית ANC בחוץ, שים לב לסביבה שמסביב לבטיחות.

## האזנה לצליל הסביבה (LAS)



עברית


הפונקציה האזן לצליל הסביבה (LAS) מאפשרת לך להאזין לצליל הסביבה כדי שתוכל לזהות את המצב שמסביב ואת כל הסיכונים הפוטנציאליים.

## ביטול רעשים אקטיבי (ANC)



הפונקציה ביטול רעשים אקטיבי (ANC) חוסמת כל צליל סביבה. לכן, באפשרותך להשתמש בפונקציה כדי להאזין למוסיקה או לצפות בסרטון וידאו ללא הפרעה.

## פונקציות שיחות לנייד



זכירת


| פונקציה           | סטטוס | תיאור                                                                                                                                                                                                                        |
|-------------------|-------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| מענה לשיחות       | צלצול | גע באזזניה השמאלית או הימנית פעם אחת.                                                                                                                                                                                        |
| סיום שיחות        | שיחה  | גע באזזניה השמאלית או הימנית פעמיים.                                                                                                                                                                                         |
| ביצוע שיחות       | בטל   | אם תבצע שיחה באמצעות טלפון נייד, השיחה תתחבר באופן אוטומטי לאוזנייה האלחוטית.                                                                                                                                                |
| קבלת שיחות בטלפון | שיחה  | אם תיגע פעם אחת באזזניה השמאלית או הימנית, השיחה הנוכחית תושהה ותוכל לענות לשיחה נכנסת.<br>אם השיחה הקודמת בהמתנה, באפשרותך לסיים את השיחה הנוכחית בטלפון הנייד.<br>(פונקציה זו עשויה לעבוד באופן שונה בהתאם להגדרות הטלפון) |
| קבלת שיחות        | צלצול | גע והחזק את האוזנייה השמאלית או הימנית.                                                                                                                                                                                      |

2 כאשר אתה שם את האוזניות, תשמע צליל חיווי שהאוזניה בשימוש.



## השמעת מוזיקה

עברית



| פונקציה           | תיאור                                                                      |
|-------------------|----------------------------------------------------------------------------|
| הפעלה / השהיה     | גע באוזניה השמאלית או הימנית פעם אחת                                       |
| כוונון עוצמת הקול | גע באוזניה השמאלית (הנמכת עוצמת הקול) או הימנית (הגברת עוצמת הקול) פעמיים. |
| הפעל הבא          | גע באוזניה השמאלית או הימנית: שלוש פעמים.                                  |

✓ **הערה:** ניתן לשנות את שיטת הפעולה של הפונקציה בהגדרות לוח המגע של אפליקציית LG TONE Free.

**התראה:** ⚠ שם הדגם הנכון לחיבור וצימוד ברשימת התקני *Bluetooth* מחוברים הוא LG-TONE-FP8 ללא האותיות LE. אם שם דגם האוזנייה מוצג באופן חריג במכשיר Android, שנה את שם הדגם בתפריט *Bluetooth* של הגדרות התקן מחובר.

✓ **הערה:** כדי להתחבר להתקן אחר, בצע שוב את ההליך לעיל.


### חיבור אוטומטי

האוזניות מחוברות באופן אוטומטי בעת פתיחת המכסה של מארז הטעינה. אם תסגור את הכיסוי של מארז הטעינה כששתי האוזניות מותקנות במארז הטעינה, האוזניות מנותקות.

### שימוש באוזניות


1 הפרידו את האוזניות ממארז הטעינה והתאימו אותן כך שיתאימו בנוחות לאוזניים.

✓ **הערה:** ניתן להשתמש בג'ל אוזניים שמתאים לאוזניים כדי לשפר את ביצועי ביטול הרעשים הפעילים (ANC) וליהנות מצלילי מוסיקה עשירים.



## צימוד מכשירים וחיבור

### זוג מהיר




- 1 הפעל את פונקציית **Bluetooth** בטלפון הנייד או בהתקן שתרכו לחבר.
- 2 פתחו את הכיסוי של מארז הטעינה עם האוזניות המותקנות על המארז. לחצו לחיצה ארוכה על לוח המגע של האוזנייה השמאלית או הימנית למשך 3 עד 5 שניות עד שמחון מצב הסוללה יהבהב בכחול.




- 3 כאשר קופצת הודעת הצימוד המהיר באזור העליון של מסך הטלפון הנייד, הקישו עליו כדי להתחבר. (תומך ב- Android™ 6.0 ומעלה, ודורש קביעת תצורה של הגדרות **Bluetooth** ופרטי מידע ומיקום של הטלפון הנייד.
- 4 אם הודעת הצימוד המהיר אינה מופיעה, בחר **[LG-TONE-FP8]** מתפריט **Bluetooth** בטלפון הנייד וחבר אותו (עבור משתמי iOS או Android 5.0 וגרסאות נמוכות יותר).

## סקירה כללית

### מארז טעינה

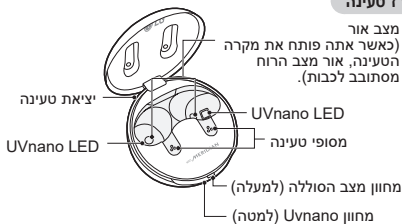

### אוזניות



\*יש לוודא כי מסוף הטעינה אינו מלוכלך בחומר זר.  
\*המראה והמפרטים של המוצר בפועל עשויים להשתנות בהתאם לדגם.

## רכיבי מוצר



כבל טעינה מסוג  
USB Type C™



כריות אוזן נוספות  
עשויות ג'ל  
(קטנות וגדולות)



LG TONE Free™  
אוזניות  
(כריות ג'ל בינוניות מותקנות)  
מארז טעינת UV

עברית



כרטיס האחריות



מדריך למשתמש

**הערה:** עיצוב המוצר בפועל עשוי להיות שונה מתמונות המוצגות באופן ידני. ✓

### ⚠️ התראה

ודא שנעשה שימוש ברכיבי LG Electronics אותנטיים. שימוש ברכיב לא אותנטי עלול לגרום נזק למוצר ובכך לבטל את האחריות. השתמש בכבל USB Type C™ המצורף למוצר.

### ✓ הערה

המדריך המלא זמין להורדה מאתר LG Electronics.  
Manuals < Manuals & Downloads < support or service < [www.lg.com](http://www.lg.com) 📄

אין לאחסן או לשלוח את המוצר בסביבת לחץ אטמוספרי הנמוך מ-11.6 kPa או בגובה מעל 15,000 מ'.

החלפת הסוללה בסוג שגוי (כגון סוגים מסוימים של סוללות ליתיום) עלולה לפגוע באמצעי הגנה.

השלכת סוללה לאש או לתנור חם, או ריסוק או חיתוך מכני שלה, עלולים לגרום לפיצוץ.

השארת סוללה בסביבה בעלת טמפרטורה גבוהה במיוחד עלולה לגרום לפיצוץ או לדליפה של נוזל או גז דליקים.

סוללה הנמצאת בסביבת לחץ אטמוספרי נמוך במיוחד עלולה לגרום לפיצוץ או לדליפת נוזל או גז דליקים.

אין להשליך ברשלנות סוללות ישנות. הדבר עלול לגרום לפיצוץ או שריפה. שיטת הסילוק עשויה להשתנות בהתאם למדינה ולאזור. יש לסלק סוללות בצורה מתאימה.

## הערה

אם המוצר חשוף להזעת יתר, יש לנקות את המוצר.

יש לשמור על ניקיון האוזניות.

לבישת אוזניות במשך זמן רב עלולה לגרום לכאב, ואם הלחות בתוך האוזניים נמשכת זמן רב, זה עלול לגרום לבעיות בעור.

## רמקול HD

אם רשת התקשורת של ההתקן שאליו אתה מתחבר תומכת בשיחות קוליות באיכות HD, באפשרותך מ לבצע שיחות קוליות ולהאזין למוסיקה בחדות גבוהה.



## ⚠ התראה

אין לפרק, לבצע התאמות או לתקן את המוצר ללא אישור היצרן.  
אין להניח את המוצר סמוך למקור חום גבוה או חומר דליק.  
המוצר עלול להיפגע אם משתמשים במטען שאינו תואם.  
יש לוודא כי תינוקות או ילדים לא יבלעו מגנט או חלקים קטנים של המוצר.  
יש למנוע כניסת גופים זרים לפתחי המטען (שקע הטעינה וחיבור החשמל).  
הדבר עלול לגרום להתלקחות אש או להלם חשמלי.  
במידה ובגופך מושגל מכשיר רפואי כלשהו, יש להתייעץ עם הרופא לפני השימוש במכשיר זה.  
מוצר זה כולל סוללה מובנית שאינה ניתנת להסרה או החלפה ללא אישור היצרן.  
למען בטיחותך, אין להסיר את הסוללה המשולבת במוצר.  
החלפת הסוללה ללא אישור היצרן או החלפתה שלא כראוי, עלולה לגרום לפיצוץ.  
סוללת הליתיום-יון היא רכיב מסוכן שעלול לגרום לפציעה.  
החלפת סוללה על ידי מי שאינו איש מקצוע מוסמך עלולה לגרום נזק למכשיר שלך.  
אל תחליף את הסוללה בכוחות עצמך. הסוללה עלולה להינזק, דבר העלול לגרום התחממות יתר ופציעה. החלפת הסוללה חייבת להיעשות בידי ספק השירות המורשה. יש למחזר או להשליך את הסוללה בנפרד מהאשפה הביתית.  
אין להשליך את הסוללה עם האשפה הביתית. יש לפעול בהתאם לתקנות המקומיות לסילוק סוללות.  
קיימת סכנת פיצוץ אם הסוללה מוחלפת בסוג שגוי.

זכויות יוצרים שמורות ל 2021 - 2023 LG ELECTRONICS  
LG TONE Free (TONE-FP8) הן אוזניות אלחוטיות קלות בטכנולוגיית  
Bluetooth.  
מוצר זה יכול לשמש כאביזר שמע למכשירים התומכים בפרופיל A2DP או דיבורית  
Bluetooth.

## אמצעי זהירות

אמצעי הבטיחות הבאים ניתנים כדי למנוע תאונה או נזק בלתי צפויים. אנא הכירו  
את אמצעי הבטיחות. אמצעי הבטיחות מסווגים כ"אזהרה" ו"התראה".

**אזהרה:** אי ציות להוראות עלול לגרום לפציעה חמורה או למוות. 

**התראה:** אי עמידה בהוראות עלולה לגרום לפציעה קלה או לנזק למוצר. 

## אזהרה

אין להפיל את המוצר ממקום גבוה.  
יש למנוע מגע של מים, אלכוהול או בנזן עם המוצר.  
אין לאחסן את המוצר במקום רטוב או מאובק.  
אין להניח חפצים כבדים על המוצר.  
מוצר זה עמיד למים ברמת אטימות IPx4 (עמיד במים בשימוש יומיומי).  
(דירוג האטימות למים IPx4 חל על מוצר האוזניות בלבד).  
אין להכניס את המוצר למים ואין להשתמש בו במקום לח כגון חדר אמבטיה.

## תוכן העניינים

|         |                                                           |
|---------|-----------------------------------------------------------|
| 1.....  | אמצעי זהירות.....                                         |
| 3.....  | רמקול HD.....                                             |
| 4.....  | רכיבי מוצר.....                                           |
| 5.....  | סקירה כללית.....                                          |
| 6.....  | צימוד מכשירים וחיבור.....                                 |
| 7.....  | שימוש באוזניות.....                                       |
| 8.....  | השמעת מוסיקה.....                                         |
| 9.....  | פונקציות שיחות לנייד.....                                 |
| 10..... | האזינו לצליל הסביבה (LAS) / ביטול רעשים אקטיבי (ANC)..... |
| 11..... | UVnano.....                                               |
| 12..... | טעינה.....                                                |
| 13..... | בדיקת מצב הסוללה.....                                     |
| 14..... | מחון מצב סוללה.....                                       |
| 15..... | מחוץ לטווח.....                                           |
| 15..... | LG TONE Free יישום.....                                   |
| 16..... | איתור תקלות.....                                          |
| 17..... | מפרטים ותכונות.....                                       |
| 19..... | מידע נוסף.....                                            |
| 22..... | מידע בטיחות חשוב.....                                     |
| 23..... | פרטי הודעה על תוכנת קוד פתוח.....                         |
| 24..... | סמלים.....                                                |



מדריך למשתמש

# LG TONE Free

LG **Bluetooth®** אוזניות סטריאו

Rev 2.0 IL



App Store



Google Play

**הערה:** לקבלת הביצועים הטובים ביותר וכדי למנוע נזק או שימוש לא תקין באוזניה, אנא קראו את כל המידע בעיון לפני השימוש באוזניה.

כל השינויים הנדרשים במדריך הפעלה זה עקב שגיאות טיפוגרפיות או חוסר דיוק של המידע הכלול בו יתבצעו אך ורק על-ידי LG Electronics Inc.

**TONE-FP8W / TONE-FP8  
TONE-FP8E**

[www.lg.com](http://www.lg.com)