



SIMPLE MANUAL

Wireless Sound Bar

Please read this manual carefully before operating your set and retain it for future reference.

To view the instructions of advanced features, visit <http://www.lg.com> and then download Owner's Manual.

Some of the content in this manual may differ from your unit.

MODEL
SJ4




www.lg.com
Copyright © 2017 LG Electronics. All Rights Reserved

ENGLISH




Front Panel

The buttons are located on the rear.

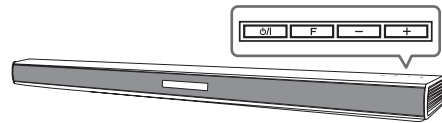

- Power** : Standby / On
- F** : Selects Function
- +** : Adjusts Volume

Rear Panel

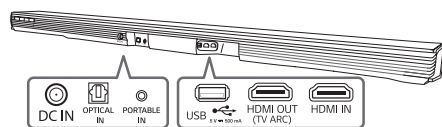

- DC IN** : Connect to the AC adapter
- OPTICAL IN** : Connect to an Optical device
- PORTABLE IN** : Connect to a Portable device
- USB** : Connect to a USB device
- HDMI OUT (TV ARC)** : Connect to a TV
- HDMI IN** : Connect to HDMI out on a device

1 Subwoofer Connection

Place the wireless subwoofer near the speaker and follow steps below.

- 1 Connect the power cord of wireless subwoofer and sound bar to the outlet.
- 2 Turn on the main unit :
The sound bar and wireless subwoofer will be **automatically** connected. The subwoofer's green LED turns on.


Subwoofer Connection Manually

If the subwoofer does not make sound, try to connect manually.

- 1 Press **Pairing** button on the rear of the wireless subwoofer.
 - The green LED on the rear of wireless subwoofer blinks quickly.
- 2 Turn on the main unit.
- 3 Pairing is completed.
 - The green LED on the rear of wireless subwoofer turns on.



Keep the sound bar and the subwoofer away from the device (ex. wireless router, microwave oven, etc.) over 1 m to prevent wireless interference.




2 TV Connection

Connect with the Sound Bar and TV using Optical (A) or HDMI ARC (B).


A Optical Connection

- 1 Connect the sound bar to the TV using Optical cable.
- 2 Set up [External Speaker (Optical)] on your TV setting menu.



B HDMI(ARC) Connection


- 1 Connect the sound bar to the TV using HDMI cable.
- 2 Set up [External Speaker (HDMI ARC)] on your TV setting menu.



- HDMI connection is unavailable if your TV does not support HDMI ARC.
- If this unit is connected by OPTICAL and ARC at the same time, the ARC signal is a high priority.


Additional Device Connection

- 1 Connect to the external device as follows.

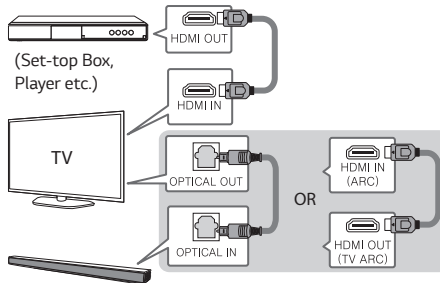

- 2 Set the input source by pressing **F** on the remote control or unit repeatedly.

Remote control




ASC/BASS BLAST/CINEMA: Selects the sound effect.

NIGHT ON/OFF: Turns down the volume at night.

WOOFFER LEVEL +/-: Adjusts the volume level of subwoofer.

AUTO POWER ON/OFF: Automatically turns on by an input source.

Replacement of battery



Additional Information

Specification

Power consumption	Refer to the main label.
AC adapter	• Model : DA-38A25 • Manufacturer : Asian Power Devices Inc. • Input : 100 - 240 V ~ 50 - 60 Hz 1.2 A • Output : 25 V $\equiv$ 1.52 A
Dimensions (W x H x D)	Approx. 890 mm x 55 mm x 85 mm With foot
Bus Power Supply (USB)	5 V $\equiv$ 500 mA
Amplifier (Total RMS Output power)	300 W RMS

Design and specifications are subject to change without notice.

OPEN SOURCE SOFTWARE NOTICE INFORMATION

To obtain the source code under GPL, LGPL, MPL, and other open source licenses, that is contained in this product, please visit <http://opensource.lge.com>.

In addition to the source code, all referred license terms, warranty disclaimers and copyright notices are available for download.

LG Electronics will also provide open source code to you on CD-ROM for a charge covering the cost of performing such distribution (such as the cost of media, shipping and handling) upon email request to opensource@lge.com. This offer is valid for three (3) years from the date on which you purchased the product.

Declaration of Conformity

CE 0197

Hereby, LG Electronics European Shared Service Center B.V., declares that this Wireless Sound Bar is compliant with the essential requirements and other relevant provisions of Directive 1999/5/EC. The complete Declaration of Conformity may be requested through the following postal address:

LG Electronics European Shared Service Center B.V.
Krijgsman 1
1186 DM Amstelveen
The Netherlands

or can be requested at our dedicated DoC website:

<http://www.lg.com/global/support/cedoc/cedoc#>

This device is a 2.4 GHz and 5 GHz wideband transmission system, intended for use in all EU member states and EFTA countries.

For consideration of the user, this device should be installed and operated with a minimum distance of 20 cm between the device and the body.

IMPORTANT SAFETY NOTICE

The cord grip for the plug fitted to this product is built into the existing power cord as supplied. If, for any reason you need to shorten the cord.

DO NOT RE-USE THE PLUG.

A new plug must be used to ensure your continued safety by securing the plug to the power cord in accordance with Plug & Socket Regulations 1994.

HDMI
HIGH-DEFINITION MULTIMEDIA INTERFACE



簡易手冊

無線 Sound Bar

操作播放器前，請細心閱讀本說明書並予以保留作日後參考之用。
要查看進階功能，請瀏覽 <http://www.lg.com> 並下載使用者手冊。
本手冊中的某些內容可能不適用於此裝置上。

型號
SJ4




www.lg.com
Copyright © 2017 LG Electronics. All Rights Reserved

中文




前面板

按鈕位於後方。

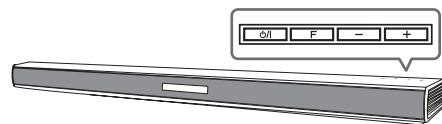

○/I 待機/啟動
F 選擇功能
- + 調節音量

後面板

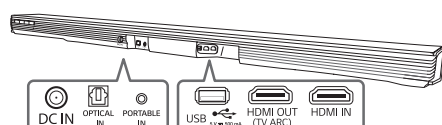

DC IN 連接 AC 電源轉接器
OPTICAL IN 連接至光纖裝置
PORTABLE IN 連接至可攜式裝置
USB 連接至 USB 裝置
HDMI OUT (TV ARC) 連接至電視
HDMI IN 從其他裝置經 HDMI 輸入

1 無線超低音揚聲器連接

把無線超低音揚聲器放置在 Sound Bar 附近並按照以下步驟操作。

- 1 連接無線的擴音機電線和 Sound Bar 至電源插座。
- 2 開啟 Sound Bar：
Sound bar 與無線超低音揚聲器會自動連接。無線超低音揚聲器的綠色 LED 燈會亮起。


手動連接無線超低音揚聲器

若重低音擴音器未能發出聲響，嘗試手動連接。

- 1 按下無線重低音揚聲器後的Pairing按鈕。
 - 無線重低音揚聲器後的綠色燈號會閃爍。
- 2 開啟 Sound Bar。
- 3 配對完成。
 - 無線重低音揚聲器後的綠色 LED 燈會亮起。



請將 Sound Bar 和無線超低音揚聲器放置在離其他裝置（例如無線路由器、微波爐等等）超過 1 米（3.3 尺）的位置，避免無線干擾。




2 電視連接

透過光纖 (A) 或 HDMI ARC (B) 連接 Sound Bar 和電視。


A 光纖連接

- 1 透過光纖將 Sound Bar 連接至電視。
- 2 在您的電視設定功能表上設定 [外置揚聲器 (光纖)]。



B HDMI (ARC) 音訊連接


- 1 透過 HDMI 纜線連接 Sound Bar 至電視。
- 2 在您的電視設定功能表上設定 [外置揚聲器 (HDMI ARC)]。



- 假如您的電視不支援HDMI ARC，HDMI 連接並不適用。
- 若裝置同時連接 OPTICAL 和 ARC，ARC訊號將更為優先。

額外裝置連接

- 1 依照下圖連接外接裝置。

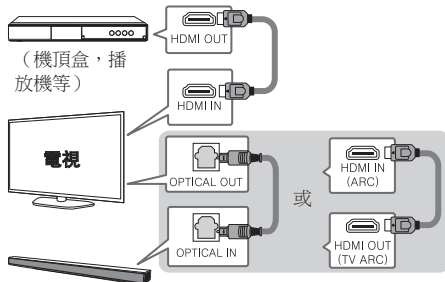

- 2 重複按遙控器或本裝置上的**F**以設定輸入源。

遙控器




ASC/BASS BLAST/CINEMA: 選擇音效。

NIGHT ON/OFF: 晚上將音量收細。

WOOFER LEVEL +/-: 調整低音揚聲器音量。

AUTO POWER ON/OFF: 自動透過輸入來源開啟。

更換電池



其他資訊

規格

耗電	請參閱主要標籤。
AC 轉接器	• 型號：DA-38A25 • 製造商：Asian Power Devices Inc. • 電源輸入：100 - 240 V ~ 50 - 60 Hz 1.2 A • 電源輸出：25 V $\overline{\sim}$ 1.52 A
尺寸 (寬 x 高 x 深)	大約 890 mm x 55 mm x 85 mm 連底部
匯流排電源供應 (USB)	5 V $\overline{\sim}$ 500 mA
擴音器 (總RMS 輸出功率)	300 W RMS

設計和規格如有任何變更，恕不另行通知。

注意：開放來源程式碼軟件

若要獲取此產品所包含的 GPL、LGPL、MPL 來源程式碼和其他開放來源程式碼認證，請瀏覽 <http://opensource.lge.com>。

除了來源程式碼，所有涉及到的授權條款、免責聲明和版權聲明可供下載。

LG Electronics 亦可以透過收費 CD-ROM 提供開放來源程式碼，費用包括 CD-ROM 成本（例如媒體成本、運費以及處理費），您可透過 opensource@lge.com 索取。此服務由購買產品日期起計算三年內有效。

符合標準聲明

CE 0197

LG Electronics European Shared Service Center B.V. 特此聲明這個 Wireless Sound Bar 可兼容基本要求和和其他相關的 1999/5/EC 指令，或經以下的通訊地址要求遞交整個符合標準聲明：

LG Electronics European Shared Service Center B.V.
Krijgsman 1
1186 DM Amstelveen
The Netherlands

或可向我們專設的 DoC 網站查詢：

<http://www.lg.com/global/support/cedoc/cedoc#>

這個裝置是 2.4 GHz 和 5 GHz 的寬頻傳輸系統，適用於所有歐盟成員國和 EFTA 國家。

為使用者安全着想，安裝或使用裝置時，身體與裝置之間的距離不應少於 20 厘米。

安全注意事項

本機的插頭握柄是專為本產品所設計，且與附設的電源線為一體，若您因為任何理由而需截短此電源線時

請勿再使用該插頭

應使用全新的插頭以確保連續使用之安全性。請依據1994年之插頭及插座規範的規定，將插頭確實地與電源線結合。

