## Additional Information

### Specification

| | |
|---|---|
| Power consumption | Refer to the main label. |
| AC adapter | • Model : DA-50F25<br>• Manufacturer : Asian Power Devices Inc.<br>• Input : 100 - 240 V ~ 50 - 60 Hz<br>• Output : 25 V ⎓ 2 A |
| Dimensions (W x H x D) | Approx.<br>890.0 mm X 57.0 mm X 85.0 mm With foot |
| Bus Power Supply (USB) | 5 V ⎓ 500 mA |
| Amplifier (Total RMS Output power) | 420 W RMS |

Design and specifications are subject to change without notice.

**Rear Surround sound**

Wireless Rear Speakers Kit included for real surround sound. (SPJ4V-S)

**Open Source Software Notice Information**

To obtain the source code that is contained in this product, under GPL, LGPL, MPL, and other open source licenses that have the obligation to disclose source code, and to access all referred license terms, copyright notices and other relevant documents, please visit https://opensource.lge.com.
LG Electronics will also provide open source code to you on CD-ROM for a charge covering the cost of performing such distribution (such as the cost of media, shipping, and handling) upon email request to opensource@lge.com.
This offer is valid to anyone in receipt of this information for a period of three years after our last shipment of this product.

LG
Life's Good

ENGLISH

SIMPLE MANUAL

# Wireless Sound Bar

Please read this manual carefully before operating your set and retain it for future reference.
To view the instructions of advanced features, visit http://www.lg.com and then download Owner's Manual. Some of the content in this manual may differ from your unit.

MODEL

SNC4R

MFL72133203
2405_Rev01

www.lg.com

Copyright © 2024 LG Electronics Inc. All Rights Reserved.

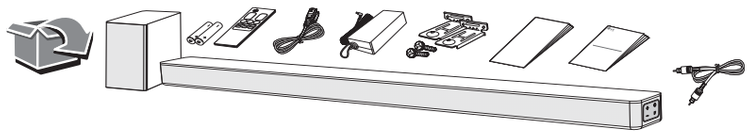

## Front Panel




⏻ (Standby) ····· Switches the unit ON or OFF.
**F** (Function) ····· Selects function.
**—/+** (Volume) ····· Adjusts volume.

## Rear Panel

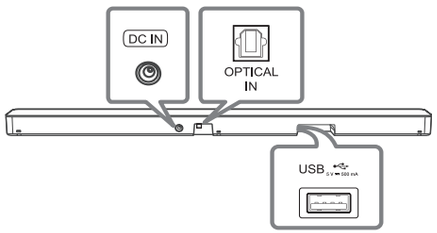


**DC IN** ····· Connect to the AC adapter.
**OPTICAL IN** ····· Connect to an optical device.
USB Port ····· Connect to a USB device.

## Subwoofer Connection

Place the wireless subwoofer near the sound bar and follow steps below.

1. Connect the power cord of the sound bar and the wireless subwoofer to the outlet.
2. Turn on the sound bar.
   - The sound bar and wireless subwoofer will be **automatically** connected. The subwoofer's yellow - green LED turns on.

### Manual Subwoofer Connection

If the subwoofer does not make sound, try to connect manually.

1. Press **PAIRING** on the rear of the wireless subwoofer.
   - The yellow - green LED on the front of the wireless subwoofer blinks quickly. (If the yellow - green LED does not blink, press and hold the **PAIRING**.)
2. Turn on the sound bar.
   - Pairing is completed. The yellow - green LED on the front of the wireless subwoofer turns on.

Keep the sound bar and the subwoofer away from the device (ex. wireless router, microwave oven, etc.) over 1 m to prevent wireless interference.




## TV Connection

1. Connect the sound bar to the TV using Optical cable.
2. Set up [External Speaker (Optical)] on your TV setting menu.




### Additional Device Connection

1. Connect to the external device like as follow.




2. Set the input source by pressing **F** repeatedly.

## Remote control




### Replacement of Battery




⏮/⏭: Skip/Search
⏯: Play/Pause
- **Bluetooth connection lock (BT LOCK):** Select the **Bluetooth** function by pressing **F** repeatedly. Long press ⏯ and press it again to limit Bluetooth connection to only BT and LG TV.

**SOUND EFFECT:** Selects a sound effect mode.
- **TV remote:** Long press **SOUND EFFECT** and press it again to use TV remote control.

**FOLDER** ∧/∨**:** Searches a folder.
ⓘ**:** Displays the information of a file, an input source or connected **Bluetooth** device name.
- **Auto Power ON/OFF:** Long press ⓘ and press it again.

🎚: Adjusts sound level of each speaker.
- **Surround sound:** Long press 🎚 and press it again.

**REPEAT:** Listens to your files repeatedly or randomly.

ENGLISH

SIMPLE MANUAL

# Wireless Rear Speakers Kit

Please read this manual carefully before operating your set and retain it for future reference.
To view the instructions of advanced features, visit http://www.lg.com and then download Owner's Manual. Some of the content in this manual may differ from your unit.

MODEL

SPJ4V-S

MFL72133303
2405_Rev01

www.lg.com

Copyright © 2024 LG Electronics Inc. All Rights Reserved.



## 1 Rear Speakers Connection

Speaker design and connection method may be different according to models.

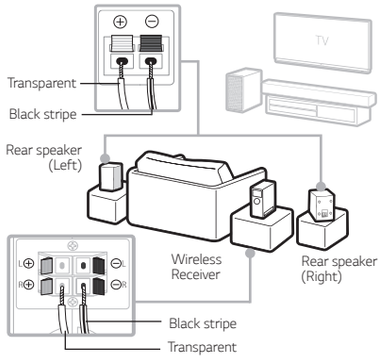


1. Connect the speaker cables to rear speakers correctly.
2. Connect the Wireless Receiver and the rear speakers (Grey: right, Blue: left) with the speaker cables.
3. Turn on the Surround function to enjoy surround sound.

## 2 Wireless Receiver Connection

1. Connect the power cord of wireless receiver to the outlet.
2. Turn on the unit: The unit and wireless receiver will be **automatically** connected. The receiver's yellow - green LED turns on.

### Wireless Receiver Connection Manually

If the rear speakers do not make sound, try to connect manually.

1. Press PAIRING button on the rear of the wireless receiver.
   - The yellow - green LED on the wireless receiver blinks quickly.
2. Turn on the main unit.
3. Pairing is completed.
   - The yellow - green LED on the wireless receiver turns on.

Set the distance between the sound bar and the wireless receiver as close as possible and keep them away from the device (ex. wireless router, microwave oven, etc.) over 1 m to prevent wireless interference.




## Surround Sound On/Off

When you turn on surround function, you can enjoy magnificent surround sound for all the input sound source with rear speakers.

The initial setting for the surround function is OFF, turn the surround function ON to use it.

Surround On: Press and hold button on the remote control about 3 seconds and then press button repeatedly to select ON - SURROUND in the display window.

Surround Off: Press and hold button on the remote control about 3 seconds and then press button repeatedly to select OFF - SURROUND in the display window.

## Additional Information

### Specification of Wireless receiver

| | |
|---|---|
| Power requirement | Refer to the main label on the wireless receiver. |
| Power consumption | Refer to the main label on the wireless receiver. |
| Dimensions (W x H x D) | Approx. 60 mm x 220 mm x 175 mm |

Design and specifications are subject to change without notice.

### About Ferrite Core (Optional)

