

Washing Machine owner's Manual

MODELS: WF-T1001TH(P) WF-T1061TH(P) WF-T1001TE(F) WF-T1061TE(F)

Please read this manual carefully before operating your set. Retain it for future reference.

Record model name and serial number of the set.

Quote this information to your dealer when you require service.



The Trubo Drum washing machine does not operate with the lid open. If the lid is opened during wash, rinse and spin cycles, the machine will stop automatically.

Fuzzy Logic Control

- A built-in load sensor automatically detects and measures the laundry load and a microprocessor optimizes washing conditions such as ideal water consumption and washing time.
- Advanced technology is built into the ⊟ectronic Control System which ensures the best washing result.

Turbo Drum washing

■ While the "Punch + 3" pulsator rotates in one direction, the Turbo Drum rotates in the opposite direction. This creates an even flow of water in both the upper and lower parts of the drum, resulting in and an enhanced washing and rinsing action.



Punch + 3 washing action

- The Punch action's powerful vertical water thrust combined with the rotating pulsator movement improves washing performance and reduces tangles.
- 3 Spinning mini-pulsators create powerful jets of water which move the laundry up and down in the drum to ensure your laundry is evenly and thoroughly washed.



3 Step washing

Rubbina

 3 Step washing makes the best washing performance with low tangling. ; 3 Step works at large and medium water level of Fuzzy and Jean Course.



Rubbing and Shaking

Shaking and Disentangling

Lint Filter

 Lint and loose threads from laundry generated during the washing cycle are caught by the lint filters for a cleaner wash.



Strong spin

By employing a strong spin method, laundry becomes much cleaner.

Auto Restart

- In the event of a power failure, the washing machine will automatically resume its interrupted cycle when power is resumed.
 - ; Applied models: WF-T1001TE(F) WF-T1061TE(F)



Read this manual

Inside you will find many helpful hints on how to use and maintain your washer properly. Just a little preventive care on your part can save you a great deal of time and money over the life of your washer. You will find many answers to common problems in the Troubleshooting section. If you review our chart of Troubleshooting Tips first, you may not need to call for service at all.

Introduction	Safety information	4
	Identification of Parts	5
	Function Information	6
Before Starting to Wash	Preparation Before Washing	7
	Use of Water, Detergent, Bleach and Softener	8
	Special Guide for Stain Removal	11
	Function of each Button	12
Washing Programs	Fuzzy Wash (Normal Wash)	14
	Jean Wash, Blanket Wash, Wool Wash	
	Home Dry Wash	16
	Economy Wash	17
	Soak Wash	18
Additional Function	Delay start (Reservation) Wash	19
Options	Option Washing	20
	Other useful Functions	22
Installation	Placing and Leveling	23
	Connecting Water Supply Hose	24
	Connecting Drain Hose	27
Care and Maintenance	Grounding Method	28
	Cleaning	29
	Cleaning and Maintenance	30
Troubleshooting	Common washing problems	31
	Troubleshooting	32
Specification	Specification	33

WARNING!

For your safety, the information in this manual must be followed to minimize the risk of fire or explosion, electric shock, or to prevent property damage, personal injury, or loss of life.


For your better understanding, these precautions are separated into two categories. We urge you to pay special attention to them in the interests of your own safety, and protection of your machine against damage:




Violation of these guidelines could result in serious or fatal injury.

Following these guidelines will protect your machine against damage.

• The appliance is not intended for use by young • Do not put your hands or feet under this Installation children or infirm persons without supervision. • Do not install the washing machine in a damp place. • Do not place any rugs or heavy material • Keep the washing machine away from fire or heat over the power cord. • Since the machine is heavy, a minimum Young children should be supervised to ensure that of two persons should move it. they do not play with the appliance. • Do not install the washer where it is • The base opening must not be obstructed by exposed to sunlight, wind, rain, etc. carpeting when the washing machine is installed on a • The appliance must be positioned so that carpeted floor. the plug is accessible Power • Make sure to ground the earth wire or connect it to a • Make sure the power cord is free of dust ground detector after you put the power cord into an and plug it in properly so that the cord Supply outlet. will not move. cord • When the power cord is loose, do not use it. • Do not touch the power cord with wet • Do not damage the power cords. hands. • Do not plug many cords into one outlet at the same time. • If the power cord or fuse is damaged, it must be replaced by the manufacturer or its service agents or similarly qualified people in order to avoid a hazard. • If the appliance is supplied from a cord extension set or electrical portable outlet device the cord extension set or electrical portable outlet device should be positioned so it is not subject to splashing or ingress of moisture. • When you take out the laundry, be careful not to • Do not press the buttons with sharp objects. Operation fall into the washer. Check the hose connection and open the tap • Do not put hands into the rotating tub. before activating the machine. • Do not sprinkle water over the buttons. • Do not pour over 50; C(122; F) water into • Make sure the lid is closed during operation of the the tub. • Do not wash any waterproof materials. spin cycle. •Do not pour corrosive materials or bleach • Do not put heavy objects on the machine. Maintenance over the washing machine. It will cause • Unplug the cord when the machine is not in use. damage to the power cord or the machine. Never disassemble or remodel the washer and power cord by yourself. Only a qualified technician should work on the machine.

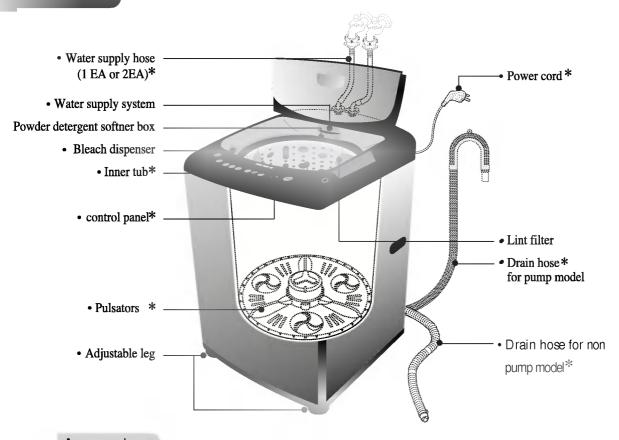

Accessories

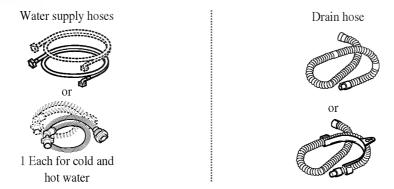

* Parts can be different according to the model.

Our machine provides various washing methods which suit various conditions and types of laundry.

Different types of laundry washing

Use this Program for normal clothes except for woolen clothes and lingerie.

The sensor automatically detects the quantity of laundry and selects the appropriate water level, wash power, washing time, rinsing time and spinning time. (refer to page 14)

Thick and heavy clothes or those which are excessively dirty like jeans or working uniforms can be washed. (*refer to page14*)

Blankets of different size can be easily washed. (refer to page 14)

Delicate clothes (lingerie, wool etc.) which may be easily damaged can be washed. (refer to page 14)

Home Dry Wash (Home Dry Cleaning)

This setting allows you to wash items marked HAND WASH & DRY CLEARABLE or WATER WASHING & DRY tags. (refer to page 16)

Washing according to the condition of laundry

Economy wash can be selected to wash moderately soiled clothes of less than 3.2 kg in a short time. (refer to page 17)

Soak Wash can be selected to wash heavily soiled laundry by soaking in water for some time to remove dirt and grime. (refer to page 18)

Other washing method

Delay start (Reservation) Wash

Delay start (Reservation) Wash is used to delay the **finishing time** of the operation. Delayed start washing can be set according to preference. (refer to page 19)

Spin, Wash, Wash/Rinse, or Rinse, Rinse/Spin only options can selected. (refer to page 20)

reparation Before Washing

* Look for a care label on your clothes. This will tell you about the fabric content of your garment and how it should be washed.




Sort clothes into loads that can be washed with the same wash cycle, water temperature and spin speed.

To get the best results, different fabrics need to be washed in different ways.

• **SOIL** (Heavy, Normal, Light) Separate clothes according to the type and amount of soil. • **COLOR** (Whites, Lights, Darks) Separate white fabrics from colored fabrics. • LINT (Lint producers, Collectors) Separate lint producers and lint collectors.

Terry cloth, Chenile, Towels, Nappies, Diapers Lint Producers Lint Collectors Synthetics, Corduroy, Permanent Press, Socks



- Mend any torn garments or loose buttons. Tears or holes may become larger during washing.
- Remove belts, underwires, etc. to prevent damage to the machine or your clothes.
- Pretreat any dirt and stains.
- Make sure the clothes are washable in water.
- Check the washing instructions.
- Remove tissue in pockets.

Pretreatment on stains or heavy soil

- Pretreat shirt collars and cuffs with a pre-wash product or liquid detergent when placing them in the washer. Before washing treat special stains with bar soaps, liquid detergent or a paste of water and granular detergent.
- Use a pretreat soil and stain remover.

Treat stains AS SOON AS POSSIBLE. The longer they are left the harder they are to remove.

(For more detail refer to page11)

Do not wash fabrics containing flammable materials (waxes, cleaning fluids, etc.). Load Size

The water level should just cover the clothes. Adjust the load size accordingly. Loosely load clothes no higher than the top row of holes in the washer tub. To add items after washer has started, press Start button and submerge additional items. Close the lid and press Start button again to restart.

Light and Large-sized clothing

Clothes like downs and woollens are light weight, large and float easily. Use a nylon net and wash them in a small amount of water. If the laundry floats during the wash cycle, it may become damaged. Use dissolved detergent to prevent the detergent from clumping.

Long laundry items

Use nylon nets for long, delicate items. For laundry with long strings or long length, a net will prevent tangling during washing. Fasten zippers, hook, and strings to make sure that these items don't snag on other clothes. * Nylon net is not supplied by LG.



Never place items in the washer that are dampened with gasoline or other flammable fluids.

No washer can completely remove oil. Do not dry anything that has ever had any type of oil on it (including cooking oils).

Doing so can result in death, explosion, or fire.







se of Water, Detergent, Bleach and Softener

Using Water

- This machine detects the quantity of laundry automatically, then sets the water level and proper amount of detergent.
- When you select a wash program, the water level and amount of detergent (to be used) will be shown on the control panel.
- The following table shows the amount of water.
- When the water level is automatically detected, it may differ depending on the quantity of laundry even though the same water level is indicated on the control panel.
- The amount of a cup in the diagram is about 40g for concentrated detergent.
- The machine sets the appropriate temperature automatically according to the wash program .
- You can change the water temperature by pressing the WATER TEMP button.
- The temperature of the water impacts the effectiveness of all laundry additives and therefore, the cleaning results. We recommend temperatures of:
 - HOT 49~60°C...(120-140°F) White items, diapers, underclothing and heavily soiled, colorfast items.
 - WARM 29~40°C...(85-105°F) Most items
 - COLD* 18~24°C...(65-75°F) Only very bright colors with light soil.
- When washing in cold water additional steps may be needed:
 - Adjust detergent amount and pre-dissolve detergent in warm water
 - Pretreat spots and stains
 - Soak heavily soiled items
 - Use appropriate bleach
- * Temperature below 18°C...(65°F) will not activate laundry additives and may cause lint, residue, poor cleaning, etc. In addition, detergent manufactures and care labels define cold water as 26~29°C...(80-85°F). If the temperature of the water in the tub is too cold for your hands, the detergent will not activate and clean effectively.

If iron is present in the water the clothes may become an all-over yellow or they may be stained with brown or orange spots or streaks. Iron is not always visible. Installation of water softener or an iron filter may be necessary for severe cases.

Using Detergent

Follow the detergent package directions. Using too little detergent is a common cause of laundry problems. Use more detergent if you have hard water, large loads, greasy or oily soils or lower water temperature.

We recommend the use of domestic detergent, (powder, liquid or concentrated). Soap flakes or granulated soap powders should not be used in your washing machine. When washing woolens remember to use detergent suitable for washing woolens.

Using Detergent

When you select a wash program the water level and the amount of detergent (to be used) will be shown on the control panel. The amount of a cup in the diagram is about 40g for concentrated detergent.

The correct amount of detergent will vary depending on the amount of soil in your clothes (Jeans and work cloches may need more detergent, while bath towels usually need less.).

For liquid and concentrated detergents, follow the recommendations of the detergent manufacturer.

Note: To check you are using the correct amount of detergent, lift the lid of your machine about half-way through the wash. There should be a thin layer of foam over the surface of the water. Lots of foam may look good, but it does not contribute to cleaning your clothes. No foam means not enough detergent has been used; soil and lint can settle back on the clothes or the washing machine.

If excess detergent is used, the rinse will not be as clean and efficient. Also, it could cause environmental pollution, so use it accordingly.

Open the detergent dispenser and deposit the appropriate Power amount of detergent Where you

where you deposit the detergent

Powder Detergent dispenser.

Some detergents MUST be fully dissolved before adding to your machine to get the best wash results.

Check the instructions on the detergent packet.

If you use powdered detergent it is essential that the required amount be fully dissolved in very hot water before being added to warm or hot water for the actual wash.

deposit the

detergent

Pre-dissolving detergent in warm water when washing in cold water can improve its performance.

Using Liquid Bleach

- Check clothing care label for special instructions and separate the laundry to be bleached
- Dilute liquid chlorine bleach.
- Measure the recommended amount of liquid bleach carefully following instructions on the bottle.
- Before starting the washer, pour measured amount of bleach directly into bleach dispenser. Avoid splashing or overfilling. Powdered bleach should be mixed with water before pouring.

Bleach dispenser



Powder Detergent / Fabric Softener dispenser.

Attention

- Never pour undiluted liquid bleach directly onto clothes or into the wash basket. This may cause change of color or damage the laundry.
- Do not mix chlorine bleach with ammonia or acids such as vinegar and/or rust remover. Mixing can reduce a toxic gas which may cause death.
- Do not pour powdered bleach into bleach dispenser.

U

se of Water, Detergent, Bleach and Softener


Using Fabric Softener

- Do not use concentrated fabric softener. This may cause some problems in automatic dispensing.
- For more details refer to the softener products instructions for use.



- Don't use softener with detergent. Use softener in last rinse water
- When using dispenser, dilute softener (30ml) with fresh water (30ml)
- When filling dispenser, do not splash or overfill. It may stain clothes.
- Never pour fabric softener directly on clothes. It may stain them
- If spotting occurs, wet and rub with hand dishwashing liquid (or mild bar soap) and rewash.

Powder Detergent / Fabric Softener dispenser.

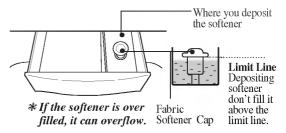

Note

Fabric Softener will be inserted automatically during the final rinse and the machine gives on alarm sound. When water pressure is low, the softener may have to be inserted manually.

Scrud(Waxy Build up)

Scrud is the name given to the waxy build-up that can occur within any washer when the fabric softener comes into contact with detergent. This build-up is not brought about by a fault in the machine.

If scrud is allowed to build-up in the machine it can result in stains on your clothes or an unpleasant smell in your washer.



If you wish to use fabric softener we recommend

- Using fabric softener sparingly.
- When filling the dispenser, do not splash or overfill.
- Clean dispenser as soon as the cycle is finished.
- Clean your machine regularly. (refer to page 30)
- Cold water washing increases the chance of this build-up occurring. We recommend a regular warm or hot wash e.g. every 5th wash should be at least a warm one.
- Fabric softener of thinner consistency is less likely to leave residue on the dispenser and contribute to a build-up.

<u>pecial Guide for Stain Removal</u>

- Do not use or mix liquid chlorine bleach with other household chemicals such as toilet cleaners, rust removers, acid or products containing ammonia. These mixtures can produce dangerous fumes which can cause serious injury or death.
- To reduce the risk of fire or serious injury to persons or property, comply with the basic warnings listed below:
 - Read and comply with all instructions on stain removal products.
 - Keep stain removal products in their original labeled containers and out of children's reach.
 - · Thoroughly wash any utensil used.
 - Do not combine stain removal products, especially ammonia and chlorine bleach. Dangerous fumes may result.
 - Never wash items which have been previously cleaned in, washed in, soaked in or spotted with gasoline, dry cleaning solvents or other flammable or explosive substances because they give off vapors that could ignite or explode.
 - Never use highly flammable solvents, such as gasoline, inside the home. Vapors can explode on contact with flames or sparks.

For successful stain removal:

- Remove stains promptly.
- Determine the kind of stain, then follow the recommended treatment in the stain removal chart below.
- To pretreat stains, use a prewash product, liquid detergent, or a paste made from granular detergent and water.
- Use cold water on unknown stains because hot water can set stains.
- Check care label instructions for treatments to avoid on specific fabrics.
- Check for colorfastness by testing stain remover on an inside seam.
- Rinse and wash items after stain removal.



Follow fabric care label instructions

Stain Removal		
STAIN	TREATMENT	
Adhesive tape, chewing gum, rubber cement	Apply ice. Scrape off excess. Place stain face down on paper towels. Saturate with prewash stain remover or nonflammable dry cleaning fluid.	
Baby formula, dairy products, egg	Use product containing enzymes to pretreat or soak stains.	
Beverages (coffee, tea, soda, juice, alcoholic beverages)	Pretreat stain. Wash using cold water and bleach safe for fabric.	
Blood	Rinse with cold water. Rub with bar soap. Or pretreat or soak with product containing enzymes. Wash using bleach safe for fabric.	
Candle wax, crayon	Scrape off surface wax. Place stain face down between paper towels. Press with warm iron until wax is absorbed. Replace paper towels frequently. Treat remaining stain with prewash stain remover or nonflammable dry cleaning fluid. Hand wash to remove solvent. Wash using bleach safe for fabric.	
Chocolate	Pretreat or soak in warm water using product containing enzymes. Wash using bleach safe for fabric.	
Collar or cuff soil, cosmetics	Pretreat with prewash stain remover or rub with bar soap.	
Dye transfer on white fabric	Use packaged color remover. Wash using bleach safe for fabric.	
Grass	Pretreat or soak in warm water using product containing enzymes. Wash using bleach safe for fabric.	
Grease, oil, tar (butter, fats, salad dressing, cooking oils, car grease, motor oils)	Scrape residue from fabric. Pretreat. Wash using hottest water safe for fabric. For heavy stains and tar, apply nonflammable dry cleaning fluid to back of stain. Replace towels under stain frequently. Rinse throughly. Wash using hottest water safe for fabric.	
Ink	Some inks may be impossible to remove. Washing may set some inks. Use prewash stain remover, denatured alcohol or nonflammable dry cleaning fluid.	
Mildew, scorch	Wash with chlorine bleach if safe for fabric. Or, soak in oxygen bleach and hot water before washing. Badly mildewed fabrics may be permanently damaged.	
Mud	Brush off dry mud. Pretreat or soak with product containing enzymes.	
Mustard, tomato	Pretreat with prewash stain remover. Wash using bleach safe for fabric.	
Nail polish	May be impossible to remove. Place stain face down on paper towels. Apply nail polish remover to back of stain. Repeat, replacing paper towels frequently. Do not use on acetate fabrics.	
Paint, varnish	WATER BASED: Rinse fabric in cool water while stain is wet. Wash. Once paint is dry, it cannot be removed, OIL BASED AND VARNISH: Use solvent recommended on can label. Rinse throughly before washing.	
Rust, brown or yellow discoloration	For spots, use rust remover safe for fabric. For discoloration of an entire load, use phosphate detergent and nonchlorine bleach. Do not use chlorine bleach because it may intensify discoloration.	
Shoe polish	LIQUID: Pretreat with a paste of granular detergent and water. PASTE: Scrape residue from fabric. Pretreat with prewash stain remover or nonflammable dry cleaning fluid. Rub detergent into dampened area, Wash using bleach safe for fabric.	

Time left, Delay start (Reservation), Alarm indication

Time left - During operation, the remaining time is indicated, and while paused, the washing time, rinsing time, and spin time is indicated. For example, while washing, "1:09" indicates the time combined remaining for wash, rinse, and spin cycles. When paused, [5m2τ5m] indicates a wash time of 15minutes, 2 Rinse times, and 6 minute spin time.

Delay start (Reservation) indication - When Delay start (Reservation) program is selected, it indicates for the finishing time. (RES. = DELAY)

Alarm indication - When an error occurs, an error message appears to indicate the abnormality. For example, indicates that the lid is open.

Water temperature button

• Use to select water temperature. Pressing button allows you to s warm (Hot&Cold), Ho Cold respectively. De setting is Cold.

Delay start (Reservation) button

• Use to set a delayed finishing time. The time increases when the button is pushed. (refer to page 19)

Water level button (indication of detergent amount)

- •Use to adjust the water level as required. The appropriate amount of detergent is shown next to the water level in the WATER-DETERGENT diagram
- •Water level is automatically selected for fuzzy normal and jean programs.

The following settings are indicated as the button is pushed LARGE <N LARGE, EX-LARGE <N EX-LARGE <N SMALL <N SMALL, MEDIUM <NMEDIUM, LARGE <N LARGE

Wash power button

WATER

TEMP.

• This button allows you to select the strength of the water current.

WATER

LEVEL

WASH

POWER

WASH

- Power option selections light up in sequence as follows NORMAL <N STRONG <N GENTLE <N NORMAL as the button is pushed. This can be selected for any program, but when washing jeans, it starts with Strong.
- · Adjustment can be made while washing.

The control panel may differ according to different models.

Washing progress Indicator

- The cycle name is to show the washing progress.
- The light turns on for the process to be progressed, flickers during cycle operation, and it turns off automatically at the cycle's completion.

Program button

- Use for selecting wash program.
- This button allows you to select 6 different programs for different kinds of laundry and dirtiness.
- Program selections light up in sequence as follows: FUZZY (NORMAL) <N BLANKET <N ECONOMY <N JEAN <N WOOL <N HOME DRY <N FUZZY (NORMAL), by pressing the button.

AUTO OFF (Power) button

- Use to turn the power on or off.
- Push again and power goes on or off.
- The power goes off automatically for about 10 seconds after the wash is finished.

ASH RINSE SPIN PRO-GRAM

Start/ Pause button

- Use to start or pause the washing process.
- Repeats start and pause by pushing the button.
- The power goes off automatically 10 minutes after stopping.

Child lock function

- Use to lock or unlock the control buttons to prevent settings from being changed by a child.
- To lock, push wash, rinse buttons simultaneously and to unlocking push them one more time during the washing process.

(refer to page22)

Wash. Rinse. Spin button

- Use when wash, rinse, spin time need to be adjusted.
- The time increases when the button is pressed .
- If adjustments are needed during the wash, press the [start/pause] button before making any changes.
- When the button is pressed during washing, the remaining time is displayed. (*refer to page20, 21*)

i The figure within arrow is processing order manually.

Washing Programs	AUTO OFF	Add the laundry	PRO- GRAM	PRO- CESS	Add the detergent	
Fuzzy Washing (Normal Wash) Used for normal loads, this mode automatically selects the most appropriate conditions and completes the sequence in one operation. The built-in sensor detects the size of the load and the ideal wash power and wash, rinse and spin times are set accordingly.					; Add the appropriate quantity of detergent as indicated by the water level next to WATER-DETERGENT. Or follow the detergent manufacturer's Instructions	
Jean Wash Use jeans program when washing heavy, thick, and extremely dirty laundry such as jeans and work outfits.			; /Select the Jean program on the Control panel.			
Blanket Wash Blankets of different size can be easily washed.			; Select the Blanket program on the Control panel.		6	
Wool Wash Use this program for washing delicate fabrics such as lingerie and woolens. (wash only "water washable" clothes) Before washing your woolens check the care label for the washing instructions. (wash only water washable clothes)			; Æelect the Wool program on the Control panel.		i /Use neutral detergent appropriate for the laundry. i /When washing woolens use a mild detergent recommended for washing wool.	

START	Close the lid	Finish		Caution 8	& Note
; /The pulsator rotates for 8 seconds to detect the laundry load. ; /Then the water level and the amount of detergent to be used will be shown and water will be supplied.	; /Water will be supplied for 2 minutesafter the start of the wash to supplement the water the laundry has absorbed.	When the wash program ends, the buzzer will ring for 10 seconds before the Power goesoff automatically.	i /If water is already in the tub, or putting wet laundry into the tub before starting will increase the water level. i /With light weight bulky, water level can be set low. i /Changes to water temperature (hot/cold) and wash level are possible during operation. (refer to page 12)		water level. evel can be set low.
			; /Before startii	100% chemical fiber with the	what the laundry iswashable. Weight: the weight of sheet is under 5.0kg
			Possible Laundry	hand-wash tag 100% Polyester with the hand-wash tag	Blanket Stuffing: Weight about 2kg (total weight of blanket 3.5kg) Sze: under approx. 2m(width) ; ¿ 2.5m(breadth)
			them floating Water may	g out of the tub. splash out when wash	carpets mere blankets to prevent ning light laundry, such as a th water set at high level.
			to preven ¡ /Washing to cold au ¡ /To dry we shape. Do action of garments ¡ /In order to some wa	t damage to laundry. with hot water may d utomatically). Ensure tl coolenslay down them ry woolens out of dire a dryer may cause shr s) o avoid damage to lau salso avoids wrinkles ter. This is normal.	anually, do not set to MEDIUM amage the laundry (Water is set hat the load is under 2kg. If lat on a towel and pat into ct sunlight. (The heat and tumble inkage or felting of woolen undry, the spin cycle may appear and clothing may still contain for the Wool Wash program.

Home dry is a special wash program for delicate items such as wool . Use this program for clothes that have [Hand Wash and Dry] or [Water Wash and Dry] tags. For home dry, amount of and laundry must be less than 1.2kg at a time.

Press the AUTO OFF (Power) button to turn power on.



Press the **PROGRAM** button to select **HOMEDRY**.



• Select the **HOME DRY** program on the Control panel.

Add the detergent.

• The appropriate quantity of detergent marked next to the water level of WATER-DETERGENT.

Add the laundry and press the **START/PAUSE** button.



- *3 Rinse cycle will be automatically selected.
- The water level and the amount of detergent to be used will be shown and water will be supplied.

Close the lid.

• Water will supplied for 2 minutes after the start of the wash to supplement the water the laundry has absorbed.

Finish

When the wash program ends, the buzzer will ring for 10seconds before the Power goes off automatically.

Attention

- Use only neutral detergent or the detergent for dry cleaning
- Use this program for garments with 'Hand Wash and 'dry Clearable' tags. Do not wash 'Dry Clean' only garment.
- Unwashable laundries : Silk, Leather garments, Rayon, Easily discolored garments and ties.
- Only Cold water is set (water temperature must be below 30°C)

Use this mode when washing lightly soilded clothes for a short time. The weight should be under 3.0kg.


Press the **POWER** button to turn power on.



Press the **PROGRAM** button to select **ECONOMY**.



• Select the ECONOMY program on the Control panel.



• The appropriate quantity of detergent marked next to the water level of WATER-DETERGENT.

Add the laundry and press the START/PAUSE button.



• The water level and the amount of detergent to be used will be shown and water will be supplied.

Close the lid.

• Water will be supplied for 2 minutes after the start of the wash to supplement the the laundry has absorbed.

Finish

When the wash program ends the buzzer will ring for 10seconds before the Power goes off automatically.

Use this mode for washing excessively dirty laundry by soaking in water for some time to remove proteins and fats;fSOAK;fImode can be used with all washing programs simultaneously except for WOOL and HOME DRY program.

Press the AUTO OFF (Power) button to turn power on.



Press the **PROGRAM** button to select the washing program.



• The SOAK will not work in WOOL and HOME DRY cleaning Program.

Press the WASH button, to select SOAK program.



• Keep pressing the WASH button until the light turns on; fSoak; fInd; fiWash; fl simultaneously as next image.



• SOAK program only works when socking time is 40, 60 or 90 minutes.

Add the detergent.

• The appropriate quantity of detergent marked next to the water level of WATER-DETERGENT.

Add the laundry and press the START/PAUSE button.



• The water level and the amount of detergent to be used will be shown and water will be supplied.

Close the lid.

• Water will be supplied for 2 minutes after the start of the wash to supplement the absorbed water by the laundry.

Finish

When the wash program ends, the buzzer will ring for 10seconds before the Power goes off automatically.

Note

Order of Soak-Wash timing



- Select soaking time 40minutes, 60minutes, or 90minutes (including washing time) by pressing the Wash button repeatedly.
- If necessary, select the times of Rinse and the time for Spinning by pressing the Rinse or Spin buttons till you reach the desired times.

elay start (Reservation) Wash

Delay start (Reservation) Wash is used to delay the finishing time of the operation. The hours to be delayed can be set by the user accordingly.

The time on the display is the finishing time, not the start time.

Press the AUTO OFF (Power) button to turn power on.



Press the **PROGRAM** button to select the washing program.



• Select the program for laundry on the Control panel. This method will not work in Wool Program.

Press the **DELAY START** (**RESERVATION**) button.



• The light will 'DELAY' turn on and 'TIME LEFT' will be marked.

• Press the button repeatedly to set the desired finishing time. For example, To finish washing in 9 hours from now, by make the number 9:00 pressing the **DELAY START** (**RESERVATION**) button repeatedly.

(RES.=DELAY)



Add the detergent.

- The appropriate quantity of detergent marked next to the water level of WATER-DETERGENT.
- When the lid is open the machine will not operate, and an alarm signal will remind you to close the lid.

Add the laundry and press the START/PAUSE button.



• When you press the START/PAUSE button the light will blink and the time will be shown.

Close the lid.

• Water will be supplied for 2 minutes after the start of the wash to supplement the water the laundry has absorbed.

Finish

The washing will be finished according to the delayed time.

- Finishing time can be delayed from 3~48 hours. Delaying from3~12 hours can be done in 1 hour time intervals and from 12~48 hours in 2 hour time intervals.
- If the lid is open, the machine will not work, and an alarm signal will alarm to remind you to close the lid.
- To select washing time, rinsing times, spinning time, water level, hot/cold or wash power manually, press the DELAY START (RESERVATION) button and select the desired option. Then press the START/PAUSE button.
- When the laundry cannot be taken out immediately after the wash program ends, it is better to omit the spinning program. (The laundry will be wrinkled if left for a long time after spinning.)

When you only need the Wash, Wash/Rinse or Rinse cycles, these can be set manually.

Press the **AUTO OFF** (Power) button to turn power on.



Only Wash	Only Wash,Rinse	
Press the WASH button to select the desired timing. (refer to page 13) WASH	Press the WASH button to select the desired timing. (refer to page 13) Press the RINSE button to select the desired times of rinse. (refer to page 13) You can use this option for preventing wrinkles of laundry	
Press the WATER LEVEL button, to control the water level according to the		

Press the **WATER LEVEL** button, to control the water level according to the amount of laundry. If you do not choose anything, it is set the middle water level automatically. (refer to page 12)

- Add the laundry into the washing tub.
 - Press the **START/PAUSE** button.



Add the detergent and close the lid.

Press the AUTO OFF (Power) button to turn power on.



Only Rinse	Only Rinse,Spin	Only Spin/Only drain	
Press the RINSE button to select the desired times of rinse. (refer to page 13)	Press the RINSE button to select the desired times of rinse. (refer to page 13) Press the SPIN button to select the desired times of rinse. (refer to page 13) SPIN	Press the SPIN button to select the desired times of rinse. (refer to page 13) When you want to only drain, wait until the water in the washing tub drains	
	button to control the water ount of laundry. (refer to page 12)	completely.	

Add the laundry into the washing tub.

Press the START/PAUSE button.



Add the detergent and close the lid.

- When a Wash, Wash/Rinse or Rinse only option is selected, after the wash is completed the water will not be drained off. If you wish to drain the water, press SPIN button and wait until the water in the tub has drained completely. Then press the START/PAUSE button.
- If you do not specify the water level, then Medium will be automatically selected.
- If only Rinse is selected, the process will start from Water Supply.

Child Lock Function

If you want to lock all the keys to prevent all the setting from being changed by a child, you can use the child lock option.

How to Lock

Press the AUTO OFF(Power) button.



• Turn Power on.

Press the START/PAUSE button to start washing.



• After all washing conditions are set according to the manual.

Press both the WASH button and the RINSE button simultaneously.





 During the wash program, all the buttons are locked until washing is completed or it is child-lock function is deactivated manually.

How to Unlock

If you want to unlock during wash, press both the WASH and the RINSE button simultaneously again.

• " [L" & the remaining time are alternatively shown on the display while they are locked.

Mute Option

If you want to use the washing machine without alarm signal sounds, press both the **WASH** and **SPIN** buttons simultaneously.

To make buzzer work, press both the **WASH** and **SPIN** buttons simultaneously one more time.

Seeing Remaining Time

To see the remaining time for each process, press one of the **WASH**, **RINSE** and **SPIN** buttons. The remaining time for each process will appear for about 1 second.

Auto Restart


Although the machine will not work during a power failure or if power is interrupted, when power is resumed, it will start again automatically from the point in the cycle when it stopped.

; Applied models: WF-T1001TE(F) WF-T1061TE(F)

Place the machine on a flat and firm surface which allows proper clearance.


We suggest a minimum clearance of 2cm to the right side and left sides of the machine for ease of installation.

At the rear, a minimum clearance of 10cm is suggested.




Check that the machine is level

Open the lid and look from above to see if it is same as shown. Check that the bubble of the level indicator is placed in the center.



Leveling the machine

Lift the front of the washing machine and twist the Adjustable Leg until the surface bubble is placed in the center.



If the appliance is supplied from a cord extension set or generator, the cord extension set or electrical portable outlet device should be positioned so that it is not exposed to splashing or ingress of moisture.



onnecting Water Supply Hose

- Before connecting the Water Supply Hose to the water tap, check the hose type and then choose the correct instruction here under.
 - Note that the Water Supply Hose supplied may vary from country to country, Make sure to connect the blue inlet hose to the cold water tap, and the orange inlet hose to the hot water tap.
- Washing machine is to be connected to the water mains using new hose sets and that old hose sets should not be reused.

Connecting Water Supply Hose to water tap




(Normal tap without thread & screw type inlet hose.)



Untighten the screw

Untighten the screw of the connector so that the tap can be placed in the middle.





Fixing the connector to the tap


Push the upper connector up till the rubber packing is in tight contact with the tap. Then tighten the 4 screws.





Attach the water supply hose connects securely to the connector


Push the water supply hose vertically upwards so that the rubber seal within the hose can adhere completely to the tap.





Fixing the connector to the water supply hose

Attach the water supply hose to the connector and then tighten it by screwing it to the right.





Check the connection of water supply hose and the connector

After connecting the hose, open the tap to check for any water leakage.

If the connection leaks, close the tap and start


again from step 1



(Normal tap without thread & one touch type inlet hose.)

Separate Middle connector from Water Supply Hose

Separate Middle connector from the Water Supply Hose by pulling the Pressing Rod and the Pressing Handle that is attached to the Water Supply Hose while pressing them.



Fixed Sticker Pressing Handle Pressing Rod

Water Supply Hose

Loosen the fixed nuts to connect the connector to the tap

Untighten the screw of the connector so that the tap can be placed in the middle.




Rubber packing screw

Fixed sticker


In case the tap is too large.

If the tap diameter is too large or is square, untighten the 4 screws and remove the guide plate.




Fixing Connectors to the Tap

Push the upper connector up till the rubber packing is in tight contact with the tap. Then tighten the 4 screws.




Fixing Upper Connector and Middle Connector

Remove the fixed sticker in between the Upper and Middle Connectors. Tighten the connectors by holding one connector and twist middle connector to the right.



Connecting Middle Connector and Water Supply Hose

Press down the pressing rod of the Water Supply Hose which was separated from middle connector(refer to Step1) and then join it to the middle connector.



Check for the water leakage

After connecting the hose, open the tap to check for any water leakage.

If the connection leaks, close the tap and start again from step 1.


If you skip step1, Water leakage may occur.



onnecting Water Supply Hose

Attach the water supply hose to the tap.

Push the water supply hose up so that the rubber packing within the hose can adhere completely to the tap.



Connect the water supply hose to the tap.

Connect the water supply hose to the tap and then tighten it by screwing it to the right.



Check water leakage.


After connecting the hose, open the tap to check for any water leakage.



Connecting Water Supply Hose to the machine

Connect the water supply hose to inlet valve of the washing machine, and then lock it by turning the hose connecting part.

Check to see if there is a rubber seal inside the connector.



Before connecting Drain Hose, check your Drain Hose model and choose the correct instructions.


Fit the machine end of the drain hose to the outlet of the drain pump and tighten the clamp.



Put the other end of the drain hose over the standpipe or wash tub.

Fit the plastic holder into either holes for the holder at the rear of the machine.

The holder is possible to fit at either direction according to location of the standpipe. Make sure that the holder keeps firmly the drain hose so that the drain hose should not fall down.

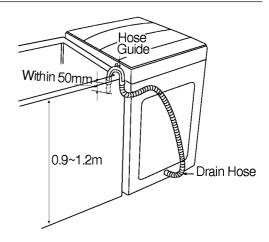


Note

- To prevent siphoning, the drain hose should not extend more than 50mm from the end of the hose guide.
- The discharge height should be approximately $0.9 \sim 1.2$ m from the floor.

None Pump Model

Before connecting

Ensure that the hose clip is set as indicted here.




Connect the ∃bow Hose

Push the elbow hose toward the body of the washing machine.



Place the Drain Hose

To change the direction of the hose, pull out the elbow hose and change the direction. Repeat Step2.




Earth wire should be connected.

If the earth wire is not connected, there is possible danger of electric shock caused by the current leakage.


Grounding Method with Ground insert space Terminal

If the AC current outlet has a ground terminal, then separate grounding is not required. Note that AC power outlet configurations may differ from country to country.




Other Grounding Method

Connect the Ground Wire to a Ground Copper Plate and bury it more than 75cm in the ground.




Connect the ground Wire to the socket provided exclusively for Grounding.



Using Short Circuit Breaker


Using a Circuit Breaker and If grounding methods described above are not possible, a separate circuit breaker should be employed and installed by a qualified electrician.



- To prevent a possible explosion, do not connect ground to a gas pipe.
- Do not connect ground to telephone wires or lightning rods. This may be dangerous during electrical storms..
- Connecting ground to plastic has no effect.
- Ground wires should be connected when an extension cord is used.

When water supply into the tub is not clean or the filter is clogged with particles(such as sands...), clean the filter in the inlet valve occasionally. The figure of power cord and water tap may vary according to the country.

To Clean the Filter in the Inlet Valve




Select both hot/cold and then press the [START/PAUSE] button to remove water from the machine completely.



Turn off the power before pulling out the cord.




After removing the water supply hose pull out the filter. Then use a brush to clean the filter.



Replace the filter after cleaning it.

• Before cleaning the filter, the impurities in the water supply hose should be removed.

To Clean the Lint Filter





Turn the net inside out to clean the filter and rinse it with water.




Replace- the filter to the original location. Push the lip of the filter until a pop sound is heard.



Note

• If the lint filter is torn or damaged, purchase a new one from LG service center.

To Clean the Pump casing (for pump model)





Turn the cap as shown in diagram and unfasten it. Remove foreign objects such as pin, button, coin,



(Bottom view)

Reassemble the cap to the arrow direction and fasten it.



(Bottom view)

Self-cleaning function(for pump model)

In the initial stage of every washing machine process, the drain pump works for 3~5 seconds to pump out water with dirt from the washing tub. It helps to keep the wash tub clean and improve pumping ability.

leaning and Maintenance

When there is a fear of freezing

- Close the water taps and remove the Water Supply Hose.
- Remove the water which remains in the water supply.
- Lower the drain hose and drain the water in the bowl and the drain hose by spinning.
- Remove the water supply hose, and immerse it in hot water at approx.. 40°C.
- Pour approx.. 2 liters of hot water at approx.. 40°C, into the bowl and let it stand for 10 minutes.
- Connect the water supply hose to the water tap and confirm that the washing machine performs the supply and drainage of water.

Wash Inner-tub Leave the lid open after washing to allow moisture to evaporate. If you want to clean

the inner-tub use a clean soft cloth dampened with liquid detergent, then rinse. (Do

not use harsh or gritty cleaners.)

Inlet Hoses

Hoses connecting washer to faucet should be replaced every 5 years. Exterior

Immediately wipe off any spills. Wipe with damp cloth. Try not to hit surface with

sharp objects.

Long Vacations Be sure water supply is shut off at faucets. Drain all water from hoses if weather will

be below freezing.

Cleaning the Inside of your Washer

If you use fabric softener or do regular cold water washing, it is very important that you occasionally clean the inside of your washer.

- Fill your washer with hot water.
- Add about two cups of a powdered detergent that contains phosphate.
- Let it operate for several minutes.
- Stop the washer, open the lid and leave it to soak overnight.
- After soaking, drain the washer and run it through a normal cycle.

We do not recommend that you wash clothes during this procedure.

ommon washing problems

Many washing problems involve poor soil & stain removal, residues of lint and scum, and fabric damage. For satisfactory washing results, follow these instructions.

WASH PROBLEM

Problems	Possible Causes	Solutions & Preventive Measures
Poor soil removal	 Not enough detergent Wash water temperature too low. Overloading the washer Incorrect wash cycle Incorrect sorting Do not pretreat stain 	 Use correct amount of detergent for load size, amount of soil and water hardness. Use warm or hot water for normal soil. Different water temperature may be required according to soil type. (refer to page 8) Reduce load size. Wash with Jean or Soak(Turbo) & Jean wash cycle for heavy soiled laundry. Separate heavily soiled items from lightly soiled ones. Pretreat stain and heavy soil according to directions shown on page 7.
Blue Stains	 Undiluted fabric softener dispensed directly onto fabric 	 Rub the stain with bar soap. Wash. Do not overfill fabric softener dispenser and do not pour liquid fabric softener directly onto fabric. See page 10 for more instructions.
Black or gray marks on clothes	 A buildup caused by the interaction of fabric softener and detergent can flake off and mark clothes Not enough detergent 	 Keep the recommendations against Scrud(waxy buildup). (refer to scrud page10.) Use correct amount of detergent for load size, amount of soil and water hardness.
Yellow or brown rust stains	 Iron or manganese in water supply, water pipes, or water heater 	 To restore discolored load of whites, use rust remover safe for fabric. Install nonprecipitating water softener or an iron filter in your water supply system for an ongoing problem. Before washing, run water for a few minutes to clear lines.
Lint	Incorrect sortingTissues left in pocketOverloading the washer	 Wash lint givers eg towels, flannelette sheets, separately from lint collectors eg synthetic fabrics and remove tissues in pockets before wash. See page 7 for sorting and caring before loading. Do not overload the washer
Residue or detergent	Overloading the washerUndissolved detergentUse too much detergent	 Do not overload the washer. Some detergents need to be pre-dissolved, check the detergent instructions. Try pre-dissolving the detergent. Increase water temperature using hot water safe for fabric. Use proper amount of detergent.
Holes, tears, or snags	 Incorrect use of chlorine bleach. Unfastened zippers, hooks, buckles Ribs, tears and broken threads Overloading the washer Degradation of fabric 	 Never pour chlorine bleach directly on fabric. See page 9 for adding liquid bleach. Fasten zippers, hooks, and buckles. Remove objects in pockets. See page 7 for caring before loading. Do not overload the washer.

Before calling for service check the problem against the list belows.

Symptom	Error Message	Check up
Water Supply Failure		 Is the water tap shut off? Is the water supply cut off? Is the tap or water supply hose frozen? (refer to page 30) Is the water pressure low or is the filter of the inlet valve clogged with impurities? (refer to page 29) Is Hot/Cold selected to Hot when the hose connected is Cold? Is the Cold hose connected to Hot?
Drainage Failure		 Is the drain hose positioned correctly? Is the drain hose bent or placed too high? Is the internal part of the hose or drain pump (only pump model) clogged with impurities? Check if electric power has gone off.
Spin Failure		 Is the laundry evenly balanced? (refer to page 23) Is the washing machine placed on a flat surface? (refer to page 23)
Door(Lid) Open		• Is the lid closed?
Internal sensing failure		Please call your nearest LG Electronics Service Center for help.
Power failure	[AE]	
Overflow failure	[]F]	



Model	WF-T1001TH(P/E/F), WF-T1061TH(P/E/F)
Weight	47 kg
Size	625(W)x625(D)x1007(H)
Standard water level	94L
Water tab pressure	30 -800 kPa (0.3 -8 kgf /cm²)

emo



P/No.: 3828EA3003S