

OWNER'S MANUAL MODEL: LAC-M5510EK









Before connecting, operating or adjusting this product, please read this instruction booklet carefully and completely

RODUCTION

Table of Contents
Safety Precautions
Before Use
Front Panel
PREPARATION
Connections6-7
OPERATION
Basic Operation
Turning the unit on
Turning the unit off
Selecting a source
Adjusting the volume
SOUND Adjustment
RDS Operation10-1
RDS Display Options
RDS AF/REG FUNCTION
LOCAL/DX selection in EON-TA mode
RDS MODE Adjustment
Radio Operation
Listening the radio stations
Auto Search Memory
Storing and recalling broadcast frequencies

Оре	eration with Audio CD, MP3 Disc	13-14
	Playing an Audio CD and MP3 Disc	13-14
RE	FERENCE	
Tro	ubleshooting	15
Spe	ecifications	



Disposal of your old appliance

- When this crossed-out wheeled bin symbol is attached to a product it means the product is covered by the European Directive 2002/96/EC.
- 2. All electrical and electronic products should be disposed of separately from the municipal waste stream via designated collection facilities appointed by the government or the local authorities.
- 3. The correct disposal of your old appliance will help prevent potential negative consequences for the environment and human health.
- 4. For more detailed information about disposal of your old appliance, please contact your city office, waste disposal service or the shop where you purchased the product.





CAUTION






Warning: To reduce the risk of electric shock, do not remove the cover or back of this product. There are no user-serviceable parts inside. Refer servicing to qualified service personnel.



Warning: To reduce the risk of fire or electric shock, do not expose this product to dripping or splashing water, rain, or moisture.



Warning: Due to high temperature outside of the unit, please use the unit only installed in a car.

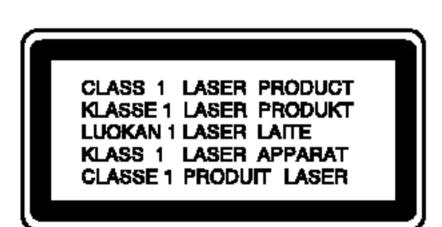



Caution: Protect this product from moisture.



Caution: If the battery is disconnected or discharged, the preset memory will be erased and must be reprogrammed.

CAUTION:

This unit employs a Laser System.

To ensure proper use of this product, please read this owner's manual carefully and retain for future reference should the unit require maintenance, contact an authorized service location (see service procedure).

Use of controls, adjustments, or the performance of procedures other than those specified herein may result in hazardous radiation exposure.

To prevent direct exposure to laser beam, do not try to open the enclosure. Visible laser radiation when open. DO NOT STARE INTO BEAM.



al carefully and retain for future reference.

Symbol Used in this Manual



The lightning flash symbol alerts you to the presence of dangerous voltage within the product enclosure that may constitute a risk of electric shock.



Indicates hazards likely to cause harm to the unit itself or other material damage.


NOTE

Indicates special notes and operating features.

Notes on Discs

Handling Discs

Do not touch the playback side of the disc. Hold the disc by the edges so that fingerprints do not get on the surface. Never stick paper or tape on the disc.

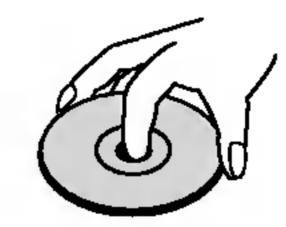



Storing Discs

After playing, store the disc in its case. Do not expose the disc to direct sunlight or sources of heat and never leave it in a parked car exposed to direct sunlight.


Cleaning Discs


Fingerprints and dust on the disc can cause poor picture quality and sound distortion. Before playing, clean the disc with a clean cloth. Wipe the disc from the center out.



Do not use strong solvents such as alcohol, benzine, thinner, commercially available cleaners, or anti-static spray intended for older vinyl records.

This unit cannot be operated by 8cm disc (using 12cm disc only).

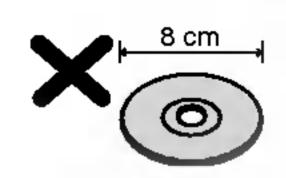

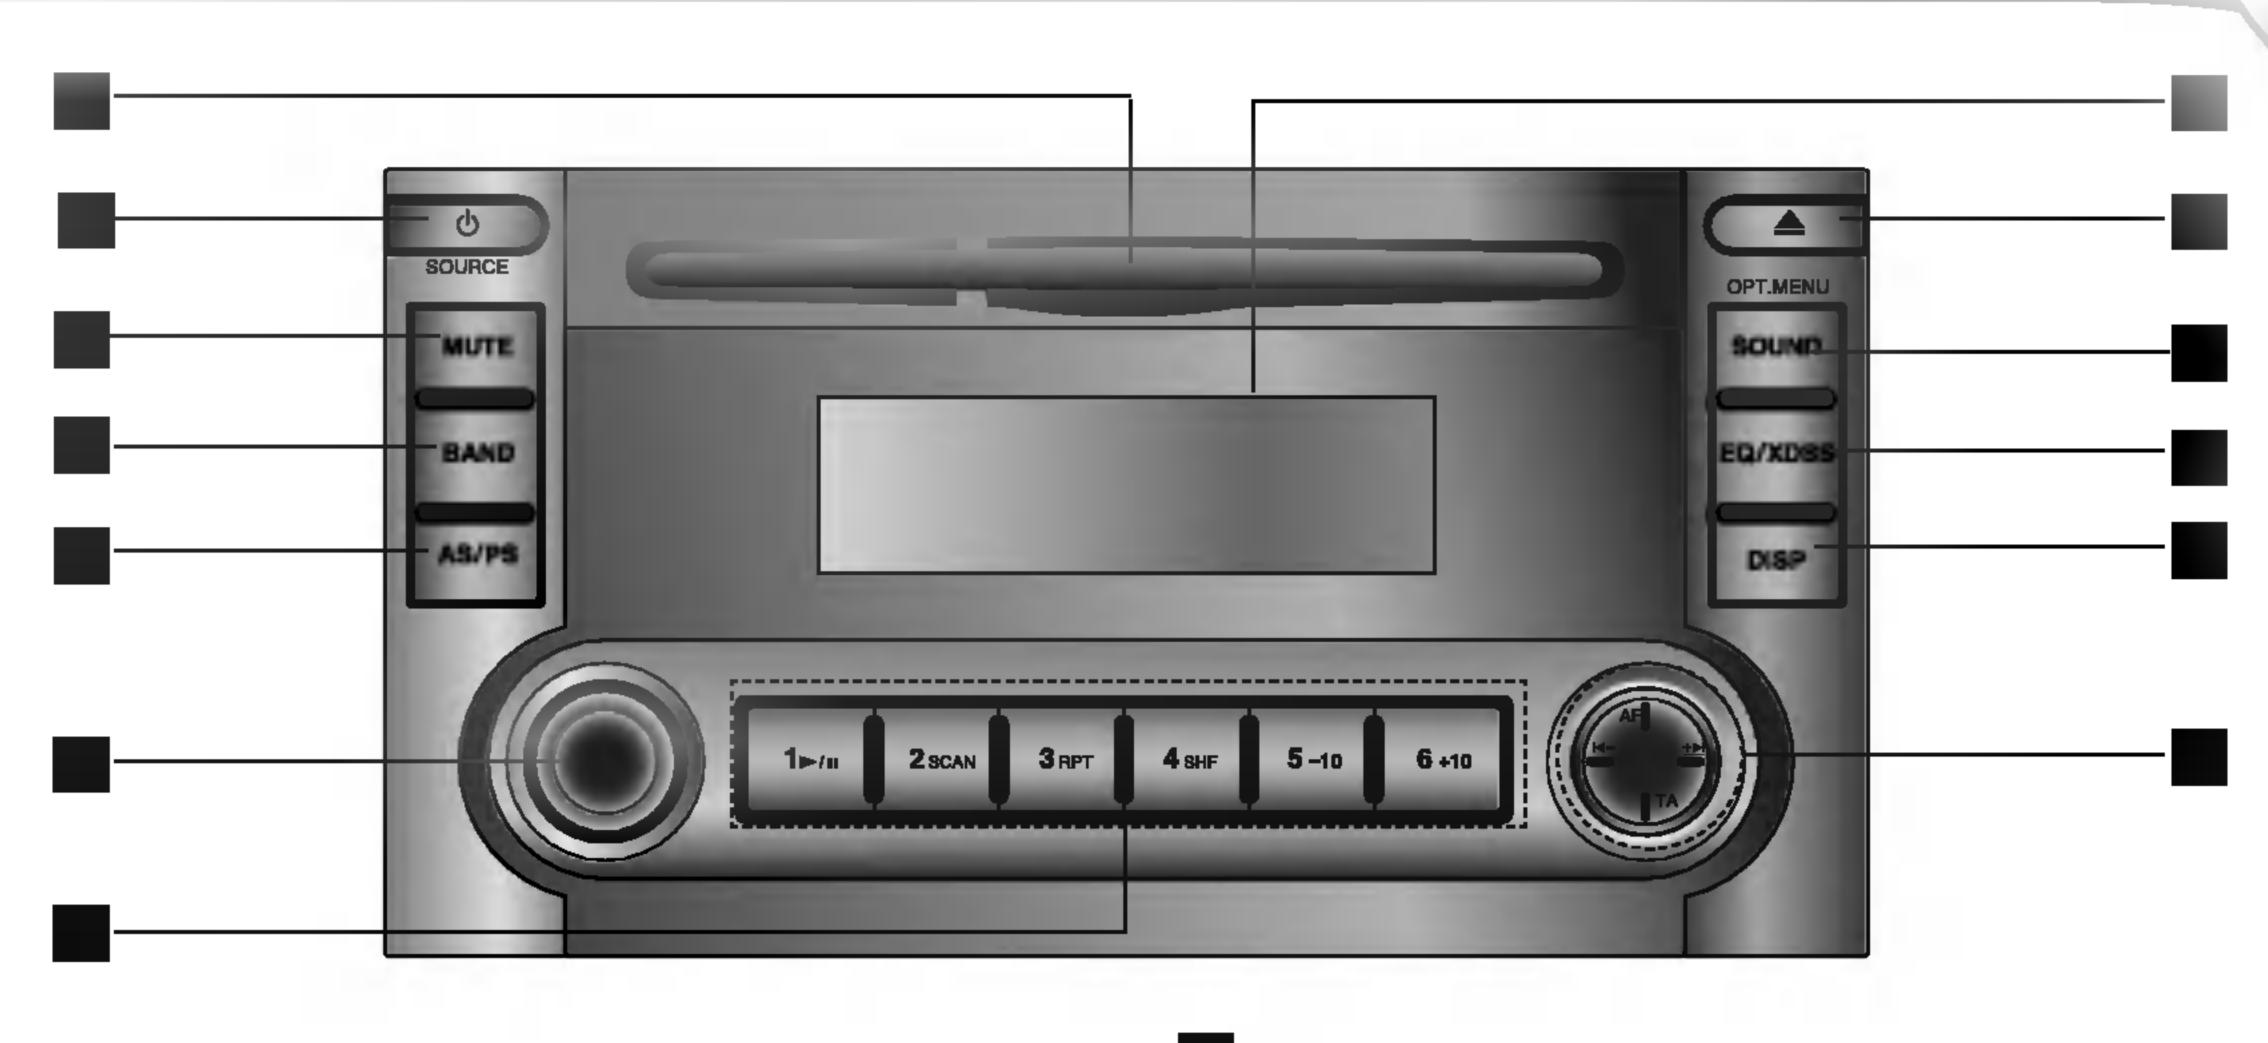


- CD disc slot
- POWER/SOURCE (🖰) button
- MUTE button
- BAND button
- AUTO STORE/PRESET SCAN (AS/PS) button
- VOLUME KNOB
 - CONTROL UP/DOWN dial
- Preset Station buttons. (1-6)
 - CD PLAY/PAUSE (1 ►/II) button
 - INTRO SCAN (2 SCAN) button
 - REPEAT (3 RPT) button
 - SHUFFLE (4 SHF) button
 - MP3 TRACK -/+10 (5 -10/ 6 +10) button

- ALTERNATIVE FREQUENCIES (AF) button
 - TA button
 - CD SKIP/SEARCH (► / ►) button
 - SEEK/TUNE (-/+) button
- DISPLAY (DISP) button
- EQUALIZER/XDSS (EQ/XDSS) button
- SOUND OPT.MENU button
- EJECT (♠) button
- DISPLAY WINDOW

paecting to Car

Before connecting, make sure that ignition switch is set to OFF, and remove the $\,\ominus\,$ terminal of the battery to avoid short circuits.

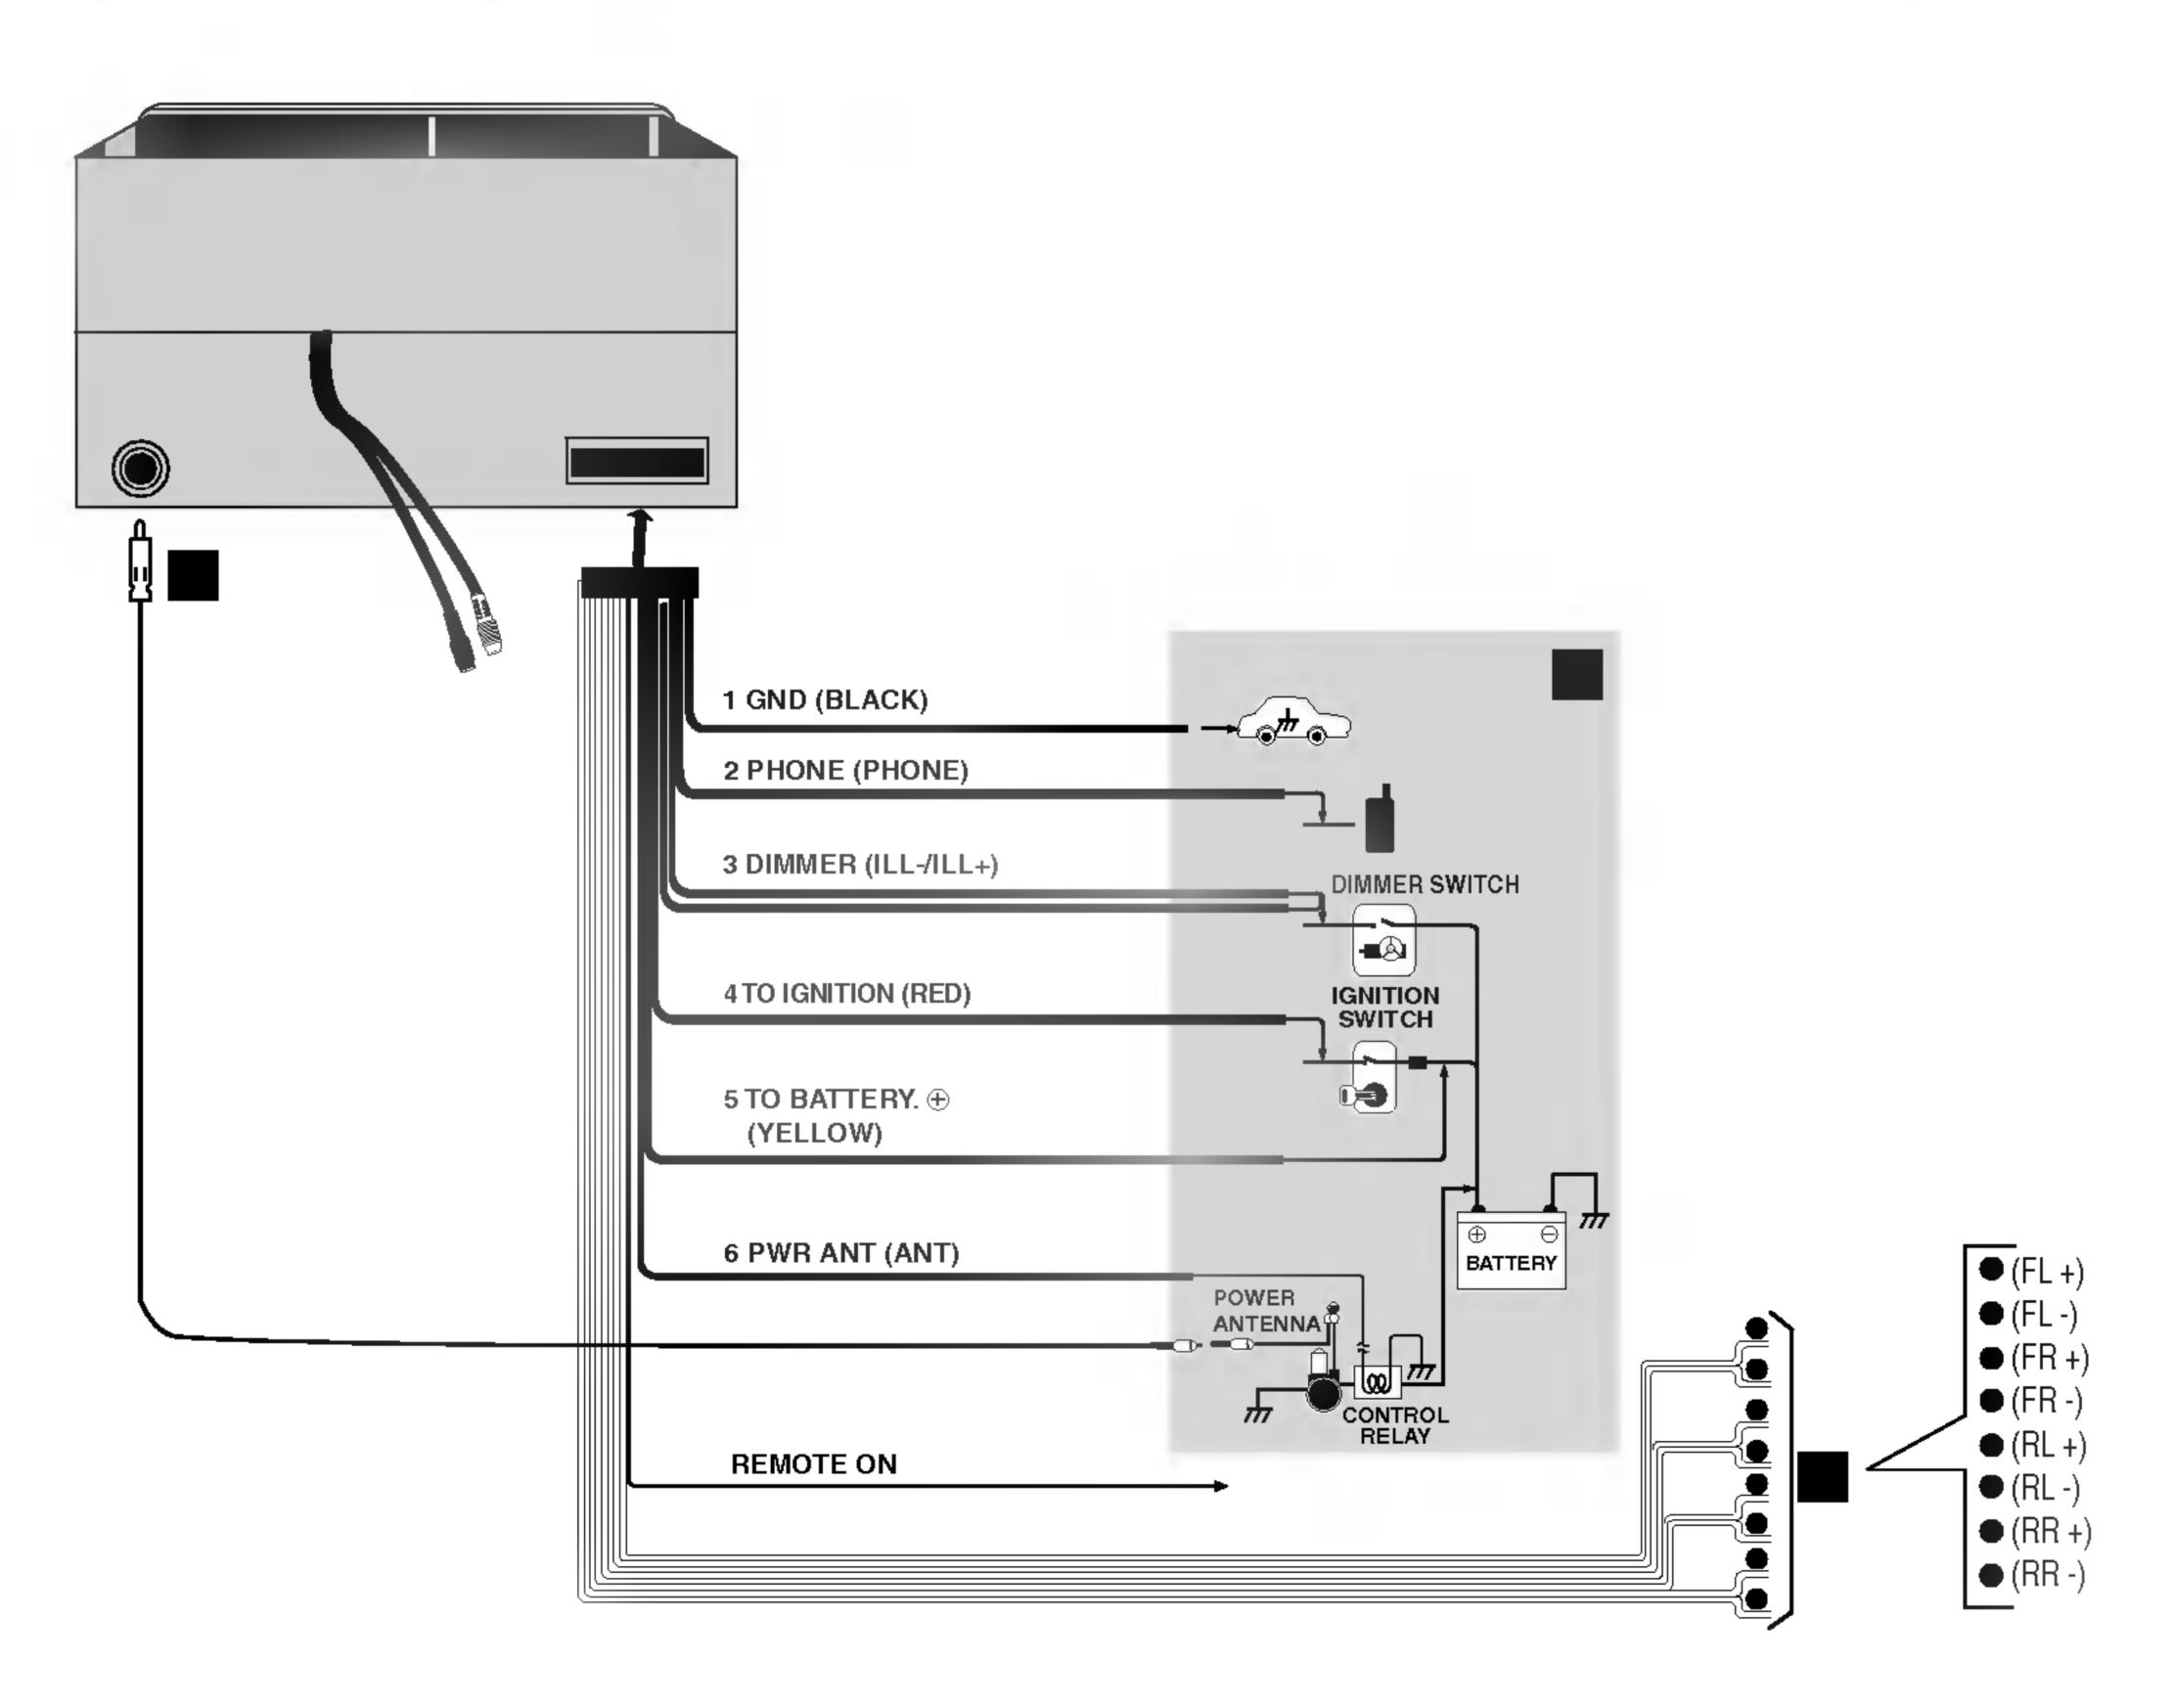

Connecting to Car

A From antenna

B To the wiring of vehicle Colors of leads

1 GND (BLACK): This lead is for connection to the Ground.

2 PHONE: This lead is for connection to the phone line.

3 ILL-/ILL+: This lead is for connection to the Dimmer line

4 ACC(RED): This lead is for connection to the terminal from which the power is supplied when the ignition


switch is set to ACC.

5 B+(YELLOW): This lead is for connection to the Battery

(back-up) terminal from which the power is always supplied.

6 ANT: This lead is for connection to the power antenna.


C Speaker Connections

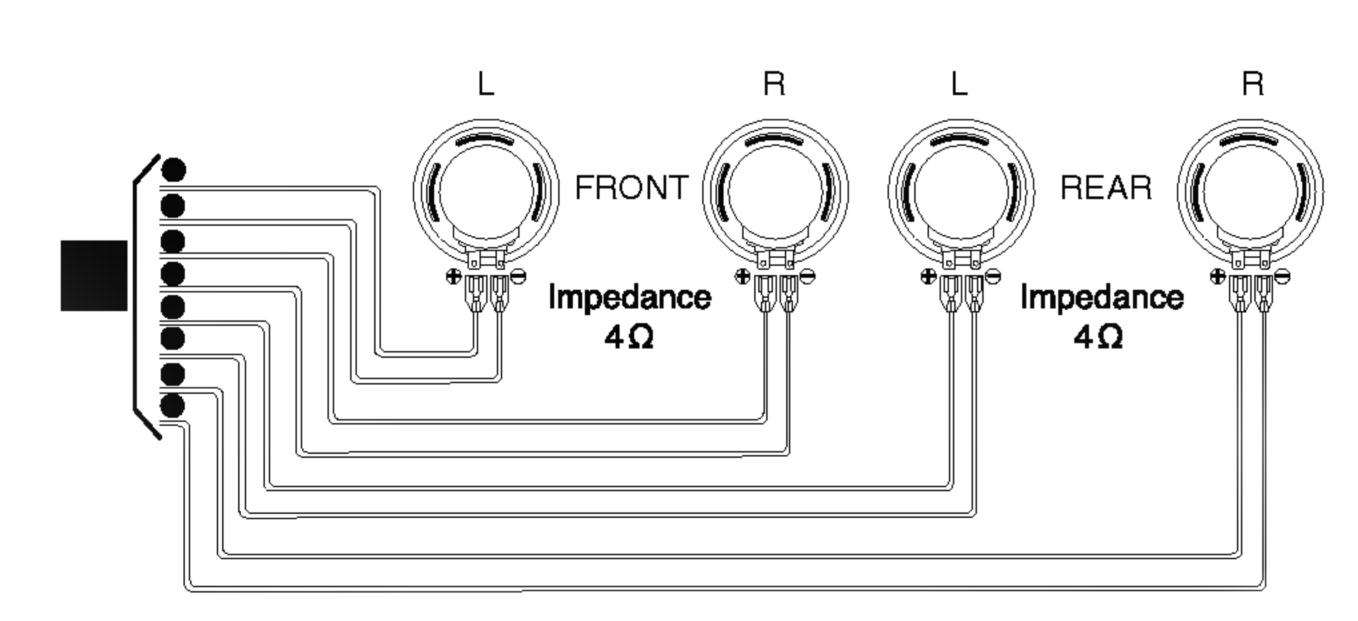

Connecting to Optional Equipment

You can use VCR or other unit connected to the AUX IN connector.

- Connect a VCR or auxiliary device, etc to the AUX IN connector.
- 2. Press POWER/SOURCE (心) button to select the AUX IN.

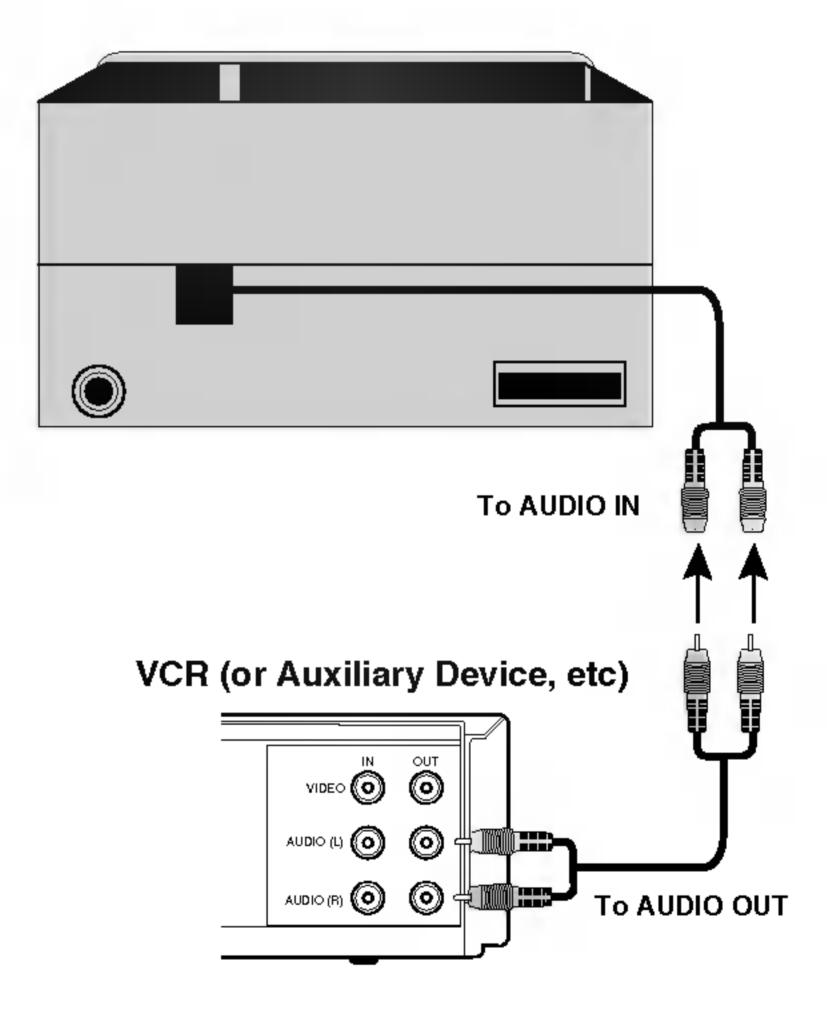

raing the unit on

Press POWER/SOURCE (心) or any other button on the front panel.

Turning the unit off

Press POWER/SOURCE (**b**) on the front panel for more than 1.2 second to turn the unit off.

Selecting a source

You can select a source you want to listen to.

Press POWER/SOURCE (心) to select a source.

Press POWER/SOURCE (心) repeatedly to switch between the following sources:

Tuner→ CD → AUX IN → Tuner...

NOTE

 When you turn off, the unit is memorized automatically the current volume level before you turn off. Whenever you turn on the unit, it will operate at the memorized volume level.

Adjusting the volume

Use VOLUME to adjust the sound level.
Rotate **VOLUME KNOB** on the front panel to increase or decrease the volume.

SOUND Adjustment

Using the EQ (Equalizer)

The equalizer lets you adjust the equalization to match car interior acoustic characteristics as desired.

There are 5 stored equalizer curves which you can easily recall at any time.

Here is a list of the equalizer curves:

- EQ POP: Reproduces the acoustics of pop music.
- EQ CLASSIC: Reproduces the acoustics of orchestral music.
- EQ ROCK: Reproduces the acoustics of rock music.
- EQ JAZZ: Reproduces the acoustics of jazz music.
- EQ VOCAL: Reproduces the acoustics of vocal music.
- 1. Press EQ/XDSS on the front panel to select the equalizer.
- 2. Press **EQ/XDSS** repeatedly to select among the following equalizer.

MUTE

- 1. Press **MUTE** to cut the sound.
- 2. To cancel it press **MUTE** again.(or any other button on the front panel.)

SOUND OPT.MENU

1. Press the **SOUND OPT.MENU** button repeatedly to select the mode you want to adjust from volume, bass, treble, balance and fader. The mode indicator lights up in the following order.

2. Turn left or right CONTROL UP/DOWN to adjust the sound quality.

	Turn right	Turn left
VOL	Increase the volume level.	Decrease the volume level.
BAS	Increase the bass level.	Decrease the bass level.
TRB	Increase the Treble level.	Decrease the Treble level.
BAL	Decrease the level of the left speaker(s).	Decrease the level of the right speaker(s).
FAD	Decrease the level of the front speaker(s).	Decrease the level of the rear speaker(s).

NOTE

The unit cannot adjust the bass and treble in the **EQ/XDSS** on mode.

XDSS (Extreme Dynamic Sound System)

XDSS ON: Press and hold EQ/XDSS button to reinforce treble, bass

and surround effect.

XDSS OFF: To cancel it press and hold EQ/XDSS again.

Display Options

name. Pressing **DISP** on the front panel enables you to cycle through the various data types in the sequence:

(FREQUENCY→PTY→RT→PS)

- PTY (Program type recognition)
- RT (Radio text recognition)
- PS (Program Service name)
- PI (Program Identification)
- AF (Alternative Frequencies for the actual program)
- TP (Traffic Program Identification)
- TA (Traffic Announcement Identification)
- EON (Enhanced Other Networks)

NOTES

• RDS is only available for FM reception.

RDS AF/REG FUNCTION

To switch on or off the AF function (Network-Tracking), shortly press the 'AF' button. To switch on or off the REG function (Regional Network Tracking), press the 'AF' button longer than 2 seconds.

LOCAL/DX selection in EON-TA mode

In the EON-TA mode, press the TA button for more than 2 seconds, causes only local and strong stations to be received. When TA button is pressed for more than 2 seconds, it receives all stations, including distant and weak ones. It is recommended to set TA button to the local position to receive local stations with good sound quality.

RDS MODE Adjustment

- Press the SOUND OPT.MENU button for more than 1.2 seconds it is activated selecting mode.
- 2. After, pressing **SOUND OPT.MENU** button one by one activated as selecting each mode.
- 3. Turn left or right CONTROL UP/DOWN to select the indicator.

TA SEEK mode

When the newly tuned station does not receive TP information 5 sec, the receiver retunes to next station which has no same PI as the last station's, but has the TP information.

TA ALARM mode

When a newly tuned station has no TP information for 5 sec, double beep sound is output.

PI SOUND mode

If the sound of a station with different PI is heard once in a while, the receiver mutes the sound after 1 second.

PI MUTE mode

If the situation described above is occurred, the receiver mutes the sound right now.

RETUNE L mode

The waiting time for starting TA search or PI search is selectable. Retune time is set to 90 seconds.

RETUNE S mode

The waiting time for starting TA search or PI search is selectable. Retune time is set to 30 seconds.

BEEP 2ND mode

The beep is only generated when key is pressed long (1 sec)

BEEP ALL mode

The beep is generated when every key is pressed.

tening the radio stations

- 1. Press POWER/SOURCE (心) button to turn the unit on.
- When you select a source the unit is turned on.
- 2. Press POWER/SOURCE (🖒) button to select the tuner.
- 3. Press BAND button to select a band.
 - Press **BAND** button until the desired band is displayed, FM1, FM2, FM3, MW(AM).
- 4. To perform seek tuning, press the ◄ -/+ ► with quick presses.
 - The tuner will scan the frequencies until a broadcast strong enough for good reception is found.
 - You can cancel seek tuning by pressing either the ► -/+ ► with quick presses.
- 5. To perform manual tuning, press and hold the ◄ -/+ ► on the remote control for 1 second. And then press the ◄ -/+ ► with quick presses.
 - The frequencies move up or down step by step.

NOTES

When the selected frequency is being broadcast in stereo, "((**)))" indicator will light.

Auto Search Memory

This function lets you automatically store the six strongest broadcast frequencies.

- 1. Press POWER/SOURCE (心) button to select the tuner.
- 2. Press AS/PS button on the front panel for about 1 second.
 - The scanning starts from the currently displayed frequency to higher frequencies and stops when 6 stations have been preset or the receivable frequencies have been scanned once.

NOTES

- The presetting is not performed if there is no station to be tuned in.
- When the automatic presetting is performed, the previous preset stations are automatically erased.
- To stop the automatic presetting, press BAND or AS/PS button.

To scan the preset stations

Press **AS/PS** button on the front panel. To stop the scanning, press **AS/PS** button.

To tune in the preset stations

Press BAND to select the desired band and press the desired number buttons (1-6) on the remote control.

The number of the preset station button is displayed and the preset station is received.

Storing and recalling broadcast frequencies

You can easily store up to six broadcast frequencies for later recall with the touch of a button.

- 1. Select the desired frequency
- 2. Press one of the **preset station** buttons (1 6) for more than 1 seconds. The number of the pressed preset station button is displayed.
- 3. Repeat steps 1 and 2 to preset other stations.

NOTES

- As F1, F2, F3 have the same frequency range, up to 18 station can be preset for FM.
- When a station is preset on the preset station button on which another station of the same band has already been preset, the previously preset station is automatically erased.

Playing an Audio CD and MP3 Disc

The unit can play MP3 formatted recordings on CD-ROM, CD-R or CD-RW discs.

Before playing MP3 recordings, read the notes on MP3 Recordings on page 16 (backcover page).

Pause •



- 1. Press PLAY/PAUSE (▶/Ⅱ) during playback.
- 2. To return to playback, press PLAY/PAUSE (▶/Ⅱ) again.


Moving to another Track



- track or to return to the beginning of the current track.
- Press the twice briefly to step back to the previous track. (If playing times is in less then 3 seconds and then this function is not operated.)

Search •

Press and hold the 🖊 -/+ 🔰 for about 1 second during playback and then release at the point you want.



The "RPT" appears in the display window. (It is played repeatedly the whole music within disc)

2. Press RPT again.

The "RPT" disappears in the display window. (The repeat mode is cancelled.)

Shuffle.

1. Press **SHF** during playback.

The "SHF" appears in the display window. (It is played randomly the whole music within disc)

2. Press **SHF** again.

The "SHF" disappears in the display window. (The random playback is cancelled.)

NOTE

MP3 TRACK -10/+10

Durning playback, press the -10 button to go back to the previous 10th track, and press +10 button to go forward to the next 10th track.

Intro scan

. Press **SCAN**.

The "SCAN" appears in the display window.
(It is played first 10 seconds of the whole music within disc)

2. Press **SCAN** again.

The "SCAN" disappears in the display window. (The intro scan is cancelled.)

ID3 TAG

When playing a disc containing information, you can see the information (ID3 TAG, Title, Artist and Album) in the display window. If there is no information "NO TEXT" will be shown in the display window.

Press twice the **DISP** button during MP3 file playback.

Symptom	Cause	Correction
Power doesn't turn on. The unit doesn't operate.	 Leads and connector are incorrectly connected. The fuse is blown. Noise and other factors are causing the built-in microprocessor to operate incorrectly. 	 Confirm once more that all connections are correct. Rectify the reason for the fuse blowing, then replace the fuse. Be very sure to install the correct fuse with the same rate. Turn the unit off and then on.
Playback is not possible.	 The disc is dirty. The loaded disc is a type this unit cannot play. 	Clean disc. Check what type the disc is.
No sound are heard. The volume level will not rise.	Cables are not connected correctly.	Connect the cables correctly.
There's no sound.	The volume level is low.	Adjust the volume.
There's audio skipping.	This unit is not firmly secured.	Secure this unit firmly.

Specifications

MP3 Disc compatibility with this unit is limited as follows:

- 1. Sampling Frequency / 32 48kHz (MP3)
- 2. Bit rate / within 32 320kbps (include VBR) (MP3)
- 3. CD-R/CD-RW physical format should be "ISO 9660"
- 4. If you record MP3 files using the software which cannot create a FILE SYSTEM, for example "Direct-CD" etc., it is impossible to playback MP3 files. We recommend that you use "Easy-CD Creator" which creates an ISO9660 file system.

Customers should also note that permission is required in order to download MP3 files and music from the Internet. Our company has no right to grant such permission. Permission should always be sought from the copyright owner.

General
Output Power
Net Weight (approx.)
FM tuner Frequency Range .87.5-108 MHz S/N Ratio .55 dE Distortion .1.0% Usable sensitivity .12 dBμNz
MW(AM) tuner Frequency Range .522-1620 kHz S/N Ratio .45 dB Distortion .1.0% Usable sensitivity .32 dBμV
CD Frequency Response

Design and specifications are subject to change without notice.

P/NO: 3834RR0031B